

2023


CATALOGUE 2023



EVOLUTION
AND DEVELOPMENT
NEVER ENDS

CATALOGUE 2023

PROGRESS® PROFILES

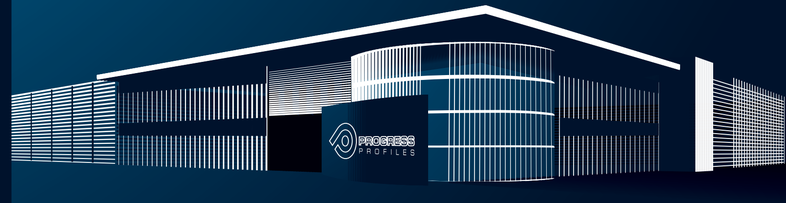

PROFILES & SYSTEMS

Sede /Headquarter

Progress Profiles SpA
Via Le Marze 7
31011 ASOLO (TV) Italy
Tel. +39 0423 950398
Fax +39 0423 950979
Azienda certificata
UNI EN ISO 9001:2015
www.progressprofiles.com
info@progressprofiles.com

Filiale /Branch Office & Warehouse

Progress Profiles America Inc.
4 Middlebury Boulevard (Unit 14)
Randolph, New Jersey 07869
U.S.A.
Tel. 001 973 584 2650
Fax 001 973 584 2657

usa@progressprofiles.com

Filiale /Branch Office & Warehouse

Progress Profiles Middle East LLC
AL QUOZ INDUSTRIAL FOURTH
26th Street, Showroom No. 1
Dubai, U.A.E.
Tel. 00971-04 325 1499
Fax 00971-04 325 1466
P.O. BOX: 29101

uae@progressprofiles.com

Filiale /Branch Office & Warehouse

Progress Profiles España S.L.
Elche Parque Industrial
Calle German Bernacer N° 15
03203 Elche Alicante
España / Spain
Tel. +34 965 057 279
Fax +34 966 054 073

ppe@progressprofiles.com

PROGRESS® PROFILES

All previous price lists lose their validity on the publication of this price list. Errors, changes, and printing mistakes as well as changes necessary in the interest of product innovation or shipping reserved. For reasons of printing, colours shown in this price list may differ from actual product colours.

Look into our eyes and we will tell you who we are




A story a human character and perseverance.
Bold decisions. Ours is a story of accomplishments that started in Canada in 1965 and blossomed in Italy . The extensive know-how acquired over 55 years of prior experience in the field of plastic extrusion and metal profiles brought to the company's turning point occurred during the 90s. This was a period rich in investments in additional qualified personnel, state-of-the-art machinery, and cutting edge innovations that opened the doors to internationalization and the development of innovative solutions for ceramic tiles, marble, wood/parquet, laminate and vinyl flooring, fitted carpets, resin or concrete flooring, mosaic and low thicknesses flooring and innovative fixing/ Laying Heating, Uncoupling and waterproofing membrane systems. All this took PROGRESS PROFILES® in a new trajectory, as demonstrated by the quick growth of the company which became increasingly larger and articulate, recognized as a true reference point in the market. This great success is mainly due to the team play spirit within our company. Highly dedicated, trained and skilled professionals in every single department, technical, training, design, manufacturing, sales, logistic, marketing allow us to bring constantly innovative solution to the international marketplace. In particular investments in marketing and marketing support has been clearly visible in and a wide range of technical catalogues, leaflets and marketing material, which have led the company, already having a leading position in the international market and being the undisputed leader in the Italian market, to achieve the goal of over 10000 active and satisfied clients.

The eyes are the mirror of the soul and of the company



Explore new ideas to constantly improve, by testing and challenging existing practices.

An example of cutting-edge entrepreneurship with determined goals and a forward-looking action plan aiming at capturing the latest trends in the sector. All this is proved by over 38 years of success in the International market, a steadily increasing turnover, and a solid business context, which, as of today, boasts over 130 employees and a network of over 120 high-profile national and international agents, and three headquarters located abroad, in America, Dubai and Spain, to promote Italian high quality through a bold internationalization policy. A dynamic policy that
is expressed in the participation in the most important International trade fairs, as well as in a cooperative International dialog with several of the main characters in the design and architectural spaces of today trend development. This dialog is critical and challenging but the company faces it with great enthusiasm and desire to grow through idea exchanging and learning.

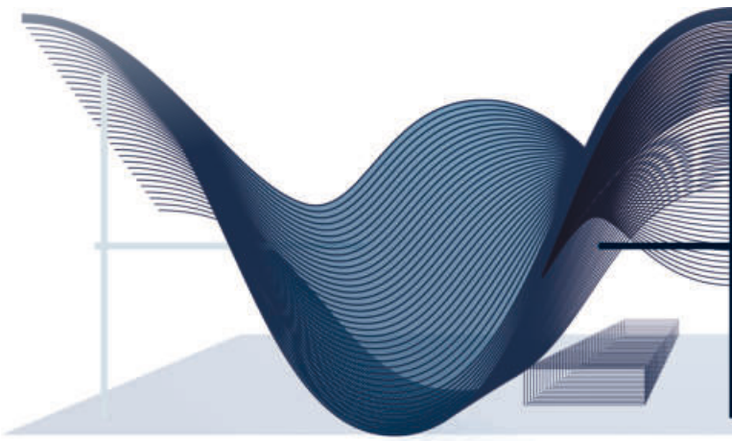


A glance at the future









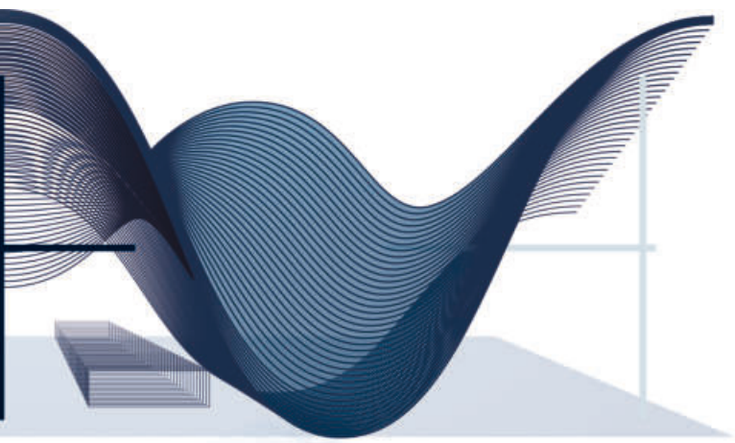

Following the entire product life cycle from idea to project and finally to finished product

The wide range of PROGRESS PROFILES® products is the result of over 38 years of research and development applied to the most advanced technologies and materials available on the market to create exclusive, functional and state-of-the-art solutions for improving the quality of the finished project, while reducing the installers efforts. These objectives have guided the company policy of important investments in enhancing the Planning Office, acquiring state-of-the-art equipment and a team of professionals that are able to seize the soul of a product and develop its full potential and performances, according to all the customer requirements and trends of the sector. A policy that has led the company to invent, design, and deposit patents and trademarks aiming at promoting and overturning established application concepts.

Eyes wide open on innovation
















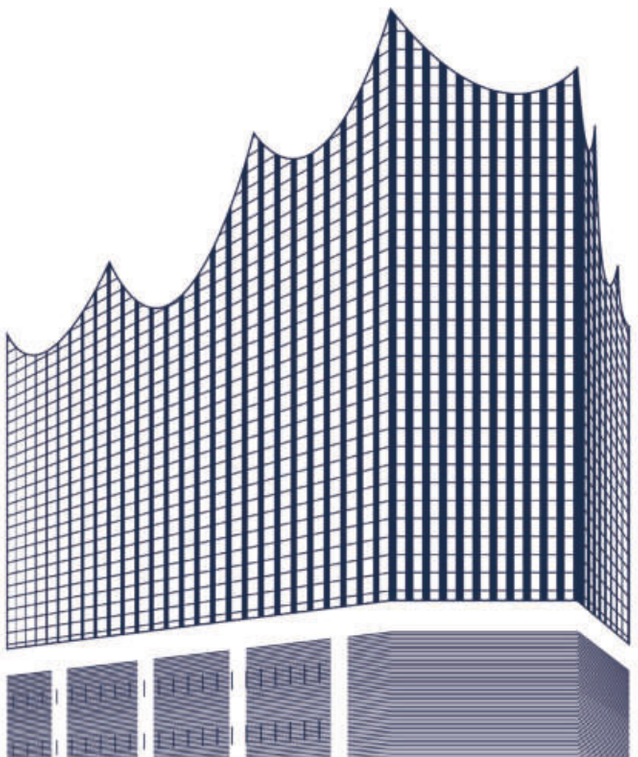




Learning and Technical Training is the most important investment for any enterprise.

PROGRESS PROFILES®' feather in the cap is the depth of training offers reserved to employees and clients, in which the company has, since the beginning,invested a large amount of energy and resources. To confirm such focus in the recently inaugurated (2015) Headquarters in Asolo the company has set up a 200 sqm showroom and 500 sqm training facility and training center equipped with latest technologies to allow operators of the trade – Italian and foreign representatives, architects, engineers, planners, designers, building and Tile laying fixers companies to view and to acquire the technical knowledge needed to use the latest product in their trade. This is achieved through practical demonstrations, video tutorials on laying methods, technical seminars and workshops, all held by accomplished,skilled and accredited professionals. All this transfer of knowledge and information to our internal and external partners is accompanied by certifications and standards documents that further strengthens and enrich the quality of their overall training, allowing them to be always up-to-date on the latest systems and products in their field.

A company that sees clearly



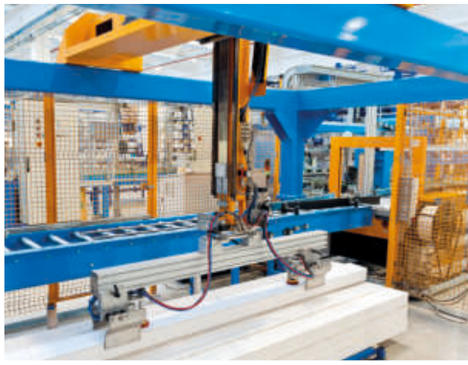

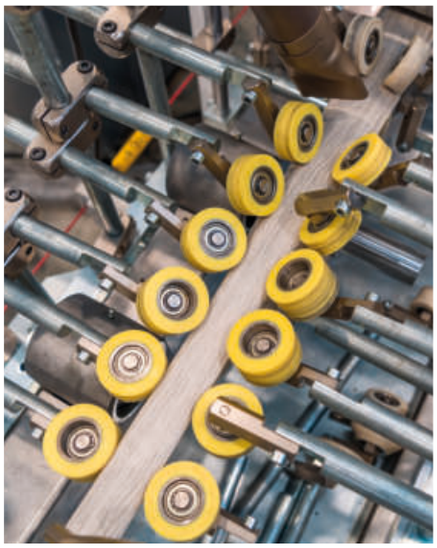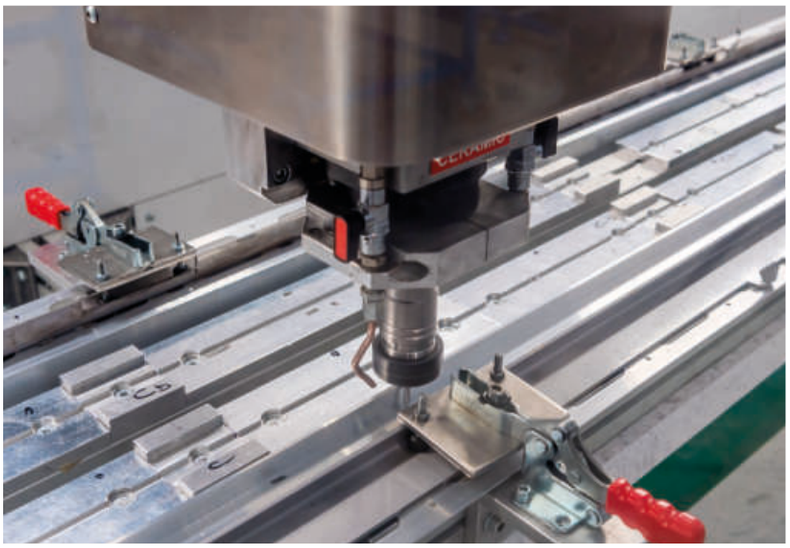
First of all, Made in Italy.

The new headquarters in Asolo, with an indoor area of over 16000 sqm and equipped with a photovoltaic roof system, generating 800 kWh, can boast state-of-the-art technology equipment: latest generation
machinery for processing stainless steel, aluminium, brass, PVC and real wood, as well as packaging, labelling and assembling machines. The result of all this are the over 30 million linear metres of its profiles that are laid every year. High-quality and great aesthetic impact characterise the wide range of PROGRESS PROFILES® products, which includes over 15000 technical and design solutions and system, most of which are patented ,for interior finishes, laying ceramic and wood, as well as for residential and commercial buildings. A wide range of products that has grown over the years through advanced technological processes that have led to the development of products, materials, and innovative modern finishes, such as anodized, polished and brushed titanium, copper, chrome and Gold, Tiltex, Black line , Tuscany line, Stone line and the latest heating and uncoupling membranes and shower systems. The entire production is strictly Italian made and ISO 9001:2015 certified. The excellence of the results is the proof.

We keep an eye on everything!









Everything at its place to guarantee efficiency and punctuality.

The logistics system devised by PROGRESS PROFILES® for the operative management of the complex warehouse is emergency proof. Studied in the slightest detail according to the most advanced methods and logics of the system, it ensures a systematic organization of the goods in a total space of 8000 sqm, which allows an efficient and punctual service and prompt delivery any time of the year. Moreover, a state of the art software management service is actively keeping direct and constant control over the entire order procedure, leaving nothing to chance and ensuring maximum reliability and accuracy.

An eye for detail that make the difference









The quality can be seen, touched and is 100% guaranteed.

Every PROGRESS PROFILES® product is made and tested according to the strictest standards that allow us to guarantee their excellence from every point of view. At the forefront in the quality, the company operates with a management system certified according to UNI EN ISO 9001 since 1999, among the first in the world in its field, and it is today ISO 9001:2015 certified. An absolute certainty of reliability that is ensured also by important company choices: 100% made in Italy, the exclusive use of non-toxic materials and top quality stainless steel, aluminium and brass alloys, conforming to Italian and International standards, the choice of high quality raw materials and their use in compliance with the REACH requirements, implementing the LEED products mapping system for gaining GREENTOP credits, and more in general, by the ability to offer a service designed in the slightest detail to meet all requirements and make a difference in the market.




A forward-looking company



A courageous international growth campaign.

PROGRESS PROFILES® sales network in Italy and abroad creates a capillary knowledge and support delivery system. Even tough as today 60% our turnover is made within the Italian national territorially, there are over 80 countries accounted for worldwide were the company exports and sells its products. Apart from the main markets such as France, Austria, Greece, Portugal, Germany, Switzerland, Scandinavia, England, Ireland,Belgium India, Australia, New Zealand – the company is also present in the countries of former Yugoslavia and Eastern Europe,in particular Russia, Croatia ,Hungary Slovanja ,Cech Rep. Slovakia, Poland in all the countries of the Middle East, Africa, and Central and South America. As a demonstration of the importance of the internationalization process, the company takes part in all the most important trade fairs of the sector and has recently created headquarters in 3 major contemporary business capitals: U.S.A.: Progress Profiles America Inc., U.A.E.: Progress Profiles Middle East LLC., and SPAIN: Progress Profile España S.L

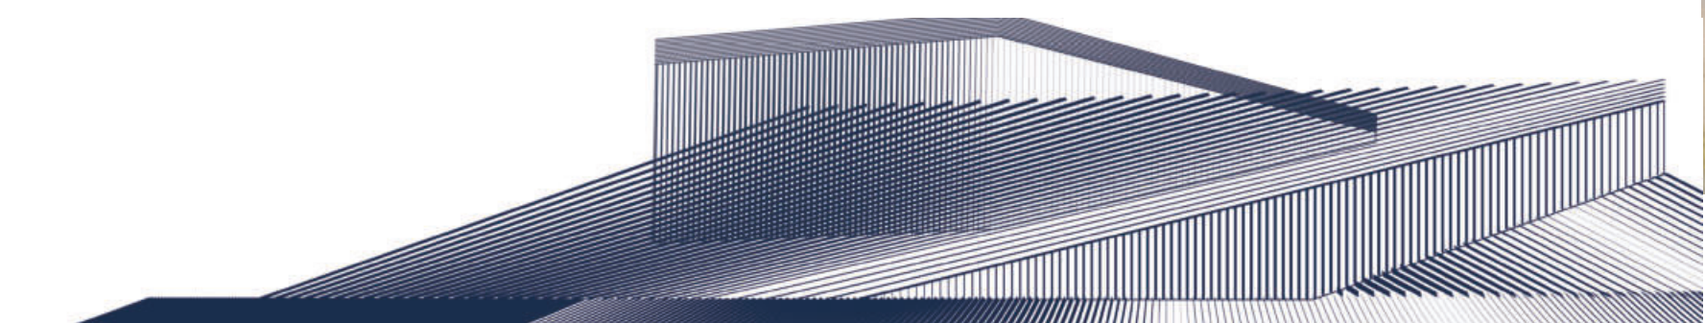



AUSTRIA • AFGHANISTAN • ANTIGUA • ALBANIA • ANDORRA • ARMENIA • AUSTRALIA • AZERBAIJAN REPUBLIC • BELGIO • BARBADOS • BULGARIA • BOSNIA ED ERZEGOVINA • BENIN • BRASILE • BAHRAIN • BAHAMAS • BRITISH VIRGIN I. • CUBA • CONGO • CANADA • SVIZZERA • COTE' D'IVOIRE • COLOMBIA • CAPO VERDE • CIPRO • CZECH REPUBLIC • GERMANIA • DANIMARCA • REP. DOMINICANA • ALGERIA • SPAGNA • KENIA • UGANDA • ECUADOR • EL SALVADOR • ESTONIA • EGITTO • FRANCIA • FINLANDIA • GRAN BRETAGNA • GUATEMALA • GHANA • GREECE • HUNGARY • HONG KONG • CROAZIA • ITALIA • IRAN • EIRE (IRELAND) • ISLAND • GIORDANIA • SAUDI ARABIA • KUWAIT • KAZAKHSTAN • LUSSEMBURGO • LIBIA • LITHUANIA • LETTONIA • MALTA • MAROCCO • PRINCIPATO DI MONACO • MACEDONIA • MONTENEGRO • MAURITIUS • NORVEGIA • NICARAGUA • PAESI BASSI • OMAN • PORTUGAL • PANAMA • POLINESIA FRANCESE • POLONIA • CINA • QATAR • ARGENTINA • CONGO • CILE • LIBANO • ROMANIA • REP.SAN MARINO • RUSSIA • SVEZIA • SLOVAKIA • SLOVENIA • SURINAME • SENEGAL • SERBIA • SIRIA • TUNISIA • TURKIYE • UCRAINA • UNITED ARAB EMIRATES • U.S.A. • UZBEKISTAN • YEMEN







PROFILES & SYSTEMS

INDEX

PROGRESS® PROFILES

ALPHABETICAL INDEX

	CATALOGUE SECTIONS INDEX	PG
	PROFILES FOR WALLS	1 - 61
	PROFILES FOR FLOORS	62 - 101
	BENDABLE & CURVE PROFILES	102 - 111
	STAIR NOSING PROFILES	112 - 137
	EXPANSION JOINTS	138 - 153
	LOW THICKNESS PROFILES	154 - 161
	PROFILES FOR TERRACES	162 - 171
	MEMBRANES & PANELS	172 - 189
	SHOWER SYSTEMS	190 - 207
	SKIRTING BOARDS	208 - 239
	PROFILES FOR LAMINATES & LVT FLOORS	240 - 273
	DO IT YOUR SELF	274 - 283
	PRODUCTS FOR LAYING	284 - 301
	BUILDING SYTEMS	302 - 321
	MARKETING	322 - 339
	News	

A		ADHESIVE-LAID JOINTS	146
		ANCHORING CLIPS FOR WATERSTOP	307
B		BROCHURE	331
C		CANAL DOUBLE U-FORM ALU.	278
		CANAL U-FORM.	278
		CATALOGUES	331
		CONTRAINBALANCE ALU.	282
		CORNER EQUAL SIDES ALU.	276
		CORNER EQUAL SIDES BRASS	276
		CORNER EQUAL SIDES PVC	277
		CORNER EQUAL SIDES STEEL	276
		CORNER L-FORM ALU.	277
		CORNER L-FORM PVC	277
		CORNER PVC	237
		COUNTER DISPLAY FOR BROCHURES	331
		COUNTER DISPLAY FOR FLYER	331
		CURVE PROFILE ALU.	281
D		DISPLAYS FOR PROFILES	337
		DOPPY	311
		DRAIN REDUCTION	193
		DRIP PVC	305
E		EMPTY RECTANGULAR TUBE ALU.	281
		EMPTY ROUND TUBE ALU.	280
		EMPTY SQUARE TUBE ALU.	281
		END CAPS / TUBE PLUGS	131
		END CAPS FOR DISTANCE TUBE	304
		EXIBITION BOARD	330
		EXPOSURE DISPLAY PEM	337
		EXPOSURE WALL	325
F		FINNED DISTANCE TUBE PVC	304
		FIREPROOF CORD	151
		FISHBONE RIBBED JOINT PVC	306
		FLAT ALU.	279
		FLAT BRASS	279
		FLAT SPACER	312
		FLYER	331
		FULL ROUND TUBE ALU.	280
		FULL SQUARE TUBE ALU.	280
G		GADGETS	338
		GAP-COVERING BALLOON SHEATH	319
		GASKETS FOR PRECAST FORMS	314
		GDA 25, GDA 35, GDA 55 ALU.	150
		GNS 20, GNS 50, GNS 75 ALU.	152
		HINGE SUPPORT	131
I		IRON	283
L		LVT PROFILES	271
M		MAGNET KIT	300
		MEMBRANE CASE	329
		MINICATALOGUE / BROCHURE	331
		MODULAR ASSEMBLY KIT	193
		MODULAR DISPLAY SYSTEM	332
		MORTAR LAYING FULL JOINT	148
		MORTAR-LAID DOUBLE JOINT	147
		MORTAR-LAID JOINTS PVC	147
		MORTAR-LAID JOINTS STEEL, BRASS, ALU.	146
		MULTIPIEDE	309
		MULTISPACER	291
P		PAU	310
		PAV	310
		PAVIJOINT PVC	320
		PIPE COLLAR PROFOIL	186,196
		PREFORMED CORNERS AND PIPE COLLAR	188
		PRO GOBOARD PANEL	205
		PROANGLE BRASS	71
		PROANGLE WOOD PVC	238
		PROANGLE WOOD PVC	270
		PROBAND 150/250	185
		PROBAND BU	186
		PROBAND FIX	186
		PROBAND KOLL	186
		PROBAND KOLL AB	186
		PROBATH FLEX PVC	57
		PROBATH PVC	57
		PROBORD STEEL	45
		PROBRASTEP ALU.	121
		PROCANAL ALU.	73
		PROCANAL BRASS	73
		PROCAP S/L	239
		PROCARE CLEAN	300
		PROCARPET ACC STEEL	77
		PROCARPET ALL ALU.	78
		PROCARPET OTT BRASS	77
		PROCOVER 1045 ALL ALU.	86
		PROCOVER 14PT ALU.	91
		PROCOVER ALU.	89
		PROCOVER ALU.	110
		PROCOVER BRASS	88
		PROCOVER STEEL	88
		PROCOVER WOOD	89,110
		PROCOVER WOOD	261
		PROCURVE MACHINE	111
		PRODESO DRAIN 5	174
		PRODESO DRAIN 8	177
		PRODESO ECO/ECO STICK	183
		PRODESO HEAT / PRODESO / PROTERRACE DISPLAY	329
		PRODESO HEAT GRIP SYSTEM	179
		PRODESO HEAT KIT	182
		PRODESO HEAT STICK	183
		PRODESO HEAT SYSTEM	181
		PRODESO MEMBRANE	185
		PRODESO SOUND	187
		PRODESO SOUND TAPE	187
		PRODESO/PRODESO HEAT DISPLAY	329
		PRODILAT ALU.	143
		PRODILAT STEEL	143
		PRODISTANZ	308
		PRODRAIN 10	188
		PRODRIP	171
		PROECOFON	187
		PROEDGE AC STEEL	46
		PROEDGE AL ALU.	48
		PROEDGE FLEX PVC	45
		PROEDGE OT BRASS	46
		PROEDGE PVC	48
		PROEDGE R AC STEEL	47
		PROEDGE R OT BRASS	47
		PROELEGANT ALU.	68
		PROELEGANT BRASS	68
		PROELEGANT CURVE ALU.	107
		PROELEGANT CURVE BRASS	107
		PROEND 5050 ALU.	136
		PROEND ALU.	132
		PROEND GRIP 70 ALU.	136
		PROEND GRIP ALU.	137
		PROEND INS 75 ALU.	135
		PROEND INS ALU.	135
		PROEXPAN 115-130-190-210 ALU.	149
		PROEXPAN H20-H40 ALU.	150
		PROFILE T-FORM ALU.	282
		PROFILE TRIANGULAR CHAMFER	306
		PROFILE WITH DOUBLE CHAMFER	306
		PROFILES COLOUR RANGE	328
		PROFINAL ALU.	71
		PROFINAL BRASS	70
		PROFINAL CURVE ALU.	108
		PROFINAL CURVE BRASS	108
		PROFINAL STEEL	70
		PROFINLIST 20 ALU.	44
		PROFIXER LINE SYSTEM ALU.	262
		PROFLAT STEEL-BRASS	73
		PROFLEX 25 PVC	148
		PROFLEX 5 PR PVC	145
		PROFLEX 5 PVC	144
		PROFLEX ACC PR STEEL	140
		PROFLEX ACC STEEL	140
		PROFLEX ACN STEEL	142
		PROFLEX AL ALU.	141
		PROFLEX ALN ALU.	142
		PROFLEX OT BRASS	141
		PROFLEX PVC	144
		PROFLOOR 1216 STEEL-BRASS	84
		PROFLOOR 24 STEEL-BRASS	85
		PROFLOOR 712 ALU.	83
		PROFLOOR 712 BRASS	83
		PROFLOOR 712 STEEL	83
		PROFOIL PANEL	189
		PROFOIL PANEL NICHE	203
		PROFOIL PASTE	188
		PROFOIL/PROFOIL PRO	188
		PROGRIP	117
		PROGRIP	137
		PROHEATER	206
		PROINSERT (optional)	273
		PROINSERT (top)	272
		PROINTER AC STEEL	30
		PROINTER AL ALU.	32
		PROINTER KL	160
		PROINTER KL ACC STEEL	30,160
		PROINTER KL ALL BRASS-ALU.	32,160
		PROINTER PVC	33
		PROJOINT ALU.	72
		PROJOINT BRASS	72
		PROJOLLY ALU.	18
		PROJOLLY ANGLE 135 STEEL	29
		PROJOLLY BRASS	17
		PROJOLLY CURVE ALU.	109
		PROJOLLY CURVE BRASS	109
		PROJOLLY ECO MARBLE PVC	25
		PROJOLLY ECO PVC	24
		PROJOLLY MARBLE PVC	23
		PROJOLLY OPEN PVC	23
		PROJOLLY PVC	22
		PROJOLLY QUART ALU.	11
		PROJOLLY QUART PVC	14
		PROJOLLY QUART STEEL	10
		PROJOLLY SQUARE ALU.	6
		PROJOLLY SQUARE BRASS	5
		PROJOLLY SQUARE PVC	9
		PROJOLLY SQUARE STEEL	2
		PROJOLLY STEEL	15
		PROJOLLY TRIANGLE ALU.	28
		PROJOLLY TRIANGLE BRASS	27
		PROJOLLY TRIANGLE STEEL	26
		PROKERLAM JOLLY / SQUARE ALL.	156
		PROKERLAM LINE	58,157
		PROKERLAM LINE ALL.	157
		PROLEVALL 25-35-38 ALU.	99
		PROLEVALL 29 ALU.	79

	PROLEVALL 305 STEEL-BRASS	80
	PROLEVALL 32 ALU.	80
	PROLEVALL 33 BRASS	79
	PROLEVALL 358 BRASS	81
	PROLEVALL 4413 BRASS-ALU.	81
	PROLEVELING SYSTEM	289
	PROLEVELING SYSTEM BOARD	330
	PROLEVELING SYSTEM DISPLAY	330
	PROLEVELING WEDGE SYSTEM	290
	PROLEVELING WEDGE SYSTEM BOARD	330
	PROLEVIGAL ALU.	67
	PROLEVIGAL BRASS	67
	PROLINOLEUM ALU.	85
	PROLISTEL ACC STEEL	40
	PROLISTEL ALL ALU.	43
	PROLISTEL AND SKIRTING DISPLAY	326
	PROLISTEL CHANNEL ALL.	34,198
	PROLISTEL CHANNEL STEEL	34,198
	PROLISTEL LED ALU.	43
	PROLISTEL P ALL ALU.	42
	PROLISTEL P BRASS	41
	PROMEMBRANE KOLL	186
	PROMOQUETTE ALU.	100
	PROMOQUETTE FIX ALU.	100
	PROMOQUETTE GIN ALU.	101
	PROMULTIFIX SYSTEM	245
	PROMULTISKIRT ROUND pvc	233,267
	PROMULTISKIRT SQUARE pvc	232,266
	PRONIVO ALU.	82
	PROPLATE 80 ALZ ALU.	91
	PROPLATE BRASS	90
	PROPLATE FIX ALU.	153
	PROPLATE FIX PVC	153
	PROPLATE STEEL	90
	PROPOLISH	300
	PROPRESS 712 STEEL-BRASS	84
	PRORAIL SYSTEM	296
	PROROUND STEEL	54
	PROSANI STRIP PVC	54
	PROSCREW ALU. BASE + TOP	264
	PROSCREW ALU. TOP	264
	PROSCREW BASE ALU.	264
	PROSEAL 25 PVC	56
	PROSEAL 50 PVC	55
	PROSEAL FLEX PVC	56
	PROSEAL WOOD PVC	238,270
	PROSGUSCIO DA PVC	53
	PROSHELF	205
	PROSHELL ALL ALU.	52
	PROSHELL D ALL ALU.	159
	PROSHELL R ALL ALU.	159
	PROSHELL STEEL	50
	PROSHOWER BASE BASIC PVC	191
	PROSHOWER BASE L PRO	194
	PROSHOWER BASE L STEEL	191
	PROSHOWER CENTRAL PANEL	200
	PROSHOWER DRAIN CENTRAL PRO	201
	PROSHOWER DRAIN LATERAL KIT	201
	PROSHOWER LINEAR KIT SYSTEM	190
	PROSHOWER PANEL	190
	PROSHOWER PROFILE	196
	PROSHOWER PROFILE FRONT	197
	PROSHOWER PROFILE GLASS	196
	PROSHOWER PROFILE WALL	197
	PROSHOWER SYSTEM DISPLAY	329
	PROSHOWER TOP PRO	194
	PROSHOWER TOP STEEL	192
	PROSIDE WALK	167
	PROSIDE WALK ALU.	123
	PROSKID BRASS-ALU.	78
	PROSKIRTING 40 ALU.	221
	PROSKIRTING ALU.	220
	PROSKIRTING CHANNEL ALU.	211
	PROSKIRTING FLAT ALU.	211
	PROSKIRTING GILED ALU.	219
	PROSKIRTING INS ALU.	212
	PROSKIRTING ISP ALU.	213
	PROSKIRTING LED / GILED DISPLAY	328
	PROSKIRTING LED ALU.	217
	PROSKIRTING LINE ALU.	212
	PROSKIRTING LIST	214
	PROSKIRTING SHELL ALU.	221
	PROSLIDER ALU.	75
	PROSLIDER BRASS	74
	PROSLIDER CURVE ALU.	111
	PROSLIDER CURVE BRASS	111
	PROSLIDER KL ALL ALU.	86
	PROSLIDER LR ALU.	75
	PROSLIDER STEEL	74
	PROSLIDER WOOD	76
	PROSOL 18-30-35-40 BRASS	95
	PROSOL 18-30-35-40 STEEL	93
	PROSOL 30-35-40 ALU.	97
	PROSQUARE BRASS	71
	PROSTAIR 50 ALU.	119
	PROSTAIR ACC STEEL	114
	PROSTAIR ALU.	120
	PROSTAIR BBRASSON / STRIP STEEL	121
	PROSTAIR GRIP ACC STEEL	117
	PROSTAIR KL 20 ALU.	161
	PROSTAIR LED ALU.	124
	PROSTAIR WOOD	128
	PROSTAIR WOOD Z	128
	PROSTEP INS ALU.	127
	PROSTEP PVC	120
	PROSTEP WOOD	129
	PROSTYLE 2610 STEEL	114
	PROSTYLE ALU.	127
	PROSTYLE BRASS	126
	PROSTYLE GRIP ACC STEEL	118
	PROSTYLE KL 10 ALU.	161
	PROSTYLE STEEL	126
	PROSTYLE WOOD	129
	PROSUPPORT PROFILE A & B	295
	PROSUPPORT PROFILE T & N	295
	PROSUPPORT SLIM SYSTEM	298
	PROSUPPORT TUBE DISPLAY	330
	PROSUPPORT TUBE SYSTEM	292
	PROTECTIVE CAPS	312
	PROTERMINAL ALU.	37
	PROTERMINAL ALU.	66
	PROTERMINAL BRASS	37
	PROTERMINAL BRASS	65
	PROTERMINAL CURVE ALU.	105
	PROTERMINAL CURVE BRASS	105
	PROTERMINAL CURVE STEEL	104
	PROTERMINAL INT ALU.	35
	PROTERMINAL PVC	39
	PROTERMINAL STEEL	16
	PROTERMINAL STEEL	36
	PROTERMSTEP ACC STEEL	122
	PROTERMSTEP ACC STEEL	59
	PROTERMSTEP ACC STEEL	122
	PROTERMSTEP ALL ALU.	122
	PROTERRACE DISPLAY	330
	PROTERRACE DOUBLE DRIP ALU.	164
	PROTERRACE DRAIN DRIP ALU.	165
	PROTERRACE DRAIN FDP ALU.	166
	PROTERRACE ECO DRIP ALU.	167
	PROTERRACE PC ALU.	169
	PROTERRACE PC STEEL	169
	PROTERRACE PCG ALU.	168
	PROTERRACE PCG STEEL	168
	PROTERRACE UNDER EDGE L/C	170
	PROTOP ALU.	60
	PROTOP T ALU.	60
	PROTRANS ALU.	82
	PROWALK 2510 & 2520 ALU.	134
	PROWALK ACC STEEL	132
	PROWALK BRASS-ALU.	133
R	RAPY 100	309
	RAPY 100 ECO	309
	RAPY 200	309
	RIBBED DISTANCE TUBE PVC	305
	ROLLER	301
	ROTATING DISPLAY	326
	ROUNDED TRIANGULAR CHAMFER FILLET	306
S	SAMPLE BOARD	326
	SAMPLE CASES	328
	SCISSORS FOR PVC PROFILES	300
	SHEATH LAYING TROLLEY	321
	SHOWROOM SET-UP EXAMPLES	334
	SKIRTING 100 ALU.	231
	SKIRTING 100-150 STEEL	230
	SKIRTING 40 ALU.	225
	SKIRTING 40 PVC	235
	SKIRTING 40 PVC	269
	SKIRTING 40 STEEL	224
	SKIRTING 60 ALU.	227
	SKIRTING 60 STEEL	226
	SKIRTING 60/120 PVC	236
	SKIRTING 62F PVC	236
	SKIRTING 7011 PVC	235,269
	SKIRTING 7016 PVC	234,268
	SKIRTING 80 ALU.	229
	SKIRTING 80 STEEL	228
	SKIRTING COVECAP PVC	239
	SKIRTING PVC	237
	SKIRTING ROTATING DISPLAY	327
	SMALL EXPOSURE STAND	326
	SNAP-ON STRAND SHEATH PVC	304
	SNAP-ON STRAND TUBE PVC	304
	SOL 30 AUTOADESIVI ALU.	260
	SOL 30P LVT	258
	SOL 40 P ALU. (proinsert)	249
	SOL 40P ALU.	261
	SPACER FOR GLASS BRICK	311
	SPACER FOR VERTICAL / HORIZONTAL MESH	311
	SPACERS DISPLAY	330
	SPACERS LEVELING WEDGES	291
	SPACERS PAX-PAL-PAS	313
	SQUARE SHOW CASE	324
	STYLE STAIR ALU.	254
	STYLE STAIR L ALU.	255
	SUPPORT / EYELET	131
	SUPPORT AND LEVELLER	299
T	TERMINAL ALU.	253
	TERMINAL CURVE ALU.	110
	TERMINAL PIN ALU. (proinsert)	252
	TERMINAL PIN LVT	258
	TROLLEY	326
	TROWEL	301
	TROWEL PVC	301
	TUBE FOR RUNNERS	131
	TUBES AND ACCESSORIES	131
W	WALL DRAIN BOX	195
	WATERSTOP	307
Z	ZERO CURVE ALU. (proinsert)	250
	ZERO CURVE AUTOADESIVI ALU.	260
	ZERO CURVE LVT	258

= News 2023

PROGRESS® PROFILES

PROFILES FOR WALLS

ARTICLE	CODE	PAGE
PROJOLLY SQUARE STEEL	PJQSAC...	2
PROJOLLY SQUARE BRASS	PJQSOS...	5
PROJOLLY SQUARE ALU.	PJQS...	6
PROJOLLY SQUARE PVC	PJQ...	9
PROJOLLY QUART STEEL	PJQTAC...	10
PROJOLLY QUART ALU.	PJQT...	11
PROJOLLY QUART PVC	PJQT...	14
PROJOLLY STEEL	PJAC...	15
PROTERMINAL STEEL	PTAC...	16
PROJOLLY BRASS	PJO...	17
PROJOLLY ALU.	PJ...	18
PROJOLLY PVC	PJ...	22
PROJOLLY MARBLE PVC	PJ...	23
PROJOLLY OPEN PVC	PJP	23
PROJOLLY ECO PVC	PJE...	24
PROJOLLY ECO MARBLE PVC	PJE...	25
PROJOLLY TRIANGLE STEEL	PJTRAC...	26
PROJOLLY TRIANGLE BRASS	PJTRO...	27
PROJOLLY TRIANGLE ALU.	PJTR...	28
PROJOLLY ANGLE 135 STEEL	PJTR135...	29
PROINTER AC STEEL	PIAC...	30
PROINTER KL ACC STEEL	PIKLAC...	30
PROINTER AL ALU.	PI...	32
PROINTER KL ALL BRASS-ALU.	PIKL...	32
PROINTER PVC	PI...	33
PROLISTEL CHANNEL ALU.	PLTCH...	34
PROLISTEL CHANNEL STEEL	PLTCH...	34
PROTERMINAL INT ALU.	PTI...	35
PROTERMINAL STEEL	PTAC...	36
PROTERMINAL ALU.	PT...	37
PROTERMINAL BRASS	PTO...	37
PROTERMINAL PVC	PT...	39
PROLISTEL ACC STEEL	PLTAC...	40
PROLISTEL P BRASS	PLTPO...	41
PROLISTEL P ALL ALU.	PLTP...	42
PROLISTEL ALL ALU.	PLT...	43
PROLISTEL LED ALU.	PLTLED	43
PROFINLIST 20 ALU.	PFLT...	44
PROBORD STEEL	PEDBD...	45
PROEDGE FLEX PVC	PFC...40	45
PROEDGE AC STEEL	PEGAC...	46
PROEDGE OT BRASS	PEGO...	46
PROEDGE R AC STEEL	PEGRAC...	47
PROEDGE R OT BRASS	PEGRO...	47
PROEDGE AL ALU.	PEG...	48
PROEDGE PVC	PEGA...	48
PROSHELL STEEL	PSHAC...	50
PROSHELL ALL ALU.	PSHA...	52
PROSGUSCIO DA PVC	PS...	53
PROROUND STEEL	PRDAC	54
PROSANI STRIP PVC	PSS...	54
PROSEAL 50 PVC	PSA...	55
PROSEAL 25 PVC	PSA...	56
PROSEAL FLEX PVC	PSF...	56
PROBATH FLEX PVC	PSBF...	57
PROBATH PVC	PSB...	57
PROKERLAM LINE	PKLL...	58
PROTERMSTEP ACC STEEL	PTSPAC...	59
PROTOP ALU.	PCT...	60
PROTOP T ALU.	PCT...T	60



PROFILES FOR FLOORS

ARTICLE	CODE	PAGE
PROTERMINAL BRASS	PTO...	65
PROTERMINAL ALU.	PT...	66
PROLEVIGAL ALU.	PLG...	67
PROLEVIGAL BRASS	PLG...	67
PROELEGANT ALU.	PLG...	68
PROELEGANT BRASS	PEL...	68
PROFINAL BRASS	PRFO...	70
PROFINAL STEEL	PRFAC...	70
PROANGLE BRASS	PGAO...	71
PROFINAL ALU.	PQE...	71
PROSQUARE BRASS	PRFA...	71
PROJOINT ALU.	PITA...	72
PROJOINT BRASS	PITO...	72
PROCANAL ALU.	PCLA...	73
PROCANAL BRASS	PCLO...	73
PROFLAT STEEL-BRASS	GPL...	73
PROSLIDER BRASS	PDO...	74
PROSLIDER STEEL	PDAC...	74
PROSLIDER ALU.	PDA...	75
PROSLIDER LR ALU.	PDLRA...	75
PROSLIDER WOOD	PDWR...	76
PROCARPET ACC STEEL	PRTAC...	77
PROCARPET OTT BRASS	PRTO...	77
PROCARPET ALL ALU.	PRTA...	78
PROSKID BRASS-ALU.	PSLD...	78
PROLEVALL 29 ALU.	PLV...29	79
PROLEVALL 33 BRASS	PLVOL 33	79
PROLEVALL 305 STEEL-BRASS	PLV...30...	80
PROLEVALL 32 ALU.	PLV...32	80
PROLEVALL 358 BRASS	PLVOL 358...	81
PROLEVALL 4413 BRASS-ALU.	PLVOL 4413	81
PRONIVO ALU.	PNVA.. 713	82
PROTRANS ALU.	PTS.. 613	82
PROFLOOR 712 ALU.	PFRAC...712	83
PROFLOOR 712 BRASS	PFROL...712	83
PROFLOOR 712 STEEL	PFRA... 712	83
PROFLOOR 1216 STEEL-BRASS	PFR...1216	84
PROPRESS 712 STEEL-BRASS	PRS...712...	84
PROFLOOR 24 STEEL-BRASS	PFR...24...	85
PROLINOLEUM ALU.	PLU...16	85
PROCOVER 1045 ALL ALU.	PCR...1045	86
PROSLIDER KL ALL ALU.	PDKLA...	86
PROCOVER BRASS	PCRO...	88
PROCOVER STEEL	PCRAC...	88
PROCOVER ALU.	PCR...	89
PROCOVER WOOD	PCRA...	89
PROPLATE BRASS	PETO...	90
PROPLATE STEEL	PETAC...	90
PROCOVER 14PT ALU.	PCR...14PT	91
PROPLATE 80 ALZ ALU.	PETAA...	91
PROSOL 18-30-35-40 STEEL	PLSAC...	93
PROSOL 18-30-35-40 BRASS	PLSO...	95
PROSOL 30-35-40 ALU.	PLS...	97
PROLEVALL 25-35-38 ALU.	PLV...	99
PROMOQUETTE ALU.	PMF...	100
PROMOQUETTE FIX ALU.	PMQ...	100
PROMOQUETTE GIN ALU.	PMG...	101



CURVE PROFILES

ARTICLE	CODE	PAGE
PROTERMINAL CURVE STEEL	**PTACV...**	**104**
PROTERMINAL CURVE ALU.	**PTANCV...**	**105**
PROTERMINAL CURVE BRASS	**PTONCV...**	**105**
PROELEGANT CURVE ALU.	**PELAACV...**	**107**
PROELEGANT CURVE BRASS	**PELONCV...**	**107**
PROFINAL CURVE ALU.	**PRFAACV...**	**108**
PROFINAL CURVE BRASS	**PRFONCV...**	**108**
PROJOLLY CURVE ALU.	**PJAACV...**	**109**
PROJOLLY CURVE BRASS	**PJONCV...**	**109**
PROCOVER ALU.	**PCR...**	**110**
PROCOVER WOOD	**PCRA...**	**110**
TERMINAL CURVE ALU.	**PINT...**	**110**
PROCURVE MACHINE	**PCM 08**	**111**
PROSLIDER CURVE ALU.	**PDAACV...**	**111**
PROSLIDER CURVE BRASS	**PDONCV...**	**111**

STAIR NOSINGS PROFILES

ARTICLE	CODE	PAGE
PROSTAIR ACC STEEL	**PSYACS 2610**	**114**
PROSTYLE 2610 STEEL	**PTRACS...**	**114**
PROGRIP	**PGR...**	**117**
PROSTAIR GRIP ACC STEEL	**PTRGRACS...**	**117**
PROSTYLE GRIP ACC STEEL	**PSYGRACS 6020**	**118**
PROSTAIR 50 ALU.	**PTR50...**	**119**
PROSTAIR ALU.	**PTP...**	**120**
PROSTEP PVC	**PTR...**	**120**
PROBRASTEP ALU.	**PBP...**	**121**
PROSTAIR BBRASSON / STRIP STEEL	**PTRB...**	**121**
PROTERMSTEP ACC STEEL	**PTSPA...**	**122**
PROTERMSTEP ACC STEEL	**ptspac...**	**122**
PROTERMSTEP ALL ALU.	**PTSPAC...**	**122**
PROSIDE WALK ALU.	**PSDWK...**	**123**
PROSTAIR LED ALU.	**PTRLEDAA..**	**124**
PROSTYLE BRASS	**PSYO...**	**126**
PROSTYLE STEEL	**PSYAC...**	**126**
PROSTEP INS ALU.	**PTSAA...**	**127**
PROSTYLE ALU.	**PSYA...**	**127**
PROSTAIR WOOD	**PTRW...**	**128**
PROSTAIR WOOD Z	**PTRWZ...**	**128**
PROSTEP WOOD	**PSYW...**	**129**
PROSTYLE WOOD	**PTPW...**	**129**
END CAPS / TUBE PLUGS	**TET...**	**131**
HINGE SUPPORT	**SC...**	**131**
SUPPORT / EYELET	**SO..**	**131**
TUBE FOR RUNNERS	**TGS...**	**131**
TUBES AND ACCESSORIES	**TCT...**	**131**
PROEND ALU.	**PED...**	**132**
PROWALK ACC STEEL	**PWKAC...**	**132**
PROWALK BRASS-ALU.	**PWK...**	**133**
PROWALK 2510 & 2520 ALU.	**PWK...25...**	**134**
PROEND INS 75 ALU.	**PED 4528...**	**135**
PROEND INS ALU.	**PED...7537**	**135**
PROEND 5050 ALU.	**PEGR..7032**	**136**
PROEND GRIP 70 ALU.	**PEGRAA 50**	**136**
PROEND GRIP ALU.	**PEGR.. 5230**	**137**
PROGRIP	**PGR...**	**137**



EXPANSION JOINTS

ARTICLE	CODE	PAGE
PROFLEX ACC PR STEEL	**PFXACPR...**	**140**
PROFLEX ACC STEEL	**PFXAC...**	**140**
PROFLEX AL ALU.	**PFXAL...**	**141**
PROFLEX OT BRASS	**PFXOT...**	**141**
PROFLEX ACN STEEL	**PFXACN...**	**142**
PROFLEX ALN ALU.	**PFXALN...**	**142**
PRODILAT ALU.	**GCAN...**	**143**
PRODILAT STEEL	**GCAC...**	**143**
PROFLEX 5 PVC	**PFX...**	**144**
PROFLEX PVC	**PFX5...**	**144**
PROFLEX 5 PR PVC	**PFX5PR...**	**145**
ADHESIVE-LAID JOINTS	**C51...**	**146**
MORTAR-LAID JOINTS STEEL, BRASS, ALU.	**G...**	**146**
MORTAR-LAID DOUBLE JOINT	**GDSP...**	**147**
MORTAR-LAID JOINTS PVC	**C51...**	**147**
MORTAR LAYING FULL JOINT	**GP...**	**148**
PROFLEX 25 PVC	**PFX...**	**148**
PROEXPAN 115-130-190-210 ALU.	**PENF...**	**149**
GDA 25, GDA 35, GDA 55 ALU.	**GDA ...**	**150**
PROEXPAN H20-H40 ALU.	**PEN...**	**150**
FIREPROOF CORD	**GDA 55...**	**151**
GNS 20, GNS 50, GNS 75 ALU.	**GNS...**	**152**
PROPLATE FIX ALU.	**PETFX...**	**153**
PROPLATE FIX PVC	**PETFXPAA...**	**153**

LOW THICKNESS PROFILES

ARTICLE	CODE	PAG
PROKERLAM JOLLY / SQUARE ALL.	**PKL...**	**156**
PROKERLAM LINE	**PKLL...**	**157**
PROKERLAM LINE ALL.	**PKLL...**	**157**
PROSHELL D ALL ALU.	**PSHD...**	**159**
PROSHELL R ALL ALU.	**PSHR...**	**159**
PROINTER KL	**PIKL...**	**160**
PROINTER KL ACC STEEL	**PIKLAC...**	**160**
PROINTER KL ALL BRASS-ALU.	**PIKL...**	**160**
PROSTAIR KL 20 ALU.	**PSYKLAA 1045**	**161**
PROSTYLE KL 10 ALU.	**PTRKLAA 2045**	**161**

PROFILES FOR TERRACES

ARTICLE	CODE	PAGE
PROTERRACE DOUBLE DRIP ALU.	**PDD...**	**164**
PROTERRACE DRAIN DRIP ALU.	**PFDPP...**	**165**
PROTERRACE DRAIN FDP ALU.	**PFDP...**	**166**
PROSIDE WALK	**PSDWK...**	**167**
PROTERRACE ECO DRIP ALU.	**PTEDP...**	**167**
PROTERRACE PCG ALU.	**PCG...**	**168**
PROTERRACE PCG STEEL	**PCG...**	**168**
PROTERRACE PC ALU.	**PC...**	**169**
PROTERRACE PC STEEL	**PC...**	**169**
PROTERRACE UNDER EDGE L/C	**PTUE...**	**170**
PRODRIP	**PDRP**	**171**




= News 2023

PROGRESS® PROFILES

INDEX

MEMBRANES & PANELS

ARTICLE	CODE	PAGE
PRODESO DRAIN 5	PDDR...	174
PRODESO DRAIN 8	PDDR...	177
PRODESO HEAT GRIP SYSTEM	PDESHG...	179
PRODESO HEAT SYSTEM	PDESH...	181
PRODESO HEAT KIT	PDESHK...	182
PRODESO ECO/ECO STICK	PDESEC...	183
PRODESO HEAT STICK	PDESHST...	183
PROBAND 150/250	PRBPE...	185
PRODESO MEMBRANE	PDES...	185
PIPE COLLAR PROFOIL	PRBT	186
PROBAND BU	PRBBU...	186
PROBAND FIX	PRBFX...	186
PROBAND KOLL	PRBKL...	186
PROBAND KOLL AB	PRBKLAB...	186
PROMEMBRANE KOLL	PRMKL	186
PRODESO SOUND	PDSND...	187
PRODESO SOUND TAPE	PDSNDTP...	187
PROECOFON	PEF...	187
PREFORMED CORNERS AND PIPE COLLAR	PRB...	188
PRODRAIN 10	PDRI 10	188
PROFOIL PASTE	PFLOPST...	188
PROFOIL/PROFOIL PRO	PFLO...	188
PROFOIL PANEL	PFLPAN...	189

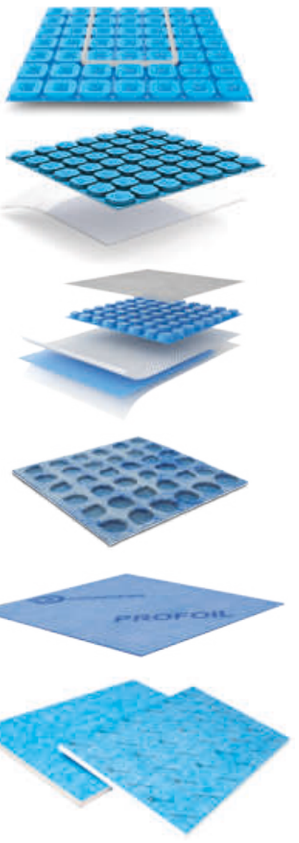


SHOWER SYSTEMS

ARTICLE	CODE	PAGE
PROSHOWER LINEAR KIT SYSTEM	PSHPANEK	190
PROSHOWER PANEL	PSHPAN	190
PROSHOWER BASE BASIC PVC	PSHWBB..	191
PROSHOWER BASE L STEEL	PSHWDL...	191
PROSHOWER TOP STEEL	PSHWDL...	192
DRAIN REDUCTION	PSHWRD...	193
MODULAR ASSEMBLY KIT	PSHW...	193
PROSHOWER BASE L PRO	PSHWP...	194
PROSHOWER TOP PRO	PSHWPLT...	194
WALL DRAIN BOX	KBPSHWPAC...	195
PIPE COLLAR PROFOIL	PRBT	196
PROSHOWER PROFILE	PSHWPACS...	196
PROSHOWER PROFILE GLASS	PSHWPGACS...	196
PROSHOWER PROFILE FRONT	PSHWPFACS...	197
PROSHOWER PROFILE WALL	PSHWPLACS...	197
PROLISTEL CHANNEL ALL.	PLTCH...	198
PROLISTEL CHANNEL STEEL	PLTCH...	198
PROSHOWER CENTRAL PANEL	PSHPANCEK	200
PROSHOWER DRAIN CENTRAL PRO	PSHWCP	201
PROSHOWER DRAIN LATERAL KIT	PSHLDK	201
PROFOIL PANEL NICHE	PFLPANICH	203
PRO GOBOARD PANEL	PGBORD	205
PROSHELF	PRSHLF...	205
PROHEATER	PHTST...	206















SKIRTING

ARTICLE	CODE	PAGE
PROSKIRTING CHANNEL ALU.	PKCHAA...	211
PROSKIRTING FLAT ALU.	PKFLAA...	211
PROSKIRTING INS ALU.	PKINSAA 60	212
PROSKIRTING LINE ALU.	PKLIAA	212
PROSKIRTING ISP ALU.	PKISPAA...	213
PROSKIRTING LIST	PKLT...	214
PROSKIRTING LED ALU.	PKLEDAA...	217
PROSKIRTING GILED ALU.	PKGLEDAA...	219
PROSKIRTING ALU.	PKAA...	220
PROSKIRTING 40 ALU.	PKSHAA 70	221
PROSKIRTING SHELL ALU.	PKSHAA...	221
SKIRTING 40 STEEL	BTAC... 40	224
SKIRTING 40 ALU.	BTA... 40	225
SKIRTING 60 STEEL	BTAC... 60	226
SKIRTING 60 ALU.	BTA... 60	227
SKIRTING 80 STEEL	BTAC... 80	228
SKIRTING 80 ALU.	BTA... 80	229
SKIRTING 100-150 STEEL	BTAC...	230
SKIRTING 100 ALU.	BTA...100	231
PROMULTISKIRT SQUARE pvc	BTEPR..S	232
PROMULTISKIRT ROUND pvc	BTEPR..R	233
SKIRTING 7016 PVC	BTEPR...7016	234
SKIRTING 40 PVC	BTEPR...4010	235
SKIRTING 7011 PVC	BTEPR...7011	235
SKIRTING 60/120 PVC	BTPV...	236
SKIRTING 62F PVC	BTPF...	236
CORNER PVC	AGE...25	237
SKIRTING PVC	BTPR...	237
PROANGLE WOOD PVC	PGAW...15	238
PROSEAL WOOD PVC	PSAW...20	238
PROCAP S/L	PRCPS...	239
SKIRTING COVECAP PVC	PRCP...	239

PROFILES FOR WOOD

ARTICLE	CODE	PAGE
PROMULTIFIX SYSTEM	PMPFX...	245
SOL 40 P ALU. (proinsert)	PISPC...	249
ZERO CURVE ALU. (proinsert)	PINZC...	250
TERMINAL PIN ALU. (proinsert)	PINTPC...	252
TERMINAL ALU.	PTSAA...	253
STYLE STAIR ALU.	PINYC...	254
STYLE STAIR L ALU.	PINYLC...	255
SOL 30P LVT	PISPC...	258
TERMINAL PIN LVT	PINTPC...	258
ZERO CURVE LVT	PINZC...	258
SOL 30 AUTOADESIVI ALU.	PINS...	260
ZERO CURVE AUTOADESIVI ALU.	PINZ...	260
PROCOVER WOOD	PCRA...	261
SOL 40P ALU.	PNSP...	261
PROFIXER LINE SYSTEM ALU.	PINZ...	262
PROSCREW ALU. BASE + TOP	PSWC...	264
PROSCREW ALU. TOP	PSWC...	264
PROSCREW BASE ALU.	PSWC...	264
PROMULTISKIRT SQUARE pvc	BTEPR..S	266
PROMULTISKIRT ROUND pvc	BTEPR..R	267
SKIRTING 7016 PVC	BTEPR...7016	268
SKIRTING 40 PVC	BTEPR...4010	269
SKIRTING 7011 PVC	BTEPR...7011	269
PROANGLE WOOD PVC	PGAW...15	270
PROSEAL WOOD PVC	PSAW...20	270
LVT PROFILES	PIN...	271
PROINSERT (top)	PIN...	272
PROINSERT (optional)	VIN...	273

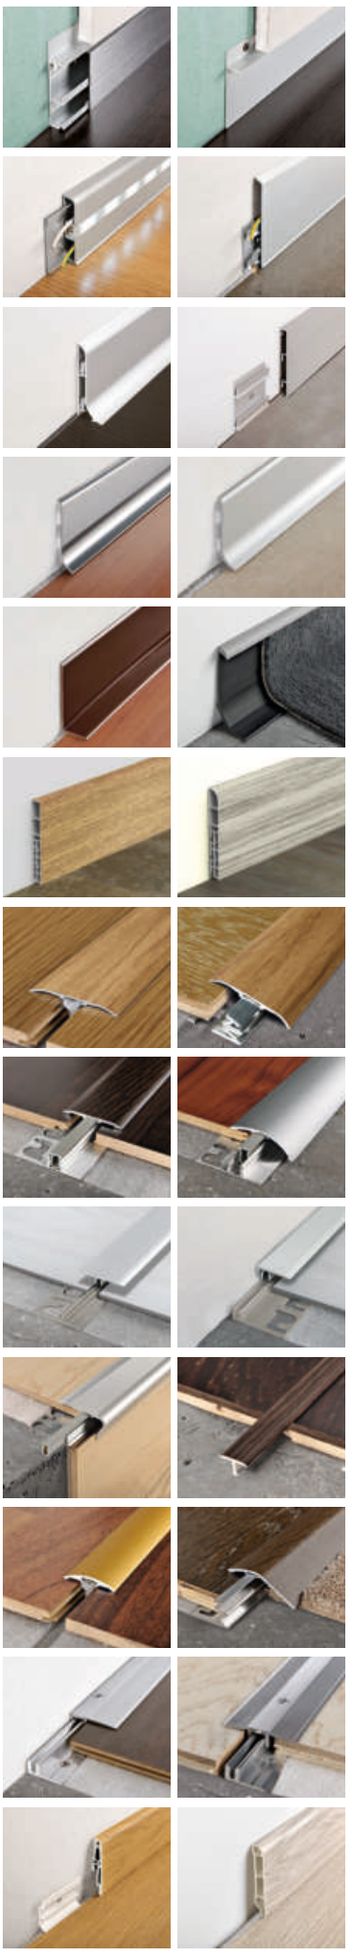

PROGRESS® PROFILES

= News 2023

DO IT YOURSELF

ARTICLE	CODE	PAGE
CORNER EQUAL SIDES ALU.	AG...	276
CORNER EQUAL SIDES BRASS	AGOL...	276
CORNER EQUAL SIDES STEEL	AGAC...	276
CORNER EQUAL SIDES PVC	AGP...	277
CORNER L-FORM ALU.	AL...	277
CORNER L-FORM PVC	ALP...	277
CANAL DOUBLE U-FORM ALU.	CW...	278
CANAL U-FORM.	CU...	278
FLAT ALU.	PI...	279
FLAT BRASS	PI...	279
EMPTY ROUND TUBE ALU.	TV...	280
FULL ROUND TUBE ALU.	TP...	280
FULL SQUARE TUBE ALU.	TQP...	280
CURVE PROFILE ALU.	UG...	281
EMPTY RECTANGULAR TUBE ALU.	TR...	281
EMPTY SQUARE TUBE ALU.	TQV...	281
CONTRAINBALANCE ALU.	CT...	282
PROFILE T-FORM ALU.	T...	282
IRON	PIF...	283







ANCHORING CLIPS FOR WATERSTOP	CLPS	307
WATERSTOP	WP...	307
PRODISTANZ	PDZ...	308
MULTIPIEDE	DMP...	309
RAPY 100	PLF...	309
RAPY 100 ECO	PLF...R...	309
RAPY 200	PLFE...	309
PAU	PPU...	310
PAV	PPV...	310
DOPPY	PPY...	311
SPACER FOR GLASS BRICK	DSVT	311
SPACER FOR VERTICAL / HORIZONTAL MESH	DVO...	311
FLAT SPACER	PPN...	312
PROTECTIVE CAPS	PCPF...	312
SPACERS PAX-PAL-PAS	PP...	313
GASKETS FOR PRECAST FORMS	M...	314
GAP-COVERING BALLOON SHEATH	C 550...	319
PAVIJOINT PVC	PVJ...	320
SHEATH LAYING TROLLEY	CPGC...	321




PRODUCTS FOR LAYING

ARTICLE	CODE	PAGE
PROLEVELING SYSTEM	PRS...	289
PROLEVELING WEDGE SYSTEM	PRLW...	290
MULTISPACER	MSP...	291
SPACERS LEVELING WEDGES	R...	291
PROSUPPORT TUBE SYSTEM	PST...	292
PROSUPPORT PROFILE A & B	PFPSAL...	295
PROSUPPORT PROFILE T & N	PSPRPT...	295
PRORAIL SYSTEM	PSTRAN	296
PROSUPPORT SLIM SYSTEM	PSTSL...	298
SUPPORT AND LEVELLER	SQG...	299
MAGNET KIT	KMD	300
PROCARE CLEAN	PRCLEAN	300
PROPOLISH	PRLISH	300
SCISSORS FOR PVC PROFILES	FTPP	300
ROLLER	PRSPD 10	301
TROWEL	PFTT...	301
TROWEL PVC	PSM	301

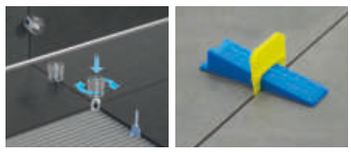









BUILDINGS SYSTEM

ARTICLE	CODE	PAGE
END CAPS FOR DISTANCE TUBE	PPT...	304
FINNED DISTANCE TUBE PVC	TDA...	304
SNAP-ON STRAND SHEATH PVC	R11...	304
SNAP-ON STRAND TUBE PVC	R11...	304
DRIP PVC	GCT...	305
RIBBED DISTANCE TUBE PVC	PPD...	305
FISHBONE RIBBED JOINT PVC	GRP...	306
PROFILE TRIANGULAR CHAMFER	PST...	306
PROFILE WITH DOUBLE CHAMFER	R...	306
ROUNDED TRIANGULAR CHAMFER FILLET	PSD...	306

MARKETING


ARTICLE	CODE	PAGE
SQUARE SHOW CASE	ESPQC...	324
EXPOSURE WALL	ESHPAN 250	325
PROLISTEL AND SKIRTING DISPLAY	ESPCLSH...	326
ROTATING DISPLAY	ESPGSM 18	326
SAMPLE BOARD	PESP...	326
SMALL EXPOSURE STAND	CURAS	326
TROLLEY	TRAG18	326
SKIRTING ROTATING DISPLAY	ESPGSMBT	327
PROFILES COLOUR RANGE	COL...	328
PROSKIRTING LED / GILED DISPLAY	ESPGLED...	328
SAMPLE CASES	COF...	328
MEMBRANE CASE	COFMIE	329
PRODESO HEAT / PRODESO / PROTERRACE DISPLAY	ESPPDHT...	329
PRODESO/PRODESO HEAT DISPLAY	SPCPDES...	329
PROSHOWER SYSTEM DISPLAY	ESPSHW 70	329
EXIBITION BOARD	PNPSR	330
PROLEVELING SYSTEM BOARD	PNPLS	330
PROLEVELING SYSTEM DISPLAY	ESPPLS	330
PROLEVELING WEDGE SYSTEM BOARD	PNPLWS	330
PROSUPPORT TUBE DISPLAY	ESPPST	330
PROTERRACE DISPLAY	ESPFDPP	330
SPACERS DISPLAY	ESPD	330
BROCHURE	BR...	331
CATALOGUES	CAT...	331
COUNTER DISPLAY FOR BROCHURES	ESPB...	331
COUNTER DISPLAY FOR FLYER	PBPLS...	331
FLYER	FLY...	331
MINICATALOGUE / BROCHURE	MCAT...	331
MODULAR DISPLAY SYSTEM	-	332
SHOWROOM SET-UP EXAMPLES	-	334
DISPLAYS FOR PROFILES	PEP...	337
EXPOSURE DISPLAY PEM	PEM	337
GADGETS	-	338



= News 2023

PROGRESS® PROFILES

PROGRESS® PROFILES

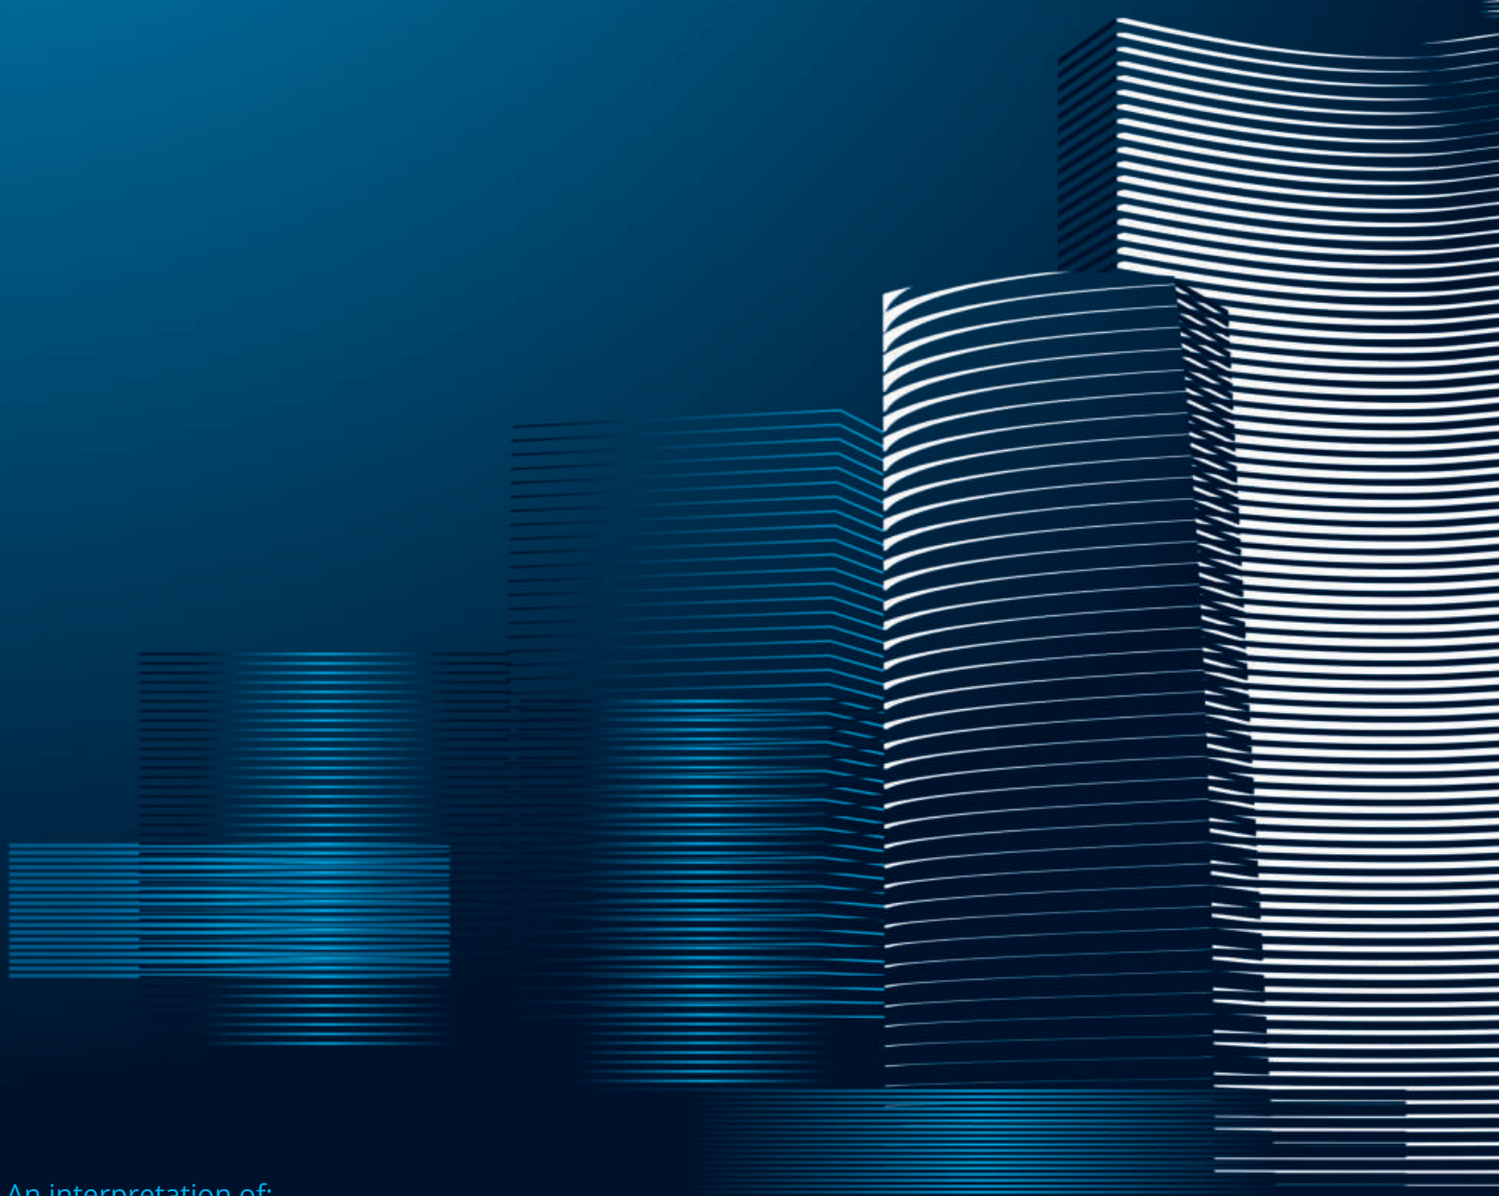

An interpretation of:
Unicredit Tower, César Pelli &
Vertical Forest, Stefano Boeri Architetti, MILAN (Italy), 2014




PROFILES FOR WALLS

PROFILES & SYSTEMS

PROJOLLY SQUARE


POLISHED, SUPER POLISHED, SANDED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY SQUARE is a square corner bead profile in polished, super polished, sanded, brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

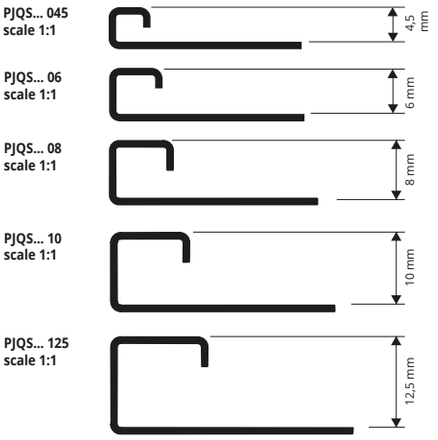

PJQSAC/S 11 & PJQSACML 11 AVAILABLE H 11 MM
PJQSAC/S 15 & PJQSACML 15 AVAILABLE H 15 MM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

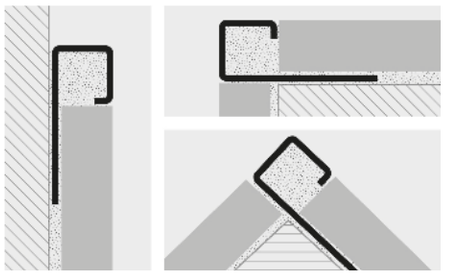

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - Pack **20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm**

Article	H mm	€/lm	€/Pc
PJQSAC 045	4,5	9,58	25,87
PJQSAC 06	6	10,08	27,22
PJQSAC 07	7	10,37	28,00
PJQSAC 08	8	10,68	28,84
PJQSAC 09	9	10,95	29,57
PJQSAC 10	10	11,25	30,38
PJQSAC 11	11	11,69	31,56
PJQSAC 125	12,5	11,89	32,10
PJQSAC 15	15	12,96	34,99

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo Packed
bar length **2,7 lm** - Pack **20 Pcs - 54 lm - 8/10 mm**

Article	H mm	€/lm	€/Pc
PJQSACML 045	4,5	12,89	34,80
PJQSACML 06	6	13,61	36,75
PJQSACML 07	7	14,11	38,10
PJQSACML 08	8	14,63	39,50
PJQSACML 09	9	15,29	41,28
PJQSACML 10	10	15,97	43,12
PJQSACML 11	11	16,28	43,96
PJQSACML 125	12,5	16,54	44,66
PJQSACML 15	15	18,59	50,19

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - Pack **20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm**

Article	H mm	€/lm	€/Pc
PJQSACS 045	4,5	11,11	30,00
PJQSACS 06	6	11,69	31,56
PJQSACS 07	7	12,89	34,80
PJQSACS 08	8	14,11	38,10
PJQSACS 09	9	14,47	39,07
PJQSACS 10	10	14,82	40,01
PJQSACS 11	11	15,07	40,69
PJQSACS 125	12,5	15,46	41,74
PJQSACS 15	15	16,42	44,33

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - Pack **20 Pcs - 54 lm - 8/10 mm**

Article	H mm	€/lm	€/Pc	
PJQSACSB 07	7	14,66	39,58	*
PJQSACSB 08	8	15,09	40,74	*
PJQSACSB 09	9	15,46	41,74	*
PJQSACSB 10	10	15,81	42,69	
PJQSACSB 125	12,5	16,60	44,82	

COLOURS



ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED, SATIN AND SANDED FINISH ST. STEEL AISI 304/1.4301-V2A / PLASTIC

* **Capsules & end caps of the on demand profiles are also on demand**

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSAC .../...	045/06/07/08/09/ 10/11/125/15	156,20	32,85
TPJQSAC .../...	045/06/07/08/09/ 10/11/125/15	29,54	6,44

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQSAC 045/10**

CAPSULES and END CAPS - SANDED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACSB .../...	07/08/09 10/125	196,90	41,35
TPJQSACSB .../...	07/08/09 10/125	29,54	6,44

Choose the desired pack. & height
Ex.: 8 mm capsule in 10 Pcs Pack - **CPJQSACSB 08/10**

CAPSULES AND END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACS .../...	045/06/07/08/09/ 10/11/125/15	175,59	36,88
TPJQSACS .../...	045/06/07/08/09/ 10/11/125/15	29,54	6,44

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQSACS 045/10**

JOINTS - PLASTIC


Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/07/08/09/ 10/11/125/15	28,15	6,16

Choose the desired pack. & height
Ex.: 4,5 mm joint in 10 Pcs Pack - **GIJQ 045/10**

CAPSULES - SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACML .../...	045/06/07/08/09/ 10/11/125/15	194,49	40,91
TPJQSACML .../...	045/06/07/08/09/ 10/11/125/15	26,86	5,86


Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQSACML 045/10**

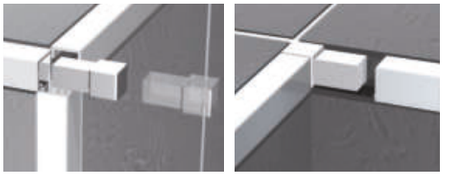

JOINT **CAPSULE** **END CAP**



GIJQ .../... **CPJQS... .../...** **TPJQS... .../...**



= *News 2023*

* **= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole Packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROJOLLY SQUARE is a square corner bead profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROJOLLY SQUARE

POLISHED, BRUSHED STAINLESS STEEL
AISI 316LL/1.4404-V4A



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film
bar length **2,7 LM** - Pack **20 Pcs - 54 lm - 8/10 mm**

Article	H mm	€/lm	€/Pc	
PJQSACM 08	8	13,86	37,42	*
PJQSACM 10	10	14,61	39,45	
PJQSACM 11	11	15,20	41,04	
PJQSACM 125	12,5	15,45	41,72	

COLOURS

ACM - Polished stainless st. AISI 316LL



BRUSHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film
bar length **2,7 LM** - Pack **20 Pcs - 54 lm - 8/10 mm**

Article	H mm	€/lm	€/Pc	
PJQSACMS 10	10	18,99	51,27	*
PJQSACMS 11	11	19,77	53,38	*
PJQSACMS 125	12,5	20,08	54,22	*

COLOURS

ACMS - Brushed stainless st. AISI 316LL

PJQSACM 08
scale 1:1



PJQS... 10
scale 1:1



PJQS... 11
scale 1:1



PJQS... 125
scale 1:1



INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

CAPSULES, END CAPS and THREE-WAYS JOINTS

STAINLESS STEEL AISI 316LL

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 316LL/1.4404

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACM .../...	08/10/11/12,5	202,99	42,61
TPJQSACM .../...	08/10/11/12,5	38,29	7,67

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs PACMk - **CPJQSACM 10/10**

CAPSULES and END CAPS - BRUSHED STAINLESS STEEL AISI 316LL/1.4404


Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACMS .../...	10/11/125	202,99	42,61
TPJQSACMS .../...	10/11/125	38,29	7,67

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs PACMk - **CPJQSACMS 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	08/10/11/125	28,15	6,16

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - **GIJQ 08/10**



END CAP



TPJQSACM .../...

CAPSULE



CPJQSACM .../...

JOINT



GIJQ .../...



*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole Packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY SQUARE is a square corner bead profile in chromed brass or antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and elegance and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

CHROMED BRASS, BRUSHED AND ANTIQUE BRASS





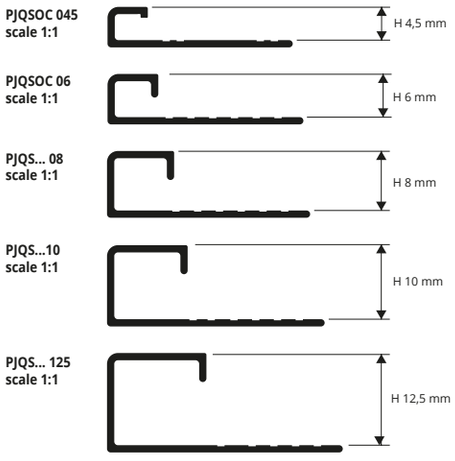

CHROMED BRASS thermo Packed
bar length **2,7 lm** - Pack **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PJQSOC 045	4,5	20,85	56,30	*
PJQSOC 06	6	23,79	64,23	
PJQSOC 08	8	28,13	75,95	
PJQSOC 10	10	30,03	81,08	
PJQSOC 125	12,5	31,13	84,05	

BRUSHED BRASS thermo Packed
bar length **2,7 lm** - Pack **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PJQSOS 045	4,5	13,86	37,42	*
PJQSOS 06	6	16,12	43,52	*
PJQSOS 08	8	16,81	45,39	*
PJQSOS 10	10	17,61	47,55	*
PJQSOS 125	12,5	19,53	52,73	*

ANTIQUE BRASS thermo Packed bar length **2,7 lm**
Pack **20 Pcs - 54 lm (PJQSOB 125 -** Pack **10 Pcs)**

Article	H mm	€/lm	€/Pc
PJQSOB 08	8	35,52	95,90
PJQSOB 10	10	38,58	104,17
PJQSOB 125	12,5	40,71	109,92

COLOURS




OC - Chromed brass | **OB** - Antique brass | **OS** - Brushed brass

INSTRUCTIONS FOR LAYING

1. Choose "PROJOLLY SQUARE" according to the tile thickness. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

EXAMPLES OF LAYING

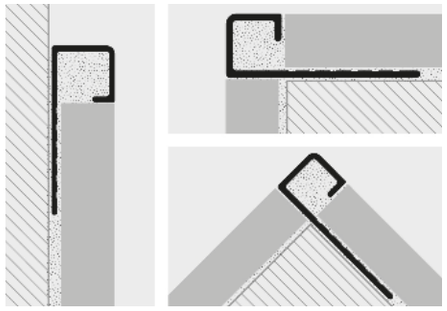

CAPSULES, END CAPS and THREE-WAYS JOINTS

CHROMED BRASS - PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - CHROMED BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSOC .../...	045/06/08/ 10/125	166,83	35,05
TPJQSOC .../...	045/06/08/ 10/125	31,47	6,62

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSOS 10/10**

CAPSULES and END CAPS - ANTIQUE BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSOB .../...	08/10/125	214,51	45,16
TPJQSOB .../...	08/10/125	40,50	4,25

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSOB 10/10**

CAPSULES and END CAPS - BRUSHED BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSOS .../...	045/06/08/ 10/125	166,83	35,05
TPJQSOS .../...	045/06/08/ 10/125	31,47	6,62

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSOS 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/ 10/125	29,56	6,47

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - **GIJQ 08/10**

JOINT



GIJQ .../...

CAPSULE




CPJQSOC .../...

END CAP



TPJQSOC .../...







= News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY SQUARE

ANODIZED AND POLISHED ALUMINIUM

PROJOLLY SQUARE is a square corner bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

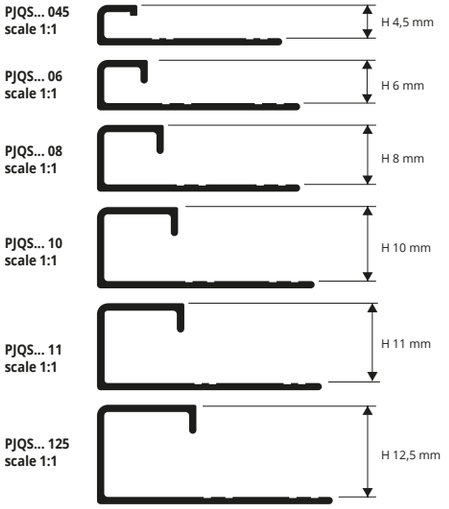

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

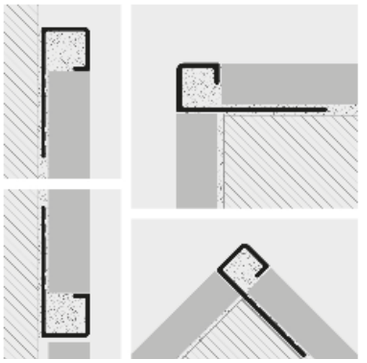

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





ANODIZED ALUMINIUM thermo Packed (silver-gold-copper-titanium-black)
bar length **2,7 lm** - Pack **40 Pcs - 108 lm (H 12,5 mm -** Pack **20 Pcs - 54 lm)**

Article	H mm	€/lm	€/Pc	
PJQSAA 045	4,5	5,54	14,96	*
PJQSAA 06	6	5,64	15,23	
PJQSAA 08	8	5,68	15,34	
PJQSAA 10	10	6,10	16,47	
PJQSAA 11	11	6,59	17,79	
PJQSAA 125	12,5	6,97	18,82	
PJQSAO 08	8	6,51	17,58	*
PJQSAO 10	10	7,04	19,01	*
PJQSAO 125	12,5	7,78	21,01	*
PJQSAR 045	4,5	7,17	19,36	*
PJQSAR 06	6	7,51	20,28	
PJQSAR 08	8	7,78	21,01	
PJQSAR 10	10	8,18	22,09	
PJQSAR 125	12,5	8,73	23,57	
PJQSAT 045	4,5	5,91	15,96	*
PJQSAT 06	6	6,24	16,85	
PJQSAT 08	8	6,51	17,58	
PJQSAT 10	10	7,04	19,01	
PJQSAT 11	11	7,44	20,09	
PJQSAT 125	12,5	7,78	21,01	
PJQSNE 08	8	10,77	29,08	
PJQSNE 10	10	11,42	30,83	
PJQSNE 11	11	12,74	34,40	
PJQSNE 125	12,5	14,30	38,61	

POLISHED ALUMINIUM thermo Packed (chrome- gold -titanium-copper-black)
bar length **2,7 lm** - Pack **40 Pcs - 108 lm (H 12,5 mm -** Pack **20 Pcs - 54 lm)**

Article	H mm	€/lm	€/Pc	
PJQSBC 045	4,5	9,21	24,87	*
PJQSBC 06	6	9,31	25,14	
PJQSBC 08	8	9,40	25,38	
PJQSBC 10	10	10,33	27,89	
PJQSBC 11	11	10,99	29,67	
PJQSBC 125	12,5	11,67	31,51	
PJQSBO 08	8	9,40	25,38	*
PJQSBO 10	10	10,33	27,89	
PJQSBO 125	12,5	11,67	31,51	
PJQSBR 045	4,5	9,31	25,14	*
PJQSBR 06	6	9,31	25,14	
PJQSBR 08	8	9,40	25,38	*
PJQSBR 10	10	10,33	27,89	
PJQSBR 125	12,5	11,67	31,51	
PJQSBT 045	4,5	9,31	25,14	*
PJQSBT 06	6	9,31	25,14	
PJQSBT 08	8	9,40	25,38	
PJQSBT 10	10	10,33	27,89	
PJQSBT 11	11	10,99	29,67	
PJQSBT 125	12,5	11,67	31,51	
PJQSBN 08	8	12,09	32,64	
PJQSBN 10	10	12,79	34,53	
PJQSBN 11	11	13,19	35,61	
PJQSBN 125	12,5	13,64	36,83	

COLOURS

ANODIZED



AA - Anod. silver alum. | **AO** - Anod. gold alum. | **AR** - Anod. copper alum. | **AT** - Anod. titanium alum. | **NE** - Anod. black alum.

POLISHED



BC - Pol. chrome alum. | **BO** - Pol. gold alum. | **BR** - Pol. copper alum. | **BT** - Pol. titanium alum. | **BN** - Pol. black alum.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED AND POLISHED ALUMINIUM / PLASTIC

* **Capsules & end caps of the on demand profiles are also on demand**

CAPSULES and END CAPS - ANODIZED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSAA .../...	045/06/08/10/11/125	64,02	14,07
TPJQSAA .../...	045/06/08/10/11/125	29,54	6,44
CPJQSAO .../...	8/10/125	72,52	15,41
TPJQSAO .../...	8/10/125	29,54	6,44
CPJQSAR .../...	045/06/08/10/125	72,52	15,41
TPJQSAR .../...	045/06/08/10/125	29,54	6,44
CPJQSAT .../...	045/06/08/10/11/125	72,52	15,41
TPJQSAT .../...	045/06/08/10/11/125	29,54	6,44
CPJQSNE .../...	08/10/11/125	94,33	20,74
TPJQSNE .../...	08/10/11/125	29,54	6,44

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSAA 10/10**

CAPSULES and END CAPS - POLISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSBC .../...	045/06/08/10/11/125	64,02	14,07
TPJQSBC .../...	045/06/08/10/11/125	29,54	6,44
CPJQSBO .../...	8/10/125	72,52	15,41
TPJQSBO .../...	8/10/125	29,54	6,44
CPJQSBR .../...	045/06/08/10/125	72,52	15,41
TPJQSBR .../...	045/06/08/10/125	29,54	6,44
CPJQSBT .../...	045/06/08/10/11/125	72,52	15,41
TPJQSBT .../...	045/06/08/10/11/125	29,54	6,44
CPJQSBN .../...	08/10/11/125	94,33	20,74
TPJQSBN .../...	08/10/11/125	29,54	6,44

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSBC 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/10/11/125	28,15	6,16

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - **GIJQ 08/10**

JOINT



GIJQ .../...

CAPSULE




CPJQS... .../...

END CAP



TPJQS... .../...



* **= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY SQUARE is a square corner bead profile in brushed and tiltex aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

BRUSHED POLISHED AND
ANODIZED BRUSHED TILTEX ALUMINIUM





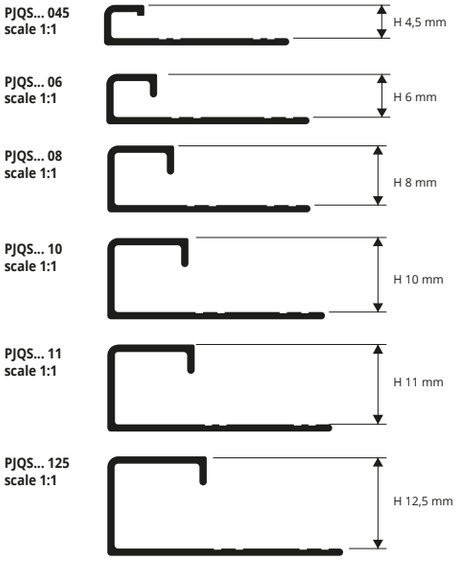

BRUSHED POLISHED ALUM. thermo Packed (silver-gold-copper titanium-black)
bar length **2,7 lm** - Pack **40 Pcs - 108 lm (H 12,5 mm -** Pack **20 Pcs - 54 lm)**

Article	H mm	€/lm	€/Pc	
PJQSBS 045	4,5	10,12	27,32	*
PJQSBS 06	6	10,46	28,24	
PJQSBS 08	8	10,58	28,57	
PJQSBS 10	10	11,40	30,78	
PJQSBS 11	11	12,09	32,64	
PJQSBS 125	12,5	12,87	34,75	
PJQSRS 045	4,5	10,12	27,32	*
PJQSRS 06	6	10,46	28,24	
PJQSRS 08	8	10,58	28,57	
PJQSRS 10	10	11,40	30,78	
PJQSRS 125	12,5	12,87	34,75	
PJQSTS 045	4,5	10,12	27,32	*
PJQSTS 06	6	10,46	28,24	
PJQSTS 08	8	10,58	28,57	
PJQSTS 10	10	11,40	30,78	
PJQSTS 11	11	12,09	32,64	
PJQSTS 125	12,5	12,87	34,75	
PJQSBOS 08	8	10,58	28,57	
PJQSBOS 10	10	11,40	30,78	
PJQSBOS 125	12,5	12,87	34,75	
PJQSBRAS 10	10	11,40	30,78	*
PJQSBRAS 125	12,5	12,87	34,75	*
PJQSNS 08	8	13,77	37,18	
PJQSNS 10	10	14,82	40,01	
PJQSNS 11	11	15,73	42,47	
PJQSNS 125	12,5	16,74	45,20	


ANOD. BRUSHED TILTEX ALUM. thermo Packed (silver-copper-titanium)
- bar length **2,7 lm** - Pack **40 Pcs - 108 lm (H 12,5 mm -** Pack **20 Pcs - 54 lm)**

Article	H mm	€/lm	€/Pc
PJQSBX 06	6	11,93	32,21
PJQSBX 08	8	13,36	36,07
PJQSBX 10	10	14,29	38,58
PJQSBX 11	11	15,03	40,58
PJQSBX 125	12,5	15,82	42,71
PJQSRX 06	6	11,93	32,21
PJQSRX 08	8	13,36	36,07
PJQSRX 10	10	14,29	38,58
PJQSRX 125	12,5	15,82	42,71
PJQSTX 06	6	11,93	32,21
PJQSTX 08	8	13,36	36,07
PJQSTX 10	10	14,29	38,58
PJQSTX 11	11	15,03	40,58
PJQSTX 125	12,5	15,82	42,71

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

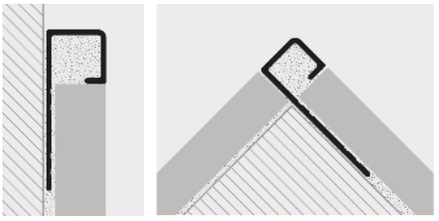

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED BRUSHED POLISHED ALUMINIUM, TILTEX / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - BRUSHED POLISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSBS .../...	045/06/08/10/11/125	72,52	15,41
TPJQSBS .../...	045/06/08/10/11/125	29,54	6,44
CPJQSRS .../...	045/06/08/10/125	72,52	15,41
TPJQSRS .../...	045/06/08/10/125	29,54	6,44
CPJQTS .../...	045/06/08/10/11/125	72,52	15,41
TPJQSTS .../...	045/06/08/10/11/125	29,54	6,44
CPJQSBOS .../...	08/10/125	72,52	15,41
TPJQSBOS .../...	08/10/125	29,54	6,44
CPJQSBRAS .../...	10/125	72,52	15,41
TPJQSBRAS .../...	10/125	29,54	6,44
CPJQSNS .../...	08/10/11/125	72,52	15,41
TPJQSNS .../...	08/10/11/125	29,54	6,44

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSBS 10/10**

CAPSULES and END CAPS - ANODIZED BRUSHED TILTEX ALUMINIUM


Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSBX .../...	06/08/10/11/125	95,21	19,98
TPJQSBX .../...	06/08/10/11/125	29,54	6,44
CPJQSRX .../...	06/08/10/125	95,21	19,98
TPJQSRX .../...	06/08/10/125	29,54	6,44
CPJQSTX .../...	06/08/10/11/125	95,21	19,98
TPJQSTX .../...	06/08/10/11/125	29,54	6,44

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSBX 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/10/11/125	28,15	6,16

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - **GIJQ 08/10**

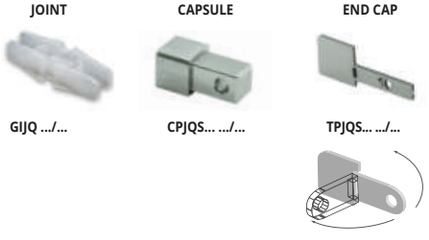


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY SQUARE


ALUMINIUM STONE LINE, VARNISHED ALUMINIUM AND TUSCANY LINE

PROJOLLY SQUARE is a corner bead profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of several finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY SQUARE** an elegant and much-sought after profile. workmanlike application.

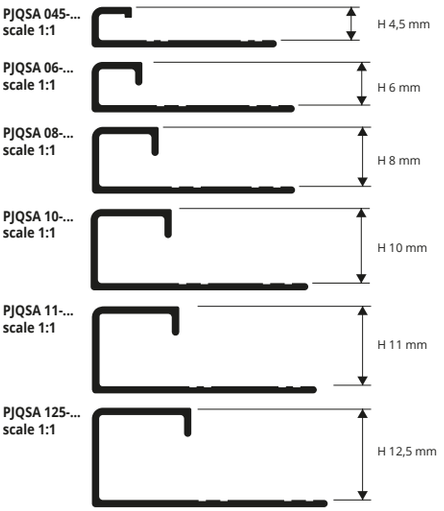





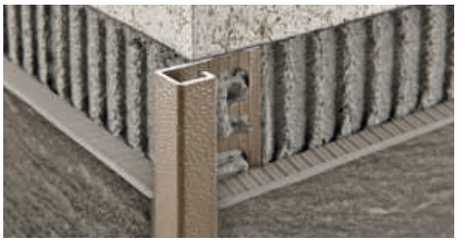

STONE LINE thermo Packed
bar length **2,7 lm** - Pack **20 Pcs-54 lm**

Article	H mm	€/lm	€/Pc
PJQSA 06-SL...	6	9,13	24,65
PJQSA 08-SL...	8	9,47	25,57
PJQSA 10-SL...	10	9,80	26,46
PJQSA 11-SL...	11	10,12	27,32
PJQSA 125-SL...	12,5	10,45	28,21

Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.

TUSCANY LINE thermo Packed
bar length **2,7 lm** - Pack **40 Pcs- 108 lm (H 12,5 mm -** Pack **20 Pcs)**

Article	H mm	€/lm	€/Pc	
PJQSA 08-...	8	9,47	25,57	*
PJQSA 10-...	10	9,80	26,46	
PJQSA 125-...	12,5	10,45	28,21	


Available in the colours: 03TU - 05TU - 20TU.
The code of the selected colour must be added to the article code.
E.g.: PJQA 08-... (chosen colour tuscany grey) PJQA 08-03TU.

WHITE VARNISHED ALUMINIUM thermo Packed
bar length **2,7 lm** - Pack **20 Pcs - 54 lm** (white colour **40 Pcs-108 lm**)

Article	H mm	€/lm	€/Pc	
PJQSA 045-01	4,5	6,63	17,90	*
PJQSA 08-01	8	6,85	18,50	
PJQSA 10-...	10	7,37	19,90	
PJQSA 11-01	11	7,71	20,82	*
PJQSA 125-01	12,5	8,03	21,68	

Available in the colours: 01 - 0106 - 02 - 11. Available on demand 01O - 03 - 0211 - 0311 - 06 - 10 - 17 with a minimum quantity order of 100 pcs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

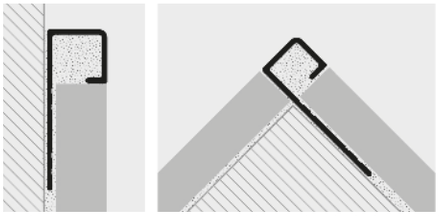


1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



CAPSULES, END CAPS and THREE-WAYS JOINTS

ALUMINIUM STONE LINE, TUSCANY LINE AND VARNISHED ALUMINIUM / PLASTIC

* **Capsules & end caps of the on demand profiles are also on demand**

CAPSULES and END CAPS - STONE LINE

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSA ...-SL.../...	06/08/10/ 11/12,5	75,05	16,52
TPJQSA ...-SL.../...	06/08/10/ 11/12,5	48,30	10,63

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSA 10-SL0**1/10

CAPSULES and END CAPS - VARNISHED

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSA ...-.../...	045/08/10 11/125	65,43	14,38
TPJQSA ...-.../...	045/08/10 11/125	29,54	6,44

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSA 10-03/**10

CAPSULES and END CAPS - TUSCANY LINE

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSA ...-...TU/...	08/10/125	101,18	22,26

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - **CPJQSA 10-03/10**

JOINT



GIJQ .../...

CAPSULE




CPJQSA ...-.../...

END CAP



TPJQSA ...-.../...



JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/ 10/11/125	28,15	6,16

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - **GIJQ 08/10**

* **= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROJOLLY SQUARE is a square corner bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY SQUARE** a much sought-after profile. It can be easily matched with the wall covering and that allows an elegant workmanlike application.

PROJOLLY SQUARE

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN







NON-TOXIC SHOCKPROOF VINYL RESIN

bar length **2,7 lm** - Pack **20 Pcs - 54 lm** (white colour **40 Pcs-108 lm**)

Article	H mm	€/lm	€/Pc
PJQ 06-...	6	1,32	3,56
PJQ 08-...	8	1,38	3,73
PJQ 10-...	10	1,50	4,05
PJQ 125-...	12,5	1,63	4,40

H 6 mm available the colours 01, other colours on demand.
Available in the colours: 00-01-0106-03-06-12-17. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJQ 08-... (chosen colour white) PJQ 08-01.

WHITE NOT FOR SALE SINGLY

PJQ 06-... scale 1:1



PJQ 08-... scale 1:1




PJQ 10-... scale 1:1



PJQ 125-... scale 1:1




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

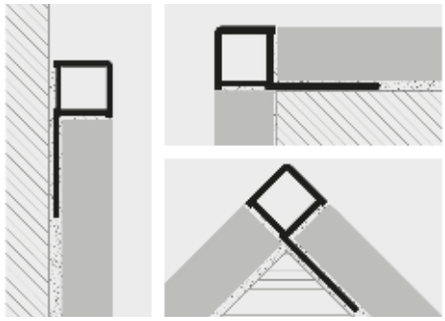

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired colour. **2.** Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

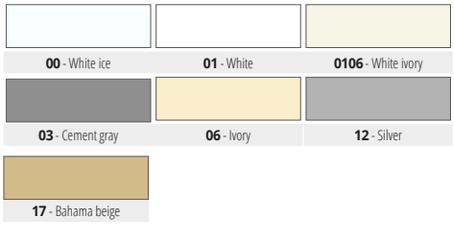


AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



CAPSULES and THREE-WAYS JOINTS

POLYPROPYLENE / POLYETYLENE UV RESISTANT





INTERNAL CAPSULES POLYPROPYLENE/POLYETYLENE

Article	H mm	€/Pack 20 Pcs	€/Pack 5 Pcs
IPJQ 06-.../...	6	22,12	6,63
IPJQ 08-.../...	8	22,59	6,75
IPJQ 10-.../...	10	23,11	6,91
IPJQ 125-.../...	12,5	23,86	7,78

EXTERNAL CAPSULES POLYPROPYLENE/POLYETYLENE

Article	H mm	€/Pack 20 Pcs	€/Pack 5 Pcs
CPJQ 06-.../...	6	22,12	6,63
CPJQ 08-.../...	8	22,59	6,75
CPJQ 10-.../...	10	23,11	6,91
CPJQ 125-.../...	12,5	23,86	7,78

H 6 mm available the colours 01, other colours on demand.
Available in the colours: 00-01-0106-03-06-12-17. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29
The code of the selected colour must be added to the article code.
E.g.: CPJQ 08-.../... (chosen colour white) CPJQ 08-01/20.
IPJQ 08-.../... (chosen colour white) IPJQ 08-01/20.

INTERNAL CAPSULES



IPJQ ...-.../...

EXTERNAL CAPSULES



CPJQ ...-.../...


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY QUART

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY QUART is a quarter-circle rounded bead profile in polished, super polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

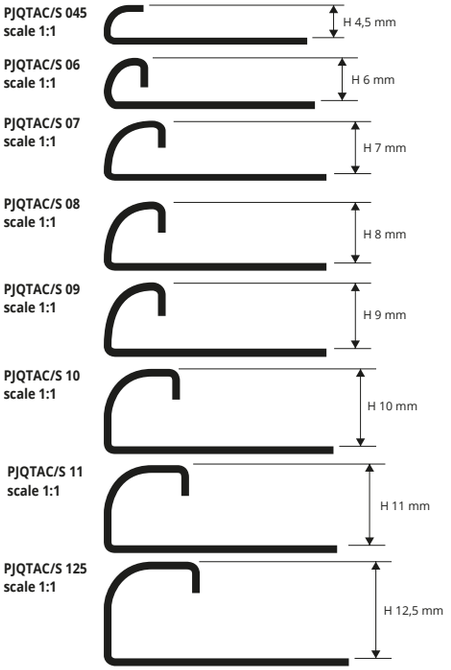

EXAMPLES FOR LAYING METHODS





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm**

Article	H mm	€/lm	€/Pc
PJQTAC 045	4,5	10,61	28,65
PJQTAC 06	6	11,56	31,21
PJQTAC 07	7	11,95	32,27
PJQTAC 08	8	12,33	33,29
PJQTAC 09	9	12,80	34,56
PJQTAC 10	10	13,28	35,86
PJQTAC 11	11	13,80	37,26
PJQTAC 125	12,5	14,24	38,45

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed
bar length **2,7 lm** - pack. **20 Pcs 54 lm (H 4,5 mm - 108 ml) - 10/10 mm**

MIRROR LINE

Article	H mm	€/lm	€/Pc	
PJQTACML 045	4,5	12,89	34,80	*
PJQTACML 06	6	14,44	38,99	*
PJQTACML 07	7	14,85	40,09	*
PJQTACML 08	8	15,20	41,04	*
PJQTACML 09	9	15,70	42,39	*
PJQTACML 10	10	16,16	43,63	
PJQTACML 11	11	16,66	44,98	*
PJQTACML 125	12,5	17,05	46,04	*



Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm**

Article	H mm	€/lm	€/Pc
PJQTACS 045	4,5	13,35	36,05
PJQTACS 06	6	13,85	37,40
PJQTACS 07	7	14,31	38,64
PJQTACS 08	8	14,68	39,64
PJQTACS 09	9	15,21	41,07
PJQTACS 10	10	15,71	42,42
PJQTACS 11	11	16,17	43,66
PJQTACS 125	12,5	16,54	44,66

COLOURS



AC - Polished stainless st. AISI 304/1.4301-V2A | **ACML** - Super polished stainless st. AISI 304/1.4301-V2A | **ACS** - Brushed stainless st. AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY QUART to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY QUART" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

* **Capsules & end caps of the on demand profiles are also on demand**

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTAC 045/...	4,5	142,88	31,51
IPJQTAC 045/...	4,5	142,88	31,51
CPJQTAC 06/...	6	148,85	33,54
IPJQTAC 06/...	6	148,85	33,54
CPJQTAC 07/...	7	152,78	33,84
IPJQTAC 07/...	7	152,78	33,84
CPJQTAC 08/...	8	155,57	34,14
IPJQTAC 08/...	8	155,57	34,14
CPJQTAC 09/...	9	161,02	34,49
IPJQTAC 09/...	9	161,02	34,49
CPJQTAC 10/...	10	166,22	34,86
IPJQTAC 10/...	10	166,22	34,86
CPJQTAC 11/...	11	174,34	36,20
IPJQTAC 11/...	11	174,34	36,20
CPJQTAC 125/...	12,5	181,05	37,55
IPJQTAC 125/...	12,5	181,05	37,55
TPJQTAC 045-06-08-10-11-125-.../...		29,54	6,44

Choose the desired packaging: E.g.:CPJQTAC .../10 (Pack. 10 Pcs)
CPJQTAC .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTACS 045/...	4,5	166,22	36,20
IPJQTACS 045/...	4,5	166,22	36,20
CPJQTACS 06/...	6	167,75	36,88
IPJQTACS 06/...	6	167,75	36,88
CPJQTACS 07/...	7	168,38	37,27
IPJQTACS 07/...	7	168,38	37,27
CPJQTACS 08/...	8	169,00	37,55
IPJQTACS 08/...	8	169,00	37,55
CPJQTACS 09/...	9	174,34	37,91
IPJQTACS 09/...	9	174,34	37,91
CPJQTACS 10/...	10	179,66	38,22
IPJQTACS 10/...	10	179,66	38,22
CPJQTACS 11/...	11	186,12	39,23
IPJQTACS 11/...	11	186,12	39,23
CPJQTACS 125/...	12,5	191,84	40,23
IPJQTACS 125/...	12,5	191,84	40,23
TPJQTACS 045-06-08-10-11-125-.../...		29,54	6,44

Choose the desired packaging: E.g.: CPJQTACS .../10 (Pack. 10 Pcs)
CPJQTACS .../2 (Pack. 2 Pcs)

CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A

MIRROR LINE

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTACML 045/...	4,5	166,22	36,20
IPJQTACML 045/...	4,5	166,22	36,20
CPJQTACML 06/...	6	167,75	36,88
IPJQTACML 06/...	6	167,75	36,88
CPJQTACML 07/...	7	168,38	37,27
IPJQTACML 07/...	7	168,38	37,27
CPJQTACML 08/...	8	169,00	37,55
IPJQTACML 08/...	8	169,00	37,55
CPJQTACML 09/...	9	174,34	37,91
IPJQTACML 09/...	9	174,34	37,91
CPJQTACML 10/...	10	179,66	38,22
IPJQTACML 10/...	10	179,66	38,22
CPJQTACML 11/...	11	186,12	39,23
IPJQTACML 11/...	11	186,12	39,23
CPJQTACML 125/...	12,5	191,84	40,23
IPJQTACML 125/...	12,5	191,84	40,23


Choose the desired packaging: E.g.: CPJQTACML .../10 (Pack. 10 Pcs)
CPJQTACML .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT 045/...	4,5	28,15	6,16
GIJQT 06/...	6	28,15	6,16
GIJQT 07/...	7	28,15	6,16
GIJQT 08/...	8	28,15	6,16
GIJQT 09/...	9	28,15	6,16
GIJQT 10/...	10	28,15	6,16
GIJQT 11/...	11	28,15	6,16
GIJQT 125/...	12,5	28,15	6,16

Choose the desired packaging: E.g.: GIJQT .../10 (Pack. 10 Pcs)
GIJQT .../2 (Pack. 2 Pcs)



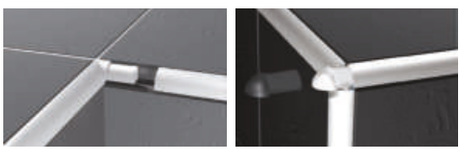

= *News 2023*

* **= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

PROGRESS® PROFILES

PROJOLLY QUART is a quarter-circle rounded bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability in four finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY QUART

ANODIZED AND POLISHED ALUMINIUM





ANODIZED ALUMINIUM (silver-titanium-gold-antique bronze) **thermo packed** bar length **2,7 lm** - pack. **40 Pcs - 108 lm (H 12,5 mm,15 mm -** pack. **20 Pcs)**

Article	H mm	€/lm	€/Pc	
PJQTAA 06	6	5,24	14,15	
PJQTAA 08	8	5,57	15,04	
PJQTAA 10	10	6,01	16,23	
PJQTAA 11	11	6,68	18,04	
PJQTAA 125	12,5	6,78	18,31	
PJQTAA 15	15	7,57	20,44	
PJQTAO 06	6	5,24	14,15	*
PJQTAO 08	8	5,57	15,04	*
PJQTAO 10	10	6,01	16,23	
PJQTAO 11	11	6,68	18,04	*
PJQTAO 125	12,5	6,78	18,31	*
PJQTAT 08	8	6,15	16,61	*
PJQTAT 10	10	6,68	18,04	
PJQTAT 11	11	7,05	19,04	*
PJQTAT 125	12,5	7,52	20,30	*
PJQTBRA 10	10	10,67	28,81	
PJQTBRA 125	12,5	11,61	31,35	

POLISHED ALUMINIUM (chrome-titanium-gold) **thermo packed -** bar length **2,7 lm** - pack. **40 Pcs - 108 lm (H 15 mm - 54 lm) - (H 12,5 mm,15 mm -** pack. **20 Pcs)**

Article	H mm	€/lm	€/Pc	
PJQTBC 06	6	8,53	23,03	
PJQTBC 08	8	9,19	24,81	
PJQTBC 10	10	10,20	27,54	
PJQTBC 11	11	10,84	29,27	
PJQTBC 125	12,5	11,52	31,10	
PJQTBC 15	15	11,98	32,35	
PJQTBO 06	6	8,53	23,03	*
PJQTBO 08	8	9,19	24,81	
PJQTBO 10	10	10,20	27,54	
PJQTBO 11	11	10,84	29,27	*
PJQTBO 125	12,5	11,52	31,10	
PJQTBT 08	8	9,19	24,81	
PJQTBT 10	10	10,20	27,54	
PJQTBT 11	11	10,84	29,27	
PJQTBT 125	12,5	11,52	31,10	

PJQT... 06 — H 6 mm

PJQT... 08 — H 8 mm

PJQT... 10 — H 10 mm


AVAILABLE PJQT... 11 - H 11MM

PJQT... 125 — H 12,5 mm

PJQT... 15 — H 15 mm

COLOURS

ANODIZED



AA - Anodized silver alum. **BRA** - Anod. antique bronze alum. **AO** - Anod. gold alum. **AT** - Anod. titanium alum.


POLISHED



BC - Polished chrome alum. **BO** - Polished gold alum. **BT** - Polished titanium alum.

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART.
CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

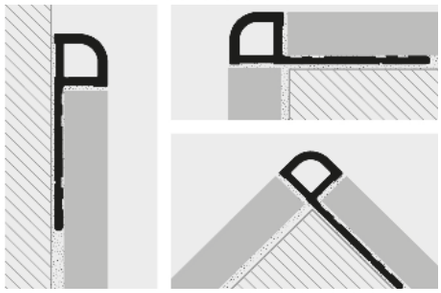

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY QUART" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED, POLISHED ALUMINIUM / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - ANODIZED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTAA .../...	06/08/10/ 11/125/15	62,24	13,69
IPJQTAA .../...	06/08/10/ 11/125/15	62,24	13,69
TPJQTAA .../...	06/08/10/ 11/125/15	29,54	6,44
CPJQTAO .../...	06/08/10/ 11/125	62,24	13,69
IPJQTAO .../...	06/08/10/ 11/125	62,24	13,69
TPJQTAO .../...	06/08/10/ 11/125	29,54	6,44
CPJQTAT .../...	08/10/11/125	64,41	14,76
IPJQTAT .../...	08/10/11/125	64,41	14,76
TPJQTAT .../...	08/10/11/125	29,54	14,76
CPJQTBRA .../...	10/125	64,41	14,76
IPJQTBRA .../...	10/125	64,41	14,76
TPJQTBRA .../...	10/125	29,54	14,76

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTAA 10/10**

CAPSULES and END CAPS - POLISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTBC .../...	06/08/10/ 11/125/15	62,24	13,69
IPJQTBC .../...	06/08/10/ 11/125/15	62,24	13,69
TPJQTBC .../...	06/08/10/ 11/125/15	29,54	6,10
CPJQTBO .../...	06/08/10/ 11/125	62,24	13,69
IPJQTBO .../...	06/08/10/ 11/125	62,24	13,69
TPJQTBO .../...	06/08/10/ 11/125	29,54	6,44
CPJQTBT .../...	08/10/11/125	64,41	14,76
IPJQTBT .../...	08/10/11/125	64,41	14,76
TPJQTBT .../...	08/10/11/125	29,54	6,44

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTBC 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT .../...	06/08/10/ 11/125/15	28,15	6,16

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJQT 10/10**



EXTERNAL CAPSULES CPJQT... .../...



INTERNAL CAPSULES IPJQT... .../...



END CAP TPJQT... .../...



JOINT GIJQT ... .../...




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY QUART

BRUSHED POLISHED, BRUSHED AND VARNISHED ALUMINIUM

PROJOLLY QUART is a quarter-circle rounded bead profile in brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and (only brushed version) like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability in three finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows an elegant workmanlike application.

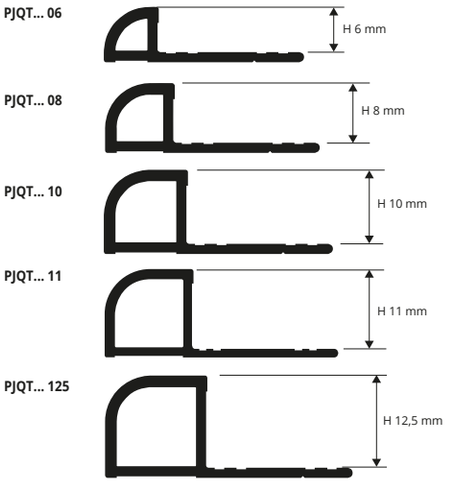

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

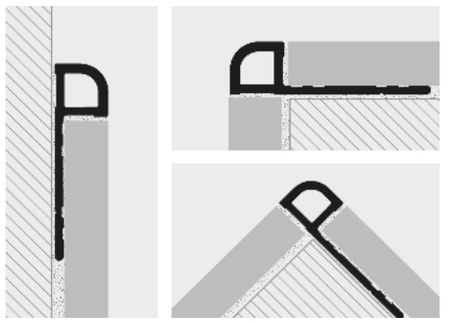

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY QUART" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED POLISHED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm (H 12,5 mm,15 mm -** pack. **20 Pcs)**

Article	H mm	€/lm	€/Pc	
PJQTBS 08	8	10,58	28,57	
PJQTBS 10	10	11,52	31,10	
PJQTBS 11	11	12,15	32,80	*
PJQTBS 125	12,5	12,87	34,75	
PJQTBOS 08	8	10,58	28,57	*
PJQTBOS 10	10	11,52	31,10	*
PJQTBOS 11	11	12,15	32,80	*
PJQTBOS 125	12,5	12,87	34,75	*

BRUSHED ANTIQUE BRONZE ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pc - 108 lm (H 12,5 mm,15 mm -** pack. **20 Pcs)**

Article	H mm	€/lm	€/Pc
PJQTBRAS 10	10	10,67	28,81
PJQTBRAS 125	12,5	11,61	31,35

COLOURS



BS - Brushed polished silver aluminium | **BRAS** - Brushed antique bronze alum.

ON DEMAND MINIMUM QUANTITY 100 PCS



BOS - Brushed gold alum.

(Price to be agreed. Production delay 4/5 weeks)

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.



VARNISHED ALUMINIUM thermo packed - bar length **2,7 M**
pack. **20 Pcs - 54 lm** (white colour **40 Pcs - 108 lm**)

Article	H mm	€/lm	€/Pc	
PJQTA 06-01	6	6,03	16,28	
PJQTA 08-01	8	6,71	18,12	
PJQTA 08-...	8	6,71	18,12	*
PJQTA 10-01	10	7,26	19,60	
PJQTA 10-...	10	7,26	19,60	*
PJQTA 11-01	11	7,52	20,30	
PJQTA 125-01	12,5	7,78	21,01	

Available in the colours: 01. Available on demand 01O - 0106 - 02 - 03 - 11 - 17. The code of the selected colour must be added to the article code. E.g.: PJQTA 08... (chosen colour White) PJQTA 08-01.

COLOURS



01 - Varnished white aluminium **(9016)**

For other colors than white in sizes 06, 11, 125, contact the sales office for quantities and prices

ON DEMAND MINIMUM QUANTITY 100 PCS



0106 - Varnished white ivory alum. **(9001)** | **02** - Varnished light grey alum. **(7035)** | **03** - Varnished dark grey alum. **(7030)**



11 - Varnished black aluminium **(9005)** | **17** - Varnished bahama beige alum. | **01O** - White Matt varnished aluminium **(9016)**

(Price to be agreed. Production delay 4/5 weeks)

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

* **Capsules & end caps of the on demand profiles are also on demand**

POLISHED BRUSHED, VARNISHED ALUMINIUM/ PLASTIC

CAPSULES & CAPS - POLISHED BRUSHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTBS .../...	08/10/11/125	72,52	15,41
IPJQTBS .../...	08/10/11/125	72,52	15,41
TPJQTBS .../...	08/10/11/125	29,54	6,44
CPJQTBOS .../...	08/10/11/125	72,52	15,41
IPJQTBOS .../...	08/10/11/125	72,52	15,41
TPJQTBOS .../...	08/10/11/125	29,54	6,44
CPJQTBRAS .../...	10/125	72,52	15,41
IPJQTBRAS .../...	10/125	72,52	15,41
TPJQTBRAS .../...	10/125	29,54	14,76

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTBS 10/10**

CAPSULES & CAP - VARNISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTA ...-.../...	06/08/10/ 11/125	63,77	14,03
IPJQTA ...-.../...	06/08/10/ 11/125	63,77	14,03
TPJQTA ...-.../...	06/08/10/ 11/125	29,54	6,10

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTA 02-10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT .../...	06/08/10/ 11/125	28,15	6,16

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJQT 10/10**





JOINT

GIJQT ...

EXTERNAL CAPSULES



CPJQT... .../...

INTERNAL CAPSULES



IPJQT... .../...

END CAP



TPJQT... .../...

* **= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

PROGRESS PROFILES

PROJOLLY QUART is a quarter-circle rounded bead profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of thirteen finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY QUART** an elegant and much-sought after profile.

PROJOLLY QUART


STONE LINE ALUMINIUM



STONE LINE ALUMINIUM thermo packed
bar length **2,7 M -** pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PJQTA 06-SL...	6	8,49	22,92	*
PJQTA 08-SL...	8	8,81	23,79	
PJQTA 10-SL...	10	9,13	24,65	
PJQTA 11-SL...	11	9,47	25,57	*
PJQTA 125-SL...	12,5	9,80	26,46	

Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.
The code of the selected colour must be added to the article code.
E.g.: PJQTA 08... (chosen colour stone white) PJQTA 08-SL01.

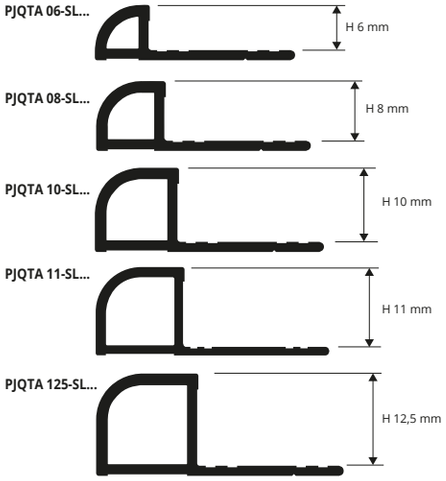

COLOURS

STONE LINE




SL01 - Stone white | **SL02** - Stone cream | **SL03** - Stone greywory | **SL04** - Stone sand | **SL05** - Stone gray | **SL06** - Stone cristal gray | **SL07** - Stone antragray

SL08 - Stone antradark | **SL09** - Stone bronze | **SL10** - Stone corten | **SL11** - Stone brown | **SL12** - Stone black | **SL13** - Stone oyster grey



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

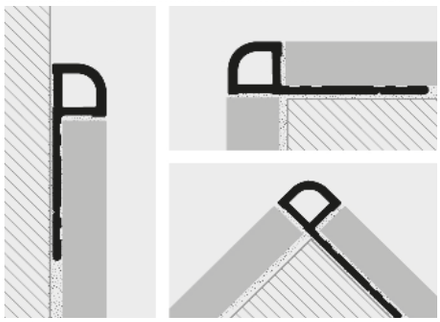

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY QUART" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

STONE LINE ALUMINIUM / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT .../...	06/08/10/ 11/125	28,15	6,16

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJQT 10/10**


CAPSULES & CAP - STONE LINE ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTA ...-SL.../...	06/08/10/ 11/125	75,05	16,52
IPJQTA ...-SL.../...	06/08/10/ 11/125	75,05	16,52
TPJQTA ...-SL.../...	06/08/10/ 11/125	48,30	10,63

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJQTA 10-SL06/10**



EXTERNAL CAPSULES



INTERNAL CAPSULES



CPJQTA ...-.../...



IPJQTA ...-.../...

END CAP
GIJQT .../...



JOINT
TPJQT.../...




* = Production on demand with minimum quantity of 80 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY QUART

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

PROJOLLY QUART is a quarter-circle rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY QUART** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

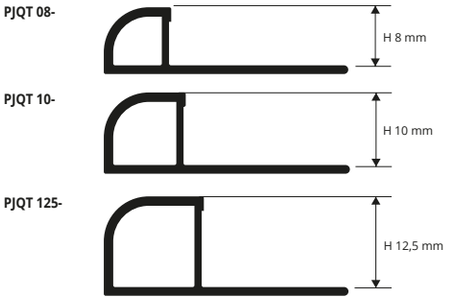





NON-TOXIC SHOCKPROOF VINYL RESIN


bar length **2,7 lm** - pack. **54 lm** (white colour pack. **108 lm**)

Article	H mm	€/lm	€/Pc
PJQT 08-...	8	1,38	3,73
PJQT 10-...	10	1,50	4,05
PJQT 125-...	12,5	1,63	4,40

Available in the colours: 00-01-02-03-05-06-11-17-18.
Available on demand 0106 - 04 - 07 - 08 - 09 -10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJQT 08-... (chosen colour white) PJQT 08-01.

WHITE NOT FOR SALE SINGLY


COLOURS

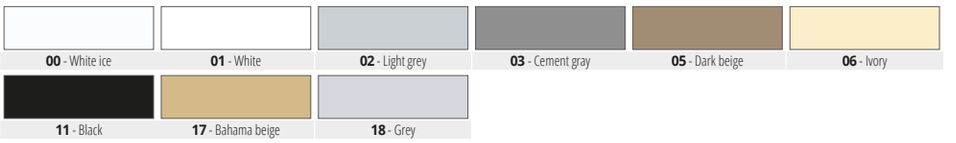

ON DEMAND - MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)




EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

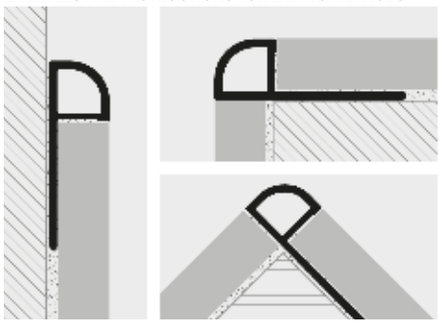

1. Choose "PROJOLLY QUART" according to the tile thickness and desired colour. **2.** Cut "PROJOLLY QUART to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY QUART" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

CAPSULES and THREE-WAYS JOINTS

POLYPROPYLENE/POLYETYLENE UV RESISTANT

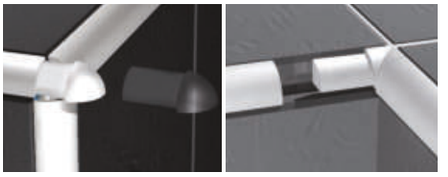

POLYPROPYLENE/POLYETYLENE UV RESISTANT

Article	H mm	€/Pack. 20 Pcs	€/Pack. 5 Pcs
CPJQT 08-... /...	8	22,59	6,57
IPJQT 08-.../...	8	22,59	6,57
CPJQT 10-.../...	10	23,11	6,71
IPJQT 10-.../...	10	23,11	6,71
CPJQT 125-.../...	12,5	23,86	6,96
IPJQT 125-.../...	12,5	23,86	6,96

Available in the colours: 01-02-03-05-06-11-17-18 (available on demand 0106-04-07-08-09-10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29). The code of the selected colour must be added to the article code. E.g.: CPJQT 08-.../... (chosen colour white) CPJQT 08-01/20.

EXTERNAL CAPSULES



CPJQT ...-.../...

INTERNAL CAPSULES



IPJQT ...-.../...





© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES


PROJOLLY

POLISHED, SUPER POLISHED, SANDED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY is a rounded bead profile in polished, super polished, sanded and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.





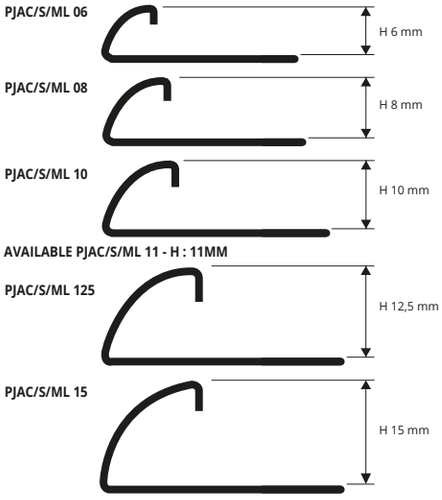

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PJAC 06	6	11,50	31,05
PJAC 08	8	12,26	33,10
PJAC 10	10	13,22	35,69
PJAC 11	11	13,78	37,21
PJAC 125	12,5	14,18	38,29
PJAC 15	15	15,83	42,74

SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A thermo packed - bar length **2,7 lm** - pack. **20 Pcs 54 lm** - **10/10 mm**

MIRROR LINE

Article	H mm	€/lm	€/Pc	
PJACML 06	6	14,31	38,64	*
PJACML 08	8	15,07	40,69	
PJACML 10	10	16,10	43,47	
PJACML 11	11	16,54	44,66	*
PJACML 125	12,5	16,93	45,71	
PJACML 15	15	18,52	50,00	*

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PJACS 06	6	13,79	37,23
PJACS 08	8	14,56	39,31
PJACS 10	10	15,59	42,09
PJACS 11	11	16,11	43,50
PJACS 125	12,5	16,48	44,50
PJACS 15	15	18,13	48,95

SANDED STAINLESS INOX AISI 304/1.4301-V2A with protective film
bar length **2,7 ml** - pack. **20 Pcs 54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc	
PJACSB 08	8	15,57	42,04	*
PJACSB 10	10	16,60	44,82	
PJACSB 125	12,5	17,57	47,44	


COLOURS



AC - Polished stainless st. AISI 304/1.4301-V2A
ACML - Super polished stainless st. AISI 304/1.4301-V2A
ACS - Brushed stainless st. AISI 304/1.4301-V2A
ACSB - Sanded stainless st. AISI 304/1.4301-V2A

ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

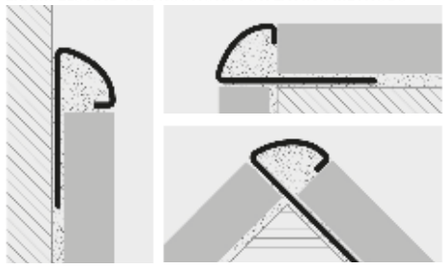

1. Choose "PROJOLLY" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJAC 06/...	6	147,20	32,19
IPJAC 06/...	6	147,20	32,19
CPJAC 08/...	8	154,17	33,54
IPJAC 08/...	8	154,17	33,54
CPJAC 10/...	10	165,59	34,86
IPJAC 10/...	10	165,59	34,86
CPJAC 11/...	11	173,06	36,20
IPJAC 11/...	11	173,06	36,20
CPJAC 125/...	12,5	179,66	37,55
IPJAC 125/...	12,5	179,66	37,55
CPJAC 15/...	15	194,49	40,91
IPJAC 15/...	15	194,49	40,91
TPJAC 06-08-10-11-125-15-.../...		29,54	6,44

Choose the desired packaging: E.g.: CPJAC .../10 (Pack 10 Pcs)
CPJAC .../2 (Pack 2 Pcs)

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJAC 06/...	6	28,15	6,16
GIJAC 08/...	8	28,15	6,16
GIJAC 10/...	10	28,15	6,16
GIJAC 11/...	11	28,15	6,16
GIJAC 125/...	12,5	28,15	6,16
GIJAC 15/...	15	28,15	6,16

Choose the desired packaging: E.g.: GIJAC .../10 (Pack. 10 Pcs)
GIJAC .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACS 06/...	6	162,29	33,54
IPJACS 06/...	6	162,29	33,54
CPJACS 08/...	8	167,75	34,86
IPJACS 08/...	8	167,75	34,86
CPJACS 10/...	10	178,38	36,88
IPJACS 10/...	10	178,38	36,88
CPJACS 11/...	11	184,73	38,57
IPJACS 11/...	11	184,73	38,57
CPJACS 125/...	12,5	190,44	40,23
IPJACS 125/...	12,5	190,44	40,23
CPJACS 15/...	15	207,80	43,60
IPJACS 15/...	15	207,80	43,60
TPJACS 06-08-10-11-125-15-.../...		29,54	6,44

Choose the desired packaging: E.g.: CPJACS .../10 (Pack. 10 Pcs)
CPJACS .../2 (Pack. 2 Pcs)

CAPSULES - SANDED STAINLESS INOX AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACSB 08/...	8	186,26	39,11
IPJACSB 08/...	8	186,26	39,11
CPJACSB 10/...	10	196,90	41,35
IPJACSB 10/...	10	196,90	41,35
CPJACSB 125/...	12,5	214,90	45,14
IPJACSB 125/...	12,5	214,90	45,14

CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A

MIRROR LINE

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACML 06/...	6	162,29	33,54
IPJACML 06/...	6	162,29	33,54
CPJACML 08/...	8	167,75	34,86
IPJACML 08/...	8	167,75	34,86
CPJACML 10/...	10	178,38	36,88
IPJACML 10/...	10	178,38	36,88
CPJACML 11/...	11	184,73	38,57
IPJACML 11/...	11	184,73	38,57
CPJACML 125/...	12,5	190,44	40,23
IPJACML 125/...	12,5	190,44	40,23
CPJACML 15/...	15	207,80	43,60
IPJACML 15/...	15	207,80	43,60

Choose the desired packaging: E.g.: CPJACML .../10 (Pack. 10 Pcs)
CPJACML .../2 (Pack. 2 Pcs)





END CAP TPJ... .../... | EXTERNAL CAPSULES CPJ... .../... | INTERNAL CAPSULES IPJ... .../... | JOINT GIJAC .../...




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY

POLISHED STAINLESS STEEL INOX AISI 316LL/1.4404-V4A

PROJOLLY is a rounded bead profile in polished stainless steel INOX AISI 316LL/1.4404-V4A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

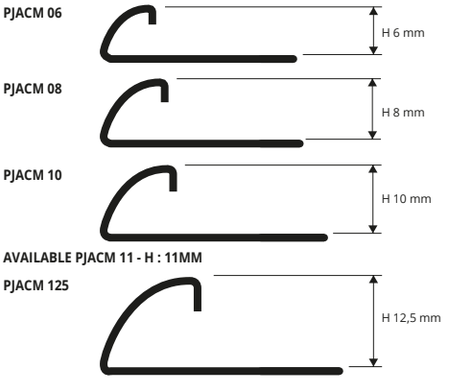

EXAMPLES OF LAYING

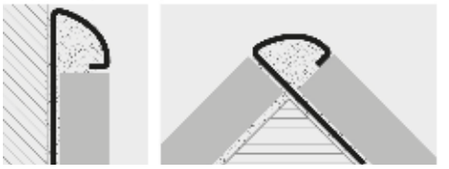



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film
- bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PJACM 06	6	14,44	38,99
PJACM 08	8	15,52	41,90
PJACM 10	10	16,66	44,98
PJACM 11	11	17,36	46,87
PJACM 125	12,5	17,77	47,98

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



COLOURS




ACM - Polished stainless st. AISI 316LL

1. Choose "PROJOLLY" according to the tile thickness. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES and THREE-WAYS JOINTS

POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A

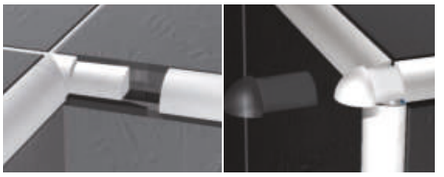

POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACM 06/...	6	175,59	36,88
IPJACM 06/...	6	175,59	36,88
CPJACM 08/...	8	182,44	38,22
IPJACM 08/...	8	182,44	38,22
CPJACM 10/...	10	190,44	40,23
IPJACM 10/...	10	190,44	40,23
CPJACM 11/...	11	197,15	41,59
IPJACM 11/...	11	197,15	41,59
CPJACM 125/...	12,5	203,88	42,92
IPJACM 125/...	12,5	203,88	42,92

Choose the desired packaging: E.g.: CPJACM .../10 (Pack. 10 Pcs) CPJACM .../2 (Pack. 2 Pcs)

EXTERNAL CAPSULES



CPJACM .../...

INTERNAL CAPSULES




IPJACM .../...


PROTERMINAL

POLISHED STAINLESS STEEL INOX AISI 316LL/1.4404-V4A

PROTERMINAL is a "L-shaped" profile in polished stainless steel INOX AISI 316LL/1.4404-V4A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in three different heights make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

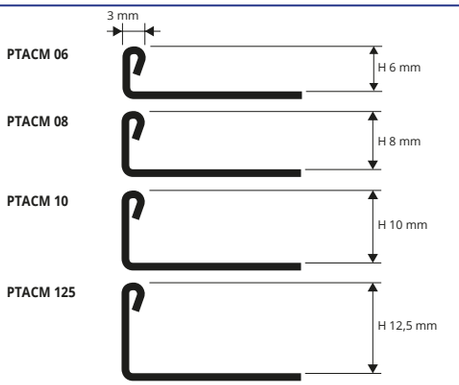

EXAMPLES OF LAYING

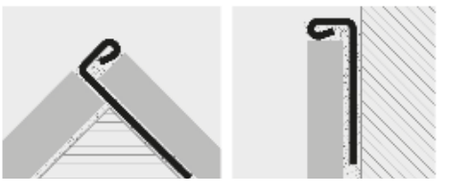



COLOURS



ACM - Polished stainless st. AISI 316LL

1. Choose "PROTERMINAL" according to the tile thickness. **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PTACM 06	6	12,38	33,43
PTACM 08	8	12,80	34,56
PTACM 10	10	13,46	36,34
PTACM 125	12,5	13,94	37,64

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROJOLLY is a rounded bead profile in natural, antique brass, polished varnished and chromed brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like (only natural and chromed version) a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY


NATURAL, POLISHED VARNISHED, CHROMED AND ANTIQUE BRASS









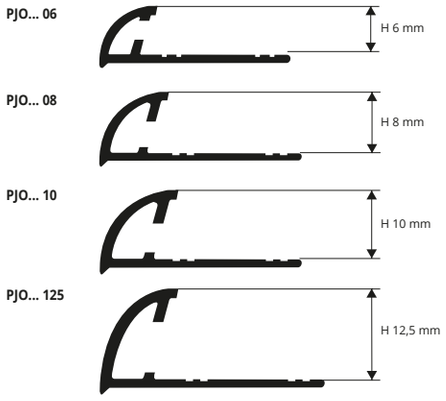

NATURAL BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PJON 08	8	16,58	44,77	*
PJON 10	10	17,61	47,55	
PJON 125	12,5	19,58	52,87	*

SUPER POLISHED VARNISHED CHROMED BRASS thermo packed bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

MIRROR LINE

Article	H mm	€/lm	€/Pc	
PJOC 06	6	22,81	61,59	*
PJOC 08	8	25,64	69,23	
PJOC 10	10	26,92	72,68	
PJOC 125	12,5	28,01	75,63	

COLOURS

ON - Natural brass
OL - Polished brass
OC - Chromed brass
OB - Antique brass

POLISHED VARNISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H mm	€/lm	€/Pc	
PJOL 06	6	20,85	56,30	*
PJOL 08	8	21,66	58,48	
PJOL 10	10	23,85	64,40	
PJOL 125	12,5	27,20	73,44	

Polished varnished brass is not suitable for frequent pedestrian traffic places and/or scratching.

ANTIQUE BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PJOB 08	8	33,50	90,45	*
PJOB 10	10	36,55	98,69	
PJOB 125	12,5	39,79	107,43	

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

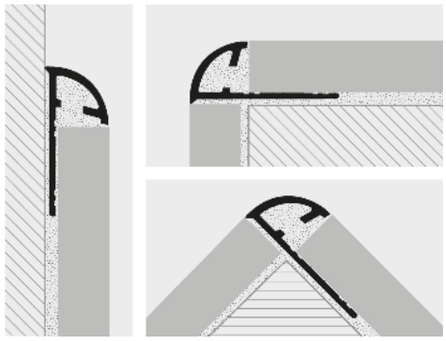

1. Choose "PROJOLLY" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

VARNISHED POLISHED BRASS AND CHROMED BRASS EFFECT / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPS and JOINTS - CHROMED BRASS / PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
TPJOC 06-08-10-125/...	6-8-10-12,5	30,15	6,74
GIJA 06-08-10-125/...	6-8-10-12,5	28,15	6,16

Choose the desired packaging: E.g.: GIJA.../10 (Pack. 10 Pcs)
GIJA .../2 (Pack. 2 Pcs)

END CAP



TPJOC .../...

JOINT



GIJA .../...

EXTERNAL CAPSULES



CPJ.. .../...



CPJD.. .../...

INTERNAL CAPSULES



IPJD.. .../...



IPJ.. .../...

LEFT CAPSULES - POLISHED VARNISHED/CHROMED BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJOL/OC 06/...	6	202,30	44,97
IPJOL/OC 06/...	6	231,91	50,58
CPJOL/OC 08/...	8	205,88	45,67
IPJOL/OC 08/...	8	235,37	51,28
CPJOL/OC 10/...	10	209,33	46,38
IPJOL/OC 10/...	10	238,15	51,99
CPJOL/OL 125/...	12,5	214,26	47,78
IPJOL/OC 125/...	12,5	243,07	52,69

Choose the desired packaging: E.g.: CPJOL .../10 (Pack. 10 Pcs)
CPJOL .../2 (Pack. 2 Pcs)

LEFT CAPSULES - ANTIQUE BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJOB 08/...	8	277,99	61,75
IPJOB 08/...	8	317,85	69,73
CPJOB 10/...	10	272,15	63,09
IPJOB 10/...	10	321,56	70,40
CPJOB 125/...	12,5	278,53	64,55
IPJOB 125/...	12,5	328,21	71,19

Choose the desired packaging: E.g.: CPJOB.../10 (Pack. 10 Pcs)
CPJOB .../2 (Pack. 2 Pcs)

The right capsules are available on demand and must be used only in the following cases:
A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code.
For example: CPJDOL 06.



Add "D" to the article code.
For example: IPJDOL 06.

B) as an alternative to end-caps (right side).



LEFT CAPSULES **RIGHT CAPSULES**
Add "D" to the article code. For example: CPJDOC 06.


= News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY


ANODIZED ALUMINIUM
SILVER, COPPER, TITANIUM, GOLD AND BLACK

PROJOLLY is a rounded bead profile in anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

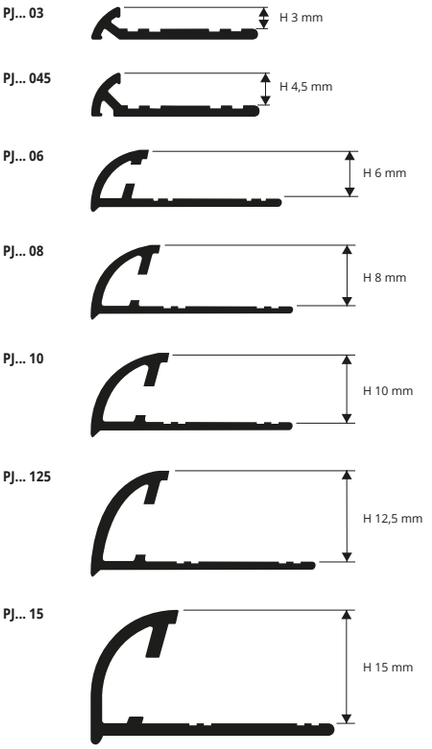



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

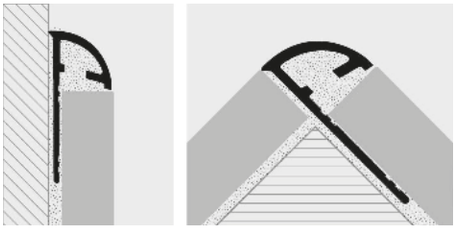


1. Choose "PROJOLLY" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUM. (silver-copper-gold-titanium-black) **thermo packed**
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**
(for **H 15** anodized silver alum. pack. **20 Pcs - 54 lm**)

Article	H mm	€/lm	€/Pc	
PJAA 03	3	4,63	12,50	*
PJAA 045	4,5	4,89	13,20	*
PJAA 06	6	5,24	14,15	
PJAA 08	8	5,57	15,04	
PJAA 10	10	6,01	16,23	
PJAA 125	12,5	6,78	18,31	
PJAA 15	15	7,57	20,44	
PJAO 03	3	4,63	12,50	*
PJAO 045	4,5	4,89	13,20	*
PJAO 06	6	5,24	14,15	*
PJAO 08	8	5,57	15,04	
PJAO 10	10	6,01	16,23	
PJAO 125	12,5	6,78	18,31	
PJAO 15	15	7,57	20,44	*
PJAR 08	8	6,01	16,23	
PJAR 10	10	6,68	18,04	
PJAR 125	12,5	7,52	20,30	*
PJAT 08	8	6,01	16,23	
PJAT 10	10	6,68	18,04	
PJAT 125	12,5	7,52	20,30	
PJNE 08	8	7,98	21,55	
PJNE 10	10	8,69	23,46	
PJNE 125	12,5	9,78	26,41	

COLOURS



© 2023 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

* **Capsules & end caps of the on demand profiles are also on demand**

Anodized ALUMINIUM (silver, copper, titanium, gold and black) / PLASTIC

LEFT CAPSULES ANODIZED ALUMINIUM
(silver, copper, titanium and gold)

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJAA .../...	06/08/10/125	62,24	13,69
CPJAA 15/...	15	69,09	15,20
IPJAA .../...	06/08/10/125	62,24	13,69
IPJAA 15/...	15	72,39	15,92
TPJAA .../...	06/08/10/125/15	29,54	6,44
CPJAO .../...	06/08/10	62,24	13,69
CPJAO 15/...	15	69,09	15,20
IPJAO .../...	06/08/10	62,24	13,69
IPJAO 15/...	15	72,39	15,92
TPJAO .../...	06/08/10/15	29,54	6,44
CPJAR .../...	08/10/125	64,41	14,76
IPJAR .../...	08/10/125	64,41	14,76
TPJAR .../...	08/10/125	29,54	6,44
CPJAT .../...	08/10/125	64,41	14,76
IPJAT .../...	08/10/125	64,41	14,76
TPJAT .../...	08/10/125	29,54	6,44
CPJNE .../...	08/10/125	83,69	18,42
IPJNE .../...	08/10/125	83,69	18,42
TPJNE .../...	08/10/125	29,54	6,44

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJAA 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA .../...	06/08/10/ 125/15	28,15	6,16

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJA 10/10**

EXTERNAL CAPSULES



CPJ.. .../..

CPJD.. .../..

INTERNAL CAPSULES



IPJ.. .../...



IPJD.. .../..

CAPS



TPJ.. .../..

JOINTS



GIJA .../...

The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;




Add "D" to the article code. For example: CPJDAA 06.



Add "D" to the article code. For example: IPJDAA 06.

B) as an alternative to end-caps (right side).



LEFT CAPSULES RIGHT CAPSULES

Add "D" to the article code. For example: CPJDAA 06.

* **= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

PROGRESS® PROFILES


PROJOLLY is a rounded bead profile in polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY

POLISHED ALUMINIUM
CHROME, COPPER, TITANIUM, GOLD AND BLACK






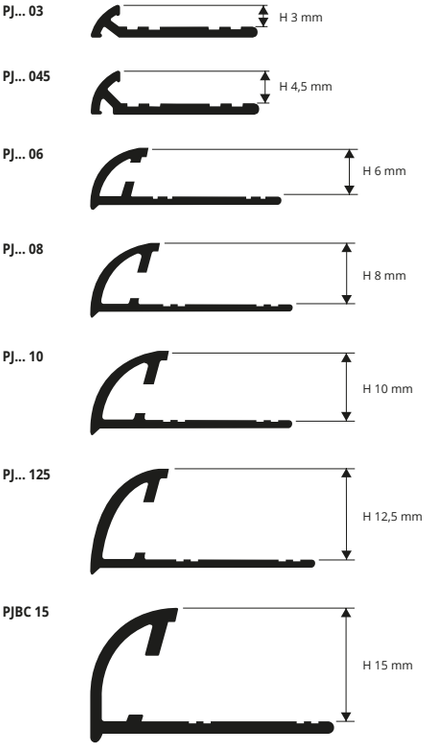

POLISHED ALUMINIUM (chrome-copper-titanium-gold-black)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** (**H 15 mm** - **54 lm**)

Article	H mm	€/lm	€/Pc	
PJBC 03	3	8,09	21,84	
PJBC 045	4,5	8,32	22,46	
PJBC 06	6	8,53	23,03	
PJBC 08	8	9,19	24,81	
PJBC 10	10	10,20	27,54	
PJBC 125	12,5	11,52	31,10	
PJBC 15	15	12,55	33,89	
PJBO 03	3	8,09	21,84	*
PJBO 045	4,5	8,32	22,46	
PJBO 06	6	8,53	23,03	*
PJBO 08	8	9,19	24,81	
PJBO 10	10	10,20	27,54	
PJBO 125	12,5	10,20	27,54	
PJBR 08	8	9,19	24,81	*
PJBR 10	10	10,20	27,54	
PJBR 125	12,5	10,20	27,54	*
PJBT 08	8	9,19	24,81	
PJBT 10	10	10,20	27,54	
PJBT 125	12,5	10,20	27,54	
PJBN 08	8	11,93	32,21	*
PJBN 10	10	12,54	33,86	*
PJBN 125	12,5	13,39	36,15	

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

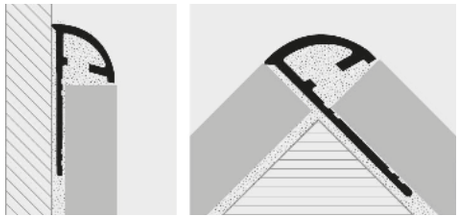

1. Choose "PROJOLLY" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



BC - Polished chrome alum. | **BR** - Polished copper alum. | **BT** - Polished titanium alum. | **BO** - Polished gold alum. | **BN** - Polished black alum.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED ALUMINIUM (chrome, copper, titanium, gold, black) / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA .../...	06/08/10/ 125/15	28,15	6,16

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJA 10/10**

END CAP



TPJ.. .../..

JOINT



GIJA .../...

EXTERNAL CAPSULES



CPJ.. .../..



CPJD.. .../..

INTERNAL CAPSULES



IPJ.. .../...



IPJD.. .../..

LEFT CAPSULES POLISHED ALUMINIUM chrome, copper, titanium and gold

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJBC .../...	06/08/10/125	62,24	13,69
CPJBC 15/...	15	69,09	15,20
IPJBC .../...	06/08/10/125	62,24	12,87
IPJBC 15/...	15	72,39	15,92
TPJBC .../...	06/08/10/125/15	29,54	6,44
CPJBO .../...	06/08/10/125	62,24	13,69
IPJBO .../...	06/08/10/125	62,24	12,87
TPJBO .../...	06/08/10/15	29,54	6,44
CPJBR .../...	08/10/125	91,16	24,68
IPJBR .../...	08/10/125	91,16	24,68
TPJBR .../...	08/10/125	29,54	6,44
CPJBT .../...	08/10/125	64,41	14,76
IPJBT .../...	08/10/125	64,41	14,76
TPJBT .../...	08/10/125	29,54	6,44
CPJBN .../...	08/10/125	118,42	26,05
IPJBN .../...	08/10/125	118,42	26,05
TPJBN .../...	08/10/125	29,54	6,44

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJBC 10/10**

(*) 12,5/15 mm NOT SUITABLE FOR THREE-WAYS CORNER

The right capsules are available on demand and must be used only in the following cases:
A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code.
For example: CPJDBC 06.



Add "D" to the article code.
For example: IPJDBC 06.

B) as an alternative to end-caps (right side).



LEFT CAPSULES **RIGHT CAPSULES**

Add "D" to the article code. For example: CPJDBC 06.


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY

BRUSHED ALUMINIUM

PROJOLLY is a rounded bead profile in brushed aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in four different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

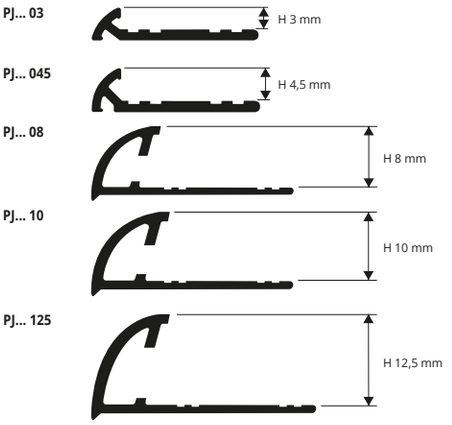

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

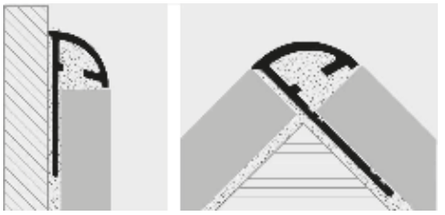

1. Choose "PROJOLLY" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PJBS 03	3	9,52	25,70	
PJBS 045	4,5	9,87	26,65	
PJBS 08	8	10,58	28,57	
PJBS 10	10	11,52	31,10	
PJBS 125	12,5	12,87	34,75	
PJRS 03	3	9,52	25,70	*
PJRS 045	4,5	9,87	26,65	*
PJRS 08	8	10,58	28,57	*
PJRS 10	10	11,52	31,10	
PJRS 125	12,5	12,87	34,75	
PJBOS 03	3	9,52	25,70	*
PJBOS 045	4,5	9,87	26,65	*
PJBOS 08	8	10,58	28,57	*
PJBOS 10	10	11,52	31,10	*
PJBOS 125	12,5	12,87	34,75	*
PJTS 03	3	9,52	25,70	
PJTS 045	4,5	9,87	26,65	
PJTS 08	8	10,58	28,57	
PJTS 10	10	11,52	31,10	
PJTS 125	12,5	12,87	34,75	
PJNS 08	8	13,45	36,31	
PJNS 10	10	14,63	39,50	
PJNS 125	12,5	16,58	44,77	



COLOURS

BRUSHED POLISHED



BS - Brushed polished silver alum. **RS** - Brushed polished copper alum. **TS** - Brushed polished titanium alum.



NS - Brushed polished black alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height

BRUSHED POLISHED



BOS - Brushed gold alum.

(Price to be agreed. Production delay 4/5 weeks)

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

* **Capsules & end caps of the on demand profiles are also on demand**

BRUSHED POLISHED ALUMINIUM (silver, copper, titanium, black) / PLASTIC

LEFT CAPSULES - BRUSHED POLISHED ALUMINIUM
silver-gold-copper-titanium-black

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJBS .../...	08/10/125	72,52	15,41
IPJBS .../...	08/10/125	72,52	15,41
TPJBS .../...	08/10/125	29,54	6,44
CPJBOS .../...	08/10/125	72,52	15,41
IPJBOS .../...	08/10/125	72,52	15,41
TPJBOS .../...	08/10/125	29,54	6,44
CPJRS .../...	08/10/125	72,52	15,41
IPJRS .../...	08/10/125	72,52	15,41
TPJRS .../...	08/10/125	29,54	6,44
CPJTS .../...	08/10/125	72,52	15,41
IPJTS .../...	08/10/125	72,52	15,41
TPJTS .../...	08/10/125	29,54	6,44
CPJNS .../...	08/10/125	93,31	20,54
IPJNS .../...	08/10/125	93,31	20,54
TPJNS .../...	08/10/125	29,54	6,44

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJBS 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA .../...	08/10/125	28,15	6,16

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJA 10/10**

EXTERNAL CAPSULES



CPJ... .../...



CPJD... .../...

INTERNAL CAPSULES



IPJ... .../...



IPJD... .../...

The right capsules are available on demand and must be used only in the following cases:
A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDBS 08.



Add "D" to the article code. For example: IPJDBS 08.

B) as an alternative to end-caps (right side).



LEFT CAPSULES



RIGHT CAPSULES

Add "D" to the article code. For example: CPJDBS 08.

END CAP



TPJ... .../...

JOINT



GIJA .../...

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY is a rounded bead profile in varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and elegance, the availability in five different colours and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY

VARNISHED ALUMINIUM





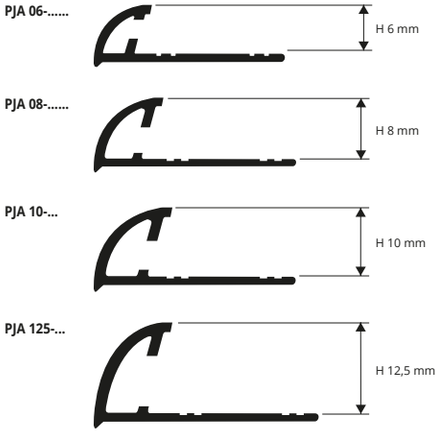


VARNISHED ALUMINIUM (HOT-WORKED 200°) thermo packed
bar length **2,7 lm** - pack. **20 Pcs**-**54 lm** (colour white **40 Pcs** - **108 lm**)

Article	H mm	€/lm	€/Pc
PJA 06-01	6	6,03	16,28
PJA 08-...	8	6,71	18,12
PJA 10-...	10	7,26	19,60
PJA 125-01	12,5	7,78	21,01

With H 8 and 10 mm available in the colours: 01 - 0106 - 0311 - 06 - 11
Available on demand: 01O - 02-03-0211-10-17.
The code of the selected colour must be added to the article code.
E.g.: PJA 08... (chosen colour white) PJA 08-01.


On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

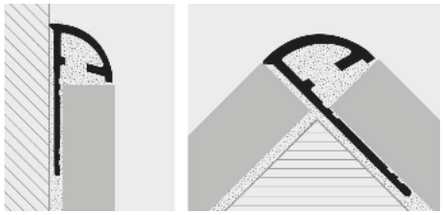

1. Choose "PROJOLLY" according to the tile thickness and desired colour. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



01 - Varnished white alum. **(9016)**
0106 - Varnished white ivory alum. **(9001)**
0311 - Varnished asphalt grey alum. **(7043)**
06 - Varnished ivory alum. **(1015)**
11 - Varnished black alum. **(9005)**

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)



01O - Varnished white matt alum. **(9016)**
02 - Varnished light grey alum. **(7035)**
03 - Varnished stone grey alum. **(7030)**
0211 - Varnished quartz grey alum. **(7039)**
10 - Varnished klinker red alum. **(8004)**
17 - Varnished bahama beige alum.

© 2020. All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS and THREE-WAYS JOINTS

VARNISHED ALUMINIUM / PLASTIC

Capsules & end caps of the on demand profiles are also on demand

LEFT CAPSULES VARNISHED ALUMINIUM (HOT-WORKED 200°)

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJA ...-.../...	08/10/125	63,77	14,03
IPJA ...-.../...	08/10/125	63,77	14,03
TPJA ...-.../...	08/10/125	29,54	6,44

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJA 10-06/10 10/10**

EXTERNAL CAPSULES



CPJA... .../... **CPJDA... .../...**

INTERNAL CAPSULES




IPJA... .../... **IPJDA... .../...**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA .../...	08/10/125	28,15	6,16

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJA 10/10**

END CAP **JOINT**



TPJA... .../... **GIJA .../...**

The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;




Add "D" to the article code. For example: CPJDA 06-01.



Add "D" to the article code. For example: IPJDA 06-01.

B) as an alternative to end-caps (right side).

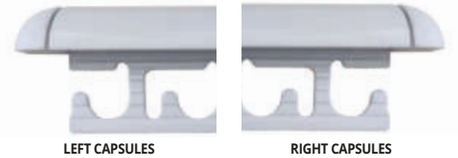


LEFT CAPSULES **RIGHT CAPSULES**

Add "D" to the article code. For example: CPJDA 06-01.


PROJOLLY

SHOCKPROOF NON - TOXIC
COLORED VINYL RESIN

PROJOLLY is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

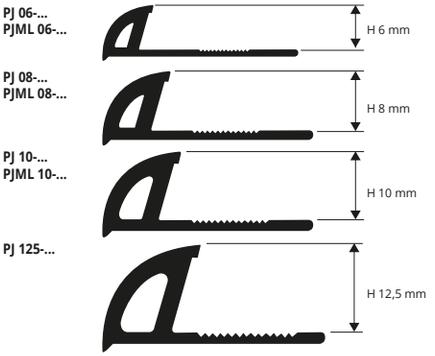

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

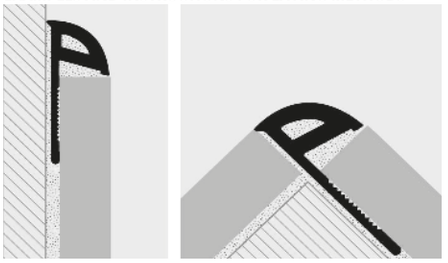

1. Choose "PROJOLLY" according to the tile thickness and desired colour. **2.** Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.



NON-TOXIC SHOCKPROOF VINYL RESIN
bar length **2,7 lm** - pack. **54 lm** (colour white pack. **108 lm**)

Article	H mm	€/lm	€/Pc
PJ 06-...	6	1,24	3,35
PJ 08-...	8	1,38	3,73
PJ 10-...	10	1,50	4,05
PJ 125-...	12,5	1,63	4,40

Available in the colours: 00 - 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 11-12 - 13 - 14 - 15 - 17 - 18 - 0106.
Available on demand 10 -16 -19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJ 06... (chosen colour white) PJ 06-01.

WHITE NOT FOR SALE SINGLY



NON-TOXIC SHOCKPROOF VINYL RESIN
MIRROR LINE EXTRA POLISHED - bar length **2,7 lm**
pack. **54 lm** (colour white pack. **108 lm**)


MIRROR LINE

Article	H mm	€/lm	€/Pc	
PJML 06-00/01	6	1,53	4,13	
PJML 06-...	6	1,53	4,13	*
PJML 08-00/01	8	1,67	4,51	
PJML 08-...	8	1,67	4,51	*
PJML 10-00/01	10	1,80	4,86	
PJML 10-...	10	1,80	4,86	*
PJML 125-00/01	12,5	1,94	5,24	
PJML 125-...	12,5	1,94	5,24	*

avaiable in the color: 01 - 00 (Available on demand 0106-02-03-04-05-07-08-09-10-11-14-15-16-17-0106-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.)
The code of the selected colour must be added to the article code.
E.g.: PJ 06... (chosen colour white) PJ 06-01.
Prices per metre are approximate. Articles not for sale singly.

WHITE NOT FOR SALE SINGLY

COLOURS

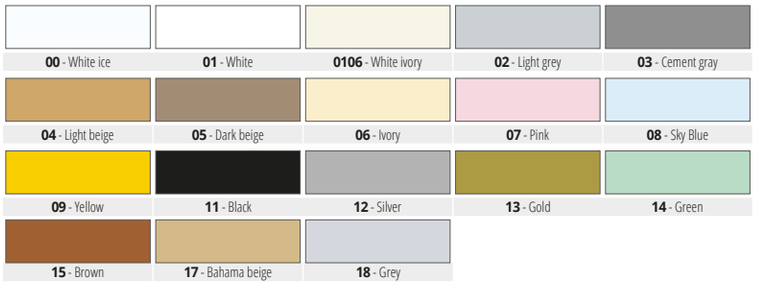

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)



CAPSULES for three-ways joints

POLYPROPYLENE/POLYETYLENE UV RESISTANT

* **Capsules & end caps of the on demand profiles are also on demand**

POLYPROPYLENE / POLYETYLENE UV RESISTANT

Article	H mm	€/Pack. 20 pcs	€/Pack. 5 pcs
CPJ 06-.../...	6	22,08	6,62
IPJ 06-.../...	6	22,08	6,62
CPJ 08-.../...	8	22,56	6,71
IPJ 08-.../...	8	22,56	6,71
CPJ 10-.../...	10	23,08	6,90
IPJ 10-.../...	10	23,08	6,90
CPJ 125-.../...	12,5	23,84	7,12
IPJ 125-.../...	12,5	23,84	7,12

Available in the colours: 01-02-03-04-05-06-07-08-09-10-11-12-13-14-15-16-17-18-0106 (not available 19-20-21-22-23-24-25-26-27-28-29).
The code of the selected colour must be added to the article code.
E.g.: CPJ 06-.../... (chosen colour white) CPJ 06-01/20.

EXTERNAL CAPSULES



CPJ ...-.../...

INTERNAL CAPSULES



IPJ ...-.../...





© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different marble effect finishes also on demand and special pieces such as internal and external corners make **PROJOLLY MARBLE** a much sought-after profile. it can be easily matched with the wall covering and allows an elegant workmanlike application.

PROJOLLY MARBLE

SHOCKPROOF NON - TOXIC
MARBLED VINYL RESIN





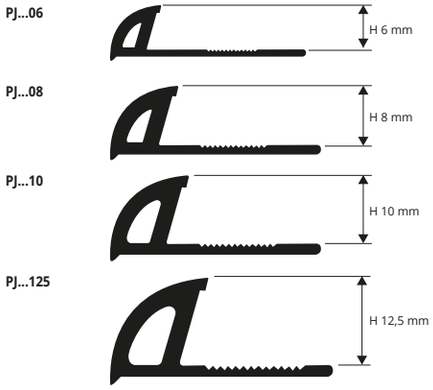


MARBLED NON-TOXIC VYNIL RESIN
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PJ... 06	6	2,30	6,21	*
PJ... 08	8	2,64	7,13	
PJ... 10	10	2,86	7,72	
PJ... 125	12,5	3,11	8,40	

Available on demand MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGV - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).
The code of the selected colour must be added to the article code. E.g.: PJ... 10 (chosen colour carrara) PJMC 10.

INSTRUCTIONS FOR LAYING
1. Choose "PROJOLLY MARBLE" according to the tile thickness and desired colour. **2.** Cut "PROJOLLY MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY MARBLE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

EXAMPLES OF LAYING

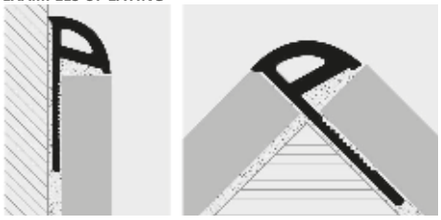

COLOURS



AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROJOLLY OPEN is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular open section and the availability in white colour make **PROJOLLY OPEN** a practical and economic profile. It can be used where low cost and workmanlike application are required.

PROJOLLY OPEN


SHOCKPROOF NON - TOXIC
WHITE VINYL RESIN



WHITE VINYL RESIN
bar length **2,7 lm** - pack. **80 Pcs** - **216 lm**


Article	H mm	€/lm	€/Pc	
PJP 06-01	6	1,28	3,46	*
PJP 09-01	9	1,41	3,81	*

ARTICLES NOT FOR SALE SINGLY

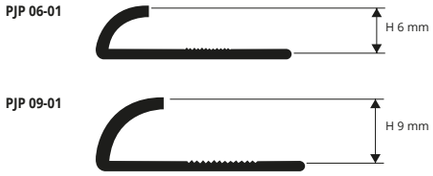

INSTRUCTIONS FOR LAYING
1. Choose "PROJOLLY OPEN" according to the tile thickness. **2.** Cut "PROJOLLY OPEN" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY OPEN" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

EXAMPLES OF LAYING

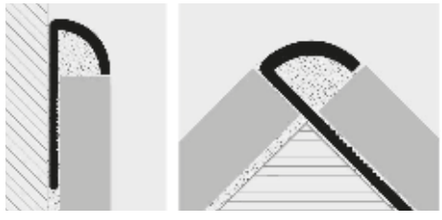

COLOURS




OTHER COLOURS ON DEMAND FOR A MINIMUM OF 800 pcs

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY ECO

SHOCKPROOF NON - TOXIC
COLORED VINYL RESIN

PROJOLLY ECO is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different colours also on demand and special pieces such as internal and external corners make **PROJOLLY ECO** a practical and economic profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

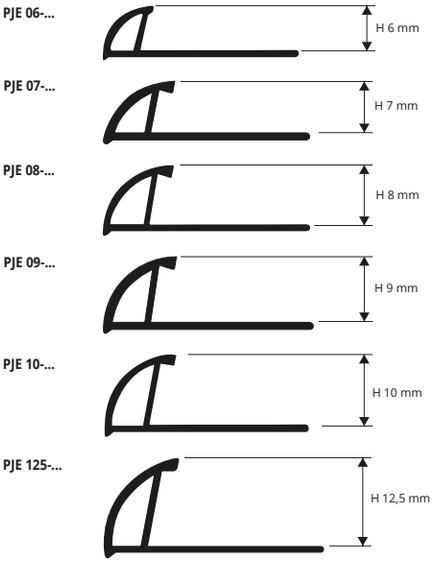

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

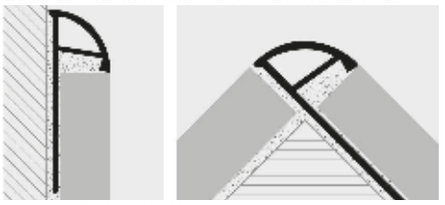

1. Choose "PROJOLLY ECO" according to the tile thickness and desired colour. **2.** Cut "PROJOLLY ECO" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY ECO" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.



COLOURED VINYL RESIN
bar length **2,7 lm** - pack. **80 Pcs** - **216 lm**

Article	H mm	€/lm	€/Pc	
PJE 06-01/06/18	6	0,88	2,38	*
PJE 08-...	8	1,02	2,75	
PJE 10-...	10	1,16	3,13	
PJE 125-...	12,5	1,44	3,89	

ARTICLES NOT FOR SALE SINGLY

H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available on demand in the colours 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (0106 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJE 08... (chosen colour white) PJE 08-01.



COLOURED VINYL RESIN
bar length **2,7 lm** - pack. **80 Pcs** - **216 lm**


Article	H mm	€/lm	€/Pc	
PJE 07-...	7	0,95	2,56	*
PJE 09-...	9	1,08	2,92	*

ARTICLES NOT FOR SALE SINGLY


PRODUCTION ON DEMAND
MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGH
(Production delay 4/5 weeks)

Available on demand in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 0106 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJE 07... (chosen colour white) PJE 07-01.

COLOURS

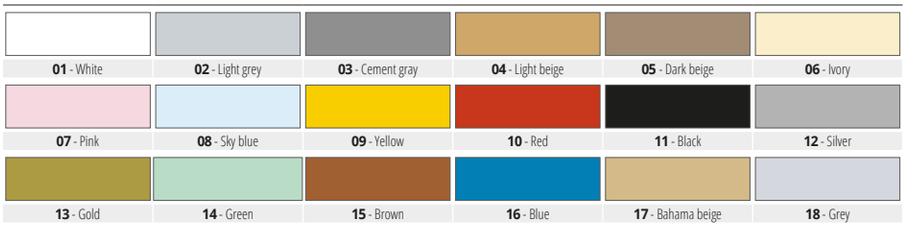

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)

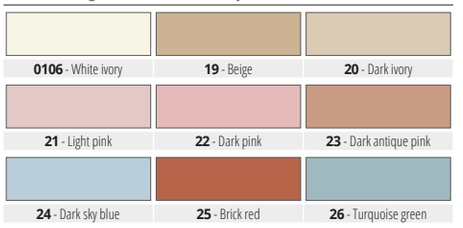

CAPSULES for three-ways joints

COLOURED PLASTIC

* **Capsules & end caps of the on demand profiles are also on demand**



EXTERNAL CAPSULES



CPJE ...-.../...

COLOURED PLASTIC

Article	H mm	€/Pack. 20 pcs	€/Pack. 5 pcs
CPJE 06-01/06/18/...	6	19,78	5,22
CPJE 08-.../...	8	21,04	5,55
CPJE 10-.../...	10	22,56	5,91
CPJE 125-.../...	12,5	25,86	6,79

ARTICLES NOT FOR SALE SINGLY

H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (not available 0106 -19-20-21-22-23-24-25-26-27-28-29).
The code of the selected colour must be added to the article code. E.g.: CPJE 08-.../... (chosen colour white) CPJE 08-01/20.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed


PROJOLLY ECO MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of different marble effect finishes, also on demand, and special pieces such as internal and external corners make **PROJOLLY ECO MARBLE** a much sought-after profile. it can be easily matched with the wall covering and allows an elegant workmanlike application.

PROJOLLY ECO MARBLE

SHOCKPROOF NON - TOXIC
MARBLED VINYL RESIN





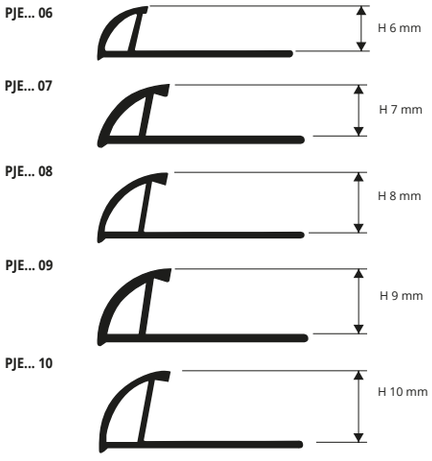

SHOCKPROOF MARBLED VINYL RESIN
bar length **2,7 lm** - pack. **80 Pcs** - **216 lm**

Article	H mm	€/lm	€/Pc	
PJE... 06	6	1,61	4,35	*
PJE... 08	8	1,71	4,62	
PJE... 10	10	1,83	4,94	

ARTICLES NOT FOR SALE SINGLY

PJE... 125 available on demand.
Available in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (on demand MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGV - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).
The code of the selected colour must be added to the article code.
E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

SHOCKPROOF MARBLED VINYL RESIN
bar length **2,7 lm** - pack. **80 Pcs** - **216 lm**


Article	H mm	€/lm	€/Pc	
PJE... 07	7	1,71	4,62	*
PJE... 09	9	1,83	4,94	*

ARTICLES NOT FOR SALE SINGLY

PRODUCTION ON DEMAND
MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGH
(Production delay 4/5 weeks)

Available on demand in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS - MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGV - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

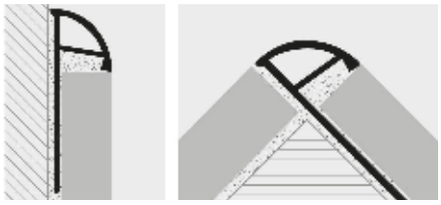

1. Choose "PROJOLLY ECO MARBLE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY ECO MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY ECO MARBLE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

COLOURS



MC - White carrara | **MB** - Real yellow beige | **MA** - Sky blue | **MR** - Pink portugal | **MV** - Green guatemalan | **MVA** - Green aquamarine | **MAS** - Soft blue | **MRS** - Soft pink | **MBS** - Soft beige




MVAS - Soft green | **MTC** - Travertino light | **MTS** - Travertino dark

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



MNA - Navona | **MBC** - Polished chrome | **MBD** - Bardiglio | **MGV** - Veined grey | **MGVC** - Light veined grey | **MBPS** - Salt-and-pepper beige | **MVBL** - Brazil green | **MCRI** - Ivory cream | **MCRC** - Light cream



MBO - Polished gold | **MAM** - Macauba blue | **MAB** - Blue | **MBDX** - Burgundy

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed


© 2020. All rights reserved by Progress Profiles. Printed in Italy

PROJOLLY TRIANGLE

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY TRIANGLE is a triangle-shaped bead profile polished, super polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PJTRAC... 06



PJTRAC... 08



PJTRAC... 10




PJTRAC... 11




PJTRAC... 125



PJTRAC... 15



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

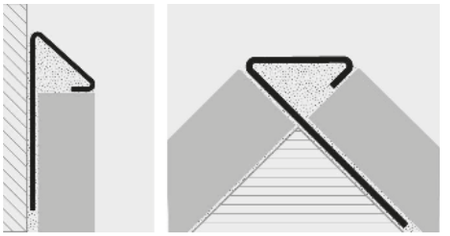





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 8/10 mm**

Article	H mm	€/lm	€/Pc
PJTRAC 06	6	9,58	25,87
PJTRAC 08	8	10,07	27,19
PJTRAC 10	10	10,57	28,54
PJTRAC 11	11	10,88	29,38
PJTRAC 125	12,5	11,32	30,56
PJTRAC 15	15	11,82	31,91

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 8/10 mm**

Article	H mm	€/lm	€/Pc
PJTRACS 06	6	11,08	29,92
PJTRACS 08	8	11,69	31,56
PJTRACS 10	10	12,18	32,89
PJTRACS 11	11	12,56	33,91
PJTRACS 125	12,5	13,06	35,26
PJTRACS 15	15	13,68	36,94

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 8/10 mm**

MIRROR LINE

Article	H mm	€/lm	€/Pc
PJTRACML 06	6	12,94	34,94
PJTRACML 08	8	13,62	36,77
PJTRACML 10	10	14,31	38,64
PJTRACML 11	11	14,74	39,80
PJTRACML 125	12,5	15,30	41,31
PJTRACML 15	15	15,99	43,17

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A | **ACML** - Super polished stainless steel AISI 304/1.4301-V2A | **ACS** - Brushed stainless steel AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - POLISHED STAINLESS STEEL

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
CPJTRAC .../...	06-08-10-11-12,5-15	147,58	31,02
IPJTRAC .../...	06-08-10-11-12,5-15	147,58	31,02
CTPJTRAC .../...	06-08-10-11-12,5-15	191,96	40,32
TPJTRAC .../...	06-08-10-11-12,5-15	45,78	9,80

Choose the desired packaging: E.g.: CPJTRAC-.../10 (Pack. 10 Pcs)
CPJTRAC-.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES AND and CAPS - BRUSHED STAINLESS STEEL

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
CPJTRACS .../...	06-08-10-11-12,5-15	168,50	35,40
IPJTRACS .../...	06-08-10-11-12,5-15	168,50	35,40
CTPJTRACS .../...	06-08-10-11-12,5-15	219,35	46,07
TPJTRACS .../...	06-08-10-11-12,5-15	52,24	11,10

Choose the desired packaging: E.g.: CPJTRACS-.../10 (Pack. 10 Pcs)
CPJTRACS-.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - SUPER POLISHED STAINLESS STEEL

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
CPJTRACML .../...	06-08-10-11-12,5-15	184,73	38,85
IPJTRACML .../...	06-08-10-11-12,5-15	184,73	38,85
CTPJTRACML .../...	06-08-10-11-12,5-15	240,26	50,46
TPJTRACML .../...	06-08-10-11-12,5-15	58,83	12,41

Choose the desired packaging: E.g.: CPJTRACML -.../10 (Pack. 10 Pcs)
CPJTRACML -.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

JOINTS - PLASTIC

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
GIJTRA .../...	06-08-10-11-12,5-15	26,08	5,60

Choose the desired packaging: E.g.: GIJTRA -.../10 (Pack. 10 Pcs)
GIJTRA -.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL CAPSULE



CPJTR... .../...

INTERNAL CAPSULE



IPJTR... .../...

THREE-WAYS CAPSULE



CTPJTR... .../...

END CAPS



TPJTR... .../...

JOINTS



GIJTRA .../...

PROGRESS® PROFILES

PROJOLLY TRIANGLE is a triangle-shaped bead profile in brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in different finishes make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY TRIANGLE

NATURAL, POLISHED VARNISHED, CHROMED AND ANTIQUE BRASS





PJTR... 10



PJTR... 125



NATURAL BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc
PJTRON 10	10	22,28	60,16
PJTRON 125	12,5	24,48	66,10

POLISHED VARNISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc
PJTROL 10	10	26,92	72,68
PJTROL 125	12,5	29,62	79,97

SUPER POLISHED CHROMED BRASS
thermo packed bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


MIRROR LINE

Article	H mm	€/lm	€/Pc
PJTROC 10	10	31,54	85,16
PJTROC 125	12,5	34,24	92,45

ANTIQUE BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H mm	€/lm	€/Pc
PJTROB 10	10	39,73	107,27
PJTROB 125	12,5	42,68	115,24

COLOURS



ON - Natural brass | **OL** - Polished brass | **OC** - Chromed brass | **OB** - Antique brass

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

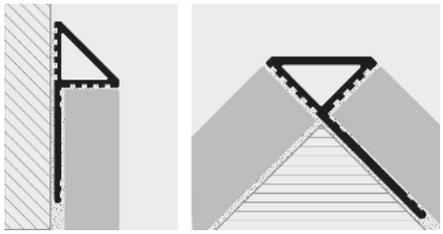

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




© 2023. All rights reserved by Progress Profiles. Printed in Italy


PROJOLLY TRIANGLE

ANODIZED, POLISHED AND BRUSHED ALUMINIUM

PROJOLLY TRIANGLE is a triangle-shaped bead profile in anodized, polished and brushed aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in seven different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

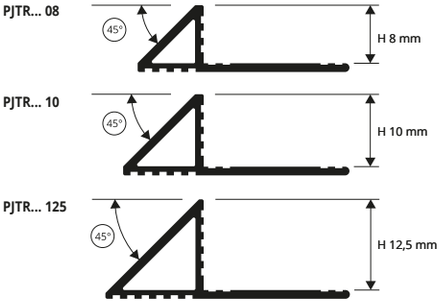

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

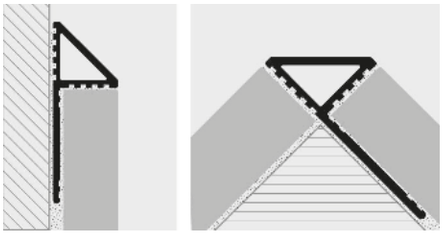

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM (silver - titanium - gold) **thermo packed**
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PJTRAA 08	8	5,55	14,99
PJTRAA 10	10	6,08	16,42
PJTRAA 125	12,5	6,86	18,52
PJTRAT 08	8	6,01	16,23
PJTRAT 10	10	6,66	17,98
PJTRAT 125	12,5	7,32	19,76
PJTRAO 08	8	5,68	15,34
PJTRAO 10	10	6,26	16,90
PJTRAO 125	12,5	6,99	18,87

BRUSHED POLISHED ALUMINIUM (silver - gold) **thermo packed**
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PJTRBS 08	8	10,06	27,16	
PJTRBS 10	10	10,84	29,27	
PJTRBS 125	12,5	12,27	33,13	
PJTRBOS 08	8	10,06	27,16	*
PJTRBOS 10	10	10,84	29,27	*
PJTRBOS 125	12,5	12,27	33,13	*




POLISHED ALUMINIUM (chrome - titanium - gold) **thermo packed**
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PJTRBC 08	8	9,32	25,16
PJTRBC 10	10	9,80	26,46
PJTRBC 125	12,5	11,10	29,97
PJTRBT 08	8	9,32	25,16
PJTRBT 10	10	9,80	26,46
PJTRBT 125	12,5	11,10	29,97
PJTRBO 08	8	9,32	25,16
PJTRBO 10	10	9,80	26,46
PJTRBO 125	12,5	11,10	29,97

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART.

CONTACT OUR CUSTOMER SERVICE FOR MINIMAL QUANTITY, TIMING AND PRICE.

COLOURS



CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

ANODIZED, POLISHED, BRUSHED POLISHED ALUMINIUM

* **Capsules & end caps of the on demand profiles are also on demand**

CAPSULES, END CAPS, THREE-WAYS - ANODIZED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTRAA .../...	08/10/125	94,08	20,70
IPJTRAA .../...	08/10/125	94,08	20,70
TPJTRAA .../...	08/10/125	45,78	9,80
CPJTRAT .../...	08/10/125	94,08	20,70
IPJTRAT .../...	08/10/125	94,08	20,70
TPJTRAT .../...	08/10/125	45,78	9,80
CPJTRAO .../...	08/10/125	94,08	20,70
IPJTRAO .../...	08/10/125	94,08	20,70
TPJTRAO .../...	08/10/125	45,78	9,80

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJTRAA 10/10**

CAPSULES, END CAPS, THREE-WAYS - POLISHED ALUM.

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTRBC .../...	08/10/125	107,77	23,69
IPJTRBC .../...	08/10/125	107,77	23,69
TPJTRBC .../...	08/10/125	52,24	11,10
CPJTRBT .../...	08/10/125	107,77	23,69
IPJTRBT .../...	08/10/125	107,77	23,69
TPJTRBT .../...	08/10/125	52,24	11,10
CPJTRBO .../...	08/10/125	107,77	23,69
IPJTRBO .../...	08/10/125	107,77	23,69
TPJTRBO .../...	08/10/125	52,24	11,10

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJTRBC 10/10**

CAPSULES, END CAPS, THREE-WAYS - BRUSHED POLISHED ALUM.

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTRBS .../...	08/10/125	122,73	27,00
IPJTRBS .../...	08/10/125	122,73	27,00
TPJTRBS .../...	08/10/125	58,83	12,41
CPJTRBOS .../...	08/10/125	122,73	27,00
IPJTRBOS .../...	08/10/125	122,73	27,00
TPJTRBOS .../...	08/10/125	58,83	12,41

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - **CPJTRBS 10/10**

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJTRA .../...	08/10/125	27,38	5,89


Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - **GIJTRA 10/10**

EXTERNAL CAPSULE



CPJTR... ... .../...

INTERNAL CAPSULE



IPJTR... .../...

THREE-WAYS CAPSULE



CTPJTR... .../...

END CAPS



TPJTR... .../...

JOINTS



GIJTRA .../...

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROJOLLY ANGLE 135 is a polished and satin stainless steel profile that can be use as protection for the 135° corners of coverings. Its particular section, the availability in two different finishes make **PROJOLLY ANGLE 135** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY ANGLE 135

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PJTR135AC 08	8	15,63	42,20
PJTR135AC 10	10	16,24	43,85
PJTR135AC 11	11	16,60	44,82
PJTR135AC 125	12,5	17,02	45,95

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PJTR135ACS 08	8	18,47	49,87
PJTR135ACS 10	10	19,08	51,52
PJTR135ACS 11	11	19,56	52,81
PJTR135ACS 125	12,5	19,92	53,78


COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



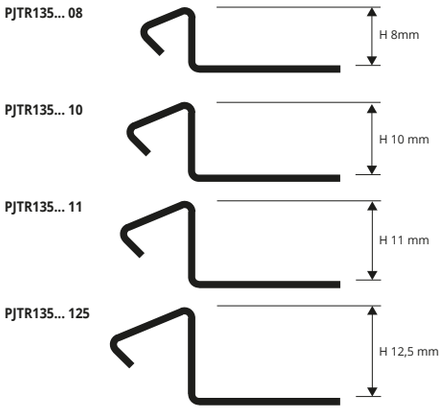

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

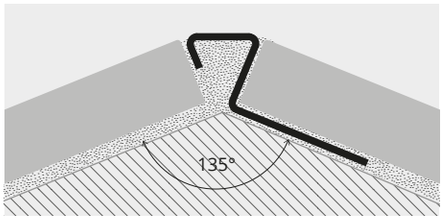


1. Choose "PROJOLLY ANGLE 135" according to the tile thickness and desired finish. **2.** Cut "PROJOLLY ANGLE 135" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY ANGLE 135" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


PROINTER AC

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A


PROINTER AC is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 304 / 1.4301 - V2A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

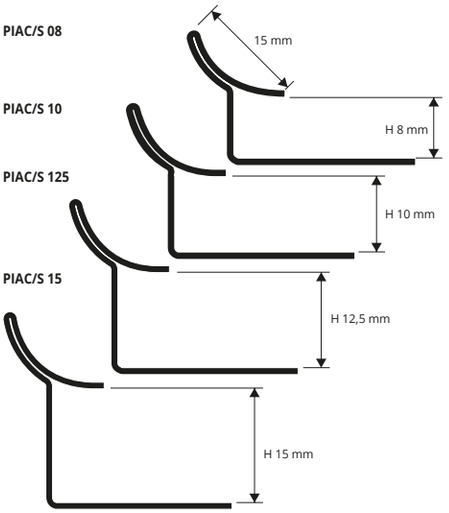

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

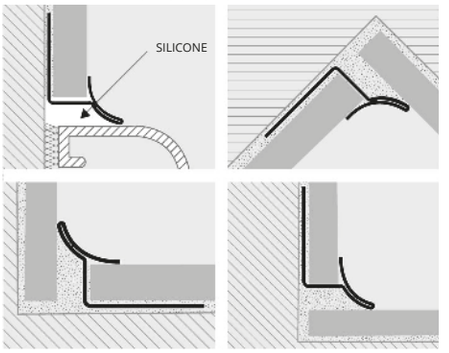

1. Choose "PROINTER AC" according to the tile thickness and desired finish. **2.** Cut "PROINTER AC" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROINTER AC" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

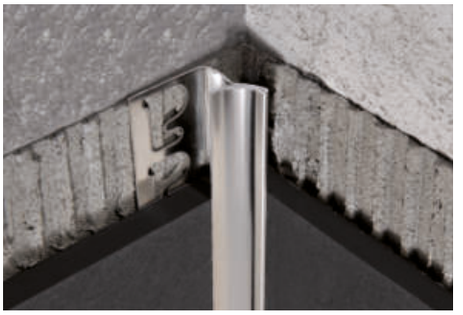



POLISHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc	
PIAC 08	8	14,56	39,31	
PIAC 10	10	15,39	41,55	
PIAC 125	12,5	19,62	52,97	
PIAC 15	15	21,81	58,89	*

BRUSHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc	
PIACS 08	8	18,26	49,30	
PIACS 10	10	20,93	56,51	
PIACS 125	12,5	23,57	63,64	*
PIACS 15	15	26,16	70,63	*

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

MIRROR LINE

Article	H mm	€/lm	€/Pc	
PIACML 08	8	18,91	51,06	*
PIACML 10	10	21,79	58,83	*
PIACML 125	12,5	24,53	66,23	*
PIACML 15	15	27,22	73,49	*

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
POLISHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. **2 Pcs**

Article	Pack. 2 Pcs

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. **2 Pcs**

Article	Pack. 2 Pcs

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A | **ACML** - Super polished stainless steel AISI 304/1.4301-V2A | **ACS** - Brushed stainless steel AISI 304/1.4301-V2A


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

Corners of the on demand profiles are also on demand *


PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A

PROINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.

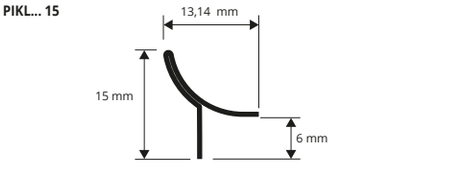


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

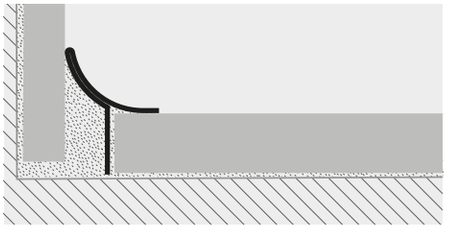

1. Choose "PROINTER KL ACC" according to the desired finish. **2.** Cut "PROINTER KL ACC" to the desired length. **3.** Apply the silicone along the floor-wall connection. **4.** Press the arrowhead of "PROINTER KL ACC" into the silicone evenly untili t is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



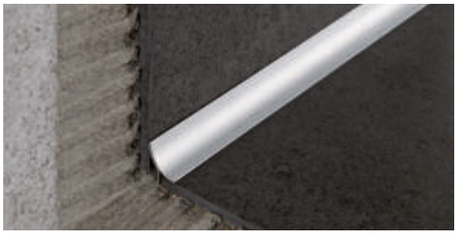

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 10/10mm**

Article	H mm	€/lm	€/Pc
PIKLAC 15	15	12,62	34,07

SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 10/10mm**

Article	H mm	€/lm	€/Pc	
PIKLACSB 15	40,50	17,32	46,76	*


BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack.. **40 Pcs - 108 lm - 8/10mm**

Article	H mm	€/lm	€/Pc
PIKLACS 15	15	15,94	43,04

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack.. **40 Pcs - 108 lm - 10/10mm**

Article	H mm	€/lm	€/Pc	
PIKLACML 15	15	16,54	44,66	*

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A | **ACS** - Brushed stainless steel AISI 304/1.4301-V2A

AVAILABLE MINIMUM QUANTITY 100 PCS



ACSB - Sanded stainless st. AISI 304/1.4301-V2A | **ACML** - Super polished stainless steel AISI 304/1.4301-V2A

ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROINTER AC


POLISHED AND BRUSHED STAINLESS STEEL
AISI 316/1.4401-V4A

PROINTER AC 316 is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc	
PIACM 08	8	18,93	51,11	*
PIACM 10	10	20,02	54,05	*
PIACM 125	12,5	25,52	68,90	*
PIACM 15	15	28,35	76,55	*

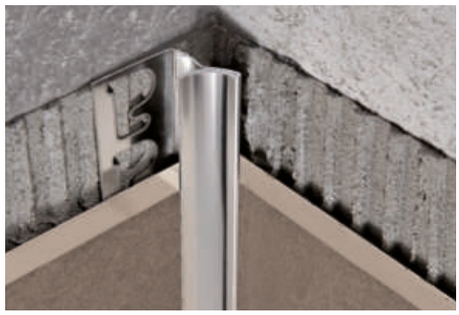

BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc	
PIACMS 08	8	23,74	64,10	*
PIACMS 10	10	27,21	73,47	*
PIACMS 125	12,5	28,22	76,19	*
PIACMS 15	15	34,00	91,80	*

COLOURS



ACM - Polished stainless steel AISI 316/1.4404-V4A
ACMS - Brushed stainless steel AISI 316/1.4404-V4A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


Corners of the on demand profiles are also on demand *

PIAC 08
scale 1:1


PIAC 10
scale 1:1

PIAC 125
scale 1:1

PIAC 15
scale 1:1

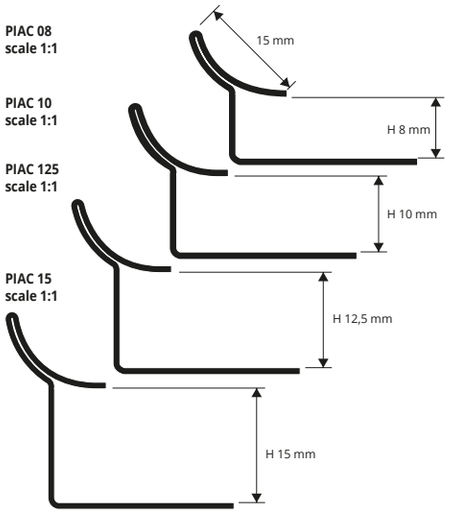

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

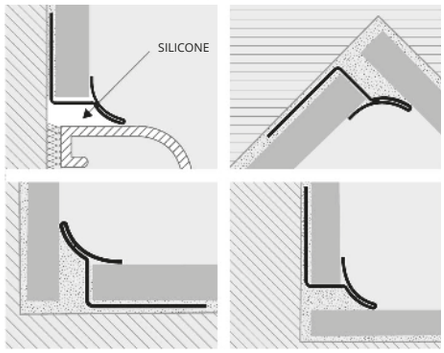

1. Choose "PROINTER AC 316" according to the tile thickness and desired finish. **2.** Cut "PROINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROINTER AC 316" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROINTER KL ACC

STAINLESS STEEL AISI 316/1.4401-V4A

PROINTER KL ACC 316 is a cove-shaped profile in stainless steel AISI 316/1.4404-V4A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL 316** a much sought after profile.



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc	
PIKLACM 15	15	16,40	44,28	*



BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**


Article	H mm	€/lm	€/Pc	
PIKLACMS 15	15	20,72	55,94	*

COLOURS




ACM - Polished stainless steel AISI 316/1.4404-V4A
ACMS - Brushed stainless steel AISI 316/1.4404-V4A

PIKL... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

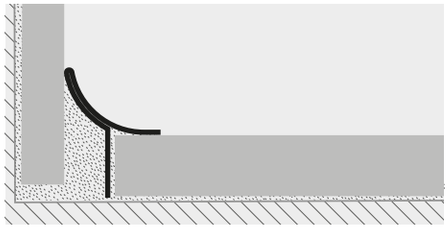

1. Choose "PROINTER KL ACC 316" according to the desired finish. **2.** Cut "PROINTER KL ACC 316" to the desired length. **3.** Apply the silicone along the floor-wall connection. **4.** Press the arrowhead of "PROINTER KL ACC 316" into the silicone evenly untili t is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

= *News 2023*

* **= Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed**

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROINTER AL

ANODIZED AND POLISHED ALUMINIUM

PROINTER AL is a cove-shaped profile in anodized and polished aluminium. It is particularly suitable to ensure cleanliness and hygiene is suitable in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in four finishes and special pieces, such as internal and external corners, make **PROINTER AL** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application.


PI... 08



PI... 10



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

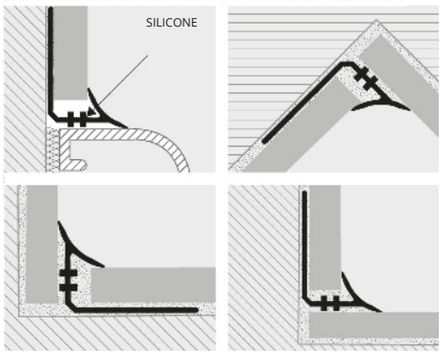

1. Choose "PROINTER AL" according to the tile thickness and desired finish. **2.** Cut "PROINTER AL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROINTER AL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED GOLD OR SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PIAA 08	8	6,97	18,82	
PIAA 10	10	7,44	20,09	
PIAO 08	8	6,97	18,82	*
PIAO 10	10	7,44	20,09	*

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
ANODIZED GOLD (**AO**) or SILVER ALUMINIUM (**AA**) - pack. **2 Pcs**

Article	Pack. 2 Pcs
REPI.../2	27,90
RIPI.../2	29,16
RITPI.../2	27,90

Corners of the on demand profiles are also on demand *

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.
BC - Polished chrome alum. **BO** - Polished gold alum.



POLISHED GOLD OR CHROMED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PIBC 08	8	10,73	28,97	
PIBC 10	10	12,56	33,91	
PIBO 08	8	10,73	28,97	*
PIBO 10	10	12,56	33,91	*

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
POLISHED GOLD (**BO**) or CHROMED ALUMINIUM (**BC**) - pack. **2 Pcs**


Article	Pack. 2 Pcs
REPI.../2	33,59
RIPI.../2	34,86
RITPI.../2	33,59

RITPI...



PROTERMINAL, PROJOLLY SQUARE ,PROJOLLY QUART (NO PROINTER)

RIPI...




PROINTER KL ALL


POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make **PROSHELL KL ALL** a much sought after profile.

PIKL... 045



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

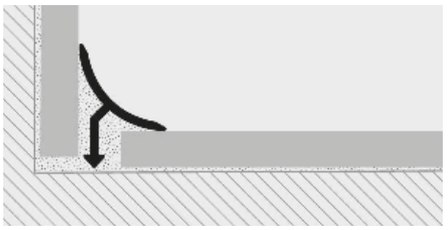

1. Choose "PROINTER KL ALL" according to the desired finish. **2.** Cut "PROINTER KL ALL" to the desired length. **3.** Apply the silicone along the floor-wall connection. **4.** Press the arrowhead of "PROINTER KL ALL" into the silicone evenly untili t is completely adherent to the floor and wall.

Corners of the on demand profiles are also on demand *




POLISHED / CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PIKLOL 045	4,5	15,24	41,15	
PIKLOC 045	4,5	23,82	64,31	*

CAPS - VARNISHED PLASTIC

Article	Pack. 2 Pcs	Pack. 10 Pcs
TPIKL .../...	3,28	16,33

COLOURS



OL - Polished brass **OC** - Chromed brass



POLISHED CHROME ALUMINIUM / GOLD thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PIKLBC 045	4,5	8,44	22,79
PIKLBO 045	4,5	8,44	22,79

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PIKLAA 045	4,5	5,91	15,96

CAPS - VARNISHED PLASTIC

Article	Pack. 2 Pcs	Pack. 10 Pcs
TPTPIKL .../...	3,28	16,33

COLOURS



AA - Anodized silver alum. **BC** - Polished chrome alum. **BO** - Polished gold alum.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES


PROINTER is a cove-shaped profile in shockproof non - toxic colored vinyl resin. It is particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in twelve colours and special pieces, such as internal and external corners, make **PROINTER** a much sought after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROINTER


SHOCKPROOF NON - TOXIC COLORED VINYL RESIN





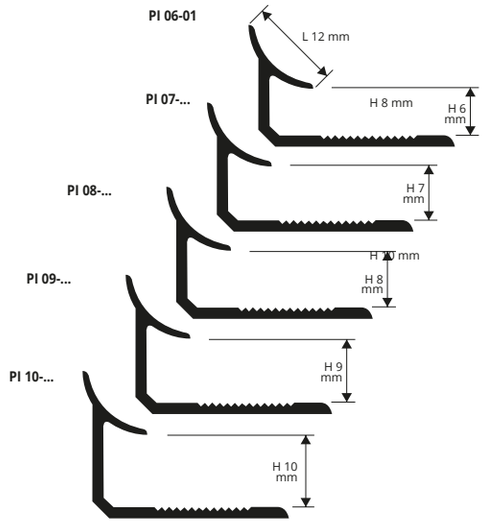

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

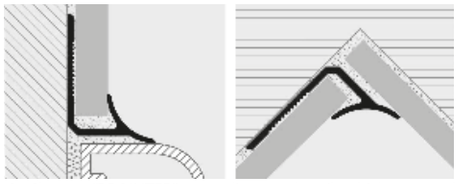

1. Choose "PROINTER" according to the tile thickness and desired colour. **2.** Cut "PROINTER" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROINTER" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

NON-TOXIC SHOCKPROOF VINYL RESIN
bar length **2,7 lm** - pack. **20 Pcs - 54 lm** (white **108 lm**)


Article	H mm	€/lm	€/Pc	
PI 06-01	6	1,41	3,81	*
PI 07-01	7	1,51	4,08	*
PI 08-...	8	1,62	4,37	
PI 09-01	9	1,72	4,64	*
PI 10-...	10	1,84	4,97	

H 6 mm available in white. Other colours on demand.
Available on demand in the colours 01-02-03-05-06-10-11-12-15-17-18-0106 (04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PI 06-... (chosen colour white) PI 06-01.

WHITE NOT FOR SALE SINGLY

PI 07-... E PI 09-...
PRODUCTION ON DEMAND
MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT
(PRODUCTION DELAY 4/5 WEEKS)

COLOURS

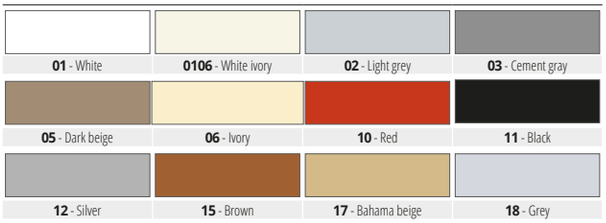

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)




COLOURS

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
VARNISHED PLASTIC (Vinyl Resin) - pack. **10 Pcs**

Article	€/Pack.
REPI .../...	**52,35**
RIPI .../...	**52,35**
RITPI .../...	**52,35**

Available in the colours: 01-02-03-05-06-10-11-12-15-17-18-0106.
Available on demand 04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29.
The code of the selected colour must be added to the article code.
E.g.: RIPI... (Chosen colour Ivory 06) RIPI 06.
PLEASE CHOOSE THE DESIRED COLOUR CODE FROM OUR COLOUR CHART. SPECIFICATION OF THE HEIGHT IS NOT REQUIRED.

COLOURS

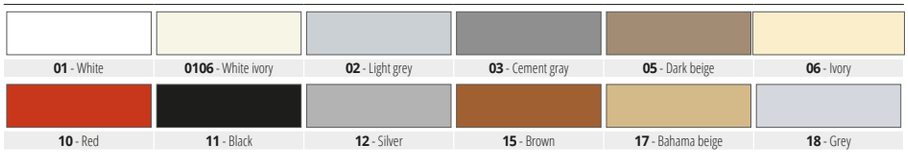



RIPI...



REPI...



RITPI...

Corners of the on demand profiles are also on demand *

= News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROLISTEL CHANNEL


STAINLESS STEEL AISI 304/1.4301-V2A

PROLISTEL CHANNEL is a F-shaped strip in polished an satin-finish stainless steel AISI 304/1.4301-V2A suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PLTCH... 08 - 10 - 11 -12,5



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

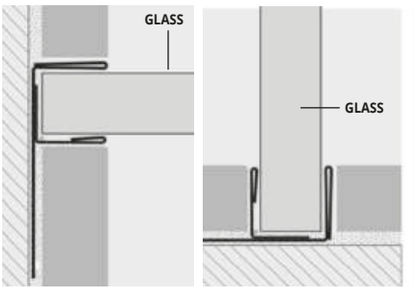

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. **2.** Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. **3.** Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. **4.** Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A

ACS - Brushed stainless steel AISI 304/1.4301-V2A





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/lm	€/Pc
PLTCHAC 0812	8	12	43,47	117,37
PLTCHAC 1012	10	12	45,89	123,90
PLTCHAC 1112	11	12	48,30	130,41
PLTCHAC 12512	12,5	12	50,71	136,92

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/lm	€/Pc
PLTCHACS 0812	8	12	47,09	127,14
PLTCHACS 1012	10	12	49,51	133,68
PLTCHACS 1112	11	12	51,92	140,18
PLTCHACS 12512	12,5	12	54,34	146,72

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/lm	€/Pc
PLTCHAC 0808	8	08	43,47	117,37 *
PLTCHAC 1008	10	08	45,89	123,90 *
PLTCHAC 1108	11	08	48,30	130,41 *
PLTCHAC 12508	12,5	08	50,71	136,92 *

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/lm	€/Pc
PLTCHACS 0808	8	08	47,09	127,14 *
PLTCHACS 1008	10	08	49,51	133,68 *
PLTCHACS 1108	11	08	51,92	140,18 *
PLTCHACS 12508	12,5	08	54,34	146,72 *

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/lm	€/Pc
PLTCHAC 0810	8	10	43,47	117,37 *
PLTCHAC 1010	10	10	45,89	123,90 *
PLTCHAC 1110	11	10	48,30	130,41 *
PLTCHAC 12510	12,5	10	50,71	136,92 *

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**


Article	H mm	L mm	€/lm	€/Pc
PLTCHACS 0810	8	10	47,09	127,14 *
PLTCHACS 1010	10	10	49,51	133,68 *
PLTCHACS 1110	11	10	51,92	140,18 *
PLTCHACS 12510	12,5	10	54,34	146,72 *

PROLISTEL CHANNEL


ANODIZED AND POLISHED ALUMINIUM

PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PLTCH... 08 - 10 - 11 -12,5



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

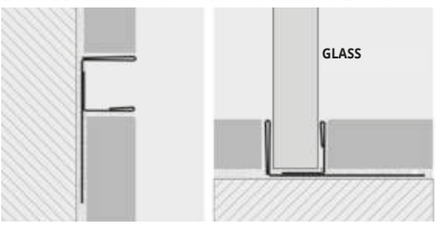

1. Scegliere "PROLISTEL CHANNEL" in funzione della superficie a vista e della finitura desiderata. 2. Tagliare "PROLISTEL CHANNEL" della lunghezza desiderata ed applicare l'adesivo sul supporto dove sarà applicato il listello. 3. Premere "PROLISTEL CHANNEL" nell'adesivo avendo cura di allinearne i bordi con la superficie del rivestimento e di lasciare una fuga di circa 2 mm. Rimuovere immediatamente residui di adesivo dalla superfice del profilo. 4. Stuccare accuratamente le fughe tra profilo e piastrella onde evitare il ristagno di eventuale acqua. Rimuovere immediatamente residui di stucco dalla superfice del profilo.






ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PLTCHAA 08	8	15,03	40,58
PLTCHAA 10	10	16,33	44,09
PLTCHAA 11	11	17,30	46,71
PLTCHAA 125	12,5	18,28	49,36

POLISHED CHROME ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PLTCHBC 08	8	17,64	47,63
PLTCHBC 10	10	18,94	51,14
PLTCHBC 11	11	19,92	53,78
PLTCHBC 125	12,5	20,89	56,40

COLOURS



AA - Anodized silver alum.

BC - Polished chrome alum.

= News 2023

* **= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROTERMINAL INT is a profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and the availability in four different finishes make **PROTERMINAL INT** a much sought-after profile that allows an elegant workmanlike application.

PROTERMINAL INT

ANODIZED AND POLISHED ALUMINIUM





ANODIZED ALUMINIUM (silver - titanium) **thermo packed**
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PTIAA 08	8	8,87	23,95
PTIAA 10	10	9,41	25,41
PTIAA 125	12,5	11,42	30,83
PTIAT 08	8	10,10	27,27
PTIAT 10	10	10,64	28,73
PTIAT 125	12,5	12,79	34,53

POLISHED ALUMINIUM (chrome - titanium) **thermo packed**
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PTIBC 08	8	12,79	34,53
PTIBC 10	10	13,32	35,96
PTIBC 125	12,5	15,35	41,45
PTIBT 08	8	14,04	37,91
PTIBT 10	10	14,55	39,29
PTIBT 125	12,5	16,72	45,14

INTERNAL, EXTERNAL, THREE-WAYS JOINTS
ANODIZED POLISHED ALUMINIUM - pack. **3 Pcs**

Article	€/Pack.
RIPTI ... 08 - 10 - 125/3	19,59
REPTI ... 08 - 10 - 125/3	19,59
RTPIT ... 08 - 10 - 125/3	19,59

INTERNAL CORNER
RIPTI ... 08 - 10 - 125



EXTERNAL CORNER
REPTI ... 08 - 10 - 125




3 WAYS JOINT
RTPIT ... 08 - 10 - 125



COLOURS

ANODIZED



AA - Anodized silver alum.




AT - Anodized titanium alum.

POLISHED




BC - Polished chrome alum.




BT - Polished titanium alum.

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimal quantity, timing and price.

PTI ...

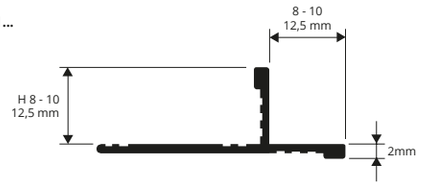

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROTERMINAL INT" according to the tile thickness and desired finish. **2.** Cut "PROTERMINAL INT" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL INT" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROTERMINAL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a L-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in two different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

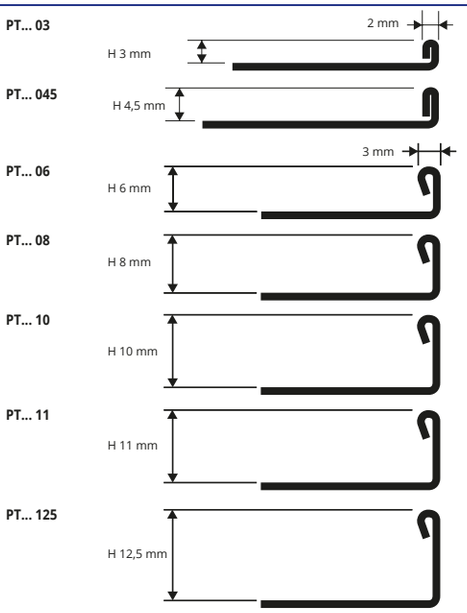

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

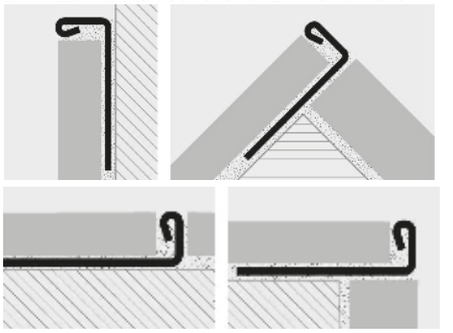

1. Choose "PROTERMINAL" according to the tile thickness and desired finish. **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PTAC 03	3	8,95	24,16
PTAC 045	4,5	9,12	24,62
PTAC 06	6	9,51	25,68
PTAC 08	8	9,84	26,57
PTAC 10	10	10,35	27,95
PTAC 11	11	10,53	28,43
PTAC 125	12,5	10,73	28,97



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PTACS 03	3	10,41	28,11
PTACS 045	4,5	11,36	30,67
PTACS 06	6	11,75	31,73
PTACS 08	8	12,14	32,78
PTACS 10	10	12,58	33,97
PTACS 11	11	12,78	34,51
PTACS 125	12,5	13,03	35,18

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



Curve version available

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316L/1.4404-V4A

PROTERMINAL is a L-shaped profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in two different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

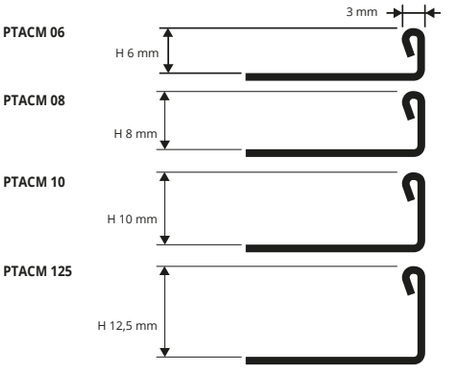

1. Choose "PROTERMINAL" according to the tile thickness. **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.





POLISHED STAINLESS ST. AISI 316/1.4404-V4A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PTACM 06	6	12,38	33,43
PTACM 08	8	12,80	34,56
PTACM 10	10	13,46	36,34
PTACM 125	12,5	13,94	37,64

COLOURS



ACM - Polished stainless steel AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

PROTERMINAL

CHROMED BRASS,BRUSHED BRASS AND ANTIQUE BRASS

PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.



CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc
PTOC 06	6	20,50	55,35
PTOC 08	8	21,37	57,70
PTOC 10	10	21,77	58,78
PTOC 125	12,5	22,46	60,64

COLOURS



OC - Chromed brass | **OB** - Antique brass | **OS** - Brushed brass

BRUSHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H mm	€/lm	€/Pc	
PTOS 06	6	11,96	32,29	*
PTOS 08	8	12,65	34,16	*
PTOS 10	10	13,63	36,80	*
PTOS 125	12,5	14,73	39,77	*

ANTIQUE BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H mm	€/lm	€/Pc
PTOB 06	6	29,28	79,06
PTOB 08	8	30,55	82,49
PTOB 10	10	33,32	89,96
PTOB 125	12,5	35,93	97,01

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

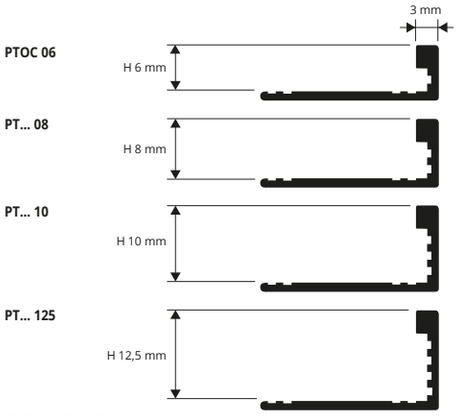

EXEMPLES OF LAYING

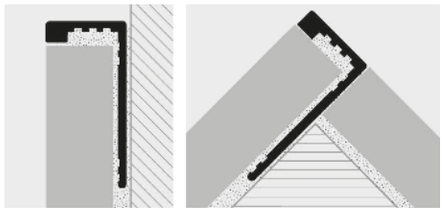

PROTERMINAL

NATURAL AND ANODIZED ALUMINIUM

PROTERMINAL is a L-shaped profile in natural and anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in six different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.



ANODIZED ALUMINIUM (gold - silver) **thermo packed**
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PTAA 03	3	3,90	10,53	
PTAA 045	4,5	4,08	11,02	
PTAA 06	6	4,23	11,42	
PTAA 08	8	4,29	11,58	
PTAA 10	10	4,56	12,31	
PTAA 11	11	4,97	13,42	
PTAA 125	12,5	5,24	14,15	
PTAA 15	15	5,57	15,04	
PTAA 20	20	6,51	17,58	
PTAO 03	3	3,90	10,53	*
PTAO 045	4,5	4,08	11,02	*
PTAO 06	6	4,23	11,42	
PTAO 08	8	4,29	11,58	
PTAO 10	10	4,56	12,31	
PTAO 11	11	4,97	13,42	
PTAO 125	12,5	5,24	14,15	

COLOURS





ANODIZED ALUMINIUM (black-titanium-copper-bronze- antique bronze)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PTNE 08	8	5,89	15,90	
PTNE 10	10	6,14	16,58	
PTNE 125	12,5	6,46	17,44	
PTAT 08	8	5,89	15,90	
PTAT 10	10	6,14	16,58	
PTAT 11	11	6,26	16,90	
PTAT 125	12,5	6,46	17,44	
PTAR 08	8	5,89	15,90	*
PTAR 10	10	6,14	16,58	
PTAR 125	12,5	6,46	17,44	
PTAB 08	8	5,89	15,90	*
PTAB 10	10	6,14	16,58	*
PTAB 125	12,5	6,46	17,44	*
PTBRA 10	10	8,85	23,89	
PTBRA 125	12,5	9,31	25,14	

NATURAL ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	H mm	€/lm	€/Pc
PTAN 03	3	3,21	8,67
PTAN 045	4,5	3,30	8,91

COLOURS




AN - Natural aluminium

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimal quantity, timing and price.

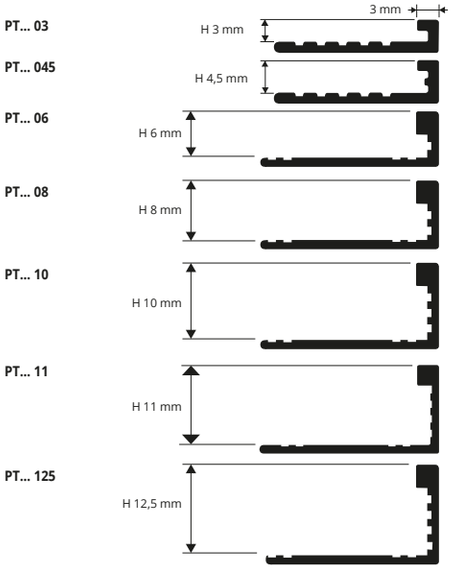

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

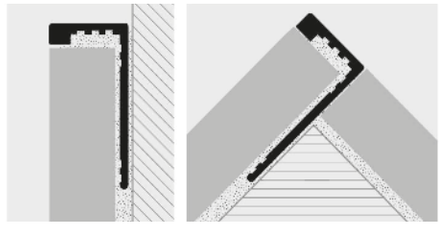

1. Choose "PROTERMINAL" according to the tile thickness and desired finish. **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

= News 2023


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023. All rights reserved by Progress Profiles. Printed in Italy


PROTERMINAL

POLISHED, BRUSHED AND VARNISHED ALUMINIUM

PROTERMINAL is a L-shaped profile in polished, brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings (the varnished only for wall application). Its particular section and the availability in different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

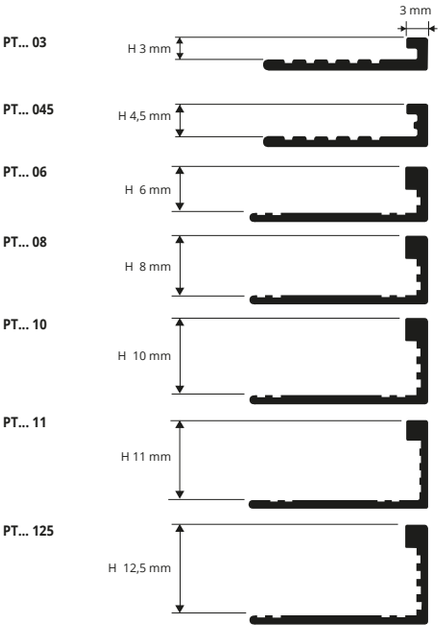

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

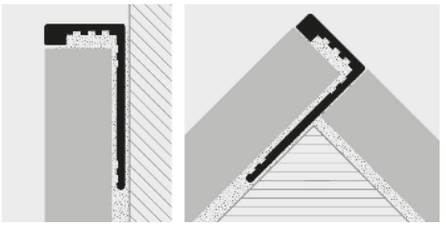

1. Choose "PROTERMINAL" according to the tile thickness and desired finish (color). **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED ALUMINIUM (chrome, gold, copper, titanium, black)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PTBC 03	3	8,02	21,65	
PTBC 045	4,5	8,44	22,79	
PTBC 06	6	8,64	23,33	
PTBC 08	8	8,99	24,27	
PTBC 10	10	9,19	24,81	
PTBC 11	11	9,41	25,41	
PTBC 125	12,5	9,65	26,06	
PTBO 03	3	8,02	21,65	
PTBO 045	4,5	8,44	22,79	
PTBO 06	6	8,64	23,33	
PTBO 08	8	8,99	24,27	
PTBO 10	10	9,19	24,81	
PTBO 11	11	9,41	25,41	
PTBO 125	12,5	9,65	26,06	
PTBT 08	8	9,80	26,46	
PTBT 10	10	10,17	27,46	
PTBT 11	11	10,45	28,21	*
PTBT 125	12,5	10,84	29,27	
PTBR 08	8	9,80	26,46	*
PTBR 10	10	10,17	27,46	
PTBR 125	12,5	10,84	29,27	*
PTBN 06	6	9,51	25,68	
PTBN 08	8	9,80	26,46	*
PTBN 10	10	10,17	27,46	
PTBN 125	12,5	10,84	29,27	



BRUSHED ALUMINIUM (silver, titanium, black, copper, antique bronze)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	H mm	€/lm	€/Pc	
PTBS 045	4,5	9,30	25,11	*
PTBS 08	8	9,41	25,41	
PTBS 10	10	9,99	26,97	
PTBS 11	11	10,32	27,86	
PTBS 125	12,5	10,72	28,94	
PTRS 045	4,5	10,27	27,73	*
PTRS 08	8	10,57	28,54	
PTRS 10	10	10,97	29,62	
PTRS 125	12,5	11,89	32,10	
PTTS 045	4,5	10,27	27,73	*
PTTS 08	8	10,57	28,54	
PTTS 10	10	10,97	29,62	
PTTS 11	11	11,42	30,83	
PTTS 125	12,5	11,89	32,10	
PTBOS 08	8	9,41	25,41	
PTBOS 10	10	9,99	26,97	
PTBOS 125	12,5	10,72	28,94	
PTNS 08	8	10,57	28,54	
PTNS 10	10	10,97	29,62	
PTNS 125	12,5	11,89	32,10	
PTBRAS 10	10	10,97	29,62	
PTBRAS 125	12,5	11,89	32,10	

COATED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pc - 54 lm** (colour white **40 Pcs - 108 lm**)


Article	H mm	€/lm	€/Pc
PTA 06-01	6	5,35	14,45
PTA 08-01	8	5,50	14,85
PTA 10-...	10	5,97	16,12
PTA 11-01	11	6,20	16,74
PTA 125-01	12,5	6,44	17,39

H 10 available in the colours: 01 - 0106 - 11.
The code of the selected colour must be added to the article code.
E.g.: PTA 10-... (chosen colour white ivory varnished alum.)
PTA 10-0106.

COLOURS

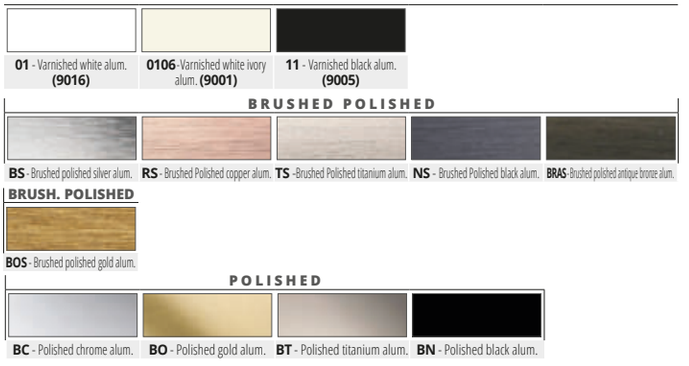

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

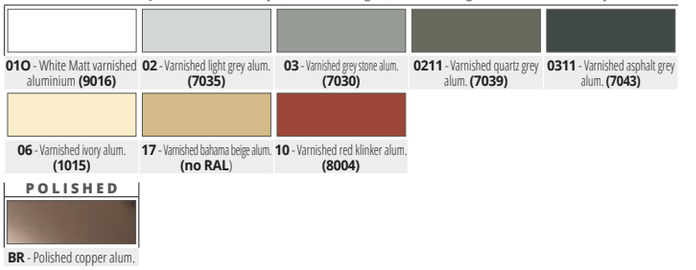

PTA 06-... & PTA 125-... For other colours different from white, please contact our company for quantity and price. Production on demand, production delay 4/5 weeks. (minimum quantity order of 100 pcs).

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERMINAL is a L-shaper profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different finishes make **PROTERMINAL** an elegant and much-sought after profile.

PROTERMINAL

STONE LINE ALUMINIUM AND
TUSCANY LINE



STONE LINE thermo packed
bar length **2,7 lm -** pack. **20 Pcs - 54 lm**


Article	H mm	€/lm	€/Pc
PTA 06-SL...	6	7,84	21,17
PTA 08-SL...	8	8,17	22,06
PTA 10-SL...	10	8,49	22,92
PTA 11-SL...	11	8,81	23,79
PTA 125-SL...	12,5	9,13	24,65

The code of the selected colour must be added to the article code.
E.g.: PTA 08... (chosen colour Stone white) PTA 08-SL01.

TUSCANY LINE thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PTA 08-...	8	8,49	22,92
PTA 10-...	10	9,02	24,35
PTA 125-...	12,5	9,80	26,46

The code of the selected colour must be added to the article code.
E.g.: PTA 08-... (chosen colour tuscany grey) PTA 08-03TU.

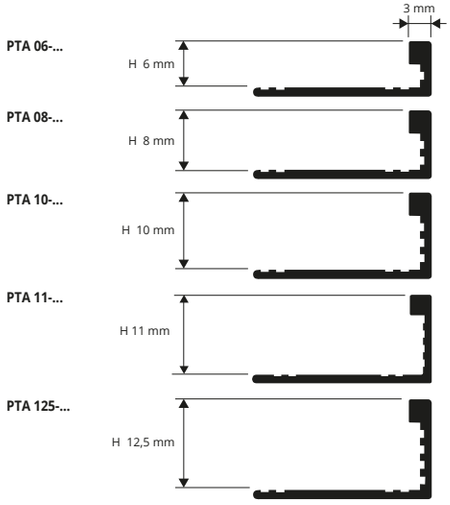

COLOURS

STONE LINE


SL01 - Stone white | **SL02** - Stone cream | **SL03** - Stone greyvory | **SL04** - Stone sand | **SL05** - Stone gray | **SL06** - Stone cristal gray | **SL07** - Stone antragray

SL08 - Stone antradark | **SL09** - Stone bronze | **SL10** - Stone corten | **SL11** - Stone brown | **SL12** - Stone black | **SL13** - Stone oyster grey

TUSCANY

03TU - Tuscany grey | **05TU** - Tuscany beige | **20TU** - Tuscany bronze

EXAMPLES FOR LAYING METHODS

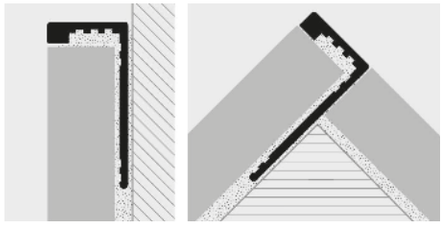

PROTERMINAL is a L-shaped profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different colours also on demand make **PROTERMINAL** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROTERMINAL

SHOCKPROOF NON - TOXIC
COLORED VINYL RESIN

NON-TOXIC SHOCKPROOF COLOURED VINYL RESIN
bar length **2,7 lm** - pack. **54 lm** (white **108 lm**)

Article	H mm	€/lm	€/Pc
PT 06-...	6	1,20	3,24
PT 08-...	8	1,34	3,62
PT 10-...	10	1,47	3,97
PT 125-...	12,5	1,75	4,73


Available in the colours: 01-0106-02-03-04-05-06-11-12-17-18
Available on demand 19-20-21-22-23-24-25-26-27-28-29-07-08-09-10-13-14-15-16 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code.
E.g.: PT 06-... (chosen colour white) PT 06-01.

WHITE NOT FOR SALE SINGLY



EXAMPLE AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness and desired colour. **2.** Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTERMINAL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

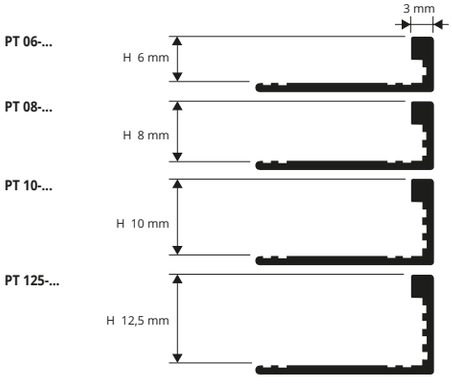

COLOURS

01 - White | **0106** - White ivory | **02** - Light grey | **03** - Cement gray

04 - Light Beige | **05** - Dark Beige | **06** - Ivory | **11** - Black

12 - Silver | **17** - Bahama Beige | **18** - Grey

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

19 - Beige | **20** - Dark ivory | **21** - Light pink | **22** - Dark pink | **23** - Dark antique pink

24 - Dark sky blue | **25** - Brick red | **26** - Turquoise green | **27** - Dark green | **28** - Hazel brown

29 - Dak browrn | **07** - Pink | **08** - Sky blue | **09** - Yellow | **10** - Red


13 - Gold | **14** - Green | **15** - Brown | **16** - Blue

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROLISTEL ACC

POLISHED, BRUSHED, SANDED
STAINLESS STEEL AISI 304/1.4301-V2A

PROLISTEL ACC is a listel in polished, brushed, sanded stainless steel AISI 304/1.4301-V2A with a flat and U-shaped (internal use) visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL ACC** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

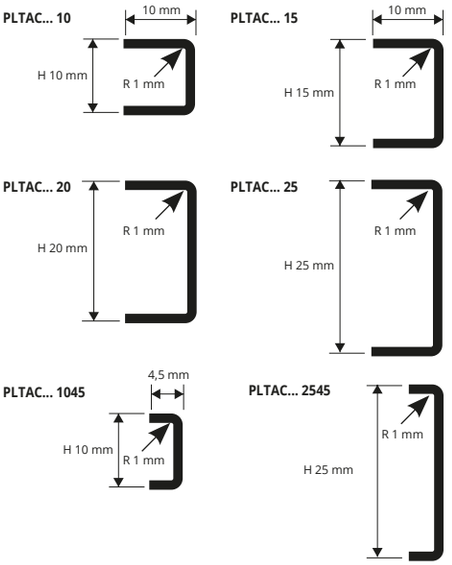









POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** - **8/10mm**

Article	HxL mm	€/lm	€/Pc	
PLTAC 10	10 x 10	7,22	19,49	
PLTAC 1045	10 x 4,5	6,91	18,66	
PLTAC 15	15 x 10	9,61	25,95	
PLTAC 20	20 x 10	12,82	34,61	
PLTAC 25	25 x 10	16,03	43,28	
PLTAC 2545	25 x 4,5	15,71	42,42	*

Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** - **8/10mm**

Article	HxL mm	€/lm	€/Pc	
PLTACS 10	10 x 10	8,66	23,38	
PLTACS 1045	10 x 4,5	8,81	23,79	
PLTACS 15	15 x 10	12,50	33,75	
PLTACS 20	20 x 10	16,65	44,95	
PLTACS 25	25 x 10	18,46	49,84	
PLTACS 2545	25 x 4,5	18,13	48,95	*

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE with protective film - bar length **2,7 lm**
pack. **40 Pcs 108 lm** - **8/10mm**

Article	HxL mm	€/lm	€/Pc	
PLTACI 10	10 x 10	7,22	19,49	*
PLTACI 1045	10 x 4,5	6,91	18,66	*
PLTACI 15	15 x 10	9,61	25,95	*
PLTACI 20	20 x 10	12,82	34,61	*
PLTACI 25	25 x 10	16,03	43,28	*
PLTACI 2545	25 x 4,5	15,71	42,42	*

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE with protective film - bar length **2,7 lm** pack. **40 Pcs 108 lm** - **8/10mm**

Article	HxL mm	€/lm	€/Pc	
PLTACSI 10	10 x 10	8,66	23,38	*
PLTACSI 1045	10 x 4,5	8,81	23,79	*
PLTACSI 15	15 x 10	12,50	33,75	*
PLTACSI 20	20 x 10	16,65	44,95	*
PLTACSI 25	25 x 10	18,46	49,84	*
PLTACSI 2545	25 x 4,5	18,13	48,95	*


SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs 108 lm** - **8/10mm**

Article	HxL mm	€/lm	€/Pc	
PLTACSB 10	10 x 10	9,60	25,92	*

ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

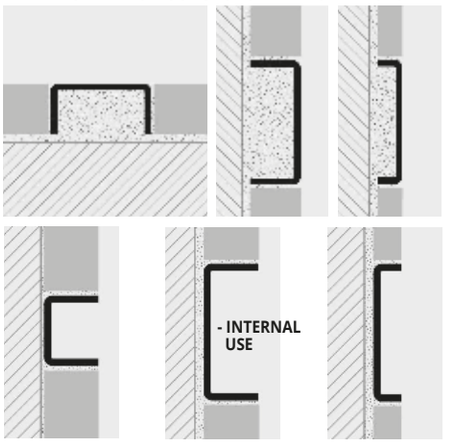

1. Choose "PROLISTEL ACC" according to the width and desired finish. **2.** Cut "PROLISTEL ACC" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press "PROLISTEL ACC" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES


PROLISTEL ACC

POLISHED STAINLESS STEEL
AISI 316L/1.4404 - V4A

PROLISTEL ACC is a range of decorative profiles/strips that are ideal for easily creating chromatic effects on ceramic tile/marble/mosaic coverings or, in the stainless steel AISI 316LL/1.4301-V4A range, for creating separations and decorations between floors in the same or differing material. Thanks to their design, shape and thickness of 4.5 and 10 mm, may be laid using the same adhesive to create horizontal and vertical lines, on the wall or on the floor, irrespective of the thickness of the covering. Various widths available in stainless steel AISI 04/1.4301-V2A, polished. Match with the same basic colours in the PROJOLLY, PROTERMINAL and PROJOLLY SQUARE and the new PROKERLAM SQUARE-LINE-JOLLY range.





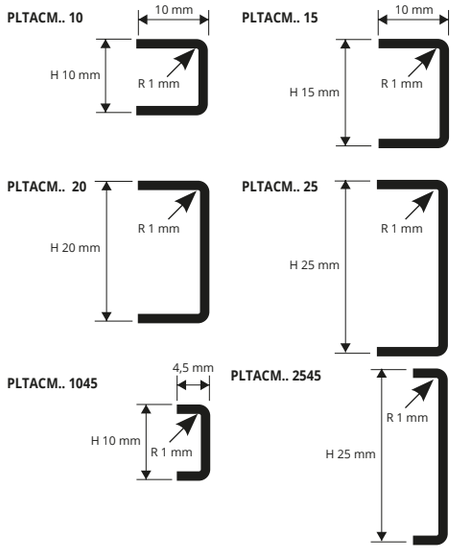


POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film - bar length **2,7 lm**
pack. **40 Pcs** - **108 lm** - **8/10mm**

Article	HxL mm	€/lm	€/Pc	
PLTACM 10	10 X 10	9,40	25,38	*
PLTACM 1045	10 X 4,5	8,97	24,22	*
PLTACM 15	15 X 10	12,50	33,75	*
PLTACM 20	20 X 10	16,66	44,98	*
PLTACM 25	25 X 10	20,84	56,27	*
PLTACM 2545	25 X 4,5	20,42	55,13	*

POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A - INTERNAL USE with protective film - bar length **2,7 lm**
pack. **40 Pcs** - **108 lm** - **8/10mm**

Article	HxL mm	€/lm	€/Pc	
PLTACMI 10	10 X 10	9,40	25,38	*
PLTACMI 1045	10 X 4,5	8,97	24,22	*
PLTACMI 15	15 X 10	12,50	33,75	*
PLTACMI 20	20 X 10	16,66	44,98	*
PLTACMI 25	25 X 10	20,84	56,27	*
PLTACMI 2545	25 X 4,5	20,42	55,13	*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

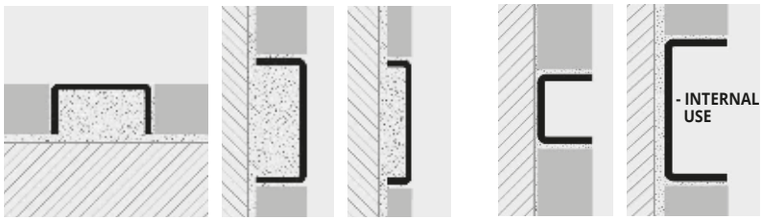

1. Choose the PROLISTEL ACC in the required width. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing it into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Pay attention to the external edges of the PROLISTEL ACC. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

COLOURS



ACM - Polished stainless steel AISI 316LL


PROLISTEL P OTT

POLISHED, CHROMED,
ANTIQUE BRASS

PROLISTEL P OTT is a decorative listel in polished, chromed and antique brass with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P OTT** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.







POLISHED, CHROMED AND ANTIQUE BRASS thermo packed - Bar lenght **2,7 lm** - pack **40 PCS** - **108 lm**

Article	H mm	€/lm	€/Pc	
PLTPOL 25	25	28,23	76,22	*
PLTPOC 25	25	41,84	112,97	*
PLTPOB 25	25	61,49	166,02	*

COLOURS



OL - Polished brass | **OC** - Chromed brass | **OB** - Antique brass

EXAMPLES AND INSTRUCTIONS FOR LAYING



1. Choose "PROLISTEL P OTT" according to the width and desired finish. **2.** Cut "PROLISTEL P OTT" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press "PROLISTEL P OTT" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

= *News 2023*

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROLISTEL P ALL


ANODIZED, POLISHED, STONE LINE, BRUSHED, TUSCANY AND TILTEX ALUMINIUM

PROLISTEL P ALL is a decorative listel in anodized, polished, brushed, tiltex aluminium and varnished tuscany and stone aluminium with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P ALL** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.


PLTP... 10



PLTP... 25



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

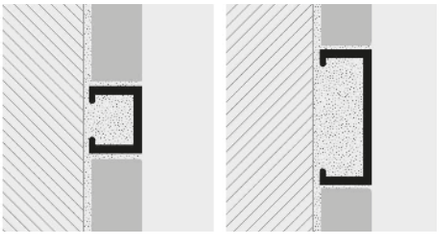

1. Choose "PROLISTEL P ALL" according to the width and desired finish. **2.** Cut "PROLISTEL P ALL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press "PROLISTEL P ALL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.









ALUMINIUM TUSCANY LINE
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PLTPA 10-...TU	10	10,38	28,03	*
PLTPA 25-...TU	25	12,74	34,40	*

STONE LINE ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PLTPA 10-SL01	10	7,77	20,98	
PLTPA 10-SL08	10	7,77	20,98	
PLTPA 10-SL12	10	7,77	20,98	
PLTPA 10-...	10	7,77	20,98	**
PLTPA 25-SL01	25	12,46	33,64	
PLTPA 25-SL08	25	12,46	33,64	
PLTPA 25-SL12	25	12,46	33,64	
PLTPA 25-...	25	12,46	33,64	**

ANODIZED ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PLTPAA 10	10	5,09	13,74	
PLTPAO 10	10	5,39	14,55	*
PLTPAR 10	10	7,04	19,01	
PLTPAT 10	10	7,04	19,01	
PLTPNE 10	10	7,12	19,22	
PLTPAA 25	25	8,18	22,09	
PLTPAO 25	25	8,56	23,11	*
PLTPAR 25	25	10,87	29,35	*
PLTPAT 25	25	10,87	29,35	
PLTPNE 25	25	11,10	29,97	

POLISHED BRUSHED ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PLTPBS 10	10	7,37	19,90	
PLTPBOS 10	10	7,74	20,90	
PLTPRS 10	10	9,80	26,46	*
PLTPTS 10	10	9,80	26,46	
PLTPNS 10	10	9,91	26,76	*
PLTPBS 25	25	10,58	28,57	
PLTPBOS 25	25	11,09	29,94	
PLTPRS 25	25	12,87	34,75	*
PLTPTS 25	25	12,87	34,75	
PLTPNS 25	25	13,16	35,53	*

POLISHED ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PLTPBC 10	10	7,32	19,76	
PLTPBO 10	10	7,68	20,74	
PLTPBR 10	10	9,46	25,54	
PLTPBT 10	10	9,46	25,54	
PLTPBN 10	10	9,57	25,84	
PLTPBC 25	25	10,58	28,57	
PLTPBO 25	25	11,09	29,94	
PLTPBR 25	25	11,93	32,21	*
PLTPBT 25	25	11,93	32,21	
PLTPBN 25	25	12,20	32,94	*

ANODIZED BRUSHED ALUMINIUM TILTEX
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PLTPBX 10	10	11,40	30,78	
PLTPRX 10	10	11,40	30,78	*
PLTPTX 10	10	11,40	30,78	
PLTPBX 25	25	15,03	40,58	
PLTPRX 25	25	15,03	40,58	*
PLTPTX 25	25	15,03	40,58	


COLOURS

ANODIZED



AA - Anodized silver aluminium | **AR** - Anodized copper aluminium | **AT** - Anodized titanium aluminium | **AO** - Anodized gold aluminium

POLISHED



BC - Polished chrome aluminium | **BO** - Polished gold aluminium | **BR** - Polished bronze aluminium | **BT** - Polished titanium aluminium

BLACK LINE



BN - Polished black aluminium | **NE** - Anodized black aluminium | **NS** - Polished brushed black aluminium

POLISHED BRUSHED




BS - Polished brushed aluminium | **BOS** - Polished brushed gold aluminium | **TS** - Polished brushed titanium aluminium | **RS** - Polished brushed copper aluminium

BRUSHED TILTEX



BX - Tiltex silver aluminium | **TX** - Tiltex titanium aluminium | **RX** - Tiltex copper aluminium

TUSCANY




03TU - Tuscany grey | **05TU** - Tuscany Beige | **20TU** - Tuscany Bronze

STONE LINE



SL01 - Stone white | **SL08** - Antradark | **SL12** - Stone black

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks) **STONE LINE**



SL02 - Stone cream | **SL03** - Stone greyvory | **SL04** - Stone sand | **SL05** - Stone gray | **SL06** - Stone cristal gray | **SL07** - Stone antragray | **SL09** - Stone bronze | **SL10** - Stone corten | **SL11** - Stone brown | **SL13** - Stone oyster grey

***** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

****** = Production on demand with minimum quantity of 80 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROLISTEL ALL

ANODIZED, POLISHED AND BRUSHED ALUMINIUM

PROLISTEL ALL is a listel in anodized, polished and brushed aluminium with a rounded visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL P ALL** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.



ANODIZED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PLTAA 15	15	6,02	16,25	
PLTAR 15	15	7,36	19,87	*
PLTAT 15	15	7,36	19,87	
PLTAO 15	15	6,02	16,25	*
PLTNE 15	15	7,46	20,14	
PLTAA 25	25	7,51	20,28	
PLTAR 25	25	9,58	25,87	*
PLTAT 25	25	9,58	25,87	
PLTAO 25	25	7,51	20,28	*
PLTNE 25	25	9,71	26,22	


POLISHED ALUMINIUM (chrome-gold-copper-titanium-black)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PLTBC 15	15	7,37	19,90	
PLTBR 15	15	9,11	24,60	*
PLTBT 15	15	9,11	24,60	
PLTBO 15	15	7,37	19,90	*
PLTBN 15	15	9,22	24,89	*
PLTBC 25	25	10,06	27,16	
PLTBR 25	25	11,81	31,89	*
PLTBT 25	25	11,81	31,89	
PLTBO 25	25	10,06	27,16	*
PLTBN 25	25	11,94	32,24	*


BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PLTBS 15	15	9,65	26,06	
PLTRS 15	15	11,81	31,89	*
PLTTS 15	15	11,81	31,89	
PLTBOS 15	15	9,65	26,06	*
PLTNS 15	15	11,94	32,24	*
PLTBS 25	25	10,65	28,76	
PLTRS 25	25	12,68	34,24	*
PLTTS 25	25	12,68	34,24	
PLTBOS 25	25	10,65	28,76	*
PLTNS 25	25	12,82	34,61	*


PLT... 15



PLT... 25



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

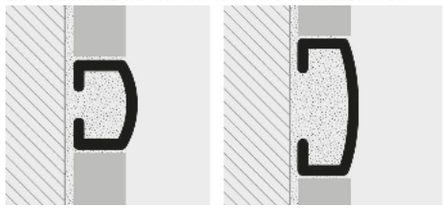


1. Choose "PROLISTEL ALL" according to the width and desired finish. **2.** Cut "PROLISTEL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press "PROLISTEL ALL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

PROLISTEL LED

ANODIZED AND POLISHED ALUMINIUM

PROLISTEL LED is a listel in anodized and polished aluminium equipped with an integrated LED lighting system that can generate a cold, hot and neutral suffused light. It is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL LED** a much sought after profile that decorates the wall coverings.





ANODIZED ALUM. SILVER, POLISHED CHROME ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**
ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H mm	€/lm	€/Pc
PLTLEDAA 20	20	12,41	33,51
PLTLEDBC 20	20	14,04	37,91

ADHESIVE FLEXIBLE LED COIL
length **5 lm** - pack. **1 ROLL**

Article	€/lm	€/Pack
LEDN	22,47	112,35
LEDF	22,47	112,35
LEDC	22,47	112,35

COLOURS



POLYCARBONATE FLAT bar length **2,7 lm** - pack. **20 Pc - 54 lm**
(AL = transparent / AO = matt)

Article	€/lm	€/Pc
PIAL 17	5,16	13,93
PIAO 17	5,16	13,93



END CAPS - R/L (3 right & 3 left)

Article	H mm	
TPLTLEDAA 20	20	21,90
TPLTLEDBC 20	20	21,90




LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article	€/Pc
ALL 7512	82,27


LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article	€/Pc
ALL 2512	56,42

PLTLED... 20



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

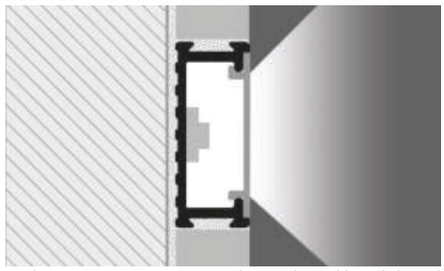

1. Choose "PROLISTEL LED" according to the width and desired finish. **2.** Cut "PROLISTEL LED" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press "PROLISTEL LED" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

© 2020. All rights reserved by Progress Profiles. Printed in Italy

PROFINLIST 20

ANODIZED, POLISHED, BRUSHED
AND TILTEX ALUMINIUM

PROFINLIST 20 is a listel in anodized, polished, brushed and tiltex aluminium with a flat visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROFINLIST 20** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

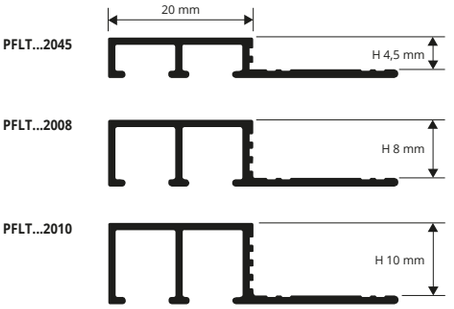










EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

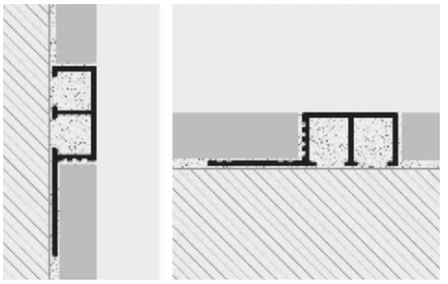

1. Choose "PROFINLIST 20" according to the width and desired finish. **2**. Cut "PROFINLIST 20" to the desired length and apply the adhesive on the support where the profile will be laid. **3**. Press the anchoring flange of "PROFINLIST 20" into the adhesive. **4**. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5**. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PFLTAA 2045	4,5	8,12	21,92	*
PFLTAA 2008	8	8,18	22,09	
PFLTAR 2008	8	9,72	26,24	*
PFLTAT 2008	8	9,72	26,24	*
PFLTAA 2010	10	8,38	22,63	
PFLTAR 2010	10	9,99	26,97	*
PFLTAT 2010	10	9,99	26,97	*

BRUSHED POLISHED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PFLTBS 2045	4,5	11,27	30,43	*
PFLTBS 2008	8	11,74	31,70	
PFLTRS 2008	8	14,42	38,93	*
PFLTTS 2008	8	14,42	38,93	*
PFLTBS 2010	10	12,00	32,40	
PFLTRS 2010	10	14,70	39,69	*
PFLTTS 2010	10	14,70	39,69	*
PFLTBOS 2010	10	14,70	39,69	

POLISHED ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PFLTBC 2045	4,5	9,46	25,54	*
PFLTBO 2045	4,5	9,84	26,57	
PFLTBC 2008	8	10,06	27,16	
PFLTBR 2008	8	11,74	31,70	*
PFLTBT 2008	8	10,06	27,16	*
PFLTBC 2010	10	10,28	27,76	
PFLTBO 2010	10	10,46	28,24	
PFLTBR 2010	10	12,00	32,40	*
PFLTBT 2010	10	10,28	27,76	*

BRUSHED TILTEX ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PFLTBX 2008	8	12,95	34,97	*
PFLTRX 2008	8	15,82	42,71	*
PFLTTX 2008	8	15,82	42,71	
PFLTBX 2010	10	13,14	35,48	*
PFLTRX 2010	10	16,16	43,63	*
PFLTTX 2010	10	16,16	43,63	

COLOURS

ANODIZED
AA - Satin anodized silver alu.

POLISHED
BC - Polished chrome alu. **BO** - Polished gold alum.

BRUSHED POLISHED
BS - Brushed silver alu. **BOS** - Brushed gold alu.

ANOD. BRUSHED TILTEX
BX - Silver TILTEX

AVAILABLE MINIMUM QUANTITY 100 PCS
by colour and height (Price to be agreed. Production delay 4/5 weeks)

ANODIZED
AR - Anodized copper alum. **AT** - Anodized titanium alum.

POLISHED
BR - Polished copper alum. **BT** - Polished titanium alum.

SPAZZ. BRILLANT.
RS - All. spazz. brill. rame **TS** - All. spazz. brill. titanio

ANOD. SPAZZOLATI TILTEX
RX - Brushed tiltex copper alum. **TX** - Titanium tiltex

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROBORD is a round corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corner of wall coverings in ceramic. Its particular section and availability in different finishes, make **PROBORD** a much sought after profile. It can be used with the range of PROLISTEL and PROSHELL profiles to obtain an elegant workmanlike application even in environments subject to high mechanical stresses.

PROBORD

POLISHED AND BRUSHED STAINLESS STEEL
AISI 304/1.4301-V2A





POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm - 10/10mm**

Article	H mm	€/lm	€/Pc
PEBDAC 08	08	19,80	53,46
PEBDAC 10	10	20,56	55,51
PEBDAC 125	12,5	21,08	56,92

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm - 10/10mm**

Article	H mm	€/lm	€/Pc
PEBDACS 08	08	23,18	62,59
PEBDACS 10	10	23,81	64,29
PEBDACS 125	12,5	24,58	66,37


COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

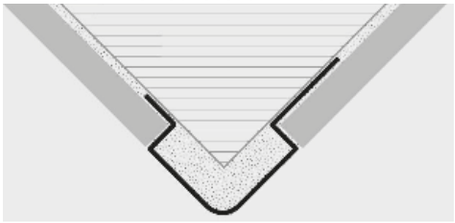


1. Choose "PROBORD" according to the tile thickness and desired finish. **2**. Cut "PROBORD" to the desired length and apply the adhesive on the support where the profile will be laid. **3**. Press the anchoring flange of "PROBORD" into the adhesive. **4**. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5**. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PEBDAC/ACS 08

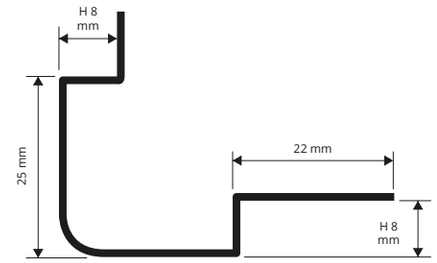

PEBDAC/ACS 10

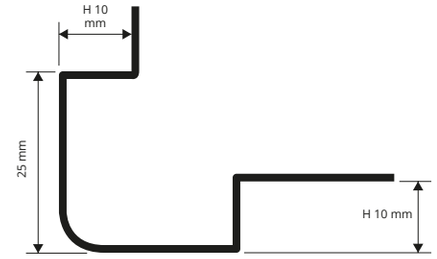

PEBDAC/ACS 125

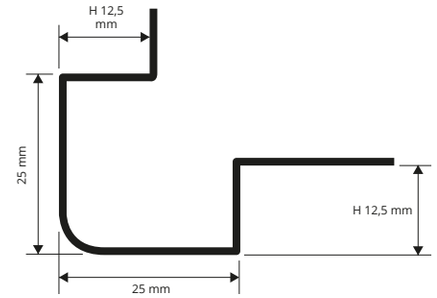

PROEDGE FLEX is a corner bead profile in shockproof non-toxic co-extruded colored vinyl resin composed by an internal rigid structure and by a soft external one. The profile is suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in different colours make **PROEDGE FLEX** a much sought after and easy to lay profile that allows a workmanlike application.

PROEDGE FLEX

SHOCKPROOF NON - TOXIC CO-EXTRUDED
COLORED VINYL RESIN






CO-EXTRUDED PVC - L 40 X 40 mm
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm**

Article	H mm	€/lm	€/Pc
PFC...40	40	8,32	22,46


CO-EXTRUDED PVC WITH ADHESIVE - L 40 X 40 mm
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm**

Article	H mm	€/lm	€/Pc
PFC...40A	40	11,14	30,08

PFC... 40/40A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

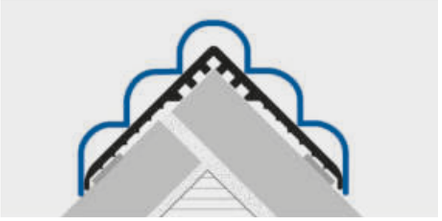

1. Choose "PROEDGE FLEX" according to the desired colour. **2.** Cut "PROEDGE FLEX" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film (version with adhesive), place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



01 - White

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)




09 - Yellow | **10** - Red | **11** - Black | **16** - Blue

© 2020. All rights reserved by Progress Profiles. Printed in Italy

PROEDGE AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROEDGE AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

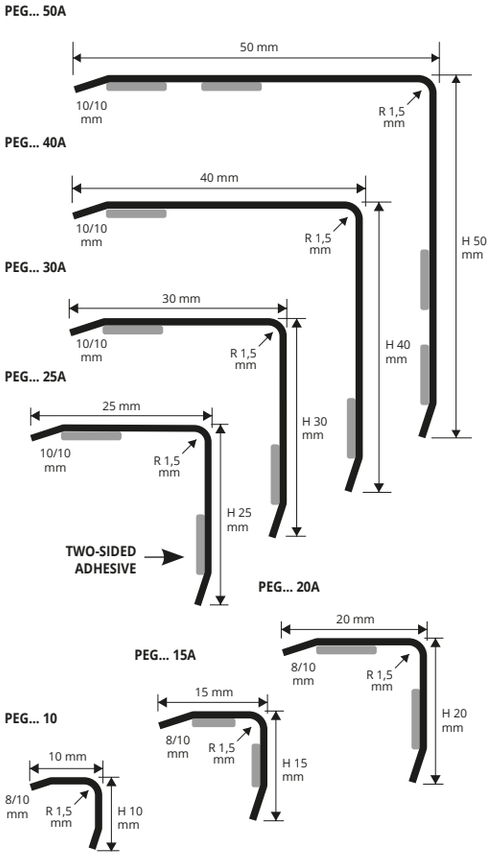



POLISHED AND BRUSHED STAINLESS STEEL
with protective film - bar length **2,7 lm** - pack. **81 lm - 8/10 mm**

Article	LxH mm	€/lm	€/Pc
PEGAC 10	10 x 10	6,50	17,55
PEGACS 10	10 x 10	8,34	22,52

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **81 lm - 8/10 mm**

Article	LxH mm	€/lm	€/Pc
PEGAC 15A	15 x 15	9,58	25,87
PEGACS 15A	15 x 15	11,43	30,86
PEGAC 20A	20 x 20	10,86	29,32
PEGACS 20A	20 x 20	12,72	34,34

For items without adhesive, write the item without the last A.
E.g.: PEGAC 15

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

Suitable for use in contact with foodstuffs.



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **40,5 lm -10/10 mm**

Article	LxH mm	€/lm	€/Pc
PEGAC 25A	25 x 25	12,14	32,78
PEGACS 25A	25 x 25	14,04	37,91
PEGAC 30A	30 x 30	17,24	46,55
PEGACS 30A	30 x 30	19,50	52,65

For items without adhesive write the item without the last A.
E.g.: PEGAC 10

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **27 lm - 10/10 mm**

Article	LxH mm	€/lm	€/Pc
PEGAC 40A	40 x 40	21,84	58,97
PEGACS 40A	40 x 40	24,74	66,80
PEGAC 50A	50 x 50	25,41	68,61
PEGACS 50A	50 x 50	27,46	74,14

For items without adhesive, write the item without the last A.
E.g.: PEGAC 40


PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

PROEDGE OT

POLISHED AND CHROMED BRASS

PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE OT** a much sought-after profile that allows an elegant workmanlike application.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

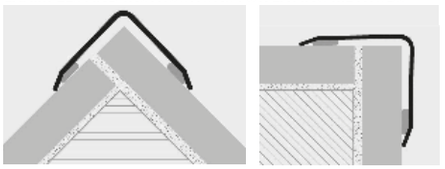


1. Choose "PROEDGE OT" according to the desired finish and width. **2.** Cut "PROEDGE OT" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



OC - Chromed brass
OL - Polished Brass

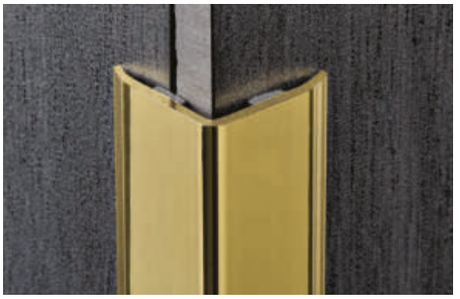

POLISHED AND CHROMED BRASS
bar length **2,7 lm** - pack. **54 lm - 8/10 mm**

Article	LxH mm	€/lm	€/Pc
PEGOL 10	10 x 10	11,38	30,73
PEGOC 10	10 x 10	16,15	43,60

POLISHED AND CHROMED BRASS WITH ADHESIVE MIRROR LINE
bar length **2,7 lm** - pack. **54 lm - 8/10 mm**

Article	LxH mm	€/lm	€/Pc	
PEGOL 15A	15 x 15	13,00	35,10	*
PEGOC 15A	15 x 15	19,32	52,16	
PEGOL 20A	20 x 20	16,65	44,95	*
PEGOC 20A	20 x 20	23,82	64,31	
PEGOC 25A	25 x 25	27,17	73,36	
PEGOC 30A	30 x 30	31,67	85,51	

For items without adhesive, write the item without the last A.
E.g.: PEGOL 15



POLISHED BRASS WITH ADHESIVE MIRROR LINE
bar length **2,7 lm** - pack. **27 lm - 10/10 mm**

Article	LxH mm	€/lm	€/Pc	
PEGOL 25A	25 x 25	17,57	17,57	*
PEGOL 30A	30 x 30	23,88	64,48	*

POLISHED BRASS WITH ADHESIVE MIRROR LINE
bar length **2,7 lm** - pack. **27 lm - 12/10 mm**

Article	LxH mm	€/lm	€/Pc	
PEGOL 40A	40 x 40	30,21	81,57	*
PEGOL 50A	50 x 50	38,63	104,30	*

PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGOL 40

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROEDGE R AC

PROEDGE R AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A





POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **81 lm - 8/10 mm**

Article	LxH mm	€/lm	€/Pc	
PEGRAC 15A	15 x 15	9,58	25,87	*
PEGRACS 15A	15 x 15	11,43	30,86	*
PEGRAC 20A	20 x 20	10,86	29,32	*
PEGRACS 20A	20 x 20	12,72	34,34	*

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **40,5 lm -10/10 mm**

Article	LxH mm	€/lm	€/Pc	
PEGRAC 25A	25 x 25	12,14	32,78	*
PEGRACS 25A	25 x 25	14,04	37,91	*
PEGRAC 30A	30 x 30	17,24	46,55	*
PEGRACS 30A	30 x 30	19,50	52,65	*

For items without adhesive write the item without the last A.
E.g.: PEGRAC 15

Suitable for use in contact with foodstuffs.

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length **2,7 lm** - pack. **27 lm - 10/10 mm**

Article	LxH mm	€/lm	€/Pc	
PEGRAC 40A	40 x 40	21,84	58,97	*
PEGRACS 40A	40 x 40	24,74	66,80	*
PEGRAC 50A	50 x 50	25,41	68,61	*
PEGRACS 50A	50 x 50	27,46	74,14	*


PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGRAC 40

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

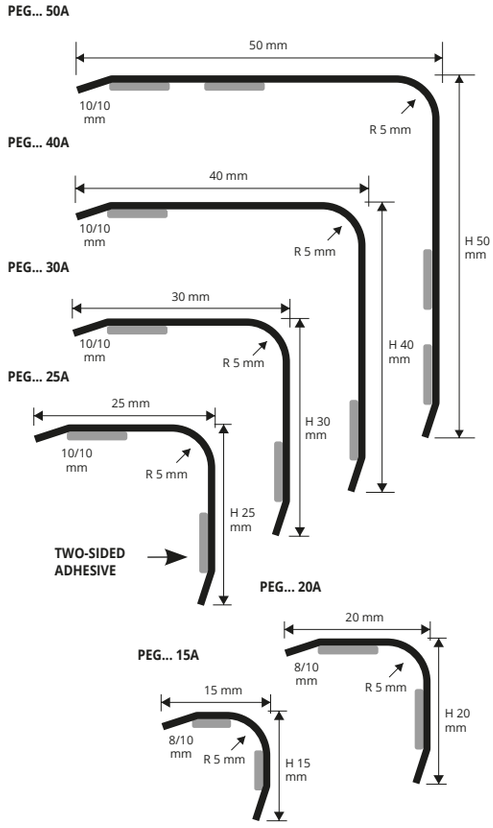

PROEDGE R OT

PROEDGE R OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R OT** a much sought-after profile that allows an elegant workmanlike application.

POLISHED AND CHROMED BRASS

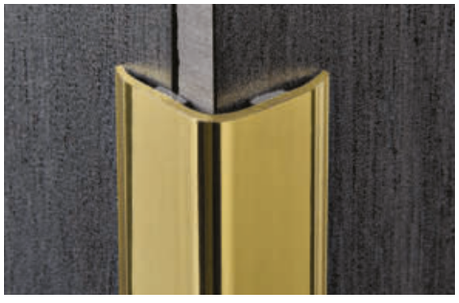



CHROMED BRASS WITH ADHESIVE
thermo packed - bar length **2,7 lm** - pack. **54 lm**

MIRROR LINE

Article	LxH mm	€/lm	€/Pc	
PEGROC 15A	15 x 15	19,32	52,16	*
PEGROC 20A	20 x 20	23,82	64,31	*
PEGROC 25A	25 x 25	27,17	73,36	*
PEGROC 30A	30 x 30	31,67	85,51	*

POLISHED BRASS WITH ADHESIVE
bar length **2,7 lm** - pack. **54 lm - 8/10 mm**

MIRROR LINE

Article	LxH mm	€/lm	€/Pc	
PEGROL 15A	15 x 15	13,00	35,10	*
PEGROL 20A	20 x 20	16,65	44,95	*

For items without adhesive, write the item without the last A.
E.g.: PEGROL 15

POLISHED BRASS WITH ADHESIVE
bar length **2,7 lm** - pack. **27 lm - 10/10 mm**

MIRROR LINE

Article	LxH mm	€/lm	€/Pc	
PEGROL 25A	25 x 25	16,78	45,31	*
PEGROL 30A	30 x 30	22,79	61,53	*

POLISHED BRASS WITH ADHESIVE
bar length **2,7 lm** - pack. **27 lm - 12/10 mm**


MIRROR LINE

Article	LxH mm	€/lm	€/Pc	
PEGROL 40A	40 x 40	30,21	81,57	*
PEGROL 50A	50 x 50	38,63	104,30	*

PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGROL 25

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

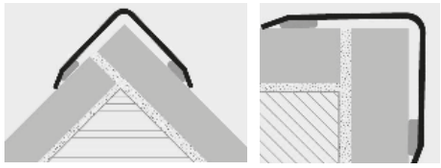

1. Choose "PROEDGE R OT" according to the desired finish and width. **2.** Cut "PROEDGE R OT" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



OC - Chromed brass
OL - Polished Brass

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROEDGE AL

PROEDGE AL is a corner bead profile in anodized and varnished aluminim suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different finishes make **PROEDGE AL** a much sought-after profile that allows a workmanlike application.

ANODIZED AND VARNISHED ALUMINIUM


PEG... 25A
PEGA 25-01A







EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

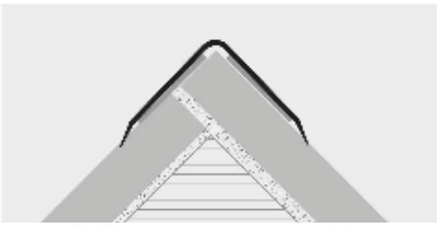

1. Choose "PROEDGE AL" according to the desired finish and width. **2.** Cut "PROEDGE AL" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

ANODIZED ALUM. (gold, silver and bronze) **WITH ADHESIVE**
thermo packed - bar length **2,7 lm** - pack. **30 Pcs - 81 lm**

Article	LxH mm	€/lm	€/Pc
PEGAO 25A	25 x 25	7,10	19,17
PEGAA 25A	25 x 25	7,10	19,17
PEGAB 25A	25 x 25	7,10	19,17

For items without adhesive, write the article without the last A.
E.g.: PEGAO 25

WHITE VARNISHED ALUMINIUM - WITH ADHESIVE
thermo packed - bar length **2,7 lm** - pack. **30 Pcs - 81 lm**

Article	LxH mm	€/lm	€/Pc
PEGA 25-01A	25 x 25	8,85	23,89

COLOURS

ANODIZED



AO - Anodized gold alum. **AA** - Anodized silver alum. **AB** - Anod. bronze alum.




01 - White varnished alum.

PROEDGE PVC

PROEDGE PVC is a corner bead profile in shockproof non-toxic co-extruded white vinyl resin suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different widths make **PROEDGE PVC** a much sought-after profile that allows a workmanlike application.

SHOCKPROOF NON - TOXIC CO-EXTRUDED
WHITE VINYL RESIN

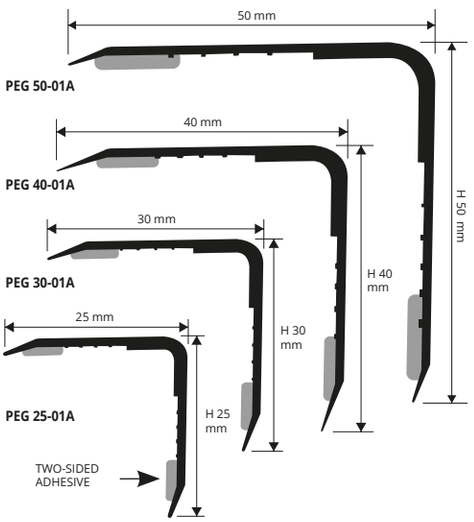





SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length **2,7 lm** - pack. **30 Pcs - 81 lm**

Article	LxH mm	€/lm	€/Pc
PEG 25-01A	25 x 25	6,00	16,20
PEG 30-01A	30 x 30	6,79	18,33

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE
bar length **2,7 lm** - pack. **30 Pcs - 81 lm**

Article	LxH mm	€/lm	€/Pc
PEG 25-01	25 x 25	4,09	11,04
PEG 30-01	30 x 30	4,89	13,20


SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm**

Article	LxH mm	€/lm	€/Pc
PEG 40-01A	40 x 40	7,58	20,47
PEG 50-01A	50 x 50	8,39	22,65

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm**

Article	LxH mm	€/lm	€/Pc
PEG 40-01	40 x 40	5,68	15,34
PEG 50-01	50 x 50	6,49	17,52

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

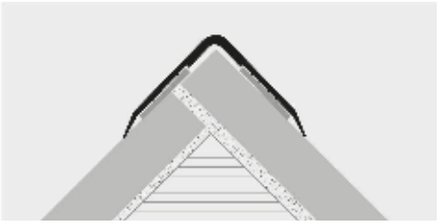

1. Choose "PROEDGE PVC" according to the desired width. **2.** Cut "PROEDGE PVCL" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



01 - White

FOR OTHER COLORS MINIMUM ORDER 400 pcs

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES




© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSHELL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A


PROSHELL is a cove-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

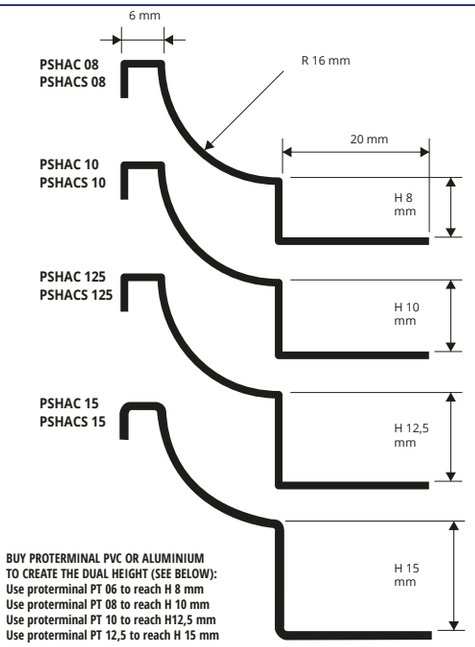


BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE BELOW):
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H12,5 mm
Use proterminal PT 12,5 to reach H 15 mm

EXAMPLES FOR LAYING

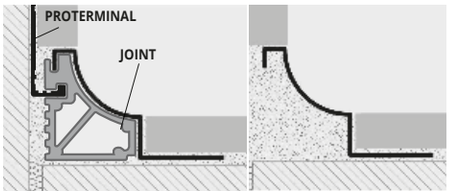



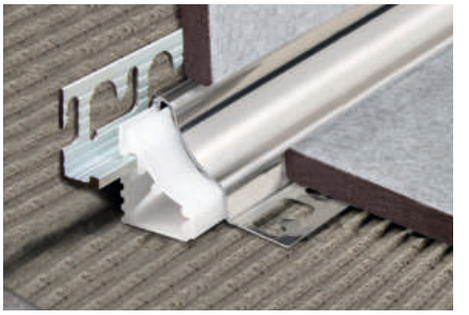

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PSHAC 08	8	17,24	46,55
PSHAC 10	10	18,13	48,95
PSHAC 125	12,5	19,30	52,11
PSHAC 15	15	20,31	54,84

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length **2,7 lm** - pack. **20 Pcs- 54 lm - 10/10 mm**


Article	H mm	€/lm	€/Pc
PSHACS 08	8	19,16	51,73
PSHACS 10	10	20,13	54,35
PSHACS 125	12,5	20,56	55,51
PSHACS 15	15	21,84	58,97

Suitable for use in contact with foodstuffs.

INSTRUCTIONS FOR LAYING

1. Choose "PROSHELL" according to the tile thickness and desired finish. **(*) 2.** Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSHELL" into the adhesive. **4.** Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.


COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

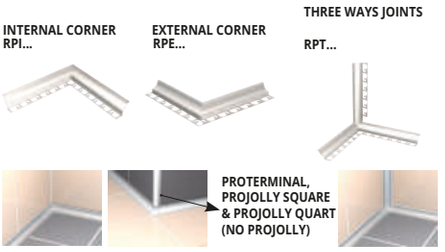

PREWELDED CORNER - POLISHED STAINLESS STEEL
L 100 mm - pack. **10 Pcs**

Article	H mm	€/Pc.	€/Pack
RPI .../10	08/10/125	21,86	218,60
RPI 15/10	15	23,19	231,90
RPE .../10	08/10/125	21,86	218,60
RPE 15/10	15	23,19	231,90
RPT .../10	08/10/125	28,97	289,70
RPT 15/10	15	30,18	301,80

Specify height of joint: E.g.: RPI 8 for H 8 mm.

PREWELDED CORNER - BRUSHED STAINLESS STEEL
L 100 mm - pack. **10 Pcs**

Article	H mm	€/Pc.	€/Pack
RPIS .../10	08/10/125	23,47	234,70
RPIS 15/10	15	24,69	246,90
RPES .../10	08/10/125	23,47	234,70
RPES 15/10	15	24,69	246,90
RPTS .../10	08/10/125	30,18	301,80
RPTS 15/10	15	31,92	319,20

Specify height of joint: E.g.: RPIS 8 for H 8 mm.




OVERLAPPING JOINTS
POLISHED AISI 316/.4404 V4A STAINLESS STEEL - pack. **10 Pcs**

Article	€/Pc.	€/Pack
RPSIACM/10	8,81	88,10
RPSEACM/10	8,81	88,10
RPSTACM/10	8,81	88,10
GPSACM/10	4,05	40,50
TPSACM/10	4,05	40,50


OVERLAPPING JOINTS
BRUSHED AISI 316/.4404 V4A STAINLESS STEEL - pack. **10 Pcs**

Article	€/Pc.	€/Pack
RPSIACMS/10	9,25	92,50
RPSEACMS/10	9,25	92,50
RPSTACMS/10	9,25	92,50
GPSACMS/10	4,24	42,40
TPSACMS/10	4,24	42,40

END CAPS

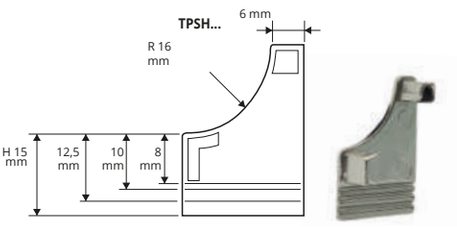

JOINT
GISHN...

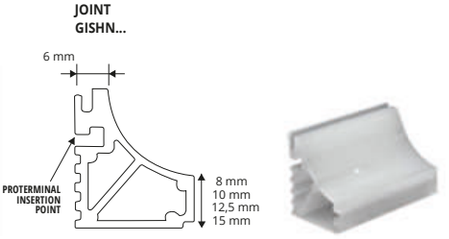

CAPS AND JOINTS IN RIGID GREY PLASTIC
pack. **10 Pcs**

Article	€/Pc.	€/Pack
TPSHAC/10	4,70	47,00
TPSHACS/10	4,70	47,00
GISHN 08/10	4,03	40,30
GISHN 10/10	4,42	44,20
GISHN 125/10	4,84	48,40
GISHN 15/10	5,31	53,10

© 2023 All rights reserved by Progress Profiles. Printed in Italy

= News 2023


PROSHELL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316L/1.4404-V4A

PROSHELL is a cove-shaped profile in polished and brushed stainless steel AISI 316L/1.4404-V4A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.





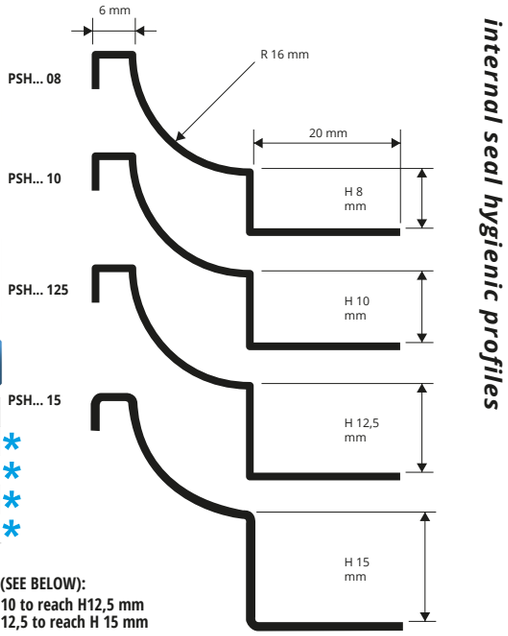

internal seal hygienic profiles

POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film
- bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc	
PSHACM 08	8	22,41	60,51	*
PSHACM 10	10	23,58	63,67	*
PSHACM 125	12,5	25,08	67,72	*
PSHACM 15	15	26,41	71,31	*

BRUSHED STAINLESS STEEL AISI 316L/1.4404-V4A with protective film
- bar length **2,7 lm** - pack. **20 Pcs- 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc	
PSHACMS 08	8	24,91	67,26	*
PSHACMS 10	10	26,17	70,66	*
PSHACMS 125	12,5	26,73	72,17	*
PSHACMS 15	15	28,40	76,68	*

Suitable for use in contact with foodstuffs.


BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE BELOW):
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H12,5 mm
Use proterminal PT 12,5 to reach H 15 mm

COLOURS

ACM - Polished stainless steel AISI 316L/1.4404-V4A
ACMS - Brushed stainless steel AISI 316L/1.4404-V4A

EXAMPLES AND INSTRUCTIONS FOR LAYING

1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) **2.** Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSHELL" into the adhesive. **4.** Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

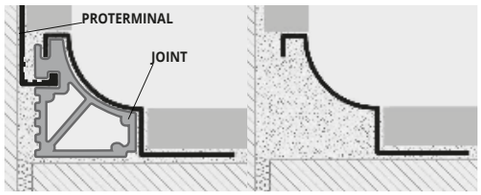

PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

PREWELDED CORNER - POLISHED STAINLESS STEEL
L 100 mm - pack. **10 Pcs**

Article	H mm	€/Pc.	€/Pack	
RPIACM .../10	08/10/125	28,42	284,20	**
RPIACM 15/10	15	30,17	301,70	**
RPEACM .../10	08/10/125	28,42	284,20	**
RPEACM 15/10	15	30,17	301,70	**
RPTACM .../10	08/10/125	37,72	377,20	**
RPTACM 15/10	15	39,23	392,30	**


Specify height of joint: E.g.: RPI 8 for H 8 mm.

PREWELDED CORNER - BRUSHED STAINLESS STEEL
L 100 mm - pack. **10 Pcs**

Article	H mm	€/Pc.	€/Pack	
RPIACMS .../10	08/10/125	30,50	305,00	**
RPISACMS 15/10	15	32,10	321,00	**
RPESACMS .../10	08/10/125	30,50	305,00	**
RPESACMS 15/10	15	32,10	321,00	**
RPTSACMS .../10	08/10/125	39,23	392,30	**
RPTSACMS 15/10	15	41,49	414,90	**

Specify height of joint: E.g.: RPIS 8 for H 8 mm.

INTERNAL CORNER RPI...
EXTERNAL CORNER RPE...
THREE WAYS CORNER RPT...

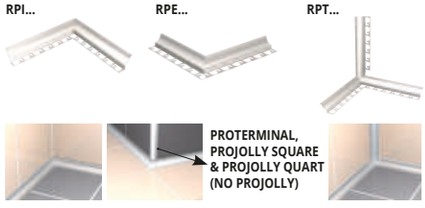

OVERLAPPING JOINTS
POLISHED AISI 316/.4404 V4A STAINLESS STEEL - pack. **10 Pcs**

Article	€/Pc.	€/Pack
RPSIACM/10	8,81	88,10
RPSEACM/10	8,81	88,10
RPSTACM/10	8,81	88,10
GPSACM/10	4,05	40,50
TPSACM/10	4,05	40,50

OVERLAPPING JOINTS
BRUSHED AISI 316/.4404 V4A STAINLESS STEEL - pack. **10 Pcs**


Article	€/Pc.	€/Pack
RPSIACMS/10	9,25	92,50
RPSEACMS/10	9,25	92,50
RPSTACMS/10	9,25	92,50
GPSACMS/10	4,24	42,40
TPSACMS/10	4,24	42,40




CAPS AND JOINTS IN RIGID GREY PLASTIC
pack. **10 Pcs**

Article	€/Pc.	€/Pack
TPSHAC/10	4,70	47,00
TPSHACS/10	4,70	47,00
GISHN 08/10	4,03	40,30
GISHN 10/10	4,42	44,20
GISHN 125/10	4,84	48,40
GISHN 15/10	5,31	53,10

JOINT

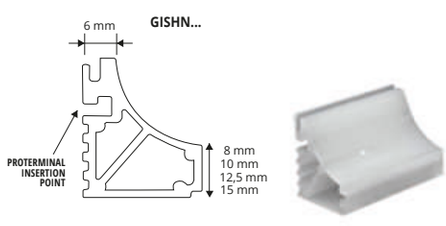

END CAPS

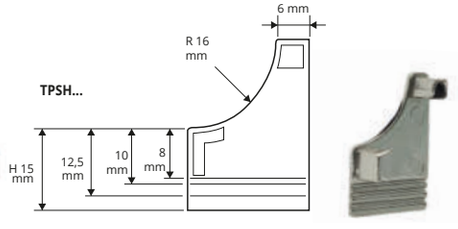

** = Production on demand with minimum quantity of 20 pcs. Production delay 4/5 weeks. Price to be agreed

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

= News 2023


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROSHELL ALL


ANODIZED, POLISHED AND VARNISHED ALUMINIUM

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL ALL** a much sought-after profile that allows a workmanlike application.


PSH... 8

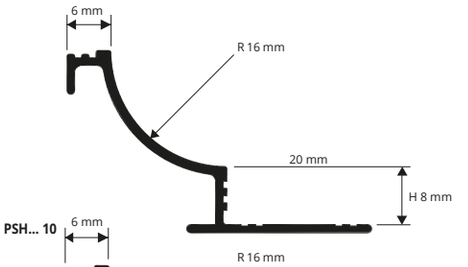

PSH... 10

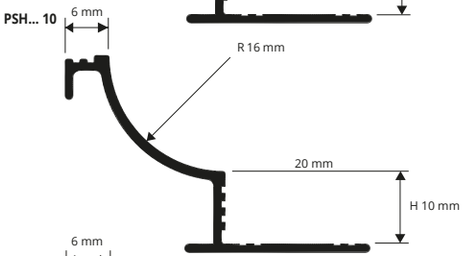

PSH... 125

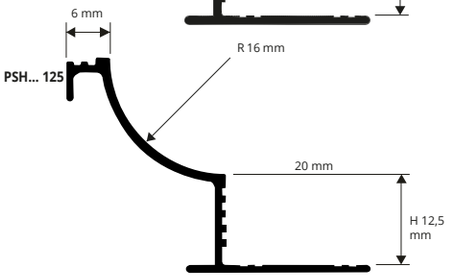

BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE NEXT PIC):
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H12,5 mm
Use proterminal PT 12,5 to reach H 15 mm




ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H mm	€/lm	€/Pc
PSHAA 08	8	10,72	28,94
PSHAA 10	10	10,84	29,27
PSHAA 125	12,5	11,03	29,78

VARNISHED WHITE ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs- 54 lm**

Article	H mm	€/lm	€/Pc
PSHA 08-01	8	12,66	34,18
PSHA 10-01	10	12,79	34,53
PSHA 125-01	12,5	14,90	40,23

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

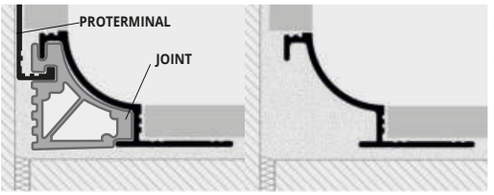

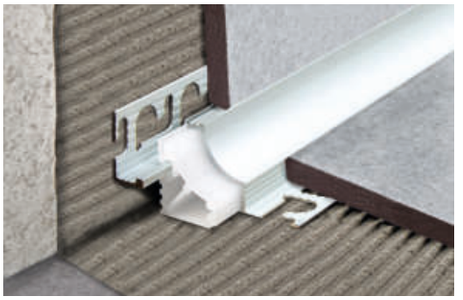

POLISHED CHROME ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc
PSHBC 08	8	14,89	40,20
PSHBC 10	10	15,15	40,91
PSHBC 125	12,5	15,48	41,80 *

COLOURS

AA - Anod. Silver alum. **BC** - Polished chrome alum. **01** - White varnished alum.

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish. **2.** Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSHELL ALL" into the adhesive. **4.** Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CORNERS, END CAPS and JOINTS

SILVER ANODIZED, POLISHED CHROME AND VARNISHED WHITE ALUMINIUM / PLASTIC

* accesories of the on demand profiles are also on demand



INTERNAL CORNER
RPSHI.../...



EXTERNAL CORNER
RPSHE.../...



END CAP
TPSH.../...



JOINT
GISHN.../...



EXTERNAL/INTERNAL CORNER - ANODIZED SILVER ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
RPSHIAA .../...	08/10/125	188,02	41,37
RPSHEAA .../...	08/10/125	188,02	41,37

EXTERNAL/INTERNAL CORNER VARNISHED WHITE ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
RPSHIA ...-01/...	08/10/125	235,06	51,72
RPSHEA ...-01/...	08/10/125	235,06	51,72

JOINTS IN RIGID GREY PLASTIC - pack. **10 Pcs**

Article	H mm	€/Pack
GISHN 08/...	8	40,18
GISHN 10/...	10	44,25
GISHN 125/...	12,5	48,30

EXTERNAL/INTERNAL CORNER POLISHED CHROME ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
RPSHIBC .../...	08/10/125	224,67	49,42
RPSHEBC .../...	08/10/125	224,67	49,42

CAPS - ANODIZED SILVER ALUMINIUM/POLISHED CHROME/VARNISHED WHITE ALUM.
pack. **10 Pcs** (5 right and 5 left) - pack. **2 Pcs** (1 right and 1 left)

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
TPSHAA 08/...	8	117,02	25,74
TPSHBC 08/...	8	146,32	32,18
TPSHA 08/...	8	154,05	33,90
TPSHAA 10/...	10	117,02	25,74
TPSHBC 10/...	10	146,32	32,18
TPSHA 10/...	10	154,05	33,90
TPSHAA 125/...	12,5	117,02	25,74
TPSHBC 125/...	12,5	146,32	32,18
TPSHA 125/...	12,5	147,05	32,37

Choose the desired packaging. E.g.: TPSH... ...-01/5 (Pack 10 Pcs)
TPSH... ...-01/1 (Pack 2 Pcs)

= News 2023

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROGRESS® PROFILES

PROSGUSCIO DA


SHOCKPROOF NON - TOXIC COLOURED VINYL RESIN


PROSGUSCIO DA is a cove-shaped profile in shockproof non - toxic coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in in public and industrial environments. Its particular section, the availability in three finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSGUSCIO DA** a much sought-after profile that allows a workmanlike application.





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

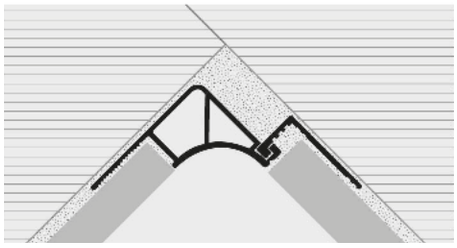

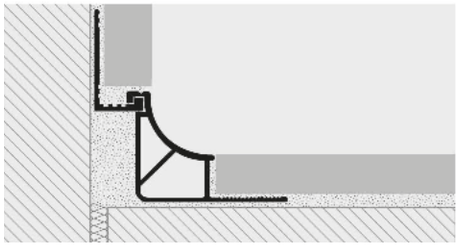

1. Choose "PROSGUSCIO DA" according to the tile thickness and desired colour. **2.** Cut "PROSGUSCIO DA" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSGUSCIO DA" into the adhesive. **4.** Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.


NON-TOXIC SHOCKPROOF VINYL RESIN
bar length **2,5 lm** - pack. **20 Pc - 50 lm**

Article	H mm	€/lm	€/Pc
PS 06-...	6	4,02	10,05
PS 08-...	8	4,37	10,93
PS 10-...	10	4,56	11,40
PS 125-...	12,5	5,04	12,60

H 06 available in the colours: 01-04.
H 08, H 10 and H 125 available in the colours: 01-03-04.
The code of the selected colour must be added to the article code.
E.g.: PS 06... (chosen colour white) PS 06-01. The interchangeable flange corresponds to white Proterminal pvc H 6-8-10 mm.

COLOURS

01 - White | **03** - Cement gray | **04** - Light Beige

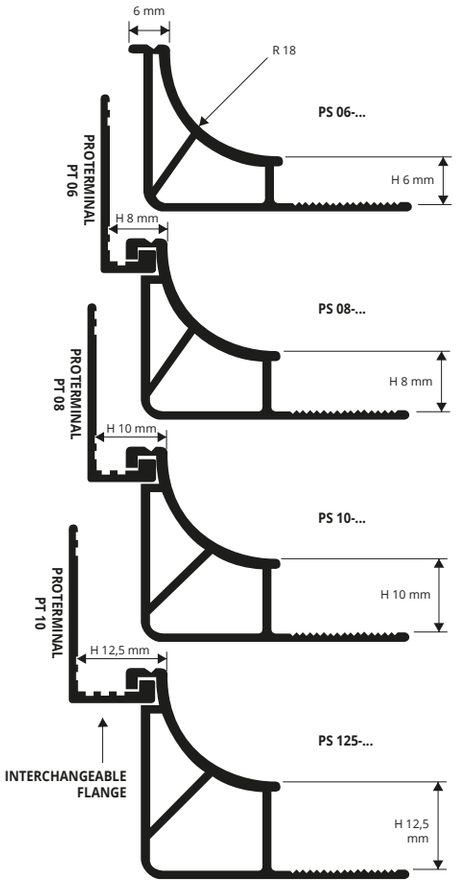

BUY WHITE PROTERMINAL TO CREATE THE DUAL HEIGHT:
Use proterminal PT 06 to reach H 8 mm
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm

© 2023. All rights reserved by Progress Profiles. Printed in Italy

CORNERS, END CAPS and JOINTS

NON- TOXIC VINYL RESIN - 3 COLOURS

EXTERNAL / INTERNAL CORNER - RVA COLOURED

Article	H mm	€/Pack 2 Pcs	€/Pack 10 Pcs
RAI ...-.../...	06/08/10/125	5,34	25,36
RAE ...-.../...	06/08/10/125	5,34	25,36

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: RAI 06-... (chosen colour white) RAI 06-01.

Choose the desired packaging. Ex. RAI 06-01/10 (pack. 10 Pcs)
RAI 06-01/2 (pack. 2 Pcs)

END CAP RT / LF - RVA COLOURED
pack. **10 Pcs** (5 right and 5 left) - pack. **2 Pcs** (1 right and 1 left)

Article	H mm	€/Pack 2 Pcs	€/Pack 10 Pcs
TCE 06-.../...	06/08/10/125	4,83	22,98

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: TCE 08-... (chosen colour white) TCE 08-01.
Choose the desired packaging. Ex. TCE 08-01/5 (pack. 10 Pcs)
TCE 08-01/1 (pack. 2 Pcs)


JOINTS - RVA COLOURED
pack. **10 Pcs -** pack. **2 Pcs**

Article	H mm	€/Pack 2 Pcs	€/Pack 10 Pcs
GIN ...-.../...	06/08/10/125	4,83	22,98

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: GIN 08-... (chosen colour white) GIN 08-01.

Choose the desired packaging. Ex. GIN 08-01/10 (pack. 10 Pcs)
GIN 08-01/2 (pack. 2 Pcs)





PROJOLLY - PROJOLLY QUART

INTERNAL CORNER
RAI...-.../...



EXTERNAL CORNER
RAE...-.../...



END CAP
TCE...-.../...



JOINT
GIN...-.../...




PROROUND

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A


PROROUND is a cove-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes and special pieces, such as internal and external corners, make **PROROUND** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

PRDAC/S 35
PRDAC/S 35A

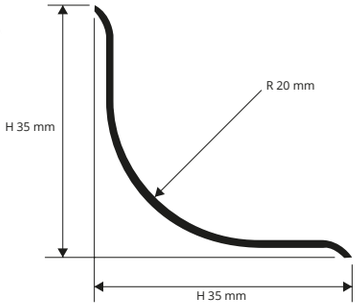

EXAMPLES OF LAYING

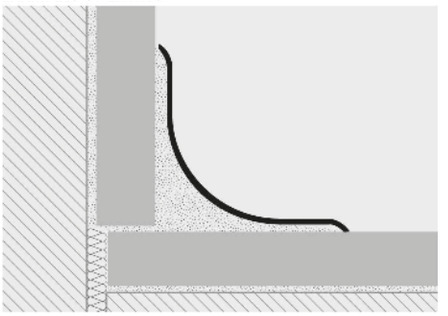





POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PRDAC 35	35	14,55	39,29
PRDAC 35A	35	18,06	48,76

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PRDACS 35	35	17,65	47,66
PRDACS 35A	35	21,17	57,16

1. Choose "PROROUND" according to the desired finish and width. **2.** Cut "PROROUND" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

Suitable for use in contact with foodstuffs.

PREWELDED CORNERS and THREE-WAYS JOINTS without gaps

POLISHED AND BRUSHED STAINLESS STEEL



INTERNAL CORNER PRDI/DIS | **EXTERNAL CORNER PRDE/DES** | **THREE WAYS JOINTS PRTE/TES**

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - pack. **10 Pcs**

Article	L mm	€/Pack
PRDI/10	100	218,58
PRDE/10	100	218,58
PRTE/10	80	327,74

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - pack. **10 Pcs**

Article	L mm	€/Pack
PRDIS/10	100	232,02
PRDES/10	100	232,02
PRTES/10	80	354,62


PROSANI STRIP & PROSANI STRIP KIT

NON-TOXIC FLEXIBLE WHITE VINYL RESIN


PROSANI STRIP and **PROSANI STRIP KIT** are profiles in non-toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection beetwen the wall tile coverings and sinks, bathtubs and shower trays. **PROSANI STRIP KIT** is provided with a double-sided butyl tape while **PROSANI STRIP** can be applied with silicone. Their particular section and ease of application, and make **PROSANI STRIP KIT** and **PROSANI STRIP** a much sought after profiles that allow a workmanlike application.

internal seal hygienic profiles


PSS 10



PSS 1035



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

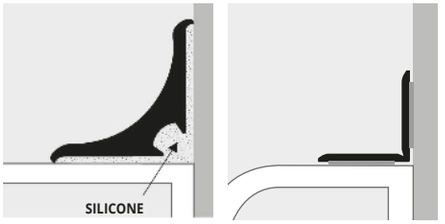

1. Choose the desired profile. **2.** Cut the profile to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film (PROSANI STRIP KIT), place correctly the profile and press it without hitting / apply the equipment double-sided butyl tape on the back of the profile (PROSANI STRIP), apply the silicone along the floor-wall joint and place the profile.






FLEXIBLE WHITE VINYL RESIN
roll **25 lm**

Article	LxH mm	€/lm	
PSS 10	10 X 10	4,23	105,75

PROSANI STRIP KIT ROLL - WHITE
roll **3,5 lm**

Article	LxH mm	€/lm	
PSS 1035	11 X 11	0,93	3,26

COLOURS



01 - White

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSEAL 50

SHOCKPROOF NON - TOXIC COEXTRUDED COLORED VINYL RESIN


PROSEAL 50 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in two different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 50** a much sought-after profile that allows a workmanlike application.







PSA 50-... / PSAA 50-...
scale 1:1

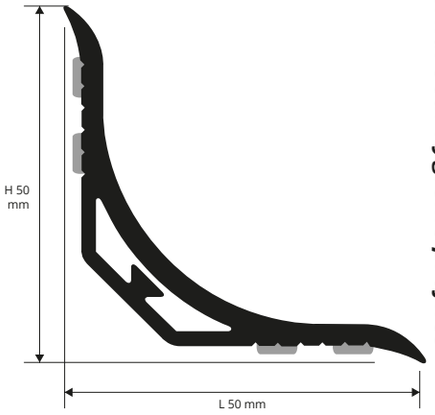

internal seal hygienic profiles

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF
bar length **2,5 lm -** Pack. **40 LM**

Article	€/lm	€/Pc
PSA 50-...	**9,31**	**23,28**


Available in the colours: 01 - 03 (on demand 04).
The code of the selected colour must be added to the article code.
E.g.: PSA 50... (chosen colour white) PSA 50-01.

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF - ADHESIVE
bar length **2,5 lm -** Pack. **30 LM**

Article	€/lm	€/Pc
PSAA 50-...	**12,87**	**32,17**

Available in the colours: 01 - 03 (on demand 04).
The code of the selected colour must be added to the article code.
E.g.: PSAA 50... (chosen colour white) PSAA 50-01.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

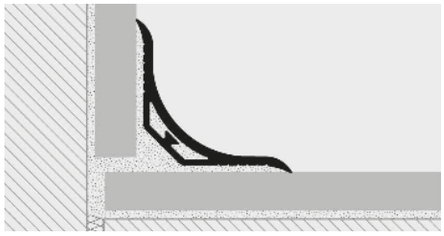

1. Choose "PROSEAL 50" according to the tile thickness and desired finish. **2.** Cut "PROSEAL 50" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.

COLOURS



01 - White | **03** - Cement Grey

AVAIABLE MINIMUM QUANTITY 100 PCS By colour and height
(Price and delivery time to be agreed)



04 - Light Beige

© 2020. All rights reserved by Progress Profiles. Printed in Italy


CORNERS and END CAPS

NON - TOXIC VINYL RESIN


INTERNAL / EXTERNAL CORNER AND END CAPS (for PROSEAL 50)

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TRI 50-.../...	**9,41**	**44,43**
TRE 50-.../...	**9,41**	**44,43**
TRT 50-.../...	**9,41**	**44,43**
TRC 50-.../...	**9,41**	**44,43**
TGN 50-.../...	**9,41**	**44,43**

Available in the desired packaging: 02 - Ex. TRI 50-01/2 (pack. 2 Pcs) 03 - Ex. TRI 50-01/10 (pack. 10 Pcs)
The code of the selected colour must be added to the article code.
E.g.: TRI 50-... (chosen colour white) TRI 50-01.

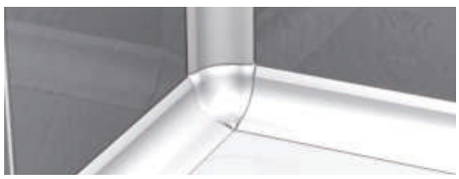






EXTERNAL CORNER



TRE 50-.../...

THREE WAYS



TRT 50-.../...

END CAP




TRC 50-.../...

JOINTS



TGN 50-.../...

INTERNAL CORNER



TRI 50-.../...

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROSEAL 25

SHOCKPROOF NON - TOXIC COEXTRUDED COLORED VINYL RESIN


PROSEAL 25 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in three different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 25** a much sought-after profile that allows a workmanlike application.

internal seal hygienic profiles

PSA 25-...
PSAA 25-...
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

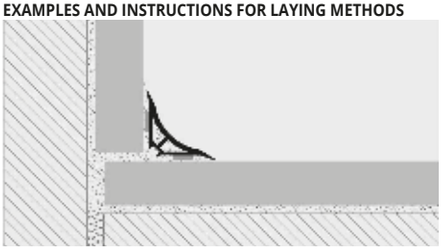

1. Choose "PROSEAL 25" according to the tile thickness and desired finish. **2.** Cut "PROSEAL 25" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.



COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF
bar length **2,5 lm -** pack. **50 LM**

Article	€/lm	€/Pc
PSA 25-...	**4,29**	**10,72**

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: PSA 25-... (chosen colour white) PSA 25-01..

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF ADHESIVE
bar length **2,5 lm -** pack. **50 LM**

Article	€/lm	€/Pc
PSAA 25-...	**6,85**	**17,13**

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: PSAA 25-... (chosen colour white) PSAA 25-01..

COLOURS



01 - White **03** - Cement gray **04** - Light beige




PROSEAL KIT 25 (1 Pc of 1,80 LM + 2 Pcs of 0,90 lm + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)


Description	Article	€/KIT
Kit PROSEAL 25	**KTPSA 25-01**	**35,26**
1 Pc PROSEAL 25 of 1,80 lm	**PSA 25-01**	
2 Pcs PROSEAL 25 of 0,90 lm	**PSA 25-01**	
2 Internal corner	**TRI 25-01**	
2 End caps	**TRC 2501**	

CORNERS, END CAPS and THREE-WAYS JOINTS

NON - TOXIC VINYL RESIN



INTERNAL CORNER
TRI ...-.../...



THREE WAYS
TRT ...-.../...



EXTERNAL CORNER
TRE ...-.../...



END CAP
TRC ...-.../...





JOINTS
TGN ...-.../...


INTERNAL / EXTERNAL CORNERS AND END CAPS (for PROSEAL 25)

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TRI 25-.../...	**5,74**	**27,30**
TRE 25-.../...	**5,74**	**27,30**
TRT 25-.../...	**5,74**	**27,30**
TRC 25-.../...	**5,23**	**26,11**
TGN 25-.../...	**5,23**	**26,11**

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: TRI 25-... (chosen colour white) TRI 25-01.
Choose the desired packaging. Ex. TRI 25-01/10 (pack. 10 Pcs)
TRI 25-01/2 (pack. 2 Pcs)

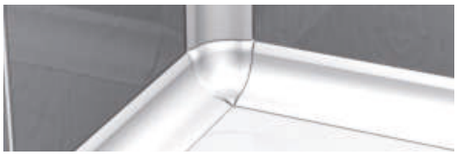






PROSEAL FLEX


NON-TOXIC FLEXIBLE VINYL RESIN

PROSEAL FLEX is a flexible non-toxic vinyl resin profile suitable to realize cove-shaped connection with resilient flooring in public and industrial environments. Its particular section makes **PROSEAL FLEX** a very sought after profile that allows that allows a workmanlike application.

PSF 15
PSF 20
PSF 25




INSTRUCTIONS FOR LAYING
1. Apply a suitable adhesive for resilient flooring on the support. **2.** Place "PROSEAL FLEX" over the adhesive. **3.** Apply the adhesive on the profile and the support and lay the resilient flooring.

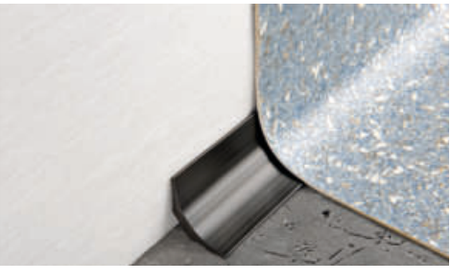

FLEXIBLE BLACK NON-TOXIC VYNIL RESIN
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
PSF 15-11	**15x15**	**1,30**	**3,25**
PSF 20-11	**20x20**	**1,58**	**3,95**
PSF 25-11	**25x25**	**1,96**	**4,90**

COLOURS



11 - Black

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROBATH

SHOCKPROOF NON - TOXIC COEXTRUDED VINYL RESIN

PROBATH is a cove-shaped profile in shockproof non - toxic coextruded white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection beetwen the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH** a much sought-after and easy to lay profile that allows a workmanlike application.





CO-EXTRUDED VINYL RESIN NON - TOXIC IMPACT - RESISTANT
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	H mm	€/lm	€/Pc
PSB 15-01	**15**	**4,58**	**11,45**
PSB 20-01	**20**	**5,89**	**14,72**

AVAILABLE ONLY IN WHITE

COLOURS


01 - White

FOR OTHER COLORS MINIMUM ORDER 400 pcs


PROBATH KIT (1 PC of 1,80 LM + 2 PCS of 0,90 LM + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)

Description	Article	€/KIT
Kit PROBATH	**KTPSB 20-01**	**34,61**
1 Pc PROBATH of 1,80 lm	**PSB 20-01**	
2 Pc PROBATH of 0,90 lm	**PSB 20-01**	
2 Internal Corner	**TRI 25-01**	
2 End caps	**TRC 25-01**	


PSB 15-01
scale 1:1



PSB 20-01
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

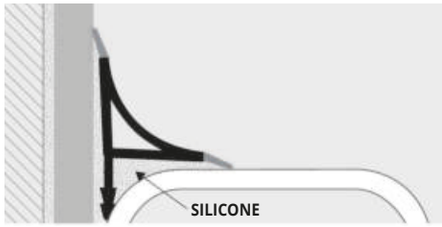

1. Choose "PROBATH" according to the desired height. **2.** Cut "PROBATH" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

internal seal hygienic profiles

PROBATH FLEX

SHOCKPROOF NON - TOXIC FLEXIBLE VINYL RESIN

PROBATH FLEX is a cove-shaped profile in shockproof non - toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection beetwen the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH FLEX** a much sought-after and easy to lay profile that allows a workmanlike application.






FLEXIBLE WHITE VYNIL RESIN
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	H mm	€/lm	€/Pc
PSBF 15-01	**15**	**5,34**	**13,35**
PSBF 20-01	**20**	**6,66**	**16,65** *


AVAILABLE ONLY IN WHITE

01 - White

PSBF 15-01
scale 1:1



PSBF 20-01
scale 1:1



1. Choose "PROBATH FLEX" according to the desired height. **2.** Cut "PROBATH FLEX" to the desired length. **3.** Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. **4.** When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

internal seal hygienic profiles

CORNERS, END CAPS and THREE-WAYS JOINTS

NON-TOXIC VINYL RESIN

CORNERS INTERNAL / EXTERNAL, THREE-WAYS, JOINTS AND END CAP

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TRI 25-01/...	**5,74**	**27,30**
TRE 25-01/...	**5,74**	**27,30**
TRT 25-01/...	**5,74**	**27,30**
TRC 25-01/...	**5,23**	**26,11**
TGN 25-01/...	**5,23**	**26,11**

Choose the desired packaging. Ex. TRI 25-01/10 (pack. 10 Pcs) TRI 25-01/2 (pack. 2 Pcs)

CORNERS INTERNAL / EXTERNAL AND END CAP - (for PSB 15 - PSBF 15)

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPSB 15-01/...	**5,23**	**26,11**
RIPSB 15-01/...	**5,74**	**27,30**
REPSB 15-01/...	**5,74**	**27,30**

Choose the desired packaging. Ex. TPSB 15-01/10 (pack. 10 Pcs) TPSB 15-01/2 (pack. 2 Pcs)


EXTERNAL CORNER
REPSB 15-01


END CAP
TPSB 15-01


INTERNAL CORNER
RIPSB 15-01



INTERNAL CORNER
TRI 25-01



EXTERNAL CORNER
TRE 25-01



END CAP
TRC 25-01


JOINTS
TGN 25-01


THREE WAYS
TRT 25-01







* = Production on demand with minimum quantity of 400 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROKERLAM LINE


POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROKERLAM LINE is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.


PKLLAC... 06
scale 1:1




PKLLAC... 08
scale 1:1




PKLLAC... 10
scale 1:1



PKLLAC... 125
scale 1:1



LAYING INSTRUCTIONS

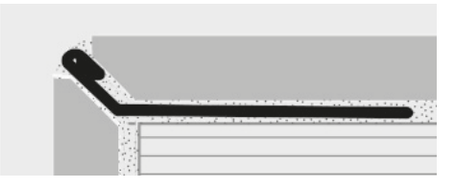



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pc
PKLLAC 06	6	8,21	22,17
PKLLAC 08	8	8,57	23,14
PKLLAC 10	10	9,00	24,30
PKLLAC 125	12,5	9,53	25,73


1. Choose "PROKERLAM LINE" according to the desired finish. **2.** Cut "PROKERLAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROKERLAM LINE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pc
PKLLACS 06	6	10,26	27,70
PKLLACS 08	8	10,74	29,00
PKLLACS 10	10	11,23	30,32
PKLLACS 125	12,5	11,95	32,27

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

PROKERLAM LINE


ANODIZED, VARNISHED AND STONE LINE ALUMINIUM

PROKERLAM LINE is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.


PKLL... 06
scale 1:1




PKLL... 08
scale 1:1



PKLL... 10
scale 1:1



PKLL... 125
scale 1:1



LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish. **2.** Cut "PROKERLAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROKERLAM LINE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




ANODISED SILVER ALUMINIUM thermo packed
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pc
PKLLAA 06	6	5,71	15,42
PKLLAA 08	8	6,09	16,44
PKLLAA 10	10	6,47	17,47
PKLLAA 125	12,5	6,98	18,85

POLISHED CHROME ALUMINIUM thermo packed
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pc
PKLLBC 10	10	10,96	29,59
PKLLBC 125	125	11,67	31,51

COLOURS





VARNISHED ALUMINIUM (White-Black) thermo packed
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pc
PKLLA 06-01	6	6,90	18,63
PKLLA 06-11	6	6,90	18,63
PKLLA 08-01	8	7,36	19,87
PKLLA 08-11	8	7,36	19,87
PKLLA 10-01	10	7,83	21,14
PKLLA 10-11	10	7,83	21,14
PKLLA 125-01	12,5	8,31	22,44
PKLLA 125-11	12,5	8,31	22,44

STONE LINE ALUMINIUM thermo packed
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pc
PKLLA 06-SL...	6	9,17	24,76
PKLLA 08-SL...	8	9,78	26,41
PKLLA 10-SL...	10	10,40	28,08
PKLLA 125-SL...	12,5	11,21	30,27

The code of the selected colour must be added to the article code.
E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.



= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERMSTEP ACC is a profile for stair in polished and brushed stainless steel AISI 304/1.4301–V2A. The profile protects the tread and cover the joint beetwen the tread and the riser of the step. It can also be used overturned and for this reason it is suitable for two different tile thickness. Its particular geometry and the availability of two finishes and different heights make **PROTERMSTEP ACC** suitable for every kind of stair with ceramic, terracotta floorings, wood and natural stone coverings.

PROTERMSTEP ACC

POLISHED AND BRUSHED STAINLESS STEEL
AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm**

Article	h / H mm	€/lm	€/Pc
PTSPAC 0815	08 / 15	17,88	48,28
PTSPAC 10125	10 / 12,5	17,88	48,28
PTSPAC 1530	15 / 30	34,23	92,42
PTSPAC 2025	20 / 25	34,23	92,42



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm**

Article	h / H mm	€/lm	€/Pc	
PTSPACS 0815	08 / 15	23,25	62,78	*
PTSPACS 10125	10 / 12,5	23,25	62,78	*
PTSPACS 1530	15 / 30	44,50	120,15	*
PTSPACS 2025	20 / 25	44,50	120,15	*

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A

ON DEMAND



ACS - Brushed stainless steel AISI 304/1.4301-V2A

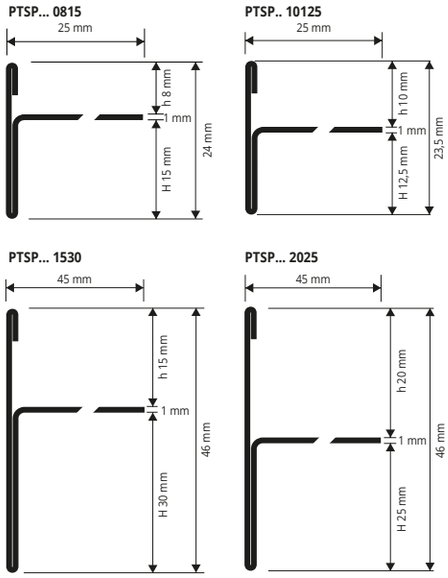

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMSTEP ACC" according to the tile thickness and desired finish. **2.** Cut "PROTERMSTEP ACC" to the desired length. **3.** Lay the raiser of the step and apply the adhesive on the support where the profile will be laid. **4.** Press the anchoring flange of "PROTERMSTEP ACC" into the adhesive. **5.** Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **6.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANGLE AND JOINT

CORNER - pack. **10 Pcs**

Article	h / H mm	€/Pc	€/pack
REPTSAC 0815/10	08 / 15	43,92	439,20
REPTSAC 10125/10	10 / 12,5	43,92	439,20
REPTSAC 1530/10	15 / 30	43,92	439,20
REPTSAC 2025/10	20 / 25	43,92	439,20


JOINT - pack. **10 Pcs**

Article	h / H mm	€/Pc	€/pack
GIPTSAC 0815/10	08 / 15	8,03	80,30
GIPTSAC 10125/10	10 / 12,5	8,03	80,30
GIPTSAC 1530/10	15 / 30	8,03	80,30
GIPTSAC 2025/10	20 / 25	8,03	80,30

JOINT
GIPTSAC ..



CORNER
REPTSAC ..





© 2023 All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROTOP


ANODIZED AND POLISHED ALUMINIUM

PROTOP is a rounded profile in anodized and polished aluminium. The profile protects the tile edges and decorates the countertops of kitckens realized with ceramic. Its particular section and elegance, the availability of three different finishes and special pieces such as internal and external corner at 90° and 135°, make **PROTOP** a much sought-after profile that allows an elegant workmanlike application.

profiles for top

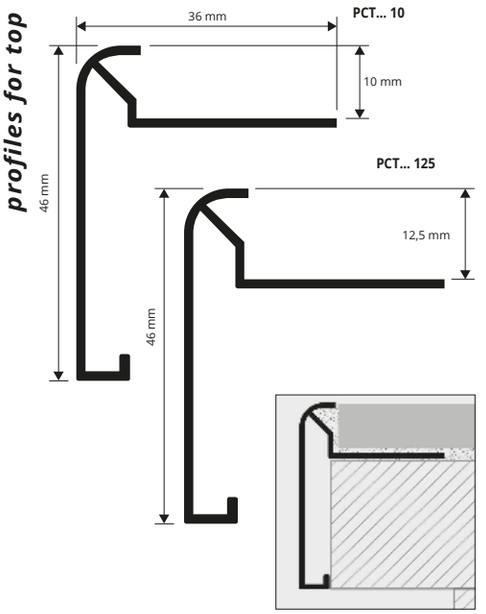

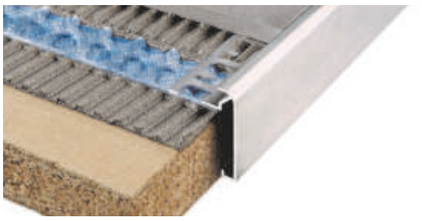

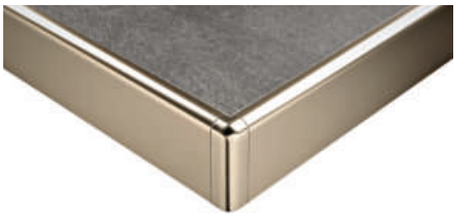

ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	H mm	€/lm	€/Pc
PCTAA 10	10	13,53	36,53
PCTAA 125	12,5	13,88	37,48

POLISHED TITANIUM ALUMINIUM
bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	H mm	€/lm	€/Pc
PCTBT 10	10	22,59	60,99
PCTBT 125	12,5	22,93	61,91

POLISHED CHROME ALUMINIUM
bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	H mm	€/lm	€/Pc
PCTBC 10	10	22,59	60,99
PCTBC 125	12,5	22,93	61,91

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS
1. Choose "PROTOP" according to the tile thickness and desired finish. **2.** Cut "PROTOP" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTOP" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AA - Anodized silver alum. **BT** -Polished titanium alum. **BC** - Polished chrome alum.

CORNERS

INTERNAL / EXTERNAL CORNERS ANODIZED SILVER ALUMINIUM
pack. **10 Pcs**

Article	€/pack
EPCTAA 90/10 (90°)	198,54
IPCTAA 90/10 (90°)	198,54
EPCTAA 135/10 (135°)	198,54
IPCTAA 135/10 (135°)	198,54

INTERNAL / EXTERNAL CORNERS POLISHED TITANIUM ALUMINIUM
pack. **10 Pcs**

Article	€/pack
EPCTBT 90/10 (90°)	234,68
IPCTBT 90/10 (90°)	234,68
EPCTBT 135/10 (135°)	234,68
IPCTBT 135/10 (135°)	234,68

INTERNAL / EXTERNAL CORNERS POLISHED CHROME ALUMINIUM
pack. **10 Pcs**

Article	€/pack
EPCTBC 90/10 (90°)	234,68
IPCTBC 90/10 (90°)	234,68
EPCTBC 135/10 (135°)	234,68
IPCTBC 135/10 (135°)	234,68


EXTERNAL CORNER EPCT... 90


EXTERNAL CORNER EPCT...135



INTERNAL CORNER IPCT... 90


INTERNAL CORNER IPCT...135

PROTOP T

ANODIZED AND POLISHED ALUMINIUM

PROTOP T is a square profile in anodized and polished aluminium. The profile protects the tile edges and decorates the countertops of kitchens realized with ceramic. Its particular section and elegance, the availability of two different finishes and special pieces such as internal and external corner at 90° and 135°, make **PROTOP T** a much sought-after profile that allows an elegant workmanlike application.

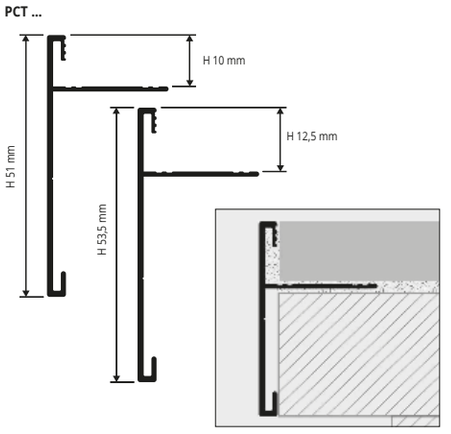





ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	H mm	€/lm	€/Pc
PCTAA 10T	10	13,53	36,53
PCTAA 125T	12,5	13,88	37,48

POLISHED CHROME ALUMINIUM
bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	H mm	€/lm	€/Pc
PCTBC 10T	10	22,59	60,99
PCTBC 125T	12,5	22,93	61,91

INTERNAL / EXTERNAL CORNER ANODIZED SILVER ALUMINIUM
pack. **10 Pcs**

Article	€/pack
IEPCTAA 12590T/10 (90°)	198,54
IEPCTAA 1090T/10 (90°)	198,54
IEPCTAA 10135T/10 (135°)	198,54
IEPCTAA 125135T/10 (135°)	198,54

INTERNAL / EXTERNAL CORNER ANODIZED CHROME ALUMINIUM
pack. **10 Pcs**

Article	€/pack
IEPCTBC 12590T/10 (90°)	198,54
IEPCTBC 1090T/10 (90°)	198,54
IEPCTBC 10135T/10 (135°)	198,54
IEPCTBC 125135T/10 (135°)	198,54


IEPCT... 90T


IEPCT... 135T

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS
1. Choose "PROTOP T" according to the tile thickness and desired finish. **2.** Cut "PROTOP T" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROTOP T" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AA - Anodized silver alum. **BC** - Polished chrome alum.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.





© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS®
PROFILES

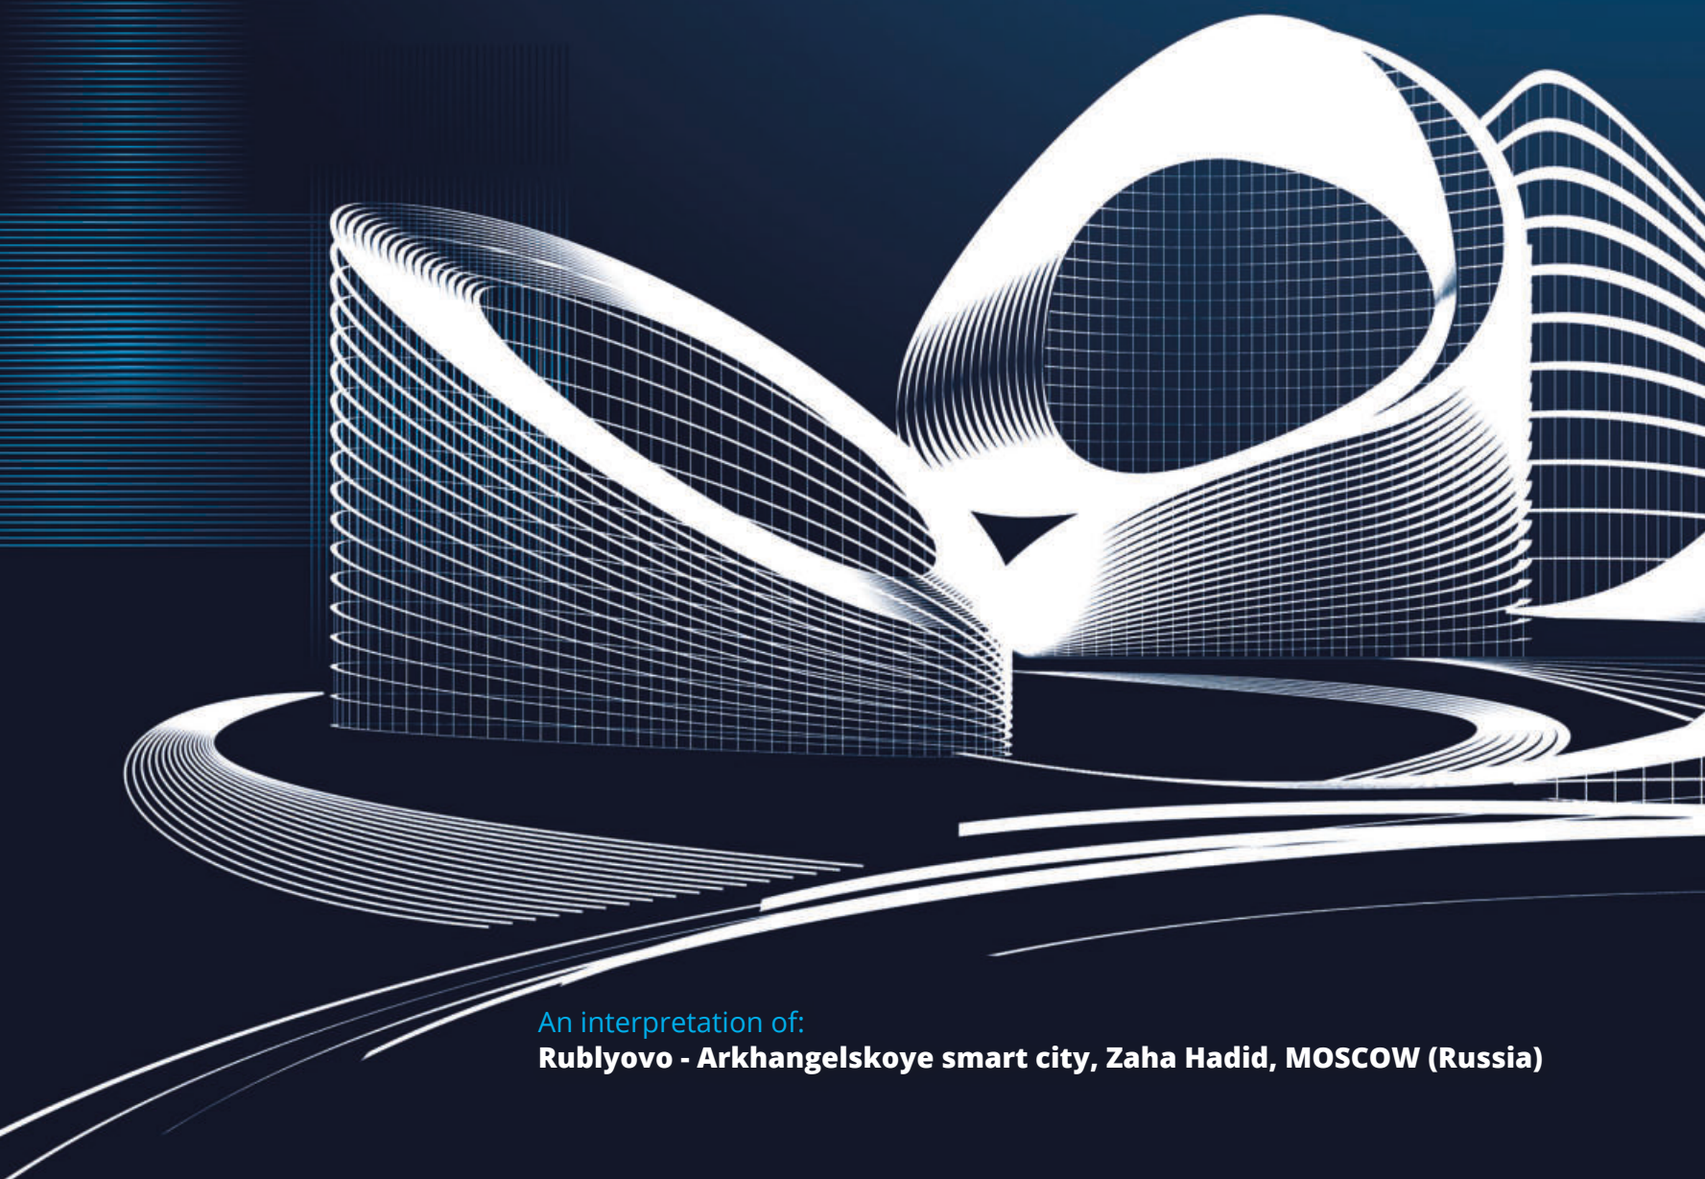

An interpretation of:
Rublyovo - Arkhangelskoye smart city, Zaha Hadid, MOSCOW (Russia)

PROFILES & SYSTEMS

FLOORSFLOORS


PROFILES FOR FLOORS



PROTERMINAL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles – tiles/parquet/marble/laminates/carpeting /linoleum, etc.) of differing thickness.
PROTERMINAL in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with PROLISTEL strips in stainless steel AISI 304/1.4301-V2A with polished or brushed and in aluminium with anodized or polished chrome finish.

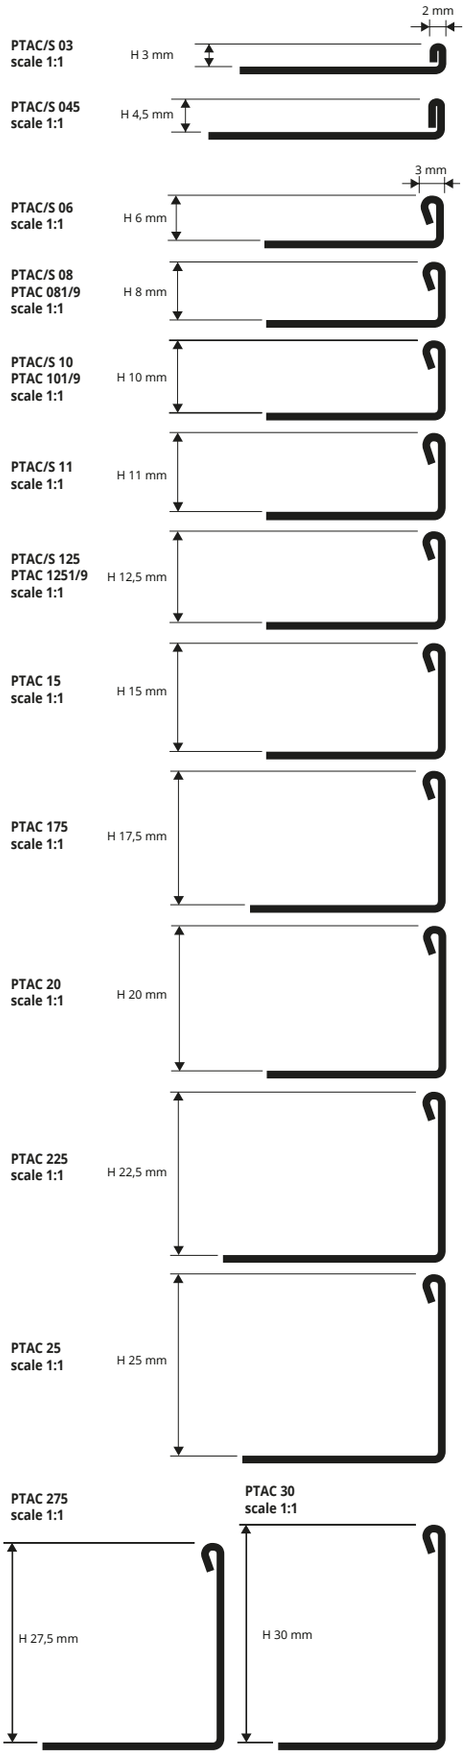









POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** - **10/10 mm**
(H 15 to H 30 mm - pack. **20 Pcs - 54 lm**)

Article	H mm	€/lm	€/Pc	
PTAC 03	3	8,95	24,16	
PTAC 045	4,5	9,12	24,62	
PTAC 06	6	9,51	25,68	
PTAC 08	8	9,84	26,57	
PTAC 10	10	10,35	27,95	
PTAC 11	11	10,53	28,43	
PTAC 125	12,5	10,73	28,97	
PTAC 15	15	11,25	30,38	
PTAC 175	17,5	11,89	32,10	
PTAC 20	20	12,19	32,91	
PTAC 225	22,5	12,96	34,99	
PTAC 25	25	13,79	37,23	
PTAC 275	27,5	14,31	38,64	*
PTAC 30	30	14,82	40,01	

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **1 lm** - pack. **40 Pcs** - **40 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc	
PTAC 081	8	/	10,35	*
PTAC 101	10	/	10,79	*
PTAC 1251	12,5	/	11,25	*

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **0,9 lm** - pack. **40 Pcs** - **36 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc	
PTAC 089	8	/	9,33	*
PTAC 109	10	/	9,71	*
PTAC 1259	12,5	/	10,08	*

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** - **10/10 mm**
(H 15 to H 30 mm - pack. **20 Pcs - 54 lm**)


Article	H mm	€/lm	€/Pc
PTACS 03	3	10,41	28,11
PTACS 045	4,5	11,36	30,67
PTACS 06	6	11,75	31,73
PTACS 08	8	12,14	32,78
PTACS 10	10	12,58	33,97
PTACS 11	11	12,78	34,51
PTACS 125	12,5	13,03	35,18
PTACS 15	15	14,24	38,45
PTACS 20	20	14,56	39,31

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

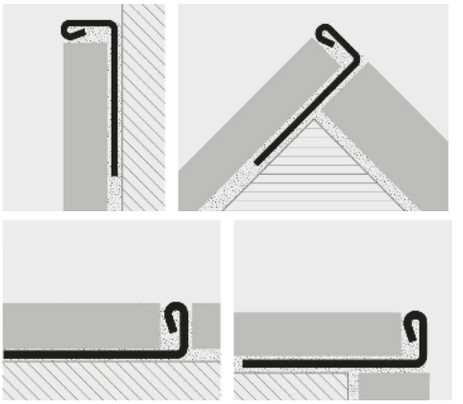

1. Choose the PROTERMINAL with the same height as the thickness of the covering. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



Curve version is also available

= News 2023

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316/1.4404-V4A

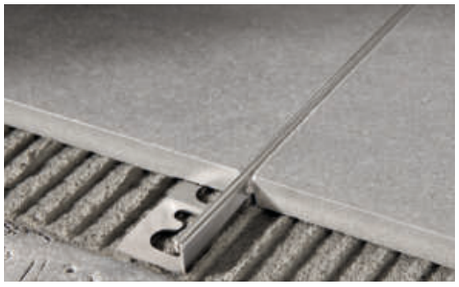

POLISHED STAINLESS ST. AISI 316L/1.4404-V4A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc
PTACM 06	6	12,38	33,43
PTACM 08	8	12,80	34,56
PTACM 10	10	13,46	36,34
PTACM 125	12,5	13,94	37,64

EXAMPLES OF LAYING




COLOURS



ACM - Polished stainless steel AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

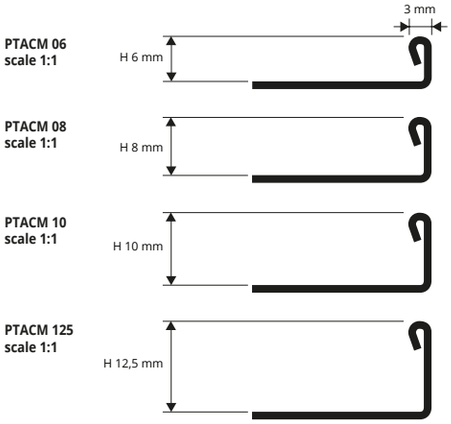

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles – tiles/parquet/marble/granite, etc.) of differing thickness.
PROTERMINAL in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.

PROTERMINAL

POLISHED, NATURAL, ANTIQUE BRASS and BRUSHED



NATURAL BRASS thermo packed
bar length **2,70 lm** pack. **20 Pcs 54 lm** (H 6 mm - **40 Pcs 108 lm**)

Article	H mm	€/lm	€/Pc
PTON 06	6	9,19	24,81
PTON 08	8	9,76	26,35
PTON 10	10	10,45	28,21
PTON 125	12,5	11,32	30,56
PTON 15	15	12,13	32,75
PTON 20	20	14,27	38,53
PTON 25	25	16,46	44,44

NATURAL BRASS thermo packed
bar length **1 lm** - pack. **40 Pcs** - **40 lm**

Article	H mm	€/lm	€/Pc	
PTON 061	6	/	9,70	*
PTON 081	8	/	10,26	*
PTON 101	10	/	10,99	*
PTON 1251	12,5	/	11,75	*

NATURAL BRASS thermo packed
bar length **0,90 lm** - pack. **40 Pcs** - **36 lm**

Article	H mm	€/lm	€/Pc	
PTON 069	6	/	8,78	*
PTON 089	8	/	9,27	*
PTON 109	10	/	9,94	*
PTON 1259	12,5	/	10,57	*



Curve version is also available

POLISHED BRASS thermo packed
bar length **2,70 lm** - pack. **20 Pcs 54 lm**

Article	H mm	€/lm	€/Pc	
PTOL 06	6	11,96	32,29	
PTOL 08	8	12,65	34,16	
PTOL 10	10	13,63	36,80	
PTOL 125	12,5	14,73	39,77	
PTOL 15	15	15,82	42,71	*
PTOL 20	20	18,66	50,38	*
PTOL 25	25	23,74	64,10	*

ANTIQUE BRASS thermo packed
bar length **2,70 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PTOB 06	6	29,28	79,06	
PTOB 08	8	30,55	82,49	
PTOB 10	10	33,32	89,96	
PTOB 125	12,5	35,93	97,01	
PTOB 15	15	41,00	110,70	*
PTOB 20	20	47,64	128,63	*
PTOB 25	25	55,26	149,20	*

BRUSHED BRASS thermo packed
bar length **2,70 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PTOS 06	6	11,96	32,29	*
PTOS 08	8	12,65	34,16	*
PTOS 10	10	13,63	36,80	*
PTOS 125	12,5	14,73	39,77	*
PTOS 15	15	15,82	42,71	*
PTOS 20	20	18,66	50,38	*
PTOS 25	25	23,74	64,10	*


COLOURS



ON - Natural brass | **OL** - Polished brass | **OB** - Antique brass


OS - Brushed brass

Chrome-plated Brass version page 37

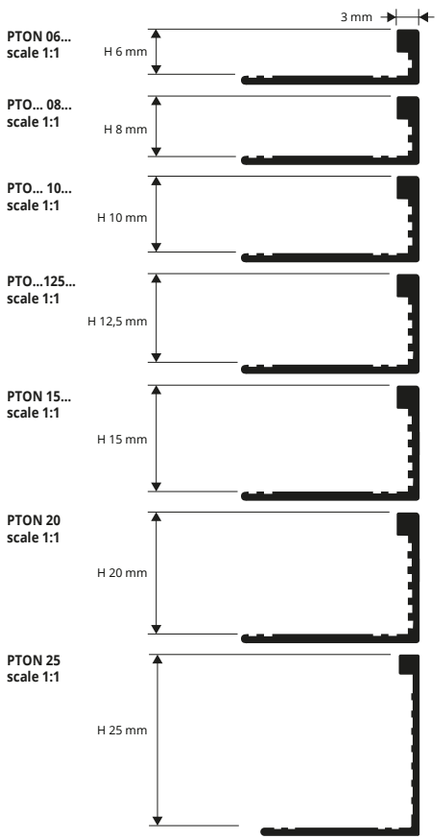

1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



= News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROTERMINAL

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM

PROTERMINAL is a professional edging profile designed to protect and decorate the outside corners of tile, mosaic and marble coverings of differing thickness.
PROTERMINAL in aluminium is also used to join different floor materials and to protect steps and decking. Excellent as the edging trim skirtings and for bathroom and kitchen wall coverings. Match with PROLISTEL ALL strips in anodized aluminium with silver and polished chrome finish and with PROLISTEL ACC strips in AISI 304-1.4301 stainless steel with polished or brushed.

PT... 03 scale 1:1 — H 3 mm details at page 35



PT... 045 scale 1:1 — H 4,5 mm details at page 35



PT... 06 scale 1:1



PT... 08 scale 1:1



PT... 10 scale 1:1



PT... 11 scale 1:1



PT... 125 scale 1:1



PT... 15 scale 1:1



PT... 20 scale 1:1



PTAN 25 scale 1:1





NATURAL ALUMINIUM thermo packed 10 Pcs
bar length **2,70 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PTAN 03	3	3,00	8,10
PTAN 045	4,5	3,05	8,24
PTAN 06	6	3,08	8,32
PTAN 08	8	3,21	8,67
PTAN 10	10	3,36	9,07
PTAN 11	11	3,46	9,34
PTAN 125	12,5	3,55	9,59
PTAN 15	15	3,90	10,53
PTAN 20	20	4,56	12,31
PTAN 25	25	5,34	14,42

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length **0,90 lm** - pack. **40 Pcs** - **36 lm**


Article	H mm	€/lm	€/Pc	
PTAN 069	6	/	3,21	*
PTAN 089	8	/	5,22	*
PTAN 109	10	/	3,49	*
PTAN 1259	12,5	/	3,61	*

COLOURS



AN - Natural alum. **AA** - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

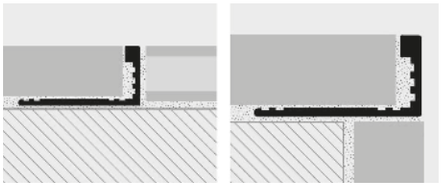



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,70 lm** - pack. **40 Pcs** - **108 lm**


Article	H mm	€/lm	€/Pc
PTAA 03	3	3,90	10,53
PTAA 045	4,5	4,08	11,02
PTAA 06	6	4,23	11,42
PTAA 08	8	4,29	11,58
PTAA 10	10	4,56	12,31
PTAA 11	11	4,97	13,42
PTAA 125	12,5	5,24	14,15
PTAA 15	15	5,57	15,04
PTAA 20	20	6,51	17,58


NATURAL ALUMINIUM thermo packed 10 Pcs
bar length **1 lm** - pack. **40 Pcs** - **40 lm**


Article	H mm	€/lm	€/Pc	
PTAN 061	6	/	3,96	*
PTAN 081	8	/	4,08	*
PTAN 101	10	/	4,23	*
PTAN 1251	12,5	/	4,48	*


Also available Polished version and curve version

1. Choose the "PROTERMINAL" with the same height as the thickness of the covering. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices.

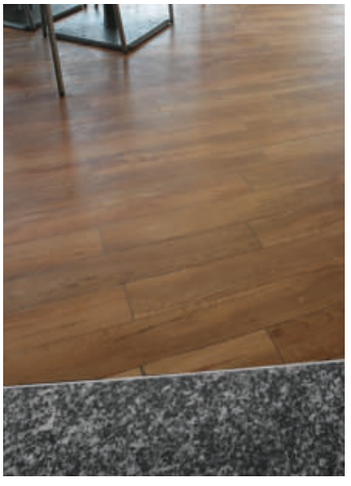

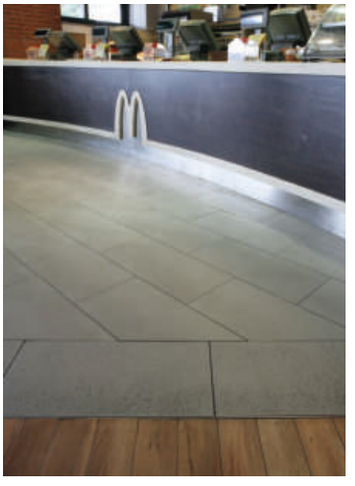

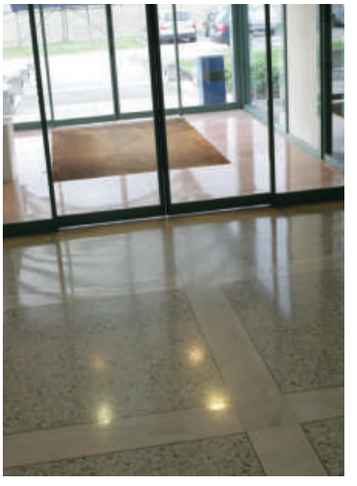

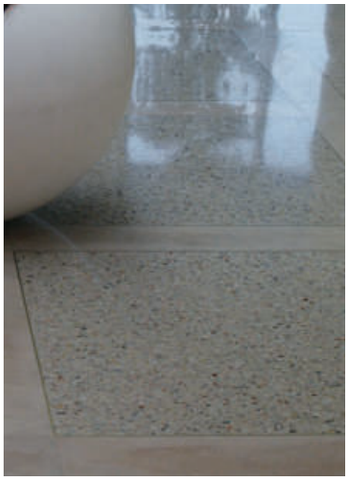

= News 2023

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES


PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL** CURVES BRASS versions.

PROLEVIGAL

NATURAL BRASS





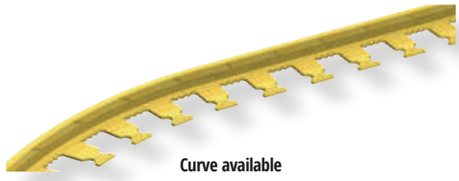


Curve available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGON 08 (CURVE) PLGON**CV** 08

NATURAL BRASS thermo packed 10 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**


Article	H mm	€/lm	€/Pc	
PLGON 08	8	10,56	28,51	*
PLGON 10	10	11,00	29,70	
PLGON 125	12,5	11,75	31,73	
PLGON 125/5	12,5	22,81	61,59	*
PLGON 15	15	12,77	34,48	
PLGON 175	17,5	13,68	36,94	*
PLGON 20	20	15,02	40,55	
PLGON 30	30	18,28	49,36	*

COLOURS



ON - Natural brass

AVAILABLE MINIMUM QUANTITY 200 PCS by color and height



OL - Polished brass **OB** - Antique brass

Price to be agreed. Production delay 4/5 weeks

PLGON 08
scale 1:1
2,5 mm
H 8 mm

PLGON 10
scale 1:1
H 10 mm

PLGON 125
scale 1:1
2,5 mm
H 12,5 mm

PLGON 15
scale 1:1
2,5 mm
H 15 mm

PLGON 175
scale 1:1
H 17,5 mm

PLGON 20
scale 1:1
H 20 mm

PLGONCV 125/5
scale 1:1
5 mm
H 12,5 mm

PLGON 30
H 30 mm

PROLEVIGAL are separating profiles used to create the technical joint in the special types of pavements such as marble- Venice- palladium ones, that must be smoothed after their laying process. The particular "L" shape with the cut/drilled base and 2,5 mm thick vertical edge consent the perfect smoothing and constant thickness as well. Available in natural aluminium and natural brass, various thickness, as well in outlined/bent **PROLEVIGAL** CURVE AL versions.

PROLEVIGAL

NATURAL ALUMINIUM







Curve available

+30 % ON GROSS PRICES FOR CURVE VERSION.
ADD **CV** AFTER THE ARTICLE CODE.
E.g.: PLGAN 08 (CURVES) PLGAN**CV** 08

NATURAL ALUMINIUM thermo packed 10 Pcs
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PLGAN 045	4,5	2,69	7,26
PLGAN 06	6	2,94	7,94
PLGAN 08	8	3,28	8,86
PLGAN 10	10	3,34	9,02
PLGAN 125	12,5	3,66	9,88
PLGAN 15	15	4,04	10,91
PLGAN 175	17,5	4,48	12,10
PLGAN 20	20	4,68	12,64

COLOURS



AN - Natural alum.

PLGAN 045
scale 1:1
2,5 mm
H 4,5 mm

PLGAN 06
scale 1:1
H 6 mm

PLGAN 08
scale 1:1
H 8 mm

PLGAN 10
scale 1:1
H 10 mm

PLGAN 125
scale 1:1
2,5 mm
H 12,5 mm

PLGAN 15
scale 1:1
2,5 mm
H 15 mm

PLGAN 175
scale 1:1
H 17,5 mm

PLGAN 20
scale 1:1
H 20 mm

= News 2023

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy


PROELEGANT

NATURAL, POLISHED
AND CHROMED BRASS

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in polished, natural and chromed brass. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The chromed version may be used as a decorative strip in the wall covering.

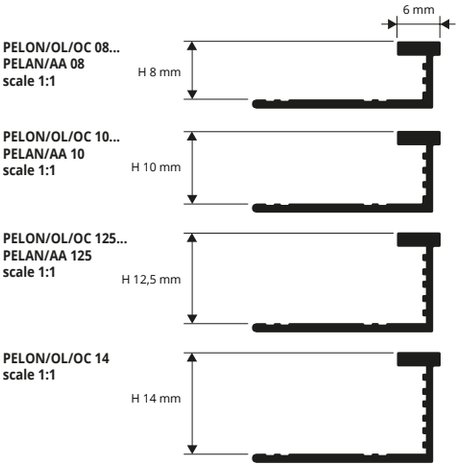

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

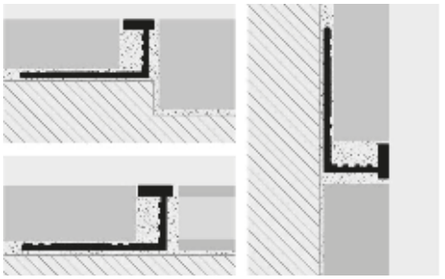

1. Choose the "PROELEGANT" with the same height as the thickness of the wall covering/floor. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.





POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PELOL 08	8	17,56	47,41	*
PELOL 10	10	18,02	48,65	
PELOL 125	12,5	18,71	50,52	
PELOL 14	14	19,35	52,25	*

CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PELOC 08	8	22,12	59,72	*
PELOC 10	10	22,58	60,97	
PELOC 125	12,5	23,22	62,69	
PELOC 14	14	23,79	64,23	*

NATURAL BRASS thermo packed 10 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PELON 08	8	13,45	36,31	*
PELON 10	10	14,61	39,45	
PELON 125	12,5	14,84	40,07	
PELON 14	14	16,06	43,36	*

NATURAL BRASS thermo packed 5 Pcs
bar length **0,90 lm** - pack. **40 Pcs** - **36 lm**

Article	H mm	€/lm	€/Pc	
PELON 089	8	/	12,90	*
PELON 109	10	/	13,98	*
PELON 1259	12,5	/	14,55	*

COLOURS




OC - Chromed brass | **OL** - Polished brass | **ON** - Natural brass

PROELEGANT

NATURAL ALUMINIUM AND
ANODIZED SILVER ALUMINIUM

PROELEGANT is a refined profile, with 6 mm visible surface, designed to cover the joint between two types of floor covering, tiles - parquet, marble or granite, bestowing a prestige aesthetic effect that is ideal for indoor and outdoor finishes, even when subject to considerable loads. **PROELEGANT** is available in natural and anodized silver aluminium. It is available in various heights in order to satisfy all technical, practical and, in particular, decorative requirements. The anodized version may be used as a decorative strip in the wall covering.

EXAMPLES OF LAYING (for instructions see the product above)

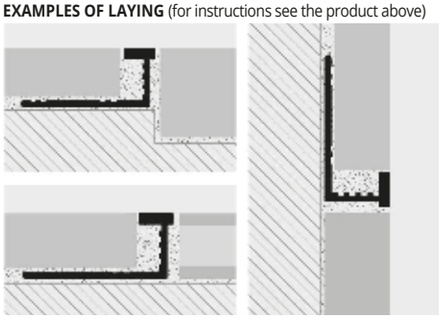



Curve available, see page 103





NATURAL ALUMINIUM thermo packed 10 Pcs
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PELAN 08	8	5,24	14,15	*
PELAN 10	10	5,57	15,04	
PELAN 125	12,5	5,91	15,96	

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PELAA 08	8	6,57	17,74	*
PELAA 10	10	6,91	18,66	
PELAA 125	12,5	7,26	19,60	

COLOURS



AN - Natural alum. | **AA** - Anodized silver alum.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.




© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROFINAL

POLISHED, BRUSHED AND SANDED
STAINLESS STEEL AISI 304/1.4301-V2A

PROFINAL is a profile in stainless steel AISI 304/1.4301-V2A polished, brushed and sanded. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PRFAC... 08
scale 1:1




PRFAC... 10
scale 1:1



PRFAC... 125
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

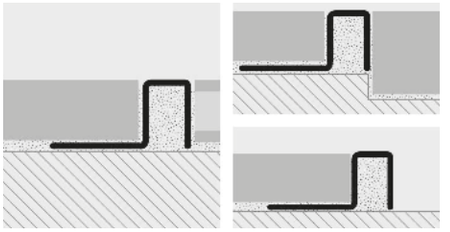

1. Choose the "PROFINAL" with the same height as the thickness of the covering. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc
PRFAC 08	8	13,33	35,99
PRFAC 10	10	14,02	37,85
PRFAC 125	12,5	15,19	41,01

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A | **ACS** - Brushed stainless steel AISI 304/1.4301-V2A | **ACSB** - Sanded stainless steel AISI 304/1.4301-V2A



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc
PRFACS 08	8	14,56	39,31
PRFACS 10	10	15,20	41,04
PRFACS 125	12,5	16,03	43,28

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc	
PRFACSB 08	8	15,57	42,04	*
PRFACSB 10	10	16,24	43,85	
PRFACSB 125	12,5	17,08	46,12	

ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROFINAL

NATURAL, POLISHED,
CHROMED AND ANTIQUE BRASS

PROFINAL is a profile in natural, polished, chromed and antique brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

PRFO... 08
scale 1:1



PRFO... 10
scale 1:1



PRFO... 11
scale 1:1




PRFO... 125
scale 1:1



PRFOC 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

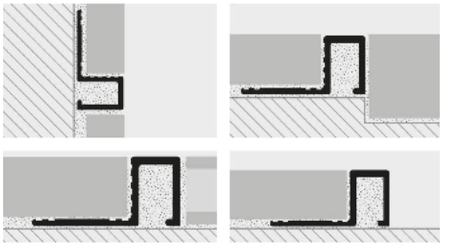




NATURAL BRASS thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PRFON 08	8	14,50	39,15
PRFON 10	10	16,86	45,52
PRFON 125	12,5	18,60	50,22

COLOURS

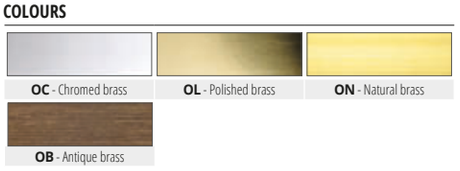

OC - Chromed brass | **OL** - Polished brass | **ON** - Natural brass | **OB** - Antique brass

1. Choose the "PROFINAL" with the same height as the thickness of the covering. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PRFOL 08	8	18,30	49,41
PRFOL 10	10	19,53	52,73
PRFOL 125	12,5	20,79	56,13

CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** (H 15 mm - **40,5 lm**)

Article	H mm	€/lm	€/Pc
PRFOC 08	8	23,33	62,99
PRFOC 10	10	25,70	69,39
PRFOC 11	11	26,97	72,82
PRFOC 125	12,5	27,84	75,17
PRFOC 15	15	29,39	79,35

ANTIQUE BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PRFOB 08	8	38,70	104,49	*
PRFOB 10	10	42,04	113,51	
PRFOB 125	12,5	45,05	121,64	

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

***= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROFINAL

PROFINAL is a profile in natural and anodized silver aluminium. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM





PRFA... 08
scale 1:1



PRFA... 10
scale 1:1



PRFA... 125
scale 1:1



NATURAL ALUMINIUM thermo packed 10 Pcs
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc	
PRFAN 08	8	5,35	14,45	*
PRFAN 10	10	5,76	15,55	
PRFAN 125	12,5	6,10	16,47	

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**


Article	H mm	€/lm	€/Pc
PRFAA 08	8	7,10	19,17
PRFAA 10	10	7,44	20,09
PRFAA 125	12,5	7,78	21,01

COLOURS



AN - Natural alum. **AA** - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

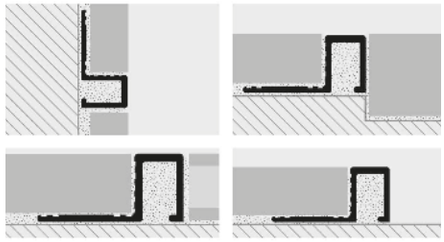

1. Choose the "PROFINAL" with the same height as the thickness of the covering. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROSQUARE

NATURAL BRASS



NATURAL BRASS
bar length **3 lm** - pack. **20 Pcs** - **60 lm**


Article	L x H mm	€/lm	€/Pc
PQEON 108	10 X 8	23,61	70,83

COLOURS



ON - Natural brass

PQEON 108
scale 1:1



PROANGLE

CHROMED, POLISHED BRASS






CHROMED, POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** (**PGAOC 10 : 27 lm**)


Article	L x H mm	€/lm	€/Pc	
PGAOC 10	10 X 10	28,34	76,52	
PGAOL 10	10 X 10	22,77	61,48	*

COLOURS



OL - Polished brass **OC** - Chromed brass

PGAOL/OC 10
scale 1:1



© 2023. All rights reserved by Progress Profiles. Printed in Italy

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOINT


NATURAL AND POLISHED BRASS

PROJOINT is a brass profile for joining two floors at the same level. It can be laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead in the PIT 510 and PIT 514 version allows excellent anchorage with the adhesive.


PITON 1025
scale 1:1




PITON 525
scale 1:1



PITON 514
scale 1:1



PITON 510/5109
scale 1:1






POLISHABLE NATURAL BRASS
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L x H mm	€/lm	€/Pc
PITON 1025	10 X 25	17,83	48,14
PITON 525	5 X 25	9,55	25,79
PITON 514	5 X 14	9,14	24,68
PITON 510	5 X 10	8,09	21,84

POLISHED BRASS
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L x H mm	€/lm	€/Pc	
PITOL 1025	10 X 25	24,08	65,02	*
PITOL 525	5 X 25	12,90	34,83	*
PITOL 514	5 X 14	12,33	33,29	*
PITOL 510	5 X 10	10,91	29,46	*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

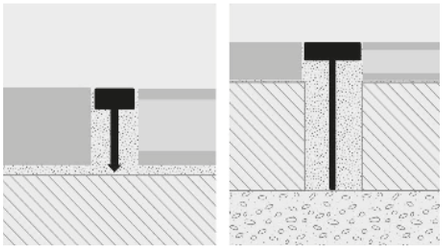

1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.
Mortar laying
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
Adhesive laying
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface. **4.** Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface. **5.** Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.



POLISHABLE NATURAL BRASS
bar length **0,90 lm** - pack. **40 Pcs**
ECO BLISTER

Article	L x H mm	€/lm	€/Pc
PITON 5109	5 X 10	/	17,57

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

POLISHED BRASS
bar length **0,90 lm** - pack. **40 Pcs**
ECO BLISTER

Article	L x H mm	€/lm	€/Pc	
PITOL 5109	5 X 10	/	23,73	*

CONSISTING OF 1 ECOBLISTER WITH 2 PCS. OF 0.90 LM

COLOURS


ON - Natural brass
ON DEMAND
OL - Polished brass

PROJOINT


NATURAL ALUMINIUM

PROJOINT is a natural aluminium profile for joining two floors at the same level. It can be laid with mortar or glue/adhesive. The head thickness allows perfect smoothing and sanding of over 3 mm. It is usually used for tile-wood-marble-Venetian-Palladian floors. Available in various heights and widths. The vertical arrowhead in the PIT 510 and PIT 514 version allows excellent anchorage with the adhesive.


PITAN 525
scale 1:1




PITAN 514
scale 1:1



PITAN 510
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

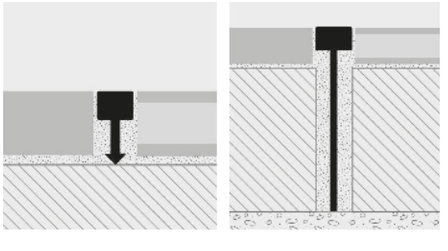



1. Choose "PROJOINT" according to the desired height.
2. Cut "PROJOINT" to the desired length.
Mortar laying
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.
Adhesive laying
3. Apply the adhesive on the support where the profile will be laid. After laying the joint should be 0,5 mm below the floor covering surface. **4.** Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all the remains of adhesive from the profile surface. **5.** Fill the joints between the profile and the tile with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.



NATURAL ALUMINIUM
bar length **2,70 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PITAN 525	5 X 25	3,68	9,94
PITAN 514	5 X 14	3,36	9,07
PITAN 510	5 X 10	2,76	7,45

COLOURS

AN - Natural alum.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROCANAL is a channel for joining floors and also for use as strips in wall coverings. This profile is made in natural, polished and chromed brass as well as natural or anodized silver aluminium. It is also used as a cable channel for the insertion of wires and conduits in all types of floor.


PROCANAL

NATURAL, POLISHED,
CHROMED, ANTIQUE AND BRUSHED BRASS
NATURAL AND ANODIZED SILVER ALUMINIUM





PCL... 10
scale 1:1



NATURAL BRASS thermo packed 10 Pcs - POLISHED, CHROMED, NATURAL, ANTIQUE AND BRUSHED BRASS thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** (**PCLOC 10** - **81 lm**)

Article	L x H mm	€/lm	€/Pc	
PCLON 10	10 X 10	13,86	37,42	
PCLOL 10	10 X 10	15,71	42,42	
PCLOC 10	10 X 10	22,35	60,35	
PCLOB 10	10 X 10	37,19	100,41	
PCLOS 10	10 X 10	15,71	42,42	*

NATURAL ALUMINIUM thermo packed 10 Pcs
ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PCLAN 10	10 X 10	3,04	8,21
PCLAA 10	10 X 10	4,05	10,94

Available Stainless steel AISI 304/1.4301-V2A
"PROLISTEL" 10x10 PLTAC 10 / PLTACS 10

COLOURS




ON - Natural brass | **OL** - Polished brass | **OC** - Chromed brass
OB - Antique Brass | **OS** - Brushed brass

COLOURS



AN - Natural alum. | **AA** - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

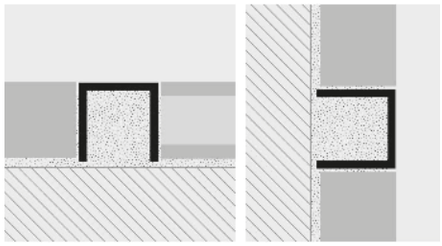

1. Choose the profile in the required material and finish. **2.** Apply the adhesive onto the area of application. **3.** Lay the "PROCANAL". **4.** Continue laying by aligning it "flush" with the covering. **5.** Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

PROFLAT is a range of 20 and 40 mm natural brass or steel strips 3 mm thick. Ideal for dividing up flooring on the same level, they may be polished in situ and also curved/shaped to create decorative patterns that are particularly recommended for marble, Palladian, Venetian and cement or resin-based floors.


PROFLAT

STAINLESS STEEL AISI 304/1.4301-V2A
NATURAL BRASS







GPLAC 203../ 205..
scale 1:1




GPLON 2025
scale 1:1



GPLAC 403../ 505..
scale 1:1



GPLON 4025
scale 1:1



STAINLESS STEEL AISI 304/1.4301-V2A
bar length **3 lm** - pack. **5 Pcs** - **15 lm**

Article	L x H mm	€/lm	€/Pc
GPLAC 2033	3 X 20	11,58	34,74
GPLAC 4033	3 X 40	18,90	56,70

STAINLESS STEEL AISI 304/1.4301-V2A
bar length **3 lm** - pack. **5 Pcs** - **15 lm**

Article	L x H mm	€/lm	€/Pc	
GPLAC 2053	5 X 20	18,52	55,56	*
GPLAC 5053	5 X 50	38,96	116,88	*

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.
Available ON REQUEST IN Brushed Stainless steel

POLISHABLE NATURAL BRASS
bar length **2,7 lm** - pack. **5 Pcs** - **13,5 lm**

Article	L x H mm	€/lm	€/Pc
GPLON 2025	2,5 X 20	14,81	39,99
GPLON 4025	2,5 X 40	19,67	53,11


COLOURS



AC - Stainless steel AISI 304/1.4301-V2A | **ON** - Natural brass

1. Choose "PROFLAT" according to the desired height and visible surface. **2.** Cut "PROFLAT" to the desired length. **3.** Cut with a trowel the fresh screed following the floor edges. **4.** Apply the profile inside the fresh screed taking care to align it with the surface of the floor. After laying the joint should be 0,5 mm below the floor covering surface. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all grout remains from the profile surface.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

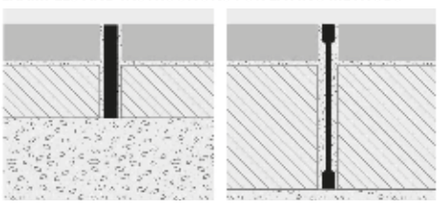

= News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSLIDER

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROSLIDER is a sloping terminal transition profile in stainless steel AISI 304/1.4301-V2A designed to join different height floors in a perfect, stepless way. This particularly sturdy profile with the bent base sloping inwards withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in AISI 304/1.4301-V2A stainless steel in various heights to accommodate all differences in level.

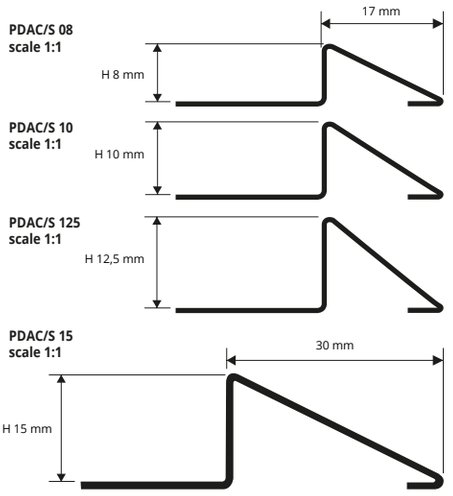



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc
PDAC 08	8	13,39	36,15
PDAC 10	10	14,48	39,10
PDAC 125	12,5	16,56	44,71
PDAC 15	15	20,70	55,89
PDAC 20	20	25,91	69,96




BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc
PDACS 08	8	16,66	44,98
PDACS 10	10	17,63	47,60
PDACS 125	12,5	21,01	56,73
PDACS 15	15	22,33	60,29
PDACS 20	20	28,01	75,63

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the profile with the required height and finish. **2.** Fill the profile cavity with adhesive and apply the adhesive onto the area of application. **3.** Lay the "PROSLIDER". **4.** Align it "flush" with the floor/covering. 5. Use the adhesive to seal any empty interstices.

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

PROSLIDER

POLISHED AND NATURAL BRASS

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor. Available in natural and polished brass in various heights to accommodate all differences in level.

transition profiles

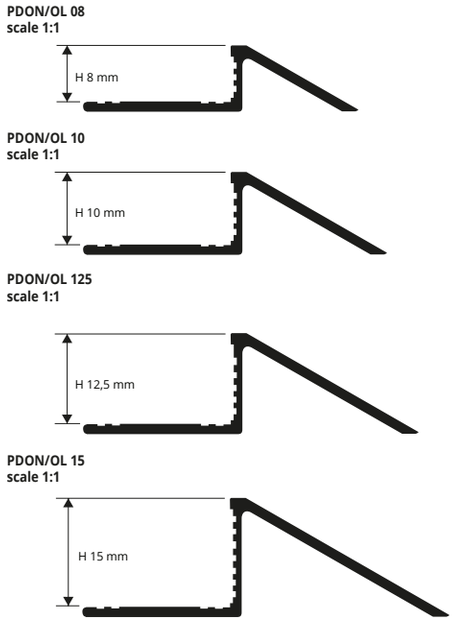



NATURAL BRASS thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PDON 08	8	14,96	40,39	*
PDON 10	10	17,17	46,36	
PDON 125	12,5	21,45	57,91	*
PDON 15	15	26,20	70,74	*



POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PDOL 08	8	19,07	51,49	*
PDOL 10	10	21,29	57,48	
PDOL 125	12,5	25,56	69,01	*
PDOL 15	15	29,94	80,84	*


INSTRUCTIONS FOR LAYING
1. Choose the profile with the required height H, material and finish. **2.** Fill the profile cavity with adhesive and apply the adhesive onto the area of application. **3.** Lay the "PROSLIDER". **4.** Align it "flush" with the floor/covering. **5.** Use the adhesive to seal any empty interstices. Oxidation marks on profiles in natural and polished brass may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

COLOURS



ON - Natural brass
OL - Polished brass

EXAMPLES OF LAYING



© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROSLIDER

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM

PROSLIDER is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER** is used in particular to join tile or wood to an existing floor.
Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.





transition profiles


PDAN/AA 08
scale 1:1



PDAN/AA 10
scale 1:1



PDAN/AA 125
scale 1:1



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PDAN 08	8	4,68	12,64
PDAN 10	10	5,30	14,31
PDAN 125	12,5	6,16	16,63

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**


Article	H mm	€/lm	€/Pc
PDAA 08	8	6,78	18,31
PDAA 10	10	7,26	19,60
PDAA 125	12,5	7,92	21,38

COLOURS



AN - Natural alum. **AA** - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

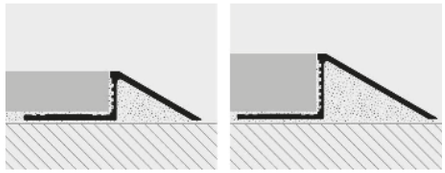


1. Choose the profile with the required height H, material and finish. **2.** Fill the profile cavity with adhesive and apply the adhesive onto the area of application. **3.** Lay the "PROSLIDER". **4.** Align it "flush" with the floor/covering. **5.** Use the adhesive to seal any empty interstices.

PROSLIDER LR

NATURAL ALUMINIUM AND ANODIZED SILVER ALUMINIUM


PROSLIDER LR is a sloping terminal transition profile designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. **PROSLIDER LR** is used in particular to join tile or wood to an existing floor.
Available in natural and anodized silver aluminium in various heights to accommodate all differences in level.

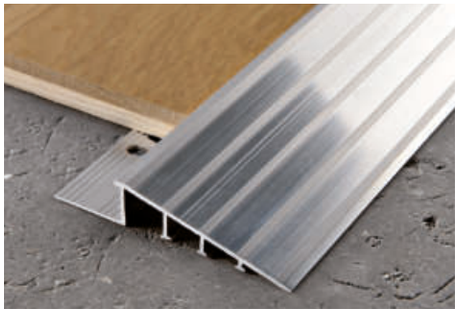




transition profiles


PDLR... 10
scale 1:2




PDLR... 125
scale 1:2



PDLR... 15
scale 1:2



PDLR... 20
scala 1:2



NATURAL ALUMINIUM thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PDLRAN 10	10	13,47	36,37
PDLRAN 125	12,5	16,77	45,28
PDLRAN 15	15	19,25	51,98
PDLRAN 20	20	24,41	65,91

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PDLRAA 10	10	17,57	47,44
PDLRAA 125	12,5	19,78	53,41
PDLRAA 15	15	22,73	61,37
PDLRAA 20	20	27,18	73,39


COLOURS



AN - Natural alum. **AA** - Anodized silver alum.

INSTRUCTIONS FOR LAYING
1. Choose the profile with the required height H, material and finish. **2.** Fill the profile cavity with adhesive and apply the adhesive onto the area of application. **3.** Lay the "PROSLIDER LR". **4.** Align it "flush" with the floor/covering. **5.** Use the adhesive to seal any empty interstices.

EXAMPLES OF LAYING

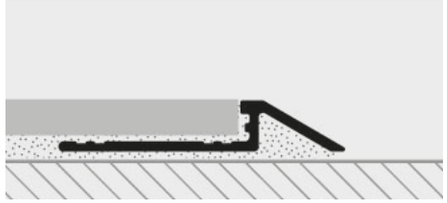

© 2023 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROSLIDER WOOD


NATURAL OAK
WITH ALUMINIUM BASE

PROSLIDER WOOD is a sloping terminal transition profile in real natural oak with glued-on, punched aluminium base, designed to join different height floors in a perfect, stepless way. This particularly sturdy profile withstands and supports high loads and frequent passage of manual trolleys and vehicles in addition to protecting the edge of the higher floor. Available in various heights to accommodate all differences in level.


PDWR 10
PDWR 1013
scale 1:2



PDWR 125
PDWR 12513
scale 1:2



PDWR 15
PDWR 1513
scale 1:2





NATURAL OAK with ALUMINIUM BASE
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**


Article	H mm	€/lm	€/Pc	
PDWR 10	10	23,77	64,18	*
PDWR 125	12,5	27,76	74,95	*
PDWR 15	15	33,25	89,78	*



NATURAL OAK with ALUMINIUM BASE
bar length **1,35 lm** - pack. **20 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc	
PDWR 1013	10	/	35,27	*
PDWR 12513	12,5	/	41,23	*
PDWR 1513	15	/	44,92	*

EXAMPLES OF LAYING

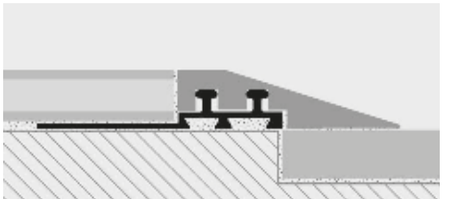

INSTRUCTIONS FOR LAYING
1. Choose the "PROSLIDER WOOD" with the required height. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile pressing the perforated flange into the adhesive. **4.** Align it "flush" with the floor/covering. **5.** Use the adhesive to seal any empty interstices.

COLOURS



Natural oak





© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROCARPET ACC


STAINLESS STEEL AISI 304/1.4301-V2A

PROCARPET ACC is a profile in stainless steel 304/1.4301-V2A used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.





PRTAC/S 08
scale 1:1

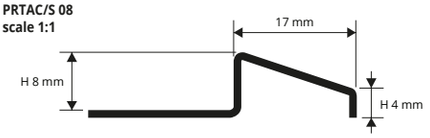

PRTAC/S 10
scale 1:1



PRTAC/S 125
scale 1:1



transition profiles

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc	
PRTAC 08	8	10,94	29,54	*
PRTAC 10	10	12,01	32,43	
PRTAC 125	12,5	15,46	41,74	*

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10 mm**

Article	H mm	€/lm	€/Pc	
PRTACS 08	8	13,67	36,91	*
PRTACS 10	10	15,00	40,50	
PRTACS 125	12,5	19,30	52,11	*


COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

INSTRUCTIONS FOR LAYING
1. Choose the "PROCARPET ACC" taking into consideration the exact height of the floor. **2.** Using a notched spreader apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

EXAMPLES OF LAYING

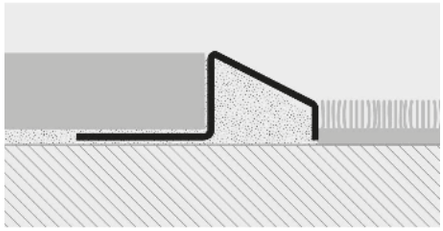

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROCARPET OTT


POLISHED AND NATURAL BRASS

PROCARPET OTT is a profile in brass (natural or polished) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.






PRTON/OL 08
scale 1:1



PRTON/OL 10
scale 1:1



transition profiles

NATURAL BRASS thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PRTON 08	8	16,37	44,20	*
PRTON 10	10	18,58	50,17	*

POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PRTOL 08	8	20,46	55,24	*
PRTOL 10	10	22,68	61,24	*


COLOURS



ON - Natural brass
OL - Polished brass

INSTRUCTIONS FOR LAYING
1. Choose the "PROCARPET OTT" taking into consideration the exact height of the floor. **2.** Using a notched spreader apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.
Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and.

EXAMPLES OF LAYING

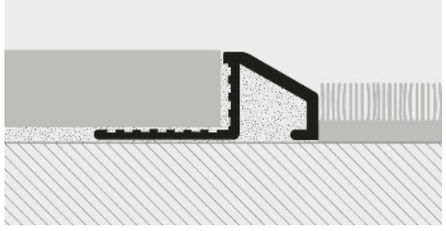

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

PROCARPET ALL

NATURAL AND ANODIZED
SILVER ALUMINIUM

PROCARPET ALL is a profile in aluminium (natural or silver anodized) used for joining two floors of differing thickness and in particular for joining a tiled or parquet floor to wall-to-wall carpeting, making a perfect join thanks to the vertical part of less than 4 mm. In addition to completely protecting the edge of the higher floor, this particularly sturdy profile withstands high loads and supports the frequent passage of manual trolleys, vehicles and intense pedestrian traffic.

transition profiles


PRTAN/AA 08
scale 1:1



PRTAN/AA 10
scale 1:1



PRTAN/AA 125
scale 1:1





NATURAL ALUMINIUM thermo packed 5 Pcs
bar length **2,70 lm** - pack. **20 Pcs** - **54 lm**


Article	H mm	€/lm	€/Pc
PRTAN 08	8	4,81	12,99
PRTAN 10	10	5,42	14,63
PRTAN 125	12,5	6,24	16,85



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,70 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PRTAA 08	8	5,64	15,23
PRTAA 10	10	6,63	17,90
PRTAA 125	12,5	7,85	21,20

EXAMPLES OF LAYING

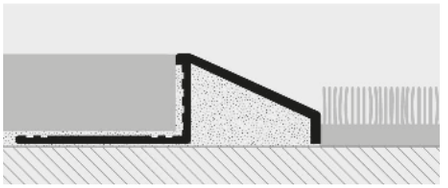

INSTRUCTIONS FOR LAYING
1. Choose the "PROCARPET ALL" taking into consideration the exact height of the floor. **2.** Using a notched spreader apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

COLOURS



AN - Natural alum. **AA** - Anodized silver alum.

PROSKID

POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM


PROSKID is a sloping profile ideal for the stepless joining of two existing floors of differing heights where no transition profile was installed at the time of laying. Silicone is used for the laying. The notching on the profile helps anchorage of the silicone or adhesive. Hardwearing and attractive.

transition profiles


PSLDOL 10/10A/109/109A/109AS
scale 1:1



PSLDAA 10/10A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

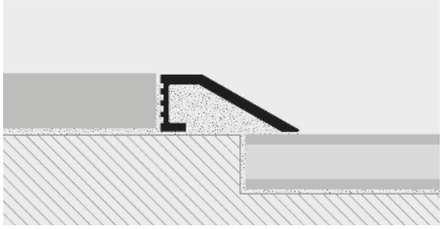

1. Choose the "PROCARPET" taking into consideration the exact height of the floor. **2.** Using a notched spreader apply the adhesive onto the area of application of the profile**. 3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.



POLISHED BRASS thermo packed
bar length **2,70 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PSLDOL 10	10	20,10	54,27	*
PSLDOL 10A	10	22,21	59,97	*

"A" at the end of the product code = Item with adhesive

POLISHED BRASS thermo packed
bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	H mm	€/lm	€/Pc
PSLDOL 109AS	10	/	25,00

"AS" at the end of the product code = Item with adhesive

POLISHED BRASS thermo packed
bar length **0,90 lm** - pack. **20 Pcs**

ECO BLISTER

Article	H mm	€/lm	€/Pc
PSLDOL 109	10	/	21,91
PSLDOL 109A	10	/	23,61

"A" at the end of the product code = Item with adhesive



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,70 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PSLDAA 10	10	6,24	16,85
PSLDAA 10A	10	7,64	20,63

"A" at the end of the product code = Item with adhesive

COLOURS



OL - Polished brass **AA** - Anodized silver alum.

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROLEVALL 29


ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

PROLEVALL 29 is a transition profile in anodized aluminium available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.






PLV... 29A
PLV... 299AS
PLV... 2910AS
scale 1:1



PLV... 29F
PLV... 298FS
PLV... 299FS
PLV... 2910FS
scale 1:1



transition profiles

ANODIZED ALUM. with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm	€/lm	€/Pc
PLV... 29A	5,5 X 29	6,63	17,90

ANODIZED ALUM. with adhesive thermo packed SELF PACK
bar length **0,83 lm** - pack. **20 Pc**

Article	H x L mm	€/lm	€/Pc
PLV... 298AS	5,5 X 29	/	6,51

ANODIZED ALUM. with adhesive thermo packed SELF PACK
bar length **0,93 lm** - pack. **20 Pc**

Article	H x L mm	€/lm	€/Pc
PLV... 299AS	5,5 X 29	/	7,32

ANODIZED ALUM. with adhesive thermo packed SELF PACK
bar length **1,03 lm** - pack. **20 Pc**

Article	H x L mm	€/lm	€/Pc
PLV... 2910AS	5,5 X 29	/	7,97

ANODIZED ALUM. punched thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm	€/lm	€/Pc
PLV... 29F	5,5 X 29	5,16	13,93

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **0,83 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLV... 298FS	5,5 X 29	/	6,05 *

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLV... 299FS	5,5 X 29	/	6,16

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **1,03 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLV... 2910FS	5,5 X 29	/	6,85

Available in the colours: AA - AO (AB, AT, CH e SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLV... 29A (chosen colour anodized gold alum.) PLVAO 29A.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




AB - Anodized bronze alum. **AT** - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anodized sand alum.

(Price to be agreed. Production delay 4/5 weeks)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

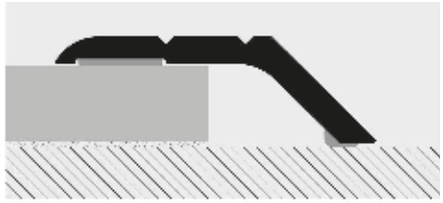

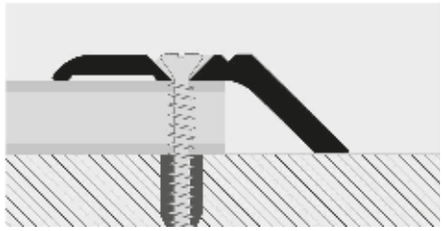

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 33

POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

POLISHED BRASS with adhesive thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PLVOL 33A	5,5 X 33	17,41	47,01 *

POLISHED BRASS with adhesive thermo packed SELF PACK
bar length **0,83 lm** - pack. **20 Pc**

Article	H x L mm	€/lm	€/Pc
PLVOL 338AS	5,5 X 33	/	15,74 *

POLISHED BRASS with adhesive thermo packed SELF PACK
bar length **0,93 lm** - pack. **20 Pc**

Article	H x L mm	€/lm	€/Pc
PLVOL 339AS	5,5 X 33	/	17,57 *

POLISHED BRASS with adhesive thermo packed SELF PACK
bar length **1,03 lm** - pack. **20 Pc**

Article	H x L mm	€/lm	€/Pc
PLVOL 3310AS	5,5 X 33	/	19,39 *

POLISHED BRASS punched thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PLVOL 33F	5,5 X 33	15,52	41,90 *

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length **0,83 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLVOL 338FS	5,5 X 33	/	14,61 *


POLISHED BRASS punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLVOL 339FS	5,5 X 33	/	16,15 *

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length **1,03 lm** - pack. **20 Pc** SELF PACK


Article	H x L mm	€/lm	€/Pc
PLVOL 3310FS	5,5 X 33	/	17,57 *

COLOURS




OL - Polished brass

PLVOL 33A
PLVOL 338AS
PLVOL 339AS
PLVOL 3310AS
scale 1:1




PLVOL 33F
PLVOL 338FS
PLVOL 339FS
PLVOL 3310FS
scale 1:1



transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.
Adhesive version
2. Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
2. Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


PROLEVALL 305

POLISHED STAINLESS STEEL 1.4016
AND POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED


PROLEVALL 305 is a transition/terminal profile for floors of medium thickness (from 3 to 7 mm), used to join and compensate two floors of differing height, material and thickness. Ideal as a finishing terminal, it covers flaws and chipping or splintering of tiles, wood and carpeting. Available in stainless steel 1.4016 and polished brass. A protective film protects the finish of the 2.70 m long bars with either self-adhesive backing or punched for fixing with screws and anchors. The 93 cm blister pack version (self pack) is shrink-wrapped with bar code.

transition profiles


PLVAC 30/309AS
PLVOL 30/309AS
scale 1:1




PLVAC 30/309FS
PLVOL 30/309FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

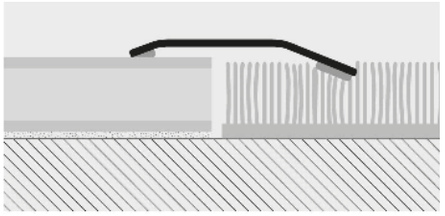

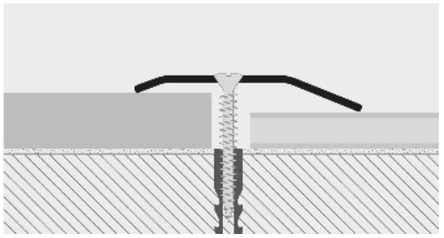

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm	€/lm	€/Pc
PLVAC 30A	5 X 30	6,79	18,33

POLISHED STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLVAC 309AS	5 X 30	/	8,33

POLISHED BRASS with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm	€/lm	€/Pc
PLVOL 30A	5 X 30	9,91	26,76

POLISHED BRASS with adhesive thermo packed
bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLVOL 309AS	5 X 30	/	10,54

COLOURS



AC - Polished stainless steel 1.4016 | **OL** - Polished brass



POLISHED STAINLESS ST. 1.4016 punched with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm	€/lm	€/Pc
PLVAC 30F	5 X 30	5,29	14,28

POL. STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLVAC 309FS	5 X 30	/	7,17 *

POLISHED BRASS punched with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H x L mm	€/lm	€/Pc
PLVOL 30F	5 X 30	8,03	21,68 *

POL. BRASS punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	H x L mm	€/lm	€/Pc
PLVOL 309FS	5 X 30	/	8,97 *

ON DEMAND HAND-BRUSHED STAINLESS STEEL
(Price to be agreed. Production delay 4/5 weeks)


PROLEVALL 32

ANODIZED ALUMINIUM WITH
SELF-ADHESIVE AND PUNCHED


PROLEVALL 32 are transition profiles in anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 32** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

transition profiles

PLV... 32A/PLV... 32F
PLV... 329AS/PLV... 329FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

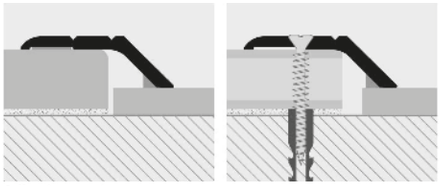

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PLV... 32A	32 X 8	8,44	22,79
PLV... 32F	32 X 8	5,64	15,23

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item




ANODIZED SILVER and GOLD ALUMINIUM
thermo packed - bar length **0,93 lm** - pack. **20 Pc** SELF PACK

Article	L x H mm	€/lm	€/Pc
PLV... 329AS	32 X 8	/	8,59
PLV... 329FS	32 X 8	/	6,51

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item


Available in the colours: AA - AO (AB -AT, CH e SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLV... 32F (chosen colour Anodized gold alum.) PLVAO 32F.

COLOURS



AA - Anodized silver alum. | **AO** - Anodized gold alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AB - Anodized bronze alum. | **AT** - Anodized titanium alum. | **CH** - Anod. champagne alum. | **SB** - Anodized sand alum.

(Price to be agreed. Production delay 4/5 weeks)

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROLEVALL 358

PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 358** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED





POLISHED BRASS thermo packed - bar length **2,7 lm**
pack. **20 Pcs** - **54 lm** (**PLVOL 358F: 15 Pcs - 40,5 lm**)

Article	L x H mm	€/lm	€/Pc	
PLVOL 358A	35 X 8	24,88	67,18	
PLVOL 358F	35 X 8	23,11	62,40	*

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

POLISHED BRASS thermo packed
bar length **0,90 lm** - pack. **20 Pc**

SELF PACK

Article	L x H mm	€/Pc
PLVOL 3589AS	35 X 8	23,75
PLVOL 3589FS	35 X 8	22,21


"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

COLOURS




OL - Polished brass

PLVOL 358A/PLVOL 3589AS
PLVOL 358F/PLVOL 3589FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

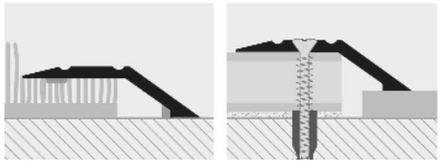

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 4413

PROLEVALL 4413 are transition profiles in polished extruded brass and anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. **PROLEVALL 4413** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED





POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	L x H mm	€/lm	€/Pc	
PLVOL 4413A	44 X 13	24,70	66,69	*
PLVOL 4413F	44 X 13	22,75	61,43	*

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

POLISHED BRASS thermo packed
bar length **0,90 lm** - pack. **20 Pc**

SELF PACK

Article	L x H mm	€/Pc	
PLVOL 44139AS	44 X 13	26,70	*
PLVOL 44139FS	44 X 13	25,30	*

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

ANODIZED SILVER and GOLD ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L x H mm	€/lm	€/Pc
PLV... 4413A	44 X 13	10,58	28,57
PLV... 4413F	44 X 13	9,25	24,98

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

Available in the colours: AA - AO (OL, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 4413F (chosen colour anodized gold alum.) PLVAO 4413F.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




OL - Polished brass **AT** - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anodized sand alum.

(Price to be agreed. Production delay 4/5 weeks)


PLVOL 4413A /PLVOL 44139AS
PLVOL 4413F /PLVOL 44139FS
scale 1:1

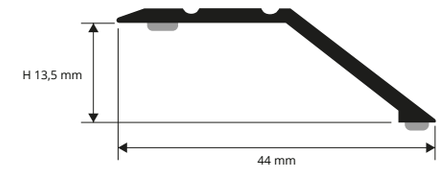

PLV... 4413A /PLV... 4413F
scale 1:1

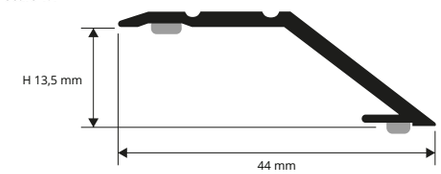

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

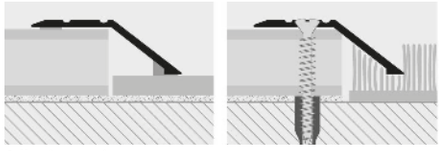

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

transition profiles

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PRONIVO

ANODIZED ALUMINIUM

PRONIVO is a transition and edging profile with a rounded shape in anodized aluminium with tap-down edge. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 7 and 13 mm where no profile was installed at the time of laying. **PRONIVO** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles


PNV... 713A
scale 1:1







EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

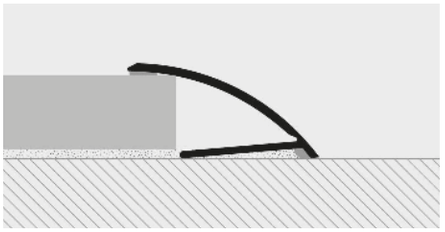

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

ANODIZED ALUMINIUM self-adhesive thermo packed
bar length **2,7 lm** - pack. **30 Pcs** - **81 lm**

Article	H mm	€/lm	€/Pc
PNVAA 713A	7/13	7,37	19,90

Available in the colours: AA (AO available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.
E.g.: PNV... 713 (chosen colour anodized gold alum.) PNVAO 713A.

COLOURS

AA - Anodized silver alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height

AO - Anodized gold alum.

(Price to be agreed. Production delay 4/5 weeks)


PROTRANS

ANODIZED ALUMINIUM

PROTRANS is a transition and edging profile with a rounded shape in anodized aluminium. It is ideal to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet. With its rounded shape it compensates for differences in thickness between 6 and 13 mm where no profile was installed at the time of laying. **PROTRANS** ensures a perfect finish and is easy to lay with the self-adhesive backing guaranteeing perfect adherence to the floor.

transition profiles


PTS... 613A
PTS... 6139AS
scale 1:1







EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

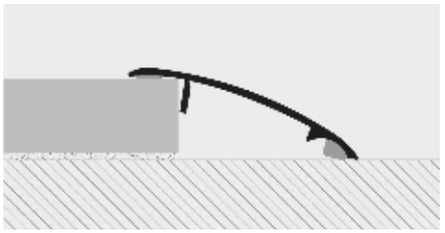

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

ANODIZED ALUMINIUM self-adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PTSAA 613A	6 / 13	7,04	19,01

ANODIZED ALUMINIUM self-adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	H mm	€/lm	€/Pc
PTS... 6139AS	6 / 13	/	7,44

Available in the colours: AA (AO, AT, CH e SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PTS... 613A (chosen colour anodized gold alum.) PTSAO 613A.

COLOURS

AA - Anodized silver alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height

AO - Anodized gold alum. **AT** - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anod. sand aluminium

(Price to be agreed. Production delay 4/5 weeks)

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROFLOOR 712

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in AISI 304/1.4301-V2A stainless steel with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A WITH SELF-ADHESIVE



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFRAC 7129AS	38 X 7/12	/	9,47

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **1,66 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFRAC 71216AS	38 X 7/12	/	16,67

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	€/lm	€/Pc
PFRAC 712A	38 X 7/12	8,97	24,22

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,83 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFRAC 7128AS	38 X 7/12	/	8,54

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **1,03 lm** - pack. **20 Pcs** SELF PACK


Article	L x H mm	€/lm	€/Pc
PFRAC 71210AS	38 X 7/12	/	10,41

COLOURS


AC - Polished stainless steel AISI 304/1.4301-V2A

On demand hand-brushed stainless steel (Price to be agreed. Production delay 4/5 weeks)

PFRAC 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

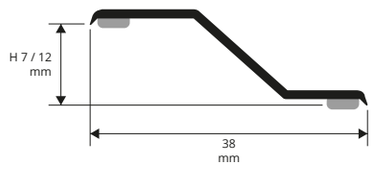

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

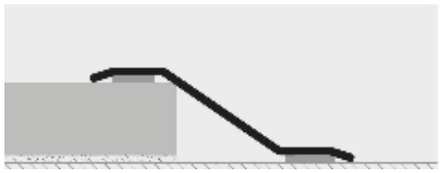

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

transition profiles

PROFLOOR 712

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

POLISHED BRASS
WITH SELF-ADHESIVE



POLISHED BRASS self-adhesive thermo packed
bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFROL 7129AS	38 X 7/12	/	13,35

POLISHED BRASS self-adhesive thermo packed
bar length **1,66 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFROL 71216AS	38 X 7/12	/	23,61

POLISHED BRASS self-adhesive thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	€/lm	€/Pc
PFROL 712A	38 X 7/12	13,08	35,32

POLISHED BRASS self-adhesive thermo packed
bar length **0,83 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFROL 7128AS	38 X 7/12	/	11,95


POLISHED BRASS self-adhesive thermo packed
bar length **1,03 lm**- pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFROL 71210AS	38 X 7/12	/	14,74


COLOURS

OL - Polished brass

PFROL 712A/7128AS/7129AS/71210AS/71216AS
scale 1:1

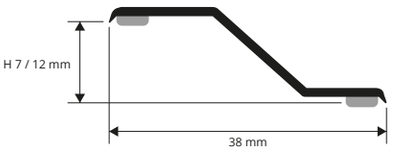

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

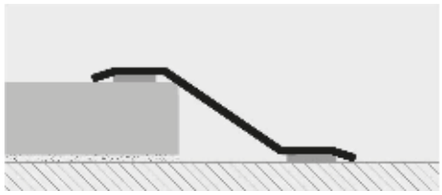

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

transition profiles

PROFLOOR 712

PROFLOOR 712 is a self-adhesive sloping terminal transition profile in anodized aluminium with silver-gold-bronze finish with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble. It joins and compensates a thickness between 7 and 12mm. **PROFLOOR 712** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

ANODIZED GOLD, SILVER AND BRONZE
ALUMINIUM WITH SELF-ADHESIVE



Anodized ALUMINIUM self-adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PFR... 712A	38 X 7/12	7,10	19,17




Anodized ALUMINIUM self-adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/lm	€/Pc
PFR... 7129AS	38 X 7/12	/	7,97

Available in the colours: AA - AO - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PFR... 712A (chosen colour anodized gold alum.) PFRAO 712A.

PFR... 712A/7129AS
scale 1:1

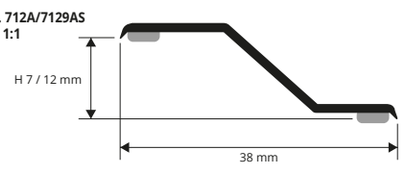

COLOURS

AA - Anodized silver alum. **AO** - Anodized gold alum. **AB** - Anodized Bronze Alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height

AT - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anod. sand aluminium

(Price to be agreed. Production delay 4/5 weeks)

transition profiles

© 2023. All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.


PROPRESS 712

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE


PROPRESS 712 is a self-adhesive sloping terminal transition profile in stainless steel 1.4301 and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 7 and 12mm.
PROPRESS 712 ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PRSAC 712A/7129AS
PRSOL 712A/7129AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

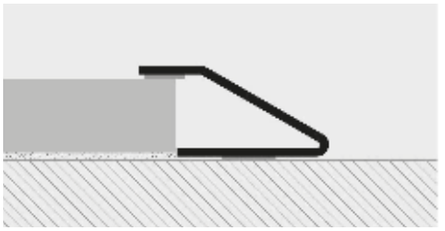

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H x L mm	€/lm	€/Pc
PRSAC 712A	27 X 7/12	11,89	32,10

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PRSAC 7129AS	27 X 7/12	13,03

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
OL - Polished brass



POLISHED BRASS self-adhesive thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H x L mm	€/lm	€/Pc
PRSOL 712A	27 X 7/12	15,40	41,58

POLISHED BRASS self-adhesive thermo packed bar length **0,90 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PRSOL 7129AS	27 X 7/12	15,74

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)


PROFLOOR 1216

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE


PROFLOOR 1216 is a self-adhesive chamfered terminal transition profile in stainless steel AISI 304/1.4301-V2A and polished brass with protective film. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 12 and 16mm. **PROFLOOR 1216** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

transition profiles

PFRAC 1216A/12169AS
PFROL 1216A/12169AS
scale 1:1

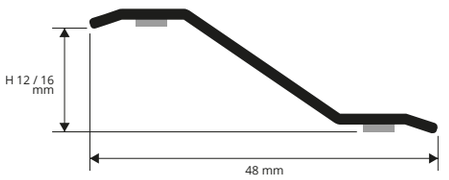

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

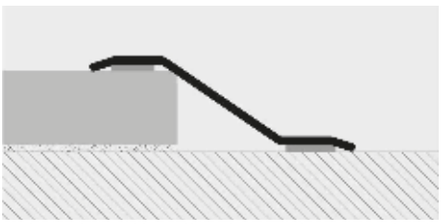

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	€/lm	€/Pc
PFRAC 1216A	48 X 12/16	13,71	37,02

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PFRAC 12169AS	48 X 12/16	13,45

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)



POLISHED BRASS self-adhesive thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	€/lm	€/Pc
PFROL 1216A	48 X 12/16	19,81	53,49

POLISHED BRASS self-adhesive thermo packed bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PFROL 12169AS	48 X 12/16	19,90

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
OL - Polished brass

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROGRESS PROFILES

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROLINOLEUM is a self-adhesive transition profile in anodized aluminium with gold/silver finish. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC or linoleum and other thin materials between 2-3 mm thick. **PROLINOLEUM** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROLINOLEUM

ANODIZED GOLD AND SILVER ALUMINIUM
WITH AND WITHOUT SELF-ADHESIVE

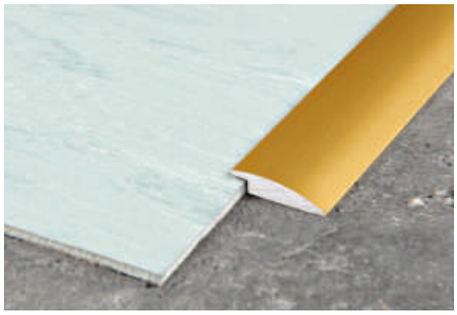



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H x L mm	€/lm	€/Pc
PLU ... 16	**2,5 X 16**	**4,29**	**11,58**

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed - WITH ADHESIVE - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H x L mm	€/lm	€/Pc
PLU ... 16A	**2,5 X 16**	**5,43**	**14,66**

Available in the colours: AA (AO, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.
E.g.: PLU ... 16 (chosen finish anod. gold) PLUAO 16.

COLOURS



AA - Anodized silver alum.


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AO - Anodized gold alum. | **AT** - Anodized titanium alum. | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium


(Price to be agreed. Production delay 4/5 weeks)

PLU ... 16
PLU ... 16A
scale 1:1



profiles for low thicknesses

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

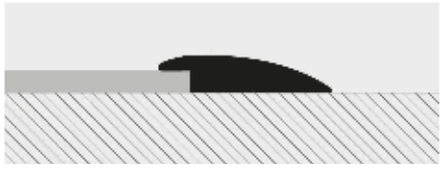

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

PROFLOOR 24 is a self-adhesive transition profile with chamfered edges in stainless steel 1.4016 and polished brass with protective film. It is used to give a clean-cut, elegant finish to hardwearing surfaces in PVC and linoleum - carpeting and other thin materials between 2 and 5mm thick. **PROFLOOR 24** ensures a perfect finish with little height, covering any flaws created during laying of the floor. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.

PROFLOOR 24

POLISHED STAINLESS STEEL AISI 304/1.4301
AND POLISHED BRASS WITH SELF-ADHESIVE





POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	L x H mm	€/lm	€/Pc
PFRAC 24A	**2/4,5 X 30**	**6,79**	**18,33**

POLISHED STAINLESS ST. AISI 304/1.4301-V2A self-adhesive thermo packed - bar length **0,93 lm**- pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PFRAC 249AS	**2/4,5 X 30**	**7,49**

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.
On demand hand-brushed stainless steel
(Price to be agreed. Production delay 4/5 weeks)


POLISHED BRASS self-adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	L x H mm	€/lm	€/Pc
PFROL 24A	**2/4,5 X 30**	**9,91**	**26,76**

POLISHED BRASS self-adhesive thermo packed bar length **0,93 lm** - pack. **20 Pcs** SELF PACK


Article	L x H mm	€/Pc
PFROL 249AS	**2/4,5 X 30**	**10,54**

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A | **OL** - Polished brass

PFRAC 24A/249A
PFROL 24A/249A
scale 1:1



profiles for low thicknesses

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

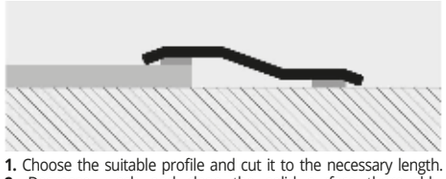

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.


PROSLIDER KL ALL

ANODIZED SILVER ALUMINIUM


PROSLIDER KL ALL is a slide shape progressive transition terminal square suitable for connecting perfectly without steps two floor levels. The particular strength of the square allows to resist and bear heavy loads and frequent passages of manual trolleys and motor vehicles besides protecting the edge of the higher floor. The **PROSLIDER KL ALL** is especially used to connect LA Kerlite/Laminam and thin ceramic tiles to each other or else it is used with wood and/or a pre-existing floor. Available in anodized aluminium.

profiles for low thicknesses

PDKLAA 045
scale 1:1

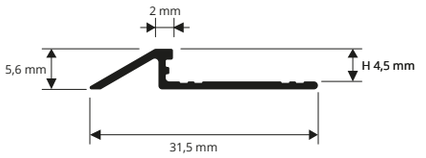

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





1. Choose the profile with the required finish. **2.** Fill the profile cavity with adhesive and apply the adhesive onto the area of application. **3.** Lay the "PROSLIDER KL ALL". **4.** Align it flush with the floor/covering. **5.** Use the adhesive to seal any empty interstices.

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PDKLAA 045	4,5	6,51	17,58

COLOURS



AA - Anodized silver alum.


PROCOVER 1045 ALL

ANODIZED AND POLISHED
SILVER, CHROME AND GOLD ALUMINIUM


PROCOVER 1045 ALL is a joint cover profile in anodized aluminium. It is applied at the end of the laying process between two adjoining floors placed at the same level, with a gap of 3 to 6 mm between the two kerlite /laminam/ or thin ceramic tile floors laid with the adhesive. It protects the external edge of the floor/covering. It is easy to lay and aesthetically pleasing. The design of the profile with lower vertical arrowhead part allows excellent anchorage with silicone / adhesive.

profiles for low thicknesses

PCR...1045
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

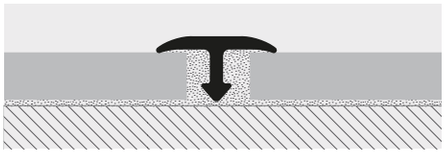



1. Choose "PROCOVER 1045 ALL" in the desired finish considering a side lap of 2/3 mm. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.
IMPORTANT: Take care of the external edges of the aluminium "PROCOVER 1045 ALL". They must be protected from aggressive substances such as adhesives and sealants and from smoothing or scraping action.

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PCRAA 1045	4,5	3,55	9,59

POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PCRBC 1045	4,5	6,10	16,47
PCRBO 1045	4,5	6,10	16,47

COLOURS



AA - Anodized silver alum. **BC** - Polished chrome alum. **BO** - Polished gold alum.





© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy




PROCOVER

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A


PROCOVER is a joint-cover profile in stainless steel (polished or brushed) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.

threshold - joint-cover profiles


PCRAC... 149/1499
scale 1:1




PCRAC... 269
scale 1:1



PCRAC... 409
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

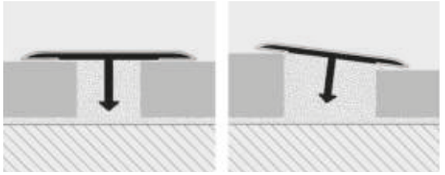

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length **2,7 lm**
(PCRAC 1499 - bar length **0,90 lm) - 4/10 mm**
ECO BLISTER

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAC 149	40	14 X 9	10,86	29,32
PCRAC 1499	20	14 X 9	11,52	31,10
PCRAC 209	40	20 X 9	14,12	38,12
PCRAC 269	30	26 X 9	15,52	41,90
PCRAC 409	20	40 X 9	20,75	56,03

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length **2,7 lm - 4/10 mm**
(PCRACS 1499 - bar length **0,90 lm** - pack. **20 Pcs)**
ECO BLISTER

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRACS 149	40	14 X 9	13,71	37,02
PCRACS 1499	20	14 X 9	14,13	38,15
PCRACS 209	40	20 X 9	15,59	42,09
PCRACS 269	30	26 X 9	19,51	52,68
PCRACS 409	20	40 X 9	23,52	63,50

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


PROCOVER

POLISHED, CHROMED AND ANTIQUE BRASS


PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

threshold - joint-cover profiles


PCR... 149/1499
scale 1:1




PCR... 209
scale 1:1



PCR... 269
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

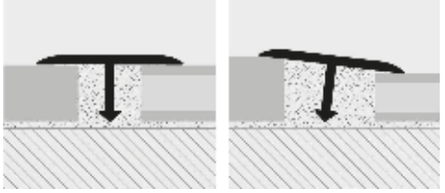

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.
Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed - bar length **2,7 lm**
(PCROL 1499 - bar length **0,90 lm** - pack. **40 Pcs)**
ECO BLISTER

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCROL 149	20	14 X 9	7,91	21,36
PCROL 1499	40	14 X 9	8,07	21,87
PCROL 209	20	20 X 9	11,96	32,29
PCROL 269	20	26 X 9	14,44	38,99

CHROMED BRASS (polished stainless st. effect) thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	€/lm	€/Pc
PCROC 149	14 X 9	15,88	42,88
PCROC 209	20 X 9	18,48	49,90
PCROC 269	26 X 9	21,95	59,27



ANTIQUE BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	€/lm	€/Pc
PCROB 149	14 X 9	25,36	68,47
PCROB 209	20 X 9	28,70	77,49
PCROB 269	26 X 9	31,70	85,59

BRUSHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	€/lm	€/Pc	
PCROS 149	14 X 9	7,91	21,36	*
PCROS 209	20 X 9	11,96	32,29	*
PCROS 269	26 X 9	14,44	38,99	*

COLOURS



OL - Polished brass
OC - Chromed brass
OB - Antique brass
OS - Brushed brass

= News 2023

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROCOVER

ANODIZED SILVER, DARK BRONZE ALUMINIUM

PROCOVER is a joint-cover profile in anodized aluminium. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.





ANODIZED SILVER, DARK BRONZE ALUMINIUM
thermo packed - bar length **2,7 lm**
(PCRAA 1499 - bar length **0,90 lm** - pack. **40 Pcs)**

ECO BLISTER

Article	Pcs/Pack	L x H mm	€/lm	€/Pc
PCRAA 149	40	14 X 9	4,08	11,02
PCRDB 149	40	14 X 9	5,22	14,09
PCRAA 1499	40	14 X 9	4,83	13,04
PCRAA 209	40	20 X 9	4,37	11,80
PCRDB 209	40	20 X 9	5,67	15,31
PCRAA 269	40	26 X 9	5,43	14,66
PCRDB 269	40	26 X 9	7,07	19,09
PCRAA 409	20	40 X 9	7,97	21,52
PCRDB 409	20	40 X 9	10,37	28,00 *

COLOURS



AA - Anodized silver alum. **DB** - Anod. dark bronze alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




AT - Anodized titanium alum. **AB** - Anodized bronze alum. **AO** - Anodized gold alum.


Available on demand PCRAT, PCRAB and PCRAO.
Price: add +20% to the price of PCRAA.

PCRAA - DB 149 curvable available


PCR... 149/1499
scale 1:1




PCR... 209
scale 1:1



PCR... 269
PCRAA 409
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

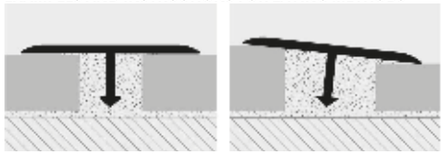

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN 77 WOODEN FINISHES (72 on demand)

PROCOVER WOOD is a joint-cover profile in aluminium covered with a very strong film available in 77 wooden finishes (72 on demand). It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

ALUMINUM COVERED WOODEN FINISHES thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm (L 26 mm - 54 lm)**

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 X 9	6,60	17,82
PCRA... 269	26 X 9	11,61	31,35

Available in the wood finishes: 05W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.




COLOURS




05W - Light oak (strip) **11W** - Decapè bleached **28W** - Aspen oak **29W** - White oak **30W** - Grey oak


PCRA... 149
scale 1:1



PCRA... 269
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

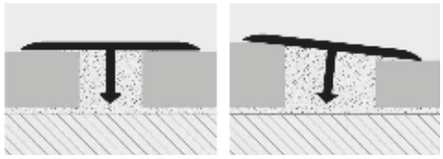

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

PROCOVER INSERT for inserting Procover profiles

VINYL RESIN / BLACK RUBBER


Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN/RUBBER
length **2,7 lm** and/or **in rolls 100 lm**


Article	€/lm	€/Pc	€/rotolo
PCPCR 2,7ML	3,80	10,26	/
PCPCR 100ML	3,80	/	380,00

PROINSERT BASE 45 AND BASE 40 - alum. punched - perfored
bar length **2,7 lm**- pack. **20 Pcs - 54 lm**

Article	Larg. mm	€/lm	€/Pc
PINBFT 45	45	6,37	17,20
PINBFT 40	40	6,29	16,98

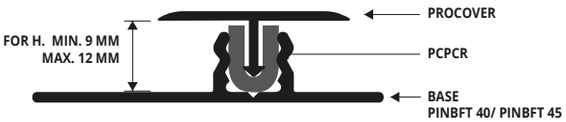

INSERT
+BASE 45/40
scale 1:1

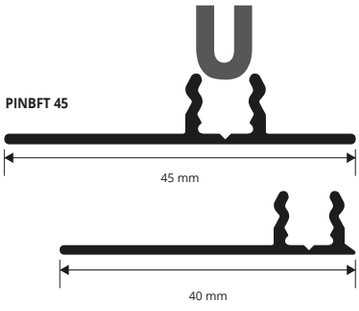

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROPLATE

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in stainless steel 1.4016 with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 – 30 - 40 – 60 – 80 mm with protective film.

POLISHED STAINLESS 1.4016 STEEL
SELF-ADHESIVE OR PUNCHED


threshold - joint-cover profiles

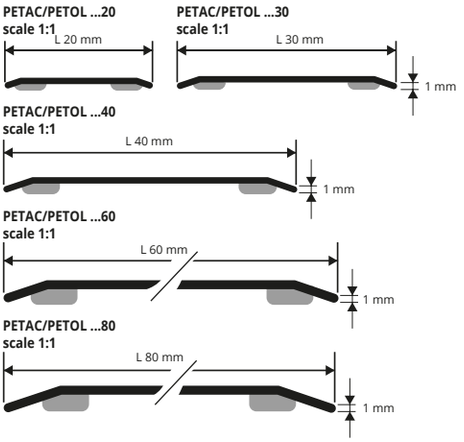

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. **2.** Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. **3.** Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. **4.** When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. **5.** Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) **6.** Align the profile and tighten the galvanised or brassed flathead screws.

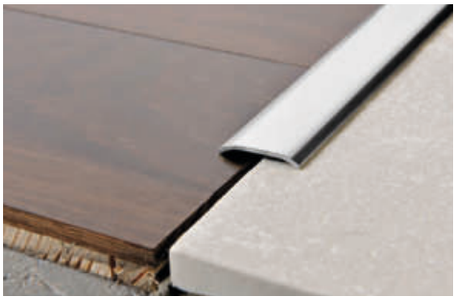

POLISHED STAINLESS 1.4016 ST. thermo packed - ADHESIVE
bar length **2,70 lm** - pack. **20 Pcs - 54 lm** (**L 20 - 30mm - 108 lm**) **- 10/10 mm**

Article	Width	€/lm	€/Pc
PETAC 20A	20mm	6,34	17,12
PETAC 30A	30mm	6,79	18,33
PETAC 40A	40mm	9,82	26,51
PETAC 60A	60mm	17,15	46,30
PETAC 80A	80mm	21,66	58,48

POLISHED STAINLESS 1.4016 STEEL thermo packed - without holes
bar length **2,70 lm** - pack. **20 Pcs - 54 lm- 10/10 mm**

Article	Width	€/lm	€/Pc
PETAC 60	60mm	15,06	40,66
PETAC 80	80mm	19,55	52,79

PETAC 60A/80A/60/80, with 12/10 thickness available on demand.

PUNCHED POLISHED STAINLESS 1.4016 ST. with protective film
bar length **2,70 lm**- pack. **20 Pcs - 54 lm (L 30mm - 108 lm) - 10/10 mm**

Article	Width	€/lm	€/Pc
PETAC 30F	30mm	5,29	14,28
PETAC 40F	40mm	8,29	22,38



POLISHED STAINLESS 1.4016 ST. thermo packed ADHESIVE bar length **0,93 lm**- pack. **20 Pcs - 10/10 mm** SELF PACK

Article	Width	€/Pc
PETAC 309AS	30mm	6,83
PETAC 609AS	60mm	16,96
PETAC 809AS	80mm	21,80

POLISHED STAINLESS 1.4016 ST. thermo packed - PUNCHED WITH SCREWS SELF PACK
bar length **0,93 lm**- pack. **20 Pcs - 10/10 mm**

Article	Width	€/Pc
PETAC 309FS	30mm	5,55

COLOURS

AC - Polished stainless steel 1.4016


PROPLATE

PROPLATE is a flat joint-cover profile with special profiled edges for perfect adherence to flooring. Made in polished brass with a protective film and available with or without adhesive or for certain widths also in the punched version. Available in widths of 20 – 30 - 40 – 60 – 80 mm with protective film.

POLISHED BRASS
SELF-ADHESIVE OR PUNCHED

threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

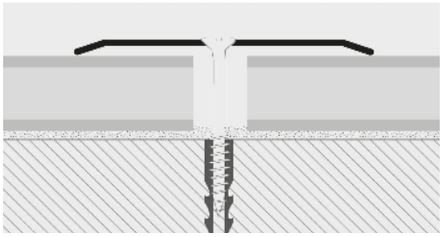

1. Choose "PROPLATE" in the required width and material and whether punched or with self-adhesive backing. **2.** Cut the profile to the required length. When laying the self-adhesive Proplate, clean, degrease and dry the surface, checking that the temperature for application is at least 15°. **3.** Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers. **4.** When laying the punched version, align the profile and mark the position of the holes using the holes in the profile as reference. **5.** Insert suitable screw anchors (usually Ø 3mm screws & 5x25mm screw anchors) **6.** Align the profile and tighten the galvanised or brassed flathead screws.

COLOURS

OL - Polished brass



POLISHED BRASS thermo packed ADHESIVE
bar length **2,70 lm** - pack. **20 Pcs - 54 lm (L 20/30mm - 108 lm) - 10/10 mm**

Article	Width	€/lm	€/Pc	
PETOL 20A	20mm	9,24	24,95	
PETOL 30A	30mm	9,49	25,62	
PETOL 40A	40mm	11,99	32,37	
PETOL 60A	60mm	21,00	56,70	*
PETOL 80A	80mm	26,49	71,52	*

POLISHED BRASS thermo packed WITHOUT HOLES
bar length **2,70 lm** - pack. **20 Pcs - 54 lm (L 20 mm - 108 lm) - 10/10 mm**

Article	Width	€/lm	€/Pc	
PETOL 20	20mm	7,46	20,14	*
PETOL 60	60mm	19,18	51,79	*
PETOL 80	80mm	24,63	66,50	*

PETOL 60A/80A/60/80 with 13/10 thickness available on demand.

POLISHED BRASS with protective film PUNCHED
bar length **2,70 lm** - pack. **20 Pcs - 54 lm (L 30 mm - 108 lm) - 10/10 mm**

Article	Width	€/lm	€/Pc	
PETOL 30F	30mm	7,72	20,84	*
PETOL 40F	40mm	10,22	27,59	*

POLISHED BRASS thermo packed ADHESIVE SELF PACK
bar length **0,83 lm** - pack. **20 Pcs - 10/10 mm**

Article	Width	€/Pc	
PETOL 308AS	30mm	9,10	*
PETOL 408AS	40mm	11,18	*

POLISHED BRASS thermo packed SELF PACK
bar length **0,93 lm** - pack. **20 Pcs - 10/10 mm**

Article	Width	€/Pc	
PETOL 309AS	30mm	10,12	
PETOL 309FS	30mm	8,79	
PETOL 409AS	40mm	13,00	
PETOL 409FS	40mm	11,52	*
PETOL 609AS	60mm	19,15	*
PETOL 809AS	80mm	24,21	*

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

POLISHED BRASS thermo packed SELF PACK
bar length **1,03 lm** - pack. **20 Pcs - 10/10 mm**

Article	Width	€/Pc	
PETOL 3010AS	30mm	11,52	
PETOL 4010AS	40mm	13,99	
PETOL 4010FS	40mm	12,78	*

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

POLISHED BRASS thermo packed ADHESIVE SELF PACK
bar length **1,66 lm** - pack. **20 Pcs - 10/10 mm**

Article	Width	€/Pc	
PETOL 3016AS	30mm	18,19	*
PETOL 4016AS	40mm	23,09	*

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROPLATE 80 ALZ


PROPLATE 80 ALZ is a new aluminium joint cover, threshold cover. It is very resistant and suitable for covering the expanding joint of two different supporting structures, or to connect a floor with an adjoining one of the same or different kind. Particularly used in Industrial field, in the malls, sport facilities and gyms equipped with wood and/or resin floors.

KNURLED ANODIZED SILVER ALUMINIUM





PETAA 80ZA
PETAA 80Z



ANODIZED SILVER ALUMINIUM thermo packed ADHESIVE
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)**

Article	Width mm	€/lm	€/Pc
PETAA 80ZA	80	19,45	52,52

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (PETAA 80Z - 40,5 lm)**

Article	Width mm	€/lm	€/Pc
PETAA 80Z	80	18,10	48,87


Punched version available on demand.

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

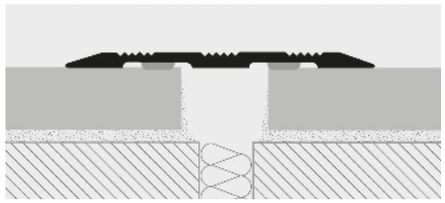

1. Choose "PROPLATE 80ALZ" model with or without sticker and cut it to the required length.
Adhesive version
2. Degrease, wash and clean accurately the solid floor. **3.** Remove the protective label from the sticker (sticker model). **4.** Rest the square pressing evenly without hammering.
Punched version
2. Perforate on one side and insert the nogs in the holes. **3.** Fix and screw the square equipped with flared head screws suitable to the holes made.

threshold - joint-cover profiles

PROCOVER 14PT


PROCOVER 14PT is a small aluminium joint cover / threshold cover square. It is used to finish technically floors laid at the same level in ceramic tiles/ ceramics ceramics / wood. It covers eventual laying flaws and guarantees that the floors which are underneath expand enough. In Gold-Silk anodized Aluminium and Bronze with sticker.

ANODIZED SILVER, GOLD AND BRONZE ALUMINIUM





PCRAA 14PTA
PCRAO 14PTA
PCRAB 14PTA
scale 1:1



ANODIZED ALUMINIUM WITH ADHESIVE thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	Width mm	€/lm	€/Pc	
PCRAA 14PTA	14	5,09	13,74	
PCRAO 14PTA	14	5,09	13,74	*
PCRAB 14PTA	14	5,09	13,74	*

COLOURS



AA - Anodized silver alum.


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



AO - Anodized gold alum. **AB** - Anodized bronze alum.

(Price to be agreed. Production delay 4/5 weeks)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

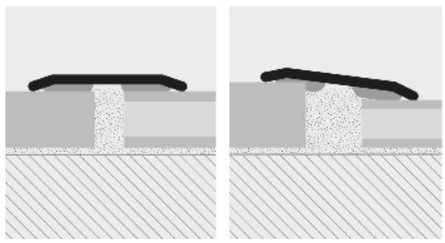

1. Choose the superficial finish of "PROCOVER 14PT" and cut it to the required lenght. **2.** Degrease, wash and clean accurately the solid floor. **3.** Remove the protective label from the sticker. **4.** Lay the square pressing evenly without hammering.

threshold - joint-cover profiles

© 2020. All rights reserved by Progress Profiles. Printed in Italy

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSOL 18-30-35-40 in steel are self-adhesive joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 18-30-35-40

STAINLESS STEEL 1.4016 WITH SELF-ADHESIVE WITH PROTECTIVE FILM





STAINLESS ST. 1.4016 with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm (L 35/40 mm - 54 lm)**

Article	Width-thick.	€/lm	€/Pc
PLSAC 18A	18 mm - 10/10	5,58	15,07
PLSAC 30A	30 mm - 10/10	6,13	16,55
PLSAC 35A	35 mm - 10/10	6,91	18,66
PLSAC 40A	40 mm - 12/10	9,66	26,08

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **0,83 lm** - pack. **20 Pcs** ECO BLISTER

Article	Width-thick.	€/Pc
PLSAC 308A	30 mm - 10/10	5,10
PLSAC 358A	35 mm - 10/10	5,74

On demand 0,73 or 0,63 lm bar lenght (quantity and prices to be agreed. Production delay 4/5 weeks).

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs** ECO BLISTER

Article	Width-thick.	€/Pc
PLSAC 189A	18 mm - 10/10	6,07

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** ECO BLISTER

Article	Width-thick.	€/Pc
PLSAC 309A	30 mm - 10/10	5,69
PLSAC 359A	35 mm - 10/10	6,52

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **0,83 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 308AS	30 mm - 10/10	6,38 *
PLSAC 358AS	35 mm - 10/10	6,76 *

On demand 0,73 or 0,63 lm bar lenght (quantity and prices to be agreed. Production delay 4/5 weeks).

STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 309AS	30 mm - 10/10	7,02
PLSAC 359AS	35 mm - 10/10	7,54
PLSAC 409AS	40 mm - 12/10	10,14 *


STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **1,03 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 3010AS	30 mm - 10/10	7,73


STAINLESS ST. 1.4016 with adhesive thermo packed - bar length **1,66 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 3016AS	30 mm - 10/10	12,14 *
PLSAC 3516AS	35 mm - 10/10	13,17 *


PLSAC 18A/189A
scale 1:1




PLSAC 30A/3010AS/309A/309AS/308A/308AS/3016AS
scale 1:1




PLSAC 35A/359A/359AS/358A/358AS
scale 1:1




PLSAC 40A/409AS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

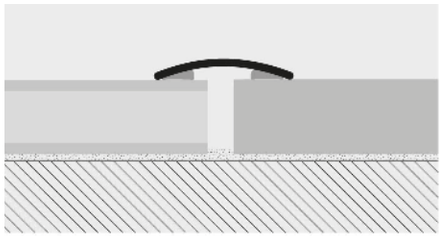

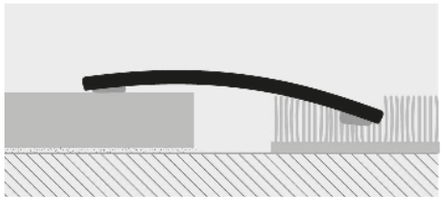


1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

COLOURS



AC - Polished stainless steel 1.4016

On demand hand-brushed stainless steel (Prices to be agreed. Production delay 4/5 weeks)

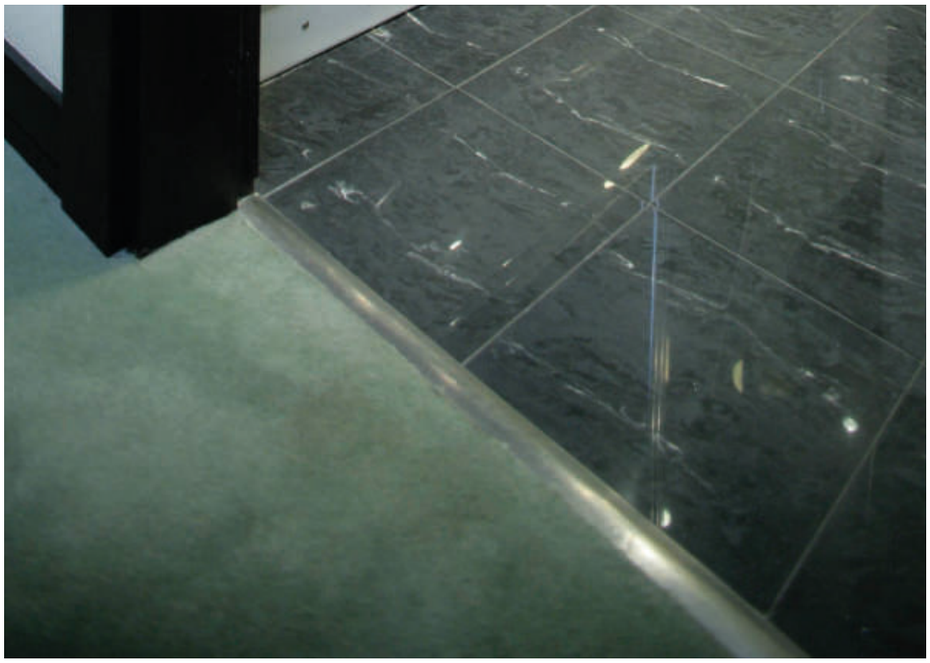

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROSOL 30-35-40

PUNCHED STAINLESS STEEL 1.4016
WITH PROTECTIVE FILM

PROSOL 30-35-40 in steel are punched joint - covers in stainless steel 1.4016 available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLSAC 30F/308F/309F/308FS/309FS/3010FS/3016FS
scale 1:1




PLSAC 35F/358F/359F/358FS/359FS/3516FS
scale 1:1




PLSAC 40F/409FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

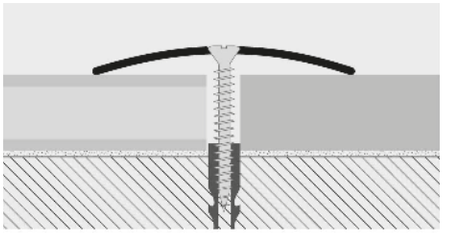

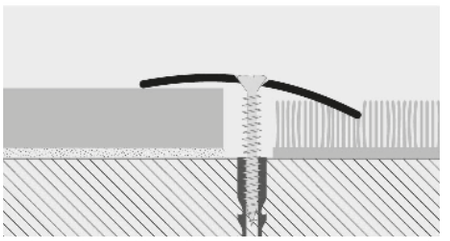

1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.





STAINLESS ST. 1.4016 punched - with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** (**L 30 mm** - **108 lm**)

Article	Width-thick.	€/lm	€/Pc
PLSAC 30F	30 mm - 10/10	4,66	12,58
PLSAC 35F	35 mm - 10/10	5,55	14,99
PLSAC 40F	40 mm - 12/10	8,14	21,98

STAINLESS ST. 1.4016 punched thermo packed ECO BLISTER
bar length **0,83 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc
PLSAC 308F	30 mm - 10/10	3,89
PLSAC 358F	35 mm - 10/10	4,60 *

STAINLESS ST. 1.4016 punched thermo packed ECO BLISTER
bar length **0,93 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc
PLSAC 309F	30 mm - 10/10	4,34
PLSAC 359F	35 mm - 10/10	5,17 *

COLOURS

AC - Polished stainless Steel 1.4016

On demand hand-brushed stainless steel (Prices to be agreed. Production delay 4/5 weeks)

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length **0,83 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 308FS	30 mm - 10/10	5,24
PLSAC 358FS	35 mm - 10/10	5,87 *

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 309FS	30 mm - 10/10	5,69
PLSAC 359FS	35 mm - 10/10	6,46 *
PLSAC 409FS	40 mm - 12/10	8,99 *

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length **1,03 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 3010FS	30 mm - 10/10	6,31

STAINLESS ST. 1.4016 punched with screws and screw anchors thermo packed - bar length **1,66 lm** - pack. **20 Pcs** SELF PACK

Article	Width-thick.	€/Pc
PLSAC 3016FS	30 mm - 10/10	9,45
PLSAC 3516FS	35 mm - 10/10	11,18 *

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSOL 18-30-35-40 in brass are self-adhesive joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PROSOL 18-30-35-40

POLISHED BRASS WITH SELF-ADHESIVE WITH PROTECTIVE FILM







PLSOL 18A/189A
scale 1:1




PLSOL 30A/308A/309A/3010A/3016A/308AS/309AS/3010AS/3016AS
scale 1:1



PLSOL 35A/359A/358AS/359AS/3510AS/3516AS
scale 1:1



PLSOL 40S/409S/409SS/416SS
scale 1:1



POLISHED BRASS with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** (**L 35/40mm** - **54 lm**)

Article	Width-thick.	€/lm	€/Pc	
PLSOL 18A	18 mm - 10/10	8,29	22,38	
PLSOL 30A	30 mm - 10/10	8,93	24,11	
PLSOL 35A	35 mm - 10/10	10,96	29,59	*
PLSOL 40A	40 mm - 10/10	20,52	55,40	*

POLISHED BRASS with adhesive thermo packed SELF PACK
bar length **0,83 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc
PLSOL 308AS	30 mm - 10/10	8,57
PLSOL 358AS	35 mm - 10/10	10,39

POLISHED BRASS with adhesive thermo packed ECO BLISTER
bar length **0,83 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc	
PLSOL 308A	30 mm - 10/10	7,37	*

On demand 0,73 or 0,63 lm bar lenght (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS with adhesive thermo packed SELF PACK
bar length **0,93 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc	
PLSOL 309AS	30 mm - 10/10	9,33	
PLSOL 359AS	35 mm - 10/10	11,52	
PLSOL 409AS	40 mm - 10/10	20,61	*

POLISHED BRASS with adhesive thermo packed ECO BLISTER
bar length **0,90 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc
PLSOL 189A	10 mm - 10/10	8,57

POLISHED BRASS with adhesive thermo packed SELF PACK
bar length **1,03 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc
PLSOL 3010AS	30 mm - 10/10	10,46
PLSOL 3510AS	35 mm - 10/10	12,72

POLISHED BRASS with adhesive thermo packed ECO BLISTER
bar length **0,93 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc	
PLSOL 309A	30 mm - 10/10	8,29	
PLSOL 359A	35 mm - 10/10	10,19	*
PLSOL 409A	40 mm - 10/10	18,96	*

POLISHED BRASS with adhesive thermo packed SELF PACK
bar length **1,66 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc	
PLSOL 3016AS	30 mm - 10/10	16,72	*
PLSOL 3516AS	35 mm - 10/10	20,43	
PLSOL 4016AS	40 mm - 10/10	36,26	*

POLISHED BRASS with adhesive thermo packed ECO BLISTER
bar length **1,03 lm** - pack. **20 Pcs**

Article	Width-thick.	€/Pc
PLSOL 3010A	30 mm - 10/10	9,21

POLISHED BRASS with adhesive thermo packed ECO BLISTER
bar length **1,66 lm** - pack. **20 Pcs**


Article	Width-thick.	€/Pc	
PLSOL 3016A	30 mm - 10/10	14,81	*


COLOURS



OL - Polished brass

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

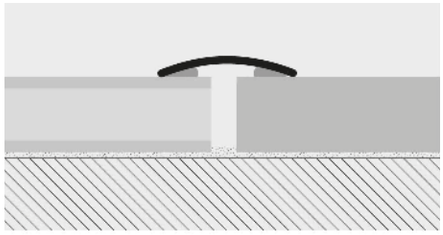

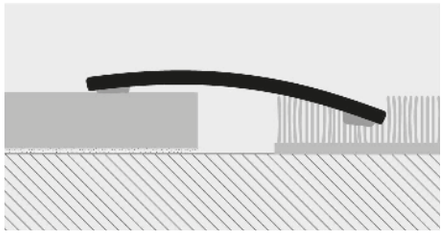

1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSOL 30-35-40

PUNCHED POLISHED BRASS
WITH PROTECTIVE FILM

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS
scale 1:1




PLSOL 35F/359F/358FS/359FS/3510FS/3516FS
scale 1:1




PLSOL 40F/409F/409FS/4016FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

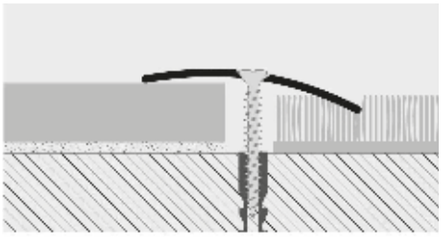

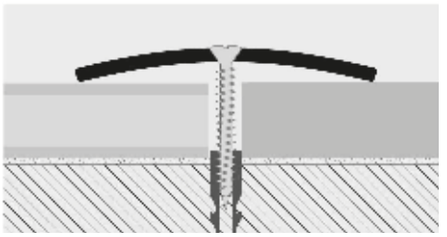

1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED BRASS punched with protective film
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm** (**L 35/40mm** - **54 lm**)

Article	Width-thick.	€/lm	€/Pc	
PLSOL 30F	30 mm - 10/10	7,17	19,36	
PLSOL 35F	35 mm - 10/10	9,14	24,68	*
PLSOL 40F	40 mm - 10/10	18,69	50,46	*

POLISHED BRASS punched thermo packed
bar length **0,83 lm** - pack. **20 Pcs**
ECO BLISTER

Article	Width-thick.	€/Pc	
PLSOL 308F	30 mm - 10/10	5,96	*

POLISHED BRASS punched thermo packed
bar length **0,93 lm** - pack. **20 Pcs**
ECO BLISTER

Article	Width-thick.	€/Pc	
PLSOL 309F	30 mm - 10/10	6,68	*
PLSOL 359F	35 mm - 10/10	8,50	*
PLSOL 409F	40 mm - 10/10	16,60	*

POLISHED BRASS punched thermo packed
bar length **1,03 lm** - pack. **20 Pcs**
ECO BLISTER

Article	Width-thick.	€/Pc	
PLSOL 3010F	30 mm - 10/10	7,44	*

POLISHED BRASS punched thermo packed
bar length **1,66 lm** - pack. **20 Pcs**
ECO BLISTER

Article	Width-thick.	€/Pc	
PLSOL 3016F	30 mm - 10/10	11,95	*

COLOURS

OL - Polished brass



POLISHED BRASS punched with screws and screw anchors thermo packed - bar length **0,83 lm** - pack. **20 Pcs**
SELF PACK

Article	Width-thick.	€/Pc	
PLSOL 308FS	30 mm - 10/10	7,51	*
PLSOL 358FS	35 mm - 10/10	9,27	*

On demand 0,73 or 0,63 lm bar lenght (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pcs**
SELF PACK

Article	Width-thick.	€/Pc	
PLSOL 309FS	30 mm - 10/10	8,23	*
PLSOL 359FS	35 mm - 10/10	10,19	
PLSOL 409FS	40 mm - 10/10	19,12	*

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length **1,03 lm** - pack. **20 Pcs**
SELF PACK

Article	Width-thick.	€/Pc	
PLSOL 3010FS	30 mm - 10/10	7,44	*
PLSOL 3510FS	35 mm - 10/10	11,32	

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length **1,66 lm** - pack. **20 Pcs**
SELF PACK

Article	Width-thick.	€/Pc	
PLSOL 3016FS	30 mm - 10/10	14,33	*
PLSOL 3516FS	35 mm - 10/10	17,71	*
PLSOL 4016FS	40 mm - 10/10	33,58	*

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSOL 30-35-40 are self-adhesive or punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold.
PROSOL is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.

PROSOL 30-35-40

ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED





ANODIZED ALUMINIUM with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	Width-thick.	€/lm	€/Pc
PLS... 30A	30 mm - 1,3	5,64	15,23
PLS... 35A	35 mm - 1,5	6,78	18,31
PLS... 40A	40 mm - 2	7,92	21,38

ANODIZED ALUMINIUM punched thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	Width-thick.	€/lm	€/Pc
PLS... 30F	30 mm - 1,3	4,08	11,02
PLS... 35F	35 mm - 1,5	5,24	14,15
PLS... 40F	40 mm - 2	6,44	17,39

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLS... 30A (chosen finish anod. silver) PLSAA 30A.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **0,83 lm** - pack. **20 Pcs** — SELF PACK

Article	Width-thick.	€/Pc
PLS... 308AS	30 mm - 10/10	5,69

On demand 0,73 or 0,63 lm bar lenght (quantity and prices to be agreed. Production delay 4/5 weeks).

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **0,83 lm** - pack. **20 Pcs** — SELF PACK

Article	Width-thick.	€/Pc
PLS... 308FS	30 mm - 10/10	4,83 *

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** — SELF PACK

Article	Width-thick.	€/Pc
PLS... 309AS	30 mm - 10/10	6,37

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pcs** — SELF PACK

Article	Width-thick.	€/Pc
PLSAA 309FS	30 mm - 10/10	5,24 *

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **1,03 lm** - pack. **20 Pcs** — SELF PACK

Article	Width-thick.	€/Pc
PLS... 3010AS	30 mm - 10/10	6,97

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **1,66 lm** - pack. **20 Pcs** — SELF PACK

Article	Width-thick.	€/Pc
PLS... 3016AS	30 mm - 10/10	11,06

ANODIZED ALUMINIUM punched with screws and screw anchors thermo packed - bar length **1,66 lm** - pack. **20 Pcs** — SELF PACK

Article	Width-thick.	€/Pc
PLS... 3016FS	30 mm - 10/10	8,90 *

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** — ECO BLISTER


Article	Width-thick.	€/Pc
PLS... 309A	30 mm - 10/10	5,24

ANODIZED ALUMINIUM punched thermo packed - bar length **0,93 lm** - pack. **20 Pcs** — ECO BLISTER

Article	Width-thick.	€/Pc
PLS... 309F	30 mm - 10/10	3,82 *

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PLS... 309A (chosen finish anod. silver) PLSAA 309A.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.


ON DEMAND MINIMUM 100 PCS by color and height




AB - Anodized bronze alum. **AT** - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anod. sand aluminium

(Prices to be agreed. Production delay 4/5 weeks)


PLS... 30A/309A/308AS/309AS/3010AS/3016AS
scale 1:1




PLS... 35A
scale 1:1




PLS... 40A
scale 1:1




PLS... 30F/309F/308FS/309FS/3016FS
scale 1:1




PLS... 35F
scale 1:1





PLS... 40F
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

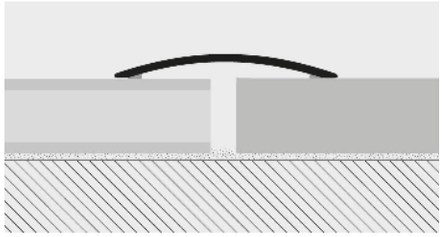

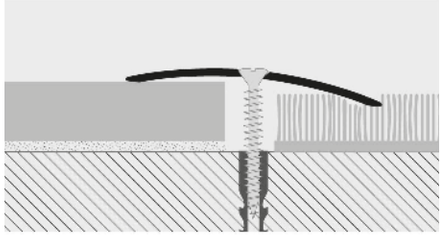

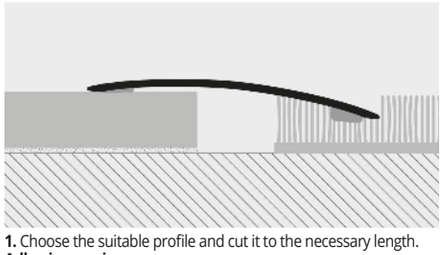

1. Choose the suitable profile and cut it to the necessary length.
Adhesive version
2. Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
2. Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROLEVALL 25-35-38-50

ANODIZED GOLD AND SILVER ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED

PROLEVALL 25-35-38-50 are joint – covers in anodized aluminium with gold, silver and bronze finish in various widths with a more or less knurled flat surface, available with self-adhesive backing or punched in various lengths. They are used to join floors of the same or differing material e.g. ceramic tiles, wood, marble, parquet or laminated, mainly to cover flaws created during laying or expansion joints.
The chamfered edges ensure perfect adhesion to the floor, while the flat top allows perfect door closure. Recommended for dwellings and public environments with intense pedestrian traffic. Easy to lay; the high-strength elastomer adhesive ensures an excellent grip.





ANODIZED ALUMINIUM with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	Width mm	€/lm	€/Pc
PLV... 25A	25	5,64	15,23
PLV... 35A	35	6,70	18,09
PLV... 38A	38	7,32	19,76
PLV... 50A	50	8,87	23,95

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code.
E.g.: PLV... 25A (chosen finish anod. silver) PLVAA 25A.

ANODIZED ALUMINIUM punched thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	Width mm	€/lm	€/Pc
PLV... 25F	25	4,16	11,23
PLV... 35F	35	5,24	14,15
PLV... 38F	38	5,83	15,74
PLV... 50F	50	7,61	20,55

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code.
E.g.: PLV... 25F (chosen finish anod. silver) PLVAA 25F.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	Width mm	€/Pc	
PLV... 259AS	25	6,37	
PLV... 359AS	35	7,32	
PLV... 389AS	38	7,97	
PLV... 509AS	50	9,51	*

Available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code.
E.g.: PLV... 259AS (chosen finish anod. silver) PLVAA 259AS.

OFF-CENTRE HOLES ON DEMAND

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **0,93 lm** - pack. **20 Pcs** SELF PACK

Article	Width mm	€/Pc	
PLV... 259FS	25	5,30	
PLV... 359FS	35	6,24	
PLV... 389FS	38	6,57	
PLV... 509FS	50	8,12	*

PLV... 259FS-359FS available in the colours: AA - AO (AB, AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code.
E.g.: PLV... 359FS (chosen finish anod. silver) PLVAA 359FS.

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **1,03 lm** - pack. **20 Pcs** SELF PACK

Article	Width mm	€/Pc	
PLV... 3510AS	35	8,03	*

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **1,03 lm** - pack. **20 Pcs** SELF PACK

Article	Width mm	€/Pc	
PLV... 3510FS	35	6,85	*

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **1,66 lm** - pack. **20 Pcs** SELF PACK

Article	Width mm	€/Pc	
PLV... 3516AS	35	12,87	*

ANODIZED ALUM. punched with screws and screw anchors thermo packed - bar length **1,66 lm** - pack. **20 Pcs** SELF PACK

Article	Width mm	€/Pc	
PLV... 3516FS	35	10,65	*

The code of the selected colour must be added to the article code. E.g.: PLV... 3510AS (chosen colour anodized gold alum.) PLVAO 3510AS.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.


ON DEMAND MINIMUM 100 PCS by color and height



AB - Anodized bronze alum. **AT** - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anod. sand aluminium


(Prices to be agreed. Production delay 4/5 weeks)

1. Choose the suitable profile and cut it to the necessary length.
Adhesive version
2. Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
2. Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

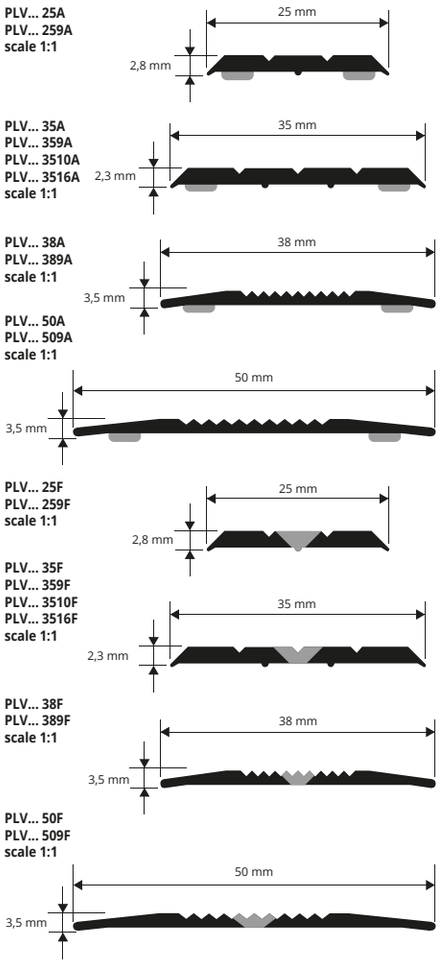

threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

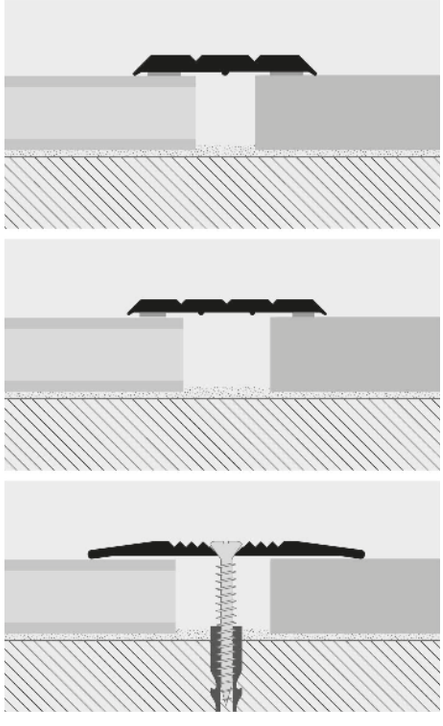

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROMOQUETTE

ANODIZED GOLD AND SILVER
ALUMINIUM WITH OR WITHOUT SELF-ADHESIVE


PROMOQUETTE is an anodized aluminium rounded edging profile with tap-down edge, which is ideal for the clean-cut, elegant finishing of carpeted floors. The carpeting is inserted inside the curved/rounded section, which is then pressed down until the carpeting is secured, thereby also protecting the edge. **PROMOQUETTE** ensures a perfect finish, covering any flaws created during laying and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the floor.

carpet gripper profiles

PMQ... 12/ 126/2
scale 1:1




PMQ... 12A /127AS /128AS /129AS
scale 1:1







EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

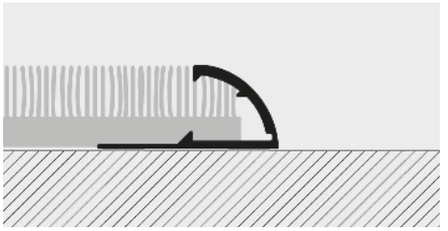

1. Cut the profile to the necessary length. **2.** Fix the "PROMOQUETTE" to the floor using screws/nails or double-sided adhesive tape. **3.** Insert the carpeting into the curved side with the necessary tension. **4.** Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

ANODIZED GOLD and SILVER ALUMINUM ADHESIVE
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PMQ... 12A	7/12	5,76	15,55
PMQ... 12	7/12	4,42	11,93

"A" at the end of the product code = Item with adhesive
Available in the colours: AA - AO. (AB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PMQ... 12A (chosen colour Anodized gold alum.) PMQAO 12A.

ANODIZED GOLD and SILVER ALUMINUM
thermo packed - bar length **0,67 lm** - pack. **2 Pcs**

Article	H mm	€/Pc
PMQ... 126/2	7/12	7,78

ANODIZED SILVER ALUMINUM ADHESIVE SELF PACK
thermo packed - bar length **0,73 lm** - pack. **20 Pcs**

Article	H mm	€/Pc
PMQAA 127AS	7/12	5,30 *

ANODIZED GOLD, SILVER and BRONZE ALUM. ADHESIVE SELF PACK
thermo packed - bar length **0,83 lm** - pack. **20 Pcs**

Article	H mm	€/Pc
PMQ... 128AS	7/12	5,97 *

ANODIZED GOLD, SILVER and BRONZE ALUM. ADHESIVE SELF PACK
thermo packed - bar length **0,93 lm** - pack. **20 Pcs**

Article	H mm	€/Pc
PMQ... 129AS	7/12	6,51 *

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.

ON DEMAND MINIMUM 100 PCS by color and height



AB - Anodized bronze alum.

(Prices to be agreed. Production delay 4/5 weeks)

PROMOQUETTE FIX

ANODIZED GOLD AND SILVER
ALUMINIUM PUNCHED OR NOTCHED


PROMOQUETTE FIX s a profile in anodized aluminium made as a terminal profile to edge carpeted floors held under tension or simply laid with double-sided adhesive tape. Two versions are available: notched or with holes/ notches for laying under tension and then permanently fixed with screws/nails; or the punched version to edge without holding under tension. **PROMOQUETTE FIX** ensures an impeccable finish to the edge of carpeting that is not always perfectly cut. It speeds up laying time and the result is attractive.

carpet gripper profiles


PMF... 14F
scale 1:1




PMF... 14D
scale 1:1

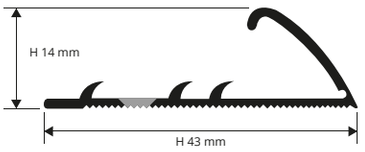



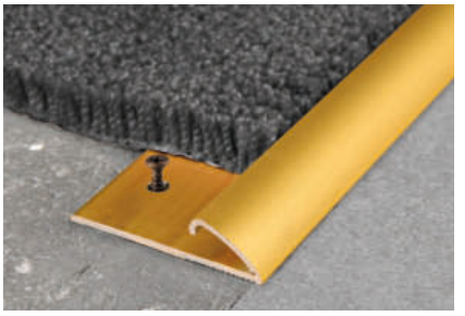

EXAMPLES OF LAYING

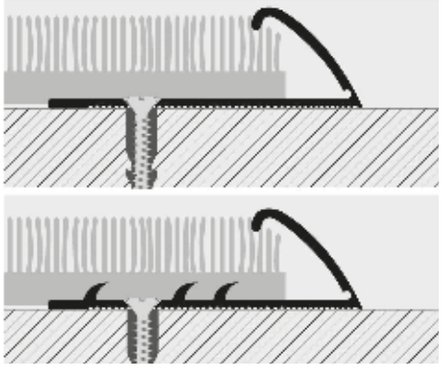

ANODIZED GOLD and SILVER ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PMF... 14F	14	4,97	13,42
PMFAA 14D	14	7,51	20,28 *

"D" at the end of the product code = Item with notched
"F" at the end of the product code = Punched Item

Available in the colours: AO - AA. (AB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PMF... 14F (chosen colour anodized gold alum.) PMFAO 14F.

INSTRUCTIONS FOR LAYING
1. Cut the profile to the necessary length. **2.** Fix the "PROMOQUETTE FIX" to the floor using screws/nails. **3.** Insert the carpeting into the curved side with the necessary tension. **4.** Apply pressure evenly over the edge of the profile until it closes over and secures the carpeting.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.

ON DEMAND MINIMUM 100 PCS by color and height



AB - Anodized bronze alum.

(Prices to be agreed. Production delay 4/5 weeks)

© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

***= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROMOQUETTE GIN is a profile in anodized aluminium with tap-down edge for edging or joining floors in carpeting, PVC, linoleum, ceramic tiles/wood, etc. Two versions are available: punched for laying under tension and then permanently fixed with screws/nails or the adhesive version for laying with glue and which can be taken up if required. **PROMOQUETTE GIN** guarantees an impeccable finish and offers the dual function of both joining and of covering any flawed edges of the floors. It speeds up laying time and the result is attractive.

PROMOQUETTE GIN

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED





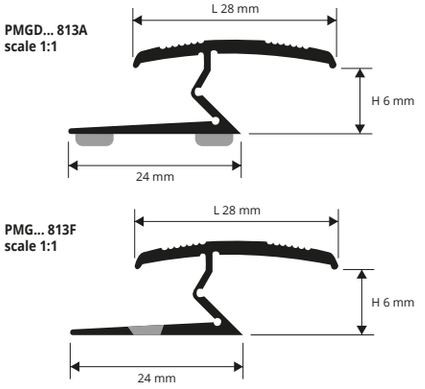

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM ADHESIVE thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PMGAA 813A	8/13	9,52	25,70	
PMGAO 813A	8/13	9,52	25,70	
PMGAB 813A	8/13	9,52	25,70	
PMGAT 813A	8/13	9,52	25,70	*
PMGCH 813A	8/13	9,52	25,70	*
PMGSB 813A	8/13	9,52	25,70	*

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code.
E.g.: PMG... 813F (chosen colour anodized gold alum.) PMGAO 813F.

ANODIZED GOLD, SILVER AND BRONZE ALUMINIUM PUNCHED thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PMGAA 813F	8/13	7,51	20,28	
PMGAO 813F	8/13	7,51	20,28	
PMGAB 813F	8/13	7,51	20,28	
PMGAT 813F	8/13	7,51	20,28	*
PMGCH 813F	8/13	7,51	20,28	*
PMGSB 813F	8/13	7,51	20,28	*

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum. **AB** - Anodized bronze alum.


ON DEMAND MINIMUM 100 PCS by color and height



AT - Anodized titanium alum. **CH** - Anodized champagne alum. **SB** - Anodized sand alum.

(Prices to be agreed. Production delay 4/5 weeks)

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

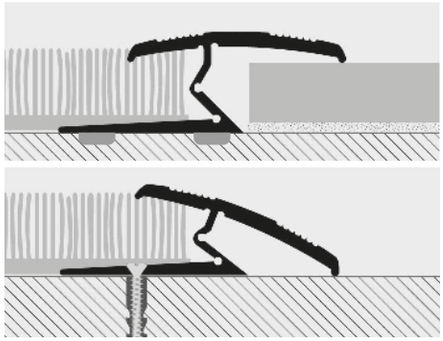


1. Cut the profile to the necessary length. **2.** Fix the "PROMOQUETTE GIN" to the floor using screws/nails or two-sided adhesive tape. **3.** Lay the required floor, inserting the carpeting, PVC, linoleum, ceramic tile or wood under the upper curved part. **4.** Apply pressure evenly on the edges of the profile until they close and secure the flooring on both sides.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROGRESS®
PROFILES

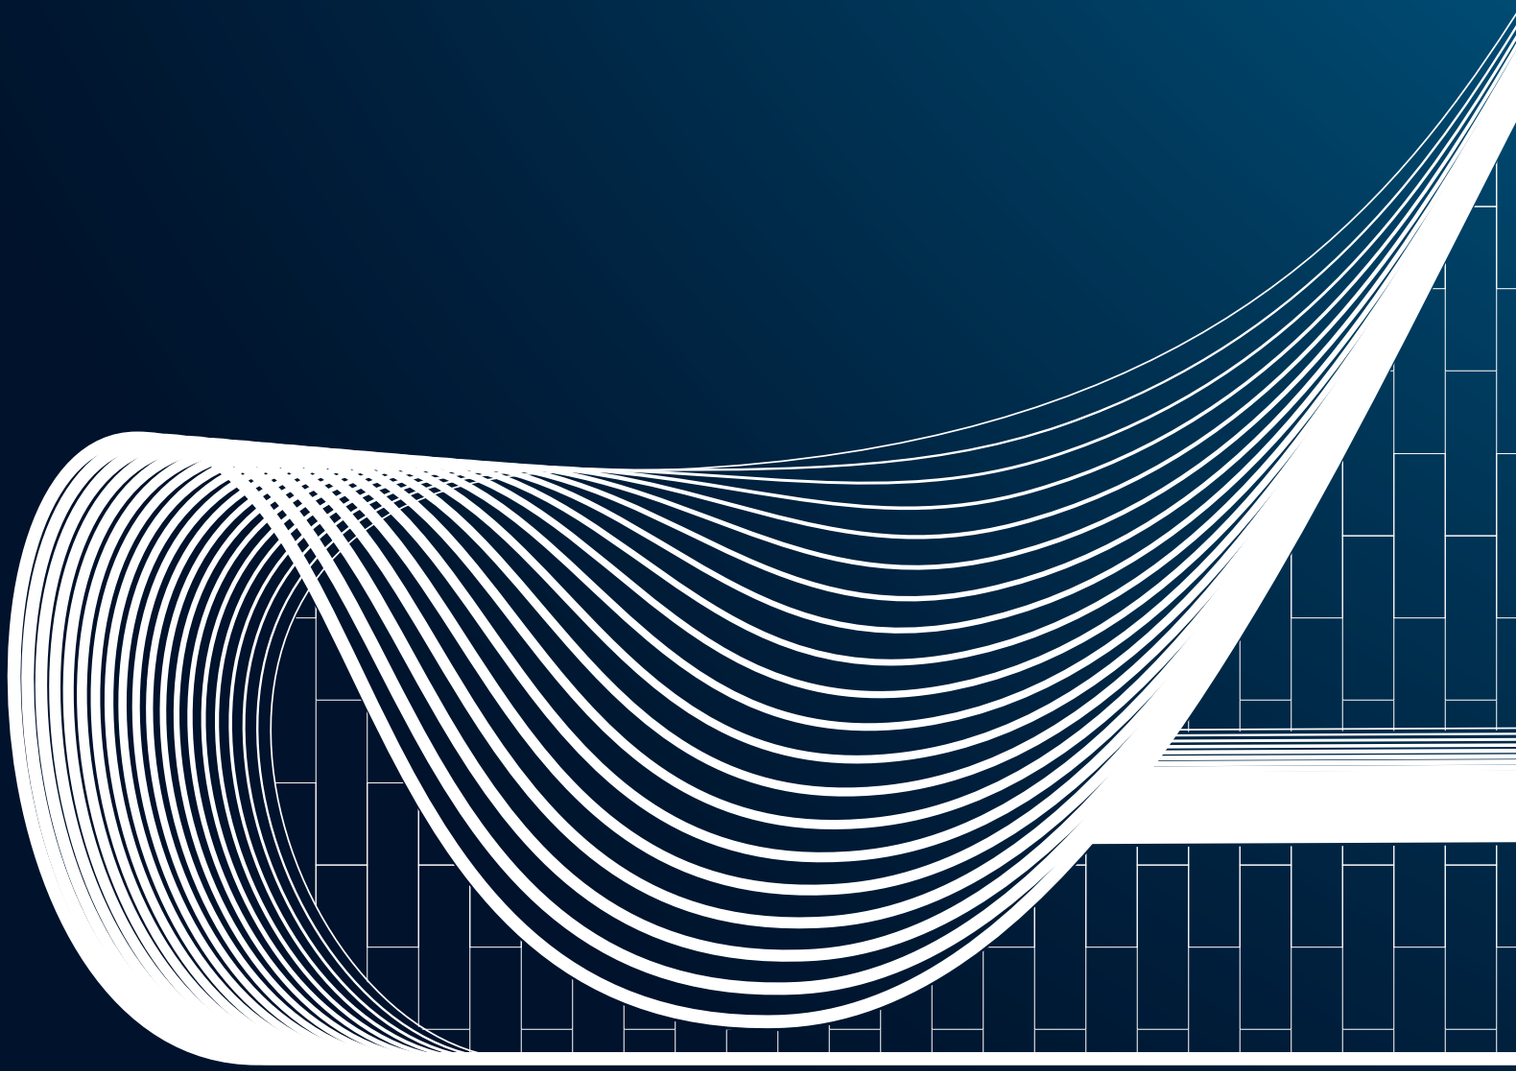

An interpretation of:
Heydar Aliyev Cultural Center, Zaha Hadid, BAKU (Azerbaijan), 2012

PROFILES & SYSTEMS

CURVE AND BENDABLE PROFILES

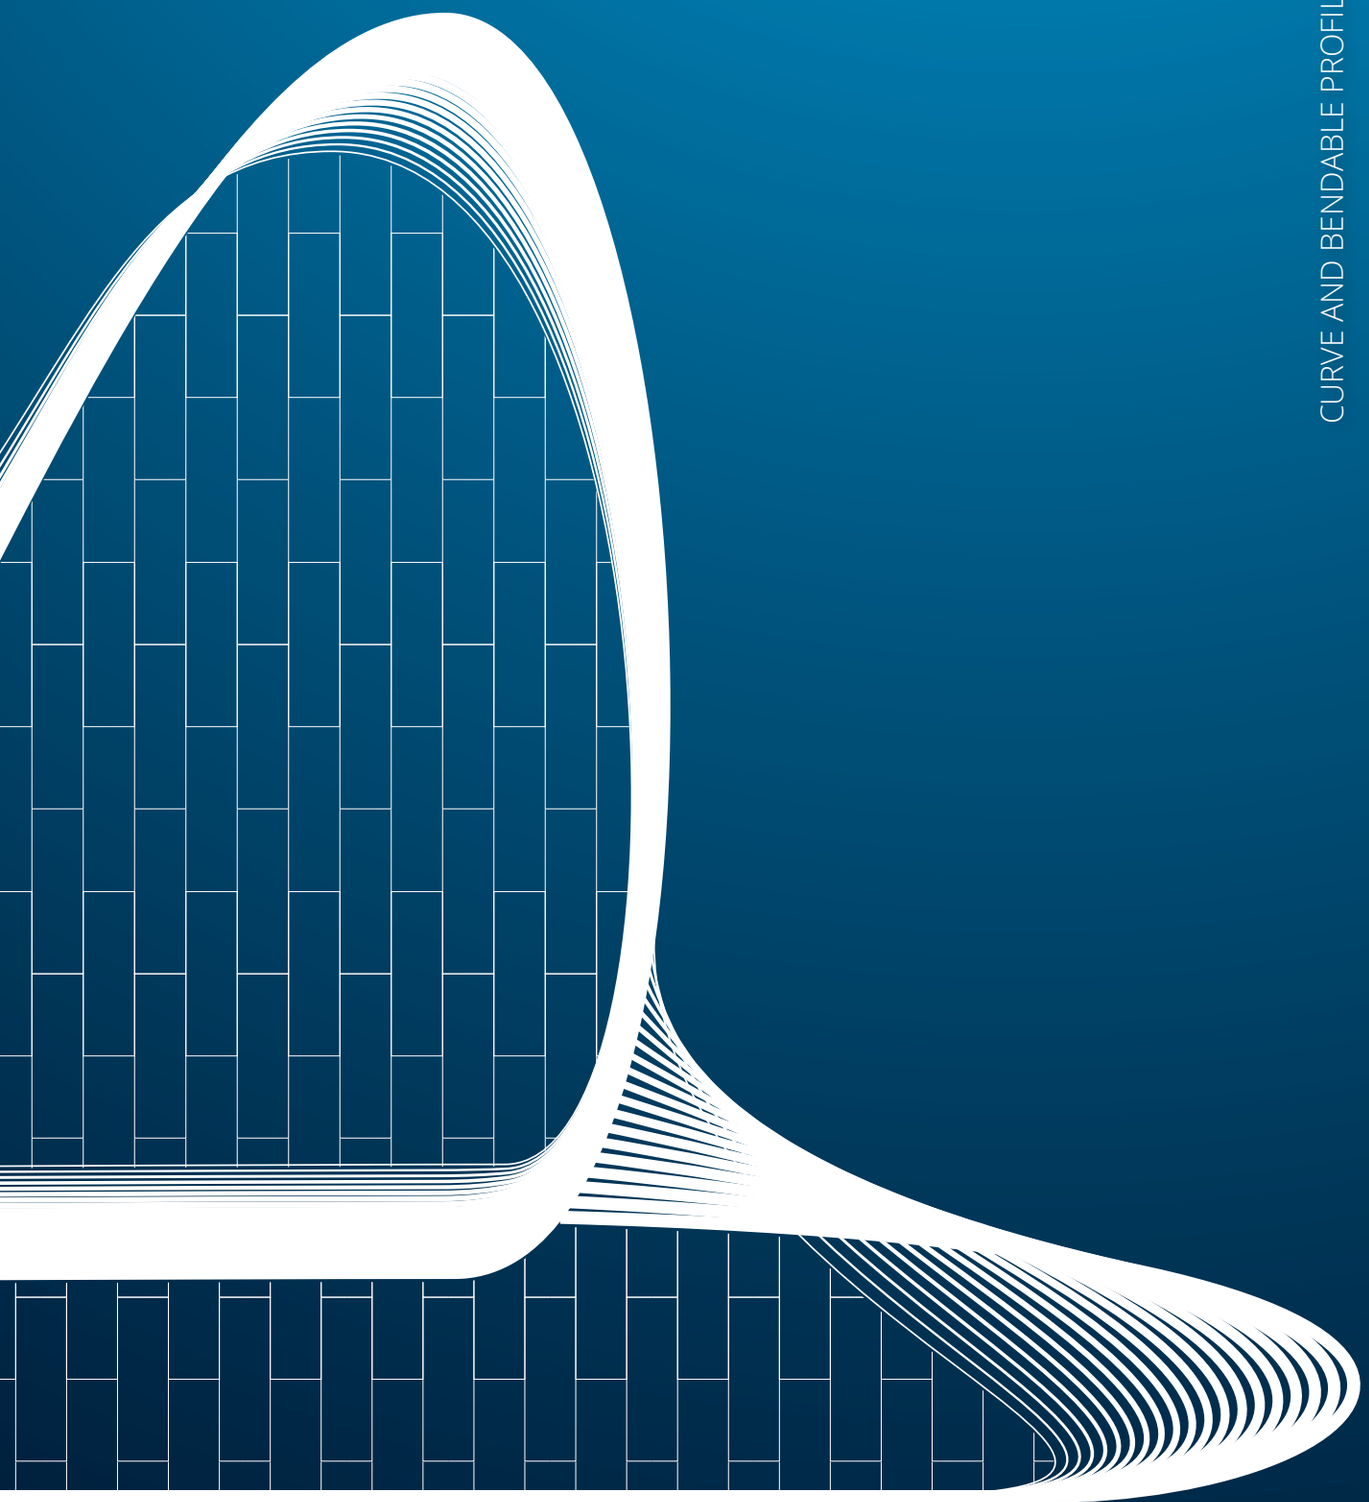

PRO CURVE LINE


PRO CURVE LINE are a range of profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. The profiles in the PRO CURVE LINE may be used as transition or edging profiles or to create joining and expansion joints on any type of ceramic, parquet, wood, laminate/melamine coated wood, marble, carpeted, Palladian, Venetian floor, etc.
The profiles are made in AISI 304/1.4301-V2A stainless steel, aluminium and brass and may be easily shaped by using the PROCURVE MACHINE to bend the profiles mechanically.




PROTERMINAL CURVE

STAINLESS STEEL AISI 304/1.4301-V2A
CURVABLE

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing them to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm. The product is made in stainless steel AISI 304/1.4301-V2A in various heights (6, 8, 10, 12,5, 15 and 20 mm) in 2.7 m bars.

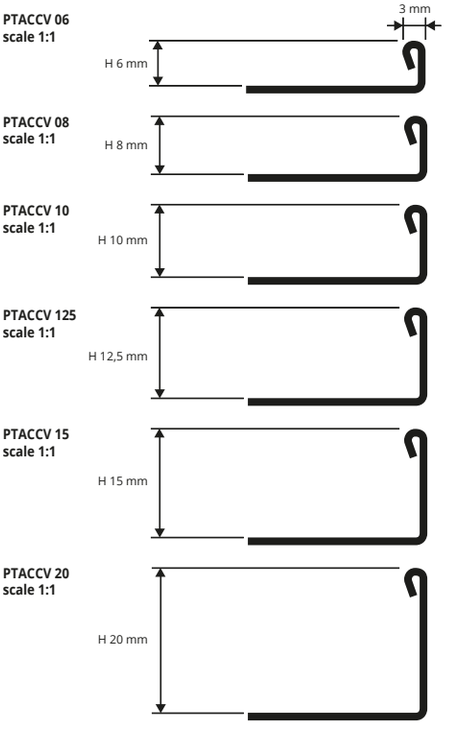



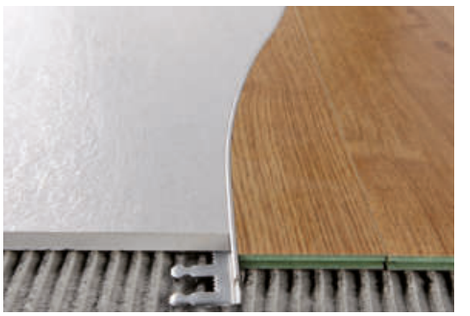

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs - 54 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PTACCV 06	6	11,50	31,05
PTACCV 08	8	11,82	31,91
PTACCV 10	10	12,26	33,10
PTACCV 125	12,5	12,72	34,34
PTACCV 15	15	14,95	40,37
PTACCV 20	20	15,83	42,74


For hand-brushed version + 30% gross price.

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A

EXAMPLES OF LAYING

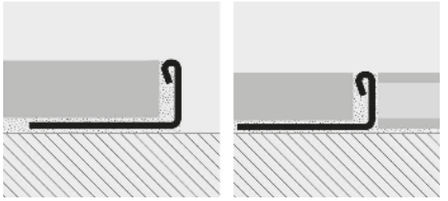

LAYING INSTRUCTIONS
1. Choose the "PROTERMINAL CURVE" with the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. If it is used as a joining profile, bring each floor to the edge of the profile.



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS


© 2023 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

PROTERMINAL CURVE

NATURAL BRASS CURVABLE

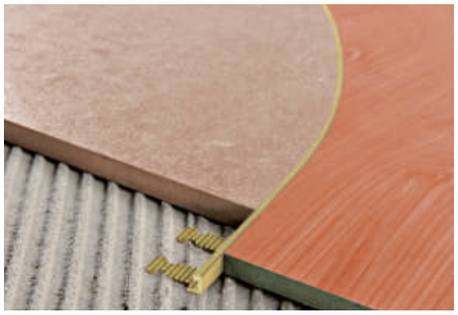

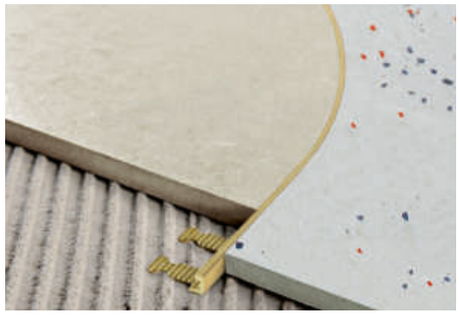

NATURAL BRASS CURVABLE thermo packed 10pcs
bar length **2,7 lm** - pack. **40 Pcs - 108 lm (H:15; 20 mm - 54 lm)**

Article	H mm	€/lm	€/Pc	
PTONCV 06	6	10,54	28,46	*
PTONCV 08	8	11,09	29,94	*
PTONCV 10	10	11,67	31,51	
PTONCV 125	12,5	12,57	33,94	
PTONCV 15	15	13,49	36,42	
PTONCV 20	20	15,47	41,77	


COLOURS



ON - Natural brass



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

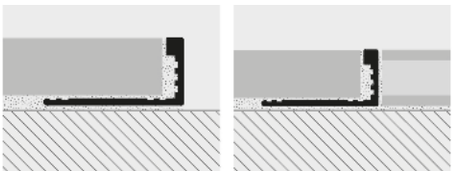

1. Choose the "PROTERMINAL CURVE" in the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.

PTONCV 06
scale 1:1



PTONCV 08
scale 1:1




PTONCV 10
scale 1:1



PTONCV 125
scale 1:1



PTONCV 15
scale 1:1



PTONCV 20
scale 1:1




© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERMINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 3 mm of sandable profile. The product is made in natural aluminium in 2.7 m bars and heights of 6, 8, 10, 12.5, 15 and 20 mm.

PROTERMINAL CURVE

NATURAL ALUMINIUM CURVABLE

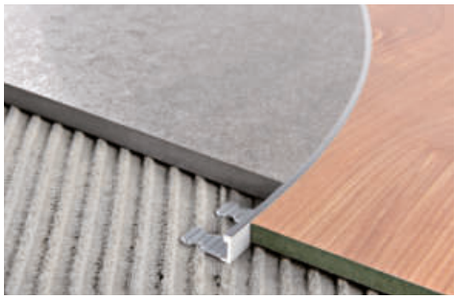



NATURAL ALUMINIUM CURVABLE thermo packed 10 Pcs
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PTANCV 06	6	4,16	11,23
PTANCV 08	8	4,37	11,80
PTANCV 10	10	4,48	12,10
PTANCV 125	12,5	4,63	12,50
PTANCV 15	15	4,97	13,42
PTANCV 20	20	5,64	15,23

ANODIZED SILVER ALUMINIUM CURVABLE thermo packed 10 Pcs
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PTAACV 08	8	6,44	17,39
PTAACV 10	10	6,63	17,90
PTAACV 125	12,5	6,98	18,85
PTAACV 15	15	7,28	19,66


COLOURS




AN - Natural aluminium **AA** - Anodized silver alum.



EXAMPLES OF LAYING (for laying instructions, see above)

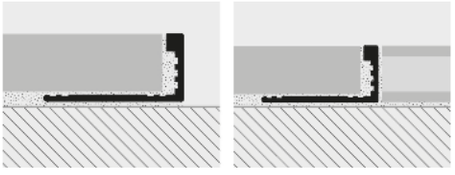

PTANCV 06
scale 1:1




PTANCV 08
scale 1:1




PTANCV 10
scale 1:1



PTANCV 125
scale 1:1



PTANCV 15
scale 1:1



PTANCV 20
scale 1:1



= *News 2023*

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.





© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROELEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8-10-12.5 and 14 mm.

PROELEGANT CURVE

NATURAL BRASS
CURVABLE

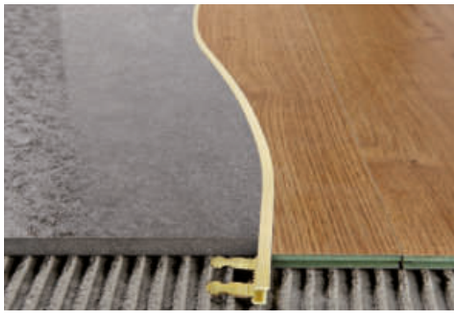

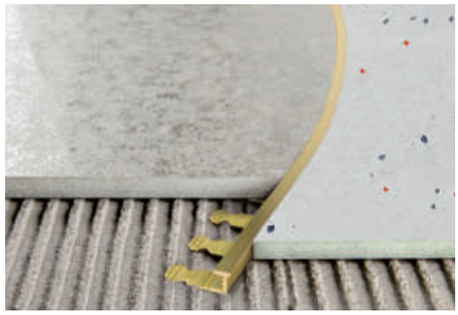

PELONCV 08
scale 1:1



PELONCV 10
scale 1:1



PELONCV 125
scale 1:1



PELONCV 14
scale 1:1



NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PELONCV 08	8	17,57	47,44	*
PELONCV 10	10	18,19	49,11	
PELONCV 125	12,5	18,83	50,84	
PELONCV 14	14	20,37	55,00	*


COLOURS



ON - Natural brass



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

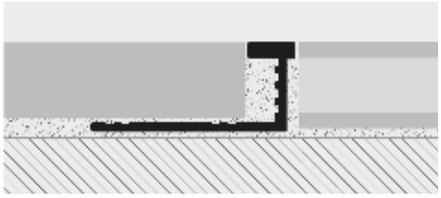

1. Choose the "PROELEGANT CURVE" in the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROELEGANT CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 6 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8-10-12.5 mm.

PROELEGANT CURVE

ANODIZED SILVER ALUMINIUM
CURVABLE



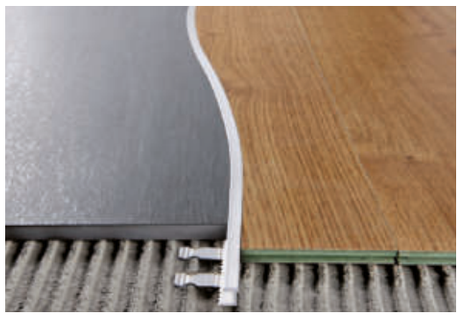

PELAACV 08
scale 1:1



PELAACV 10
scale 1:1



PELAACV 125
scale 1:1




ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc
PELAACV 08	8	8,32	22,46
PELAACV 10	10	8,59	23,19
PELAACV 125	12,5	8,99	24,27



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

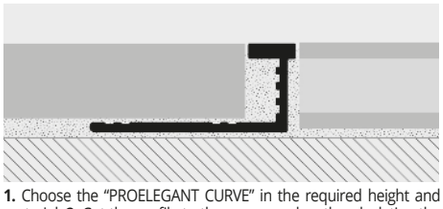

1. Choose the "PROELEGANT CURVE" in the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.).


***= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.


PROFINAL CURVE

NATURAL BRASS
CURVABLE

PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in natural brass in 2.7 m bars and heights of 8, 10 and 12.5 mm.

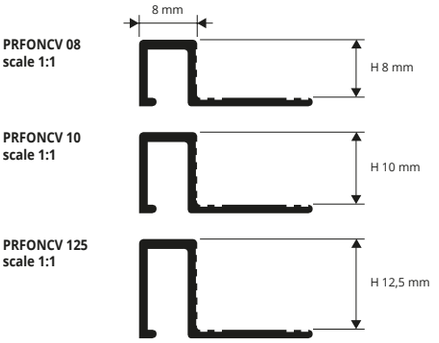



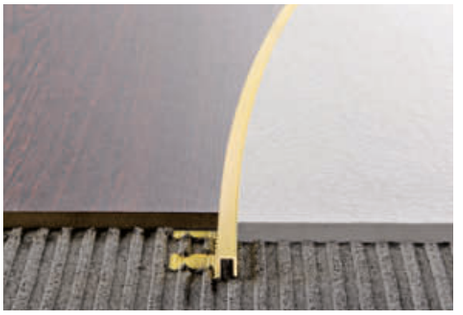


NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PRFONCV 08	8	18,96	51,19	*
PRFONCV 10	10	21,08	56,92	
PRFONCV 125	12,5	23,05	62,24	

COLOURS

ON - Natural brass

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

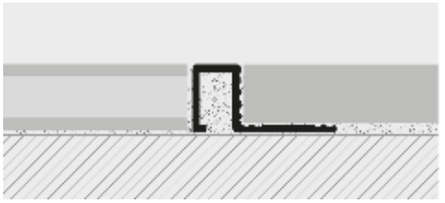


1. Choose the "PROFINAL CURVE" in the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.




PROFINAL CURVE

ANODIZED SILVER ALUMINIUM
CURVABLE

PROFINAL CURVE are a range of edging and joining profiles that may be curved/shaped. They feature a special system of perforations allowing them to be bent easily so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements and with a separation of 8 mm of sandable profile. The product is made in silver anodized aluminium in 2.7 m bars and heights of 8, 10 and 12.5 mm.

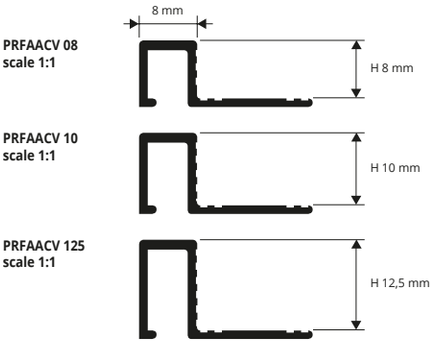

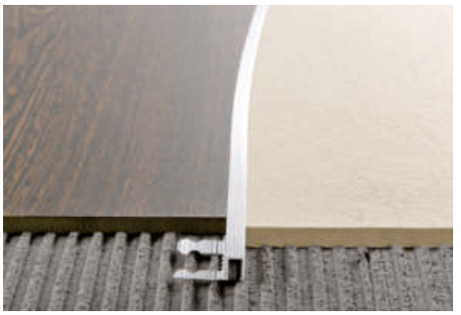




ANODIZED SILVER ALUMINIUM CURVABLE
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PRFAACV 08	8	8,99	24,27	*
PRFAACV 10	10	9,46	25,54	
PRFAACV 125	12,5	9,80	26,46	

COLOURS

AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

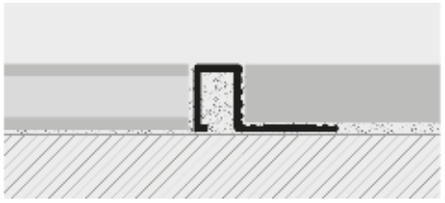

1. Choose the "PROFINAL CURVE" in the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive. Any oxidation marks may be easily removed with specific chemical products (Sidol-Smac, etc.). If it is used as a joining profile, bring each floor to the edge of the profile.



© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in natural brass, height H 8 - H 10mm, length 2.7 lm.

PROJOLLY CURVE

NATURAL BRASS CURVABLE





PJONCV 08
scale 1:1



PJONCV 10
scale 1:1



BENDABLE


NATURAL BRASS CURVABLE thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PJONCV 08	8	19,94	53,84	*
PJONCV 10	10	21,23	57,32	


COLOURS

ON - Natural brass

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

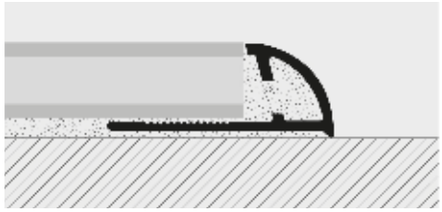

1. Choose the "PROJOLLY CURVE" in the required height and material.
2. Cut the profile to the necessary length, calculating the total length.
3. Bend the profile mechanically with the PROCURVE MACHINE.
4. If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

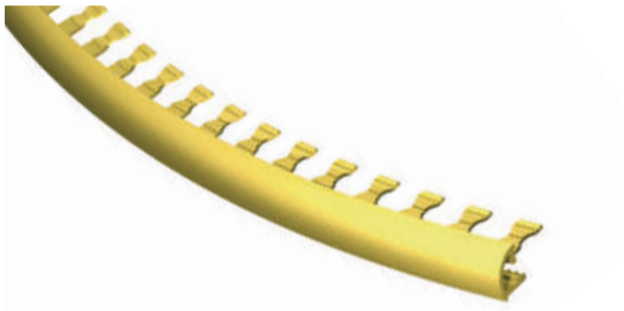

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROJOLLY CURVE is a range of terminal transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements. It is made in anodized aluminium, height H 8 -H 10mm, length 2.7 lm.

PROJOLLY CURVE

ANODIZED SILVER ALUMINIUM CURVABLE





PJAACV 08
scale 1:1



PJAACV 10
scale 1:1




ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PJAACV 08	8	7,26	19,60	*
PJAACV 10	10	7,72	20,84	


COLOURS

AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

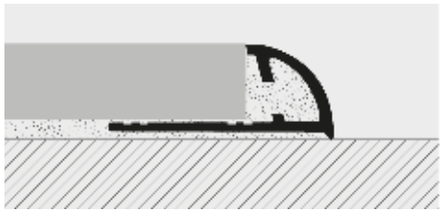

1. Choose the "PROJOLLY CURVE" in the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

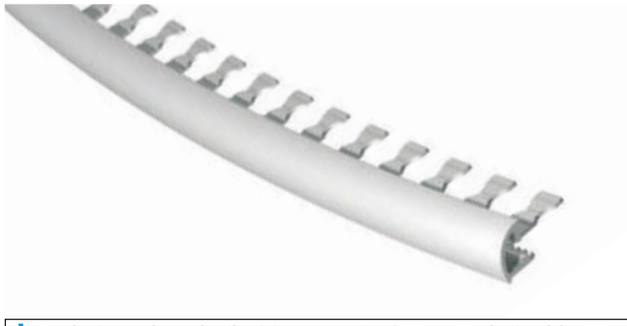

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

TERMINAL CURVE

ANODIZED SILVER ALUMINIUM
AND 10 WOOD FINISHES – CURVABLE

TERMINAL CURVE is a range of edging and joining profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements.Recommended for edging and/or joining floating floors in wood & melamine-laminated wood. It is made in anodized aluminium and in 10 wood effect finishes; it comes in various heights, length 2.7m.

PINT... CV 07
scale 1:1




PINT... CV 09
scale 1:1



PINT... CV 11
scale 1:1



PINT... CV 15
scale 1:1





ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PINTAACV 07	7	7,85	21,20	
PINTAACV 09	9	7,97	21,52	
PINTAACV 11	11	8,12	21,92	
PINTAACV 15	15	8,73	23,57	*




ALUMINIUM 10 WOOD FINISHES thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc	
PINT... CV 09	9	13,53	36,53	*
PINT... CV 15	15	15,16	40,93	*

Available in the wood finishes: 04W-05W-07W-08W-09W-10W-11W-28W-29W-30W.
The code of the selected colour must be added to the article code.
E.g.: PINT... CV 09 (chosen finish Dark beech) PINT04W CV 09.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

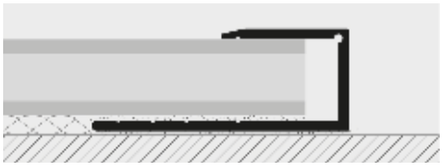

1. Choose the "TERMINAL CURVE" in the required height and material. **2.** Cut the profile to the necessary length, calculating the total length. **3.** Bend the profile mechanically with the PROCURVE MACHINE. **4.** If necessary fix with screws and screw anchors or simply insert the punched base under the floor laid with the same adhesive.

ANODIZED COLOURS ON DEMAND



AO - Anod. gold aluminium | **AB** - Anod.bronze aluminium

WOODEN COLOURS




05W - Light oak (strip) | **08W** - Dark cherry | **10W** - Wengè | **29W** - white oak | **30W** - Rovere grigio | **30W** - Victoria oak | **34W** - Havana oak | **37W** - Carvi oak | **41W** - Ice oak | **42W** - Grace oak

PROCOVER
PROCOVER WOOD


ANODIZED ALUMINIUM
AND WOOD FINISHES – CURVABLE

PROCOVER is a joint-cover profile in anodized aluminium and aluminium covered with a very strong film available in wood finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PCR... 149
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

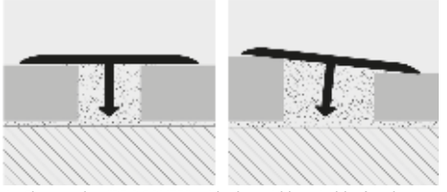

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PCRAA 149	14 x 9	4,08	11,02
PCRDB 149	14 x 9	5,22	14,09



ALUMINIUM WOOD FINISHES thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 x 9	6,60	17,82

Available in the wood finishes: 05W-11W-28W-29W-30W.
The code of the selected colour must be added to the article code.
E.g.: PCRA...149 (chosen finish Dark beech) PCRA 04W 149.

COLOURS



AA - Anodized silver alum. | **DB** - Anodized dark bronze



05W - Light oak (strip) | **11W** - Decapè bleached | **28W** - Aspen oak | **29W** - White oak | **30W** - Grey oak

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements.
Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in natural brass in various heights, length 2.7 lm.

PROSLIDER CURVE

NATURAL BRASS CURVABLE



NATURAL BRASS CURVABLE thermo packed
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm**

Article	H mm	€/lm	€/Pc
PDONCV 08	8	20,37	55,00
PDONCV 10	10	23,19	62,61 *

COLOURS

ON - Natural brass

PDONCV 08
scale 1:1




PDONCV 10
scale 1:1



BENDABLE

LAYING INSTRUCTIONS
1. Choose the "PROSLIDER CURVE" in the required height and material.
2. Cut the profile to the necessary length, calculating the total length.
3. Bend the profile mechanically with the PROCURVE MACHINE.
4. If necessary fix with screws and screw anchors, if used for floating floors in melamine/laminated wood, or simply insert the punched base under the floor laid with the same adhesive.

EXAMPLES OF LAYING

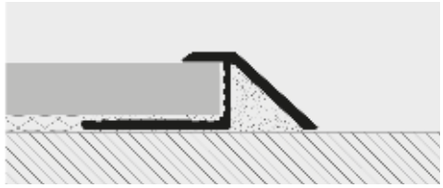

PROSLIDER CURVE is a range of transition profiles that may be curved/shaped, with a special system of perforations allowing it to be bent so that particular geometric shapes may be easily obtained in situ. This allows decorative patterns to be created at will according to technical and aesthetic requirements.
Recommended for joining floating floors in wood, melamine laminated wood and ceramics. It is made in anodized aluminium in various heights, length 2.7 lm.

PROSLIDER CURVE

ANODIZED SILVER ALUMINIUM CURVABLE



ANODIZED SILVER ALUMINIUM CURVABLE thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc
PDAACV 08	8	9,87	26,65
PDAACV 10	10	11,40	30,78


COLOURS

AA - Anodized silver alum.

PDAACV 08
scale 1:1



PDAACV 10
scale 1:1



PROCURVE MACHINE is a manual profile bending machine for profiles of the CURVE SERIES. complete with wheels for all profiles

PROCURVE MACHINE

Article		€/Pc
PCM 08	PROCURVE MACHINE	1058,37




Page	Items / series available for	MINIMUM INSIDE RADIUS	MINIMUM OUTSIDE RADIUS
100	PTACCV	30 cm	30 cm
101	PTONCV	30 cm	30 cm
101	PTANCV	30 cm	30 cm
103	PELONCV	150 cm	300 cm
103	PELAACV	200 cm	300 cm
104	PRFONCV	200 cm	
104	PRFAACV	200 cm	
105	PJONCV	200 cm	300 cm
105	PJAACV	200 cm	300 cm
106	PINTAACV	300 cm	
106	PCRAA 149	80 cm	80 cm
106	PCRA... 149	100 cm	100 cm
107	PDONCV	300 cm	
107	PDAACV	300 cm	

© 2026 All rights reserved by Progress Profiles. Printed in Italy


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

PROGRESS®
PROFILES

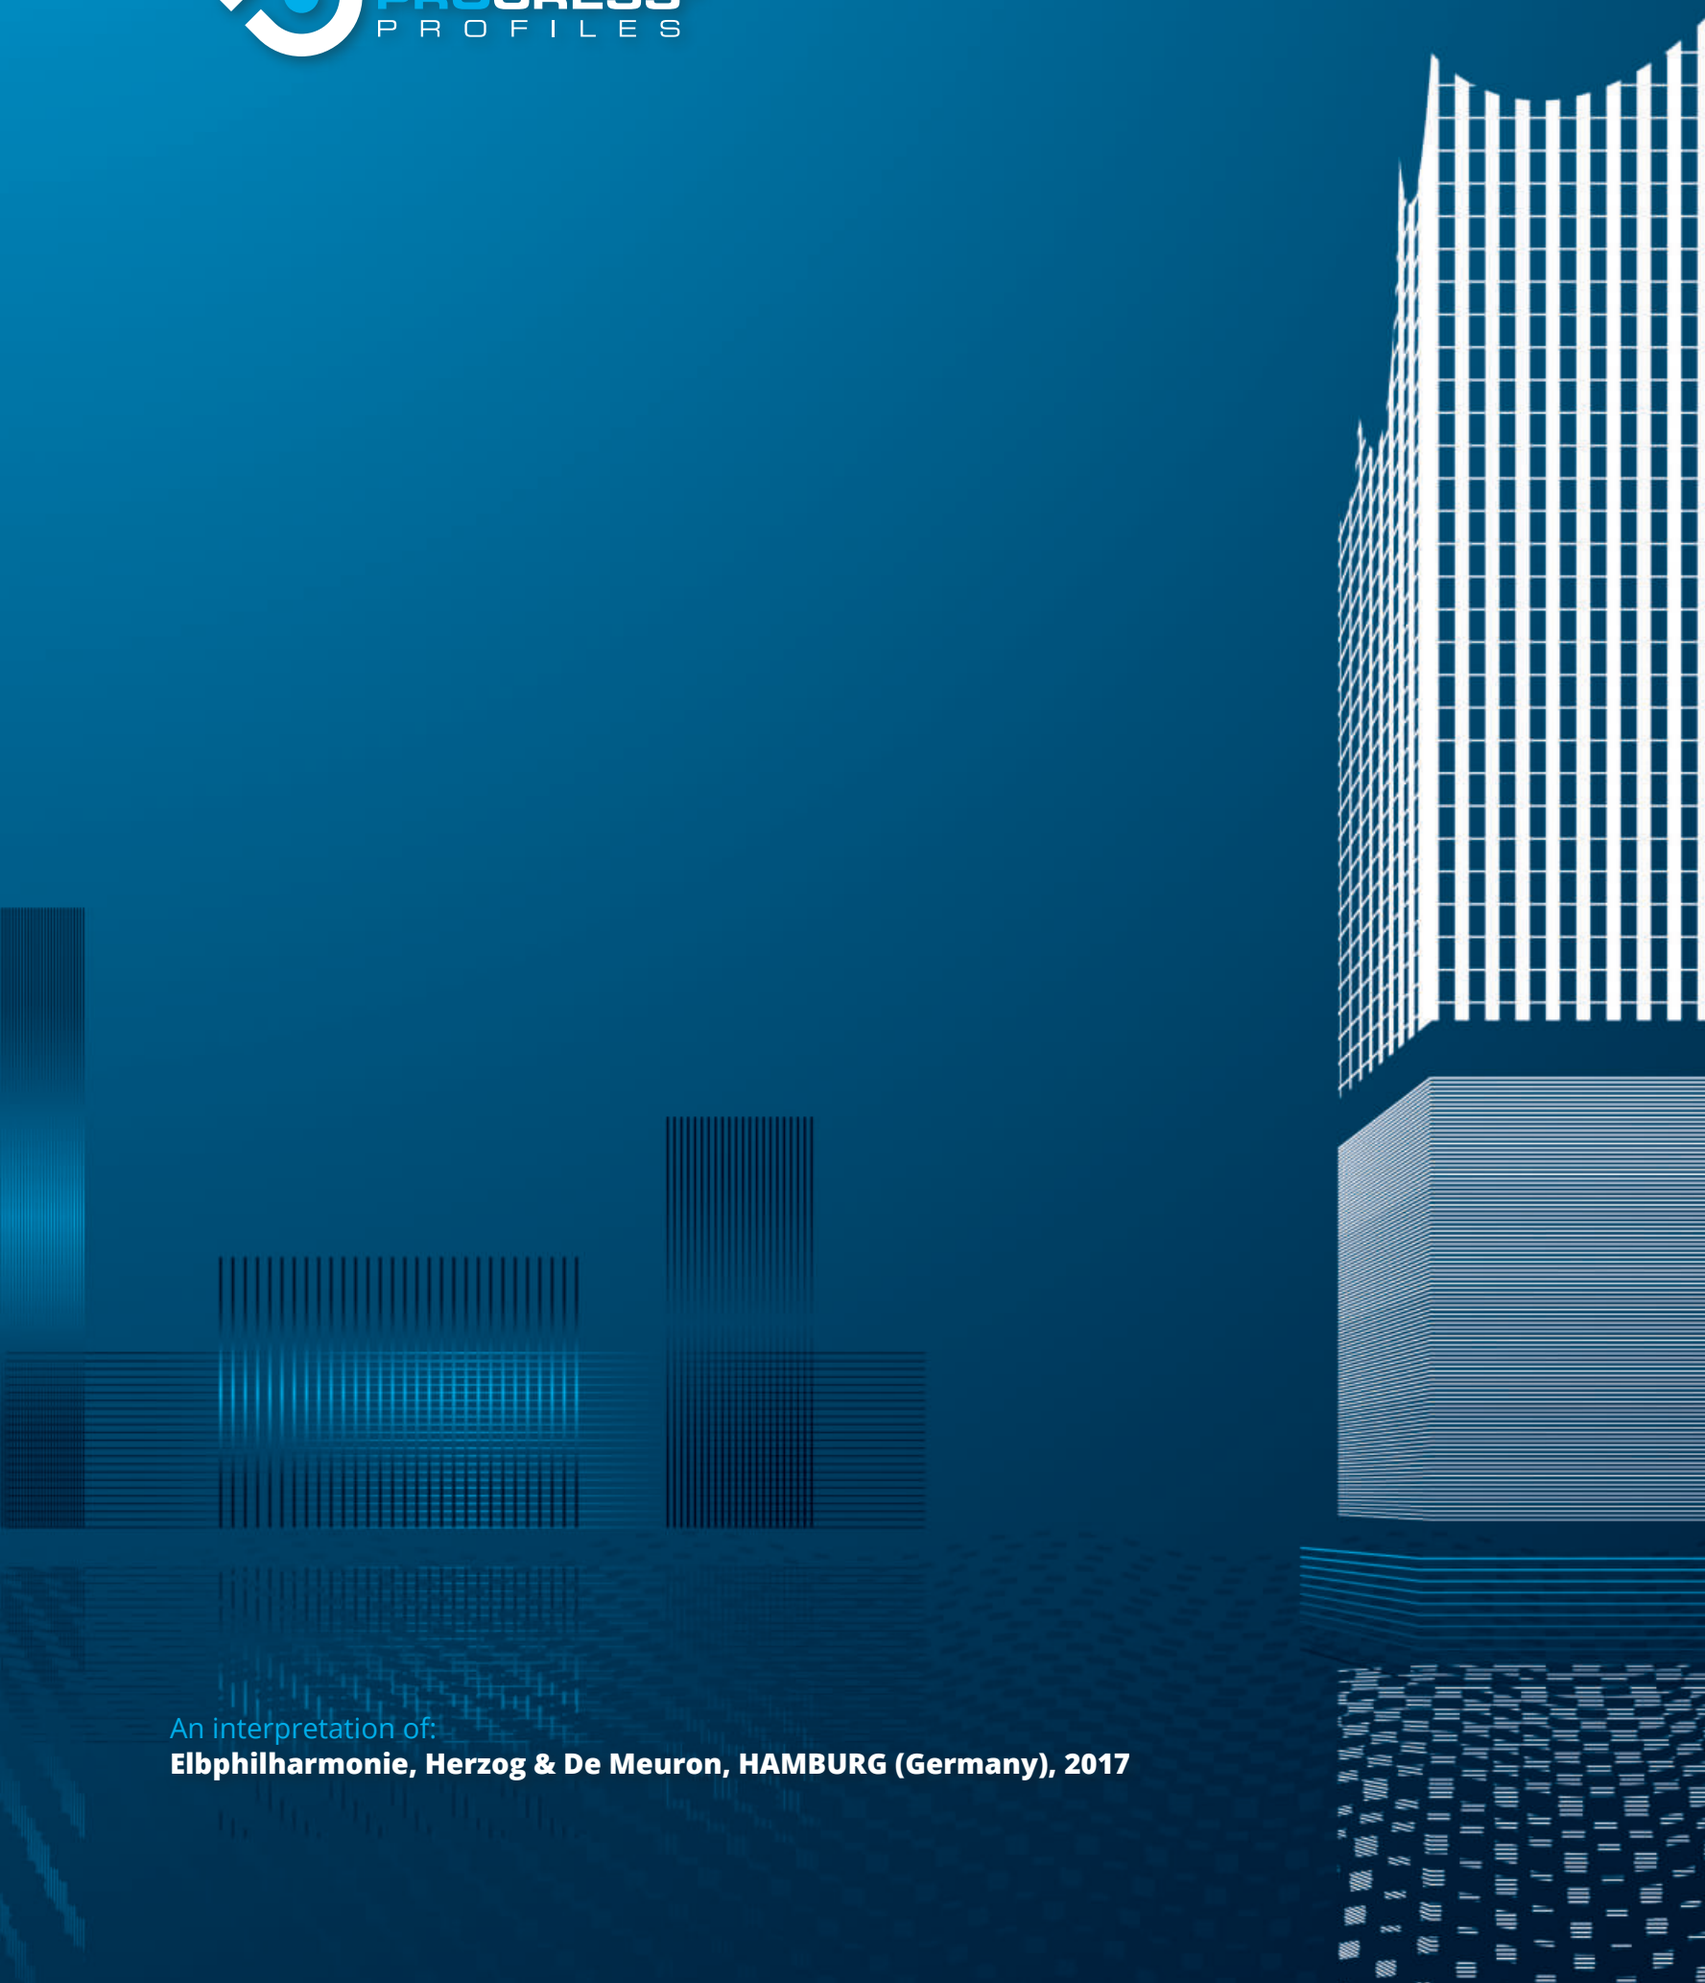

An interpretation of:
Elbphilharmonie, Herzog & De Meuron, HAMBURG (Germany), 2017

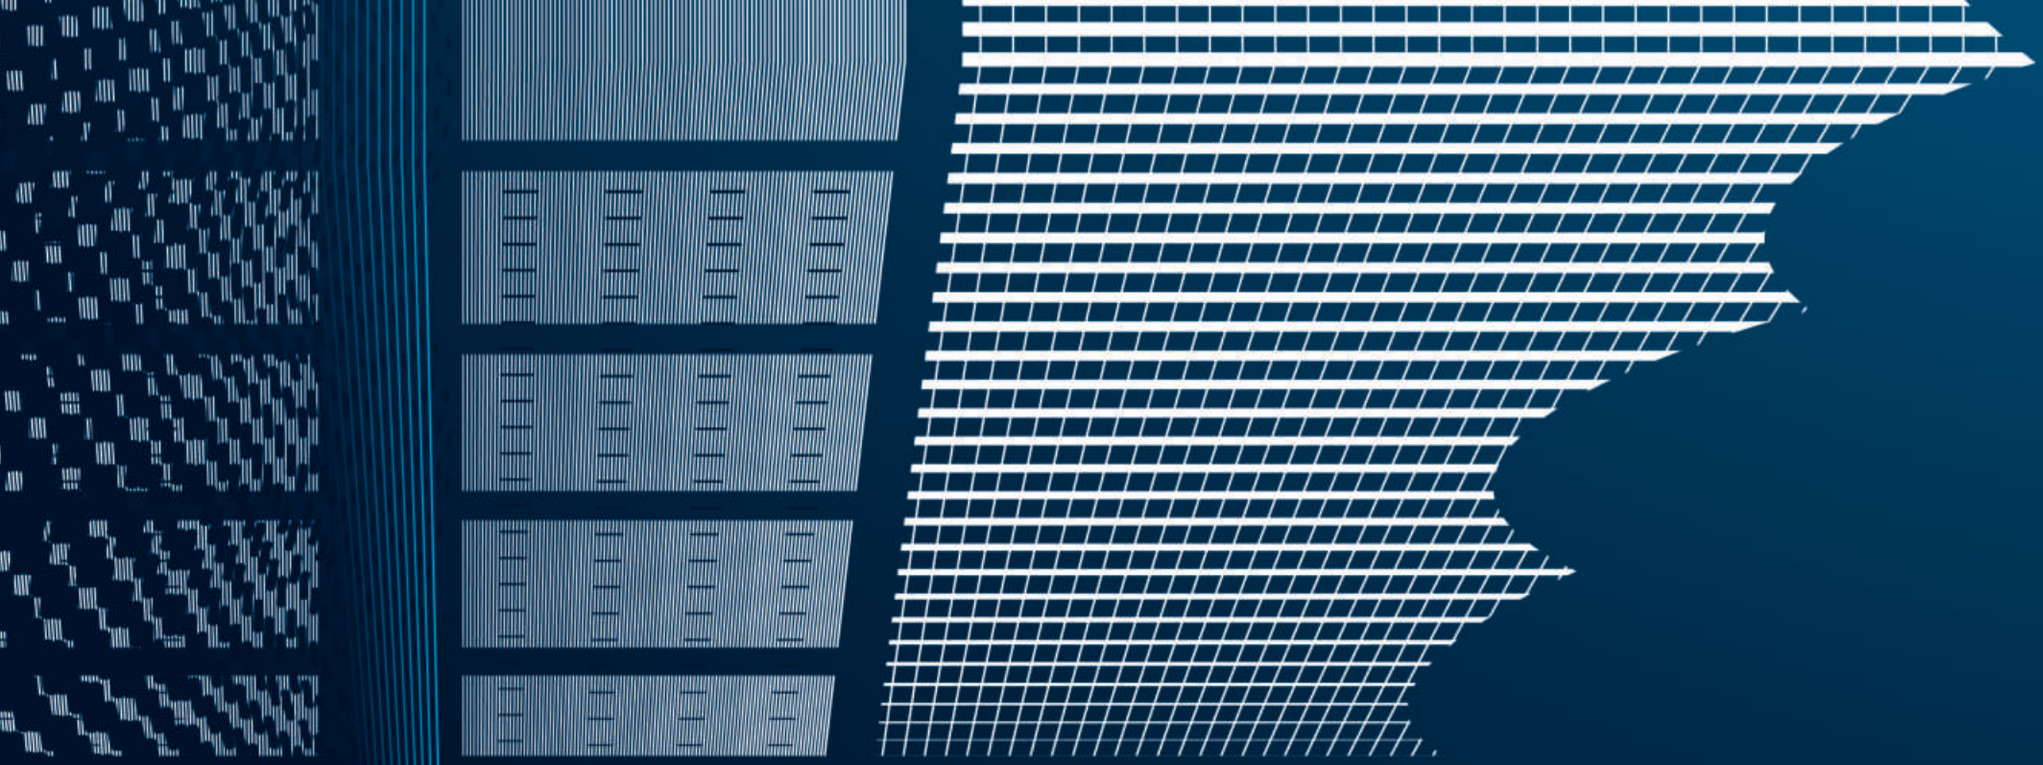

STAIR NOSINGS PROFILES


PROFILES & SYSTEMS

STEPS


PROSTAIR ACC

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A


PROSTAIR ACC is steps protecting technical profile, designed and conceived to make the step scales made of ceramic, porcelain stoneware and others nonskid and non-slip ones ; it's to be applied before the step laying process. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments: available in H 4,5-6- 8-10-12,5-15 mm versions. Combining with the entire series of steel profiles recommended.

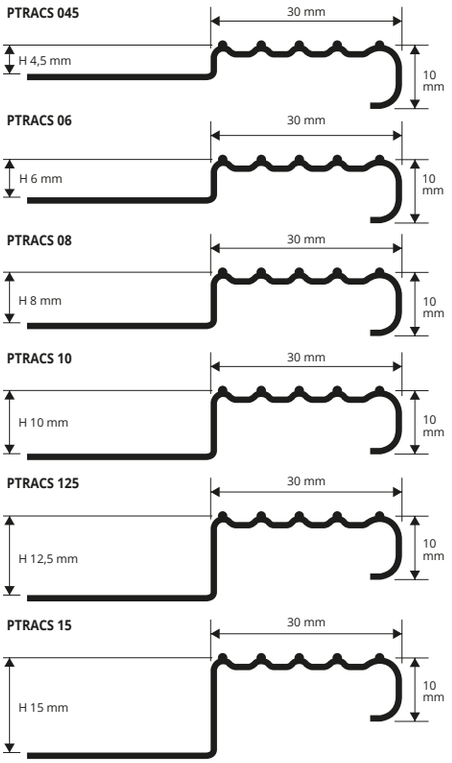

EXAMPLES OF LAYING

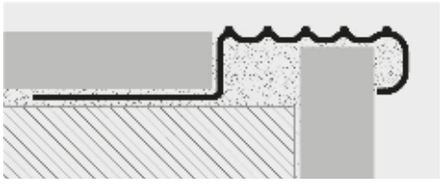



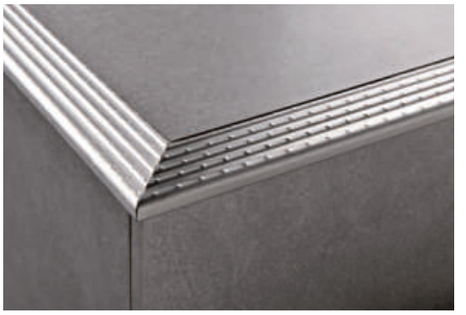

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **15 Pcs - 40,5 lm - 10/10 mm**

Article	H mm	€/lm	€/Pc
PTRACS 045	4,5	16,60	44,82
PTRACS 06	6	17,09	46,14
PTRACS 08	8	17,49	47,22
PTRACS 10	10	18,01	48,63
PTRACS 125	12,5	18,65	50,35
PTRACS 15	15	19,54	52,76


Available in Brushed STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price to be agreed. Production delay 4/5 weeks).

OUT OF STANDARD SIZE PRICES:
For Length 1 lm + 10% (minimum order of 100 pcs)
For Length 1,5 lm + 5% (minimum order of 100 pcs)

END CAP IN VARNISHED PLASTIC BRUSHED STAINLESS STEEL EFFECT
pack. **2 Pcs** (1 right and 1 left)

Article	H mm	€/Pack.
TPTRACS/1	4,5 ÷ 15	3,28

Articles not for sale singly

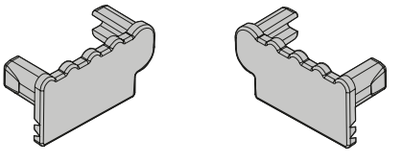

LAYING INSTRUCTIONS
1. Choose the PROSTAR ACC of the desired height and material on the basis of the tile (steps) thickness. **2.** Fix the first rising part laying it down at its appropriate and definitive level. **3.** Fill completely the empty spaces under the profile with the tile adhesive. **4.** Spread out the adhesive on the tread, lay down the profile with its cut base immersed completely in adhesive and align it so that the profile covers the riser tile edge. **5.** Lay down the tread tiles and align them with the superior grazing part of the profile by drawing its back close and filling the inner space with the adhesive.

COLOURS



ACS - Brushed stainless st. AISI 304/1.4301-V2A


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROSTYLE 2610


BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
SELF ADHESIVE OR PUNCHED

PROSTYLE 2610 is steps protecting technical profile, designed and conceived to keep the step scales made of ceramic, porcelain stoneware, wood, marble and others nonskid and non-slip ones ; it's to be applied after the step laying process or in the already present rooms. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments. Available in drilled version or in with adhesive one.

PSYACS 2610F/A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

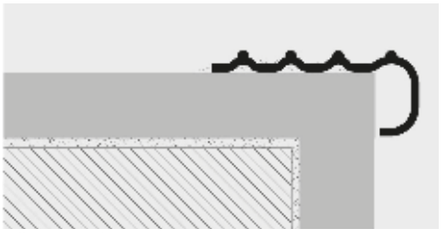

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.





BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A PUNCHED with protective film - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10mm**

Article	H mm	€/lm	€/Pc	
PSYACS 2610F	10	14,00	37,80	*

Available in Brushed STAINLESS STEEL AISI 316L/1.440-V4A (minimum quantity order 100 pcs - price to be agreed. Production delay 4/5 weeks).

OUT OF STANDARD SIZE PRICES:
For Length 1 lm + 10% (minimum order of 100 pcs)
For Length 1,5 lm + 5% (minimum order of 100 pcs)

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A WITH ADHESIVE with protective film - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10mm**

Article	H mm	€/lm	€/Pc	
PSYACS 2610A	10	16,54	44,66	*

COLOURS



ACS - Brushed stainless st. AISI 304/1.4301-V2A


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

© 2023 All rights reserved by Progress Profiles. Printed in Italy

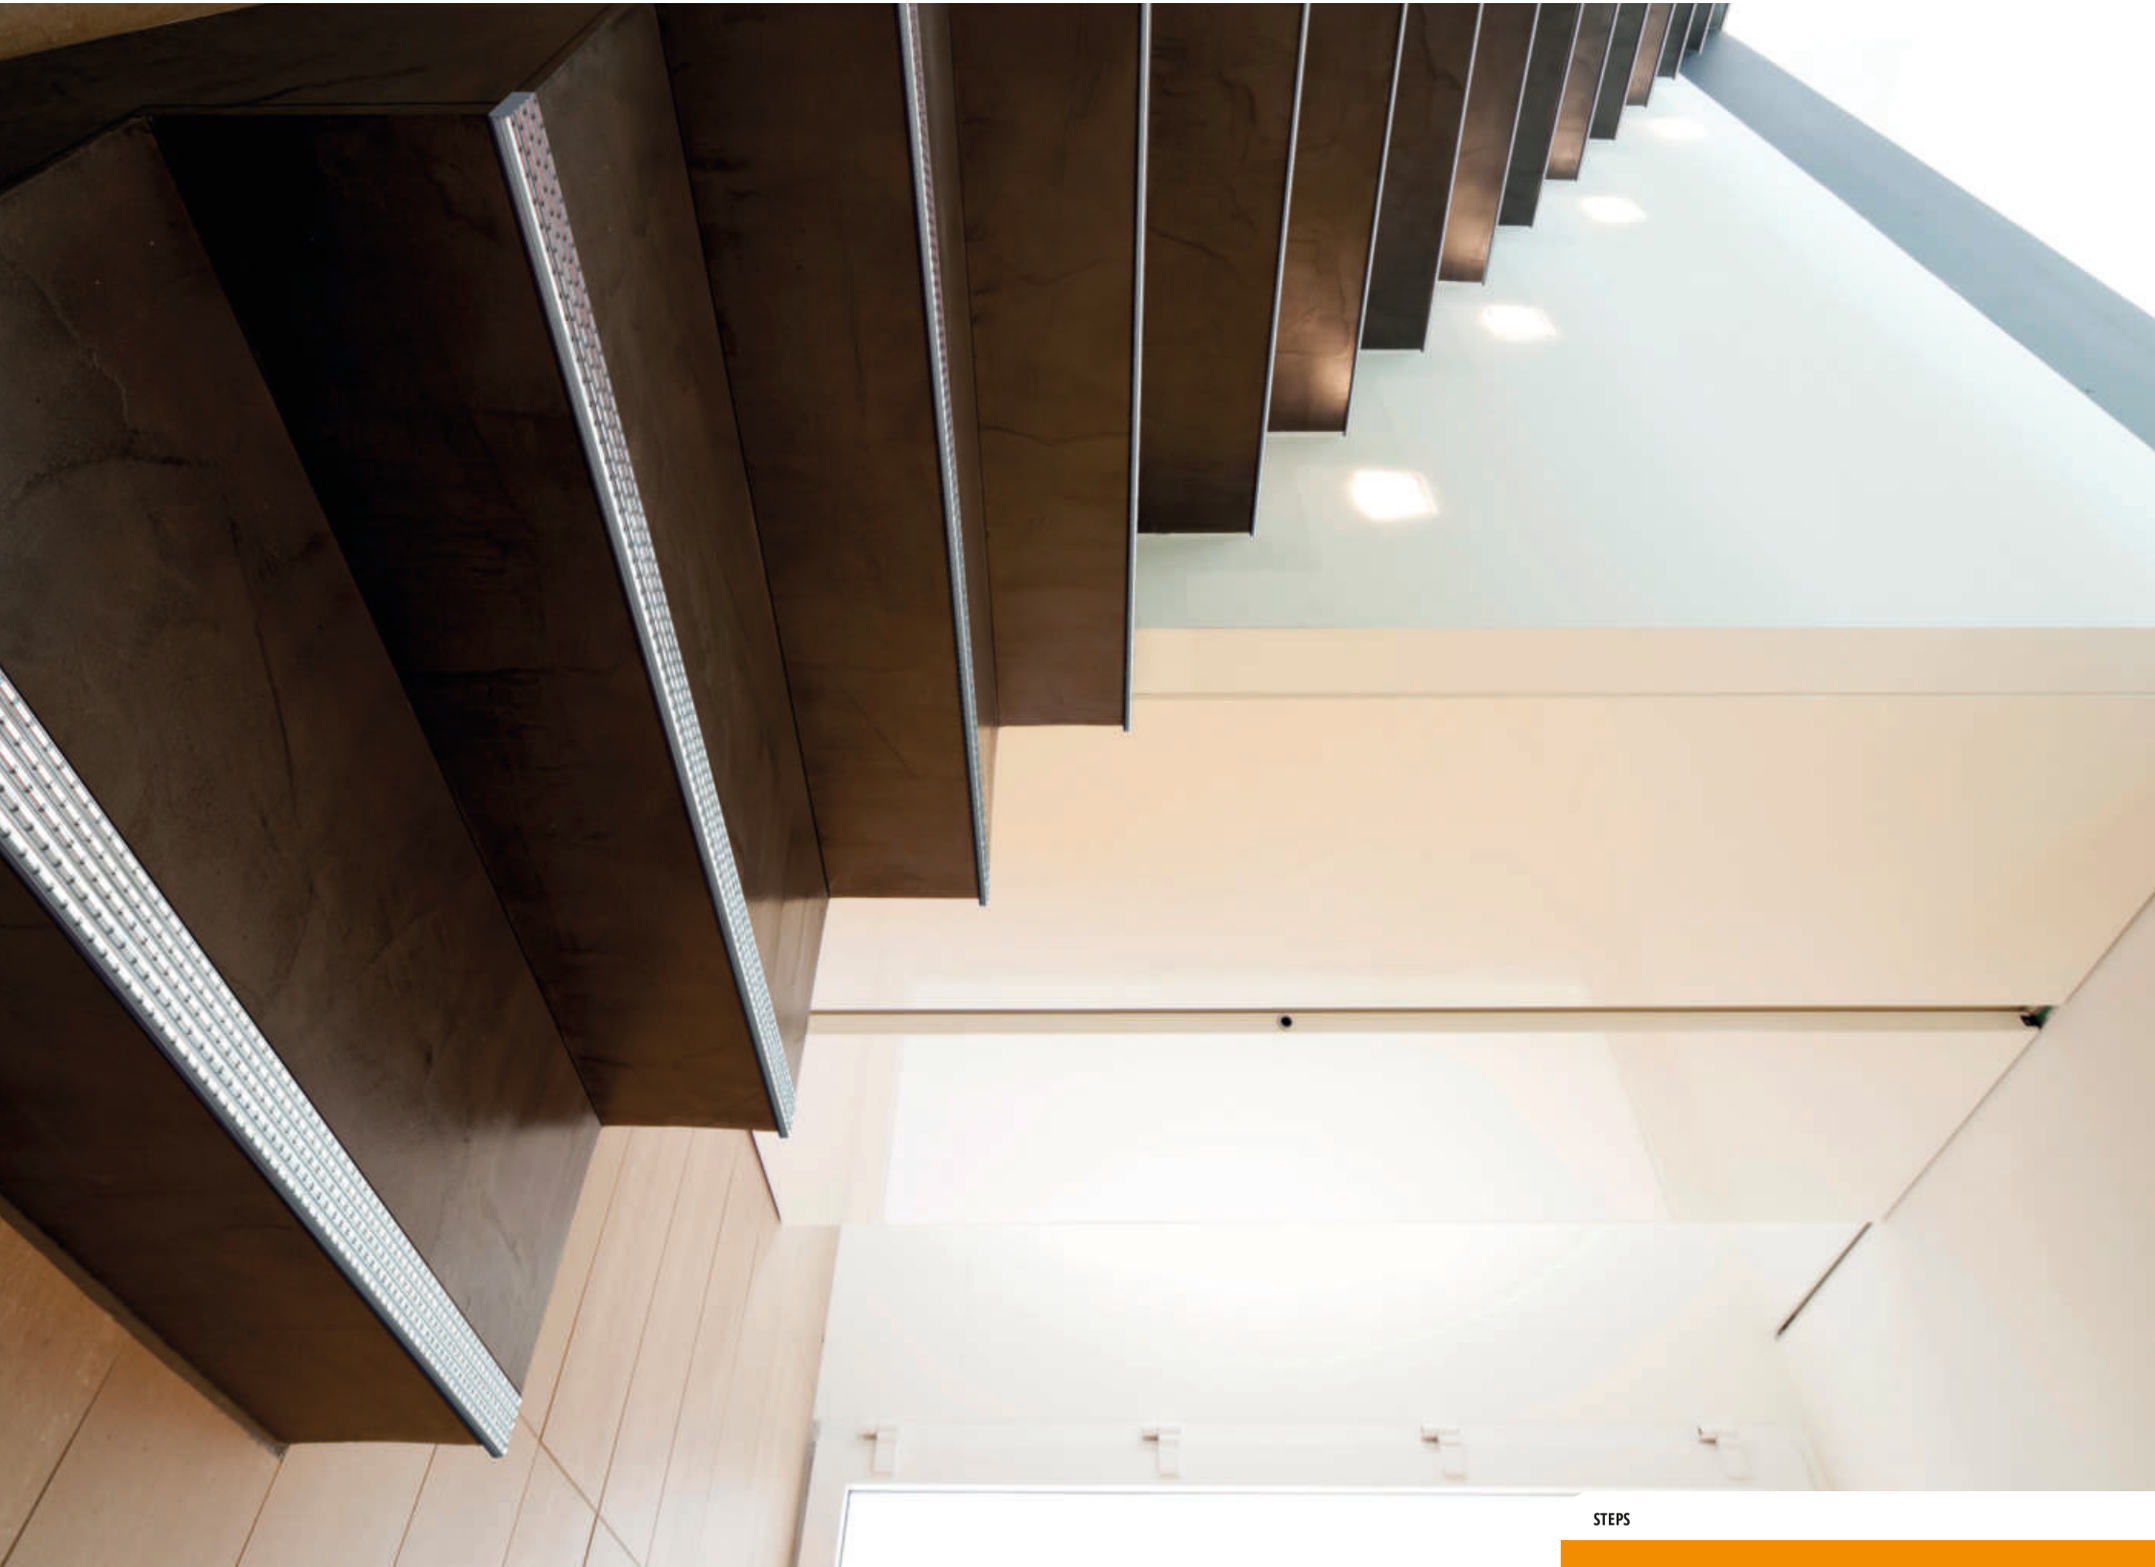

STEPS

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROSTAIR GRIP ACC is an AISI 304/1.4301–V2A brushed stainless steel profile, consisting of a punched flange, ensuring perfect anchorage to the substrate, a 36,5 and 56,5mm horizontal visually exposed surface with the carborundum stripe insert and a 20mm vertical visually exposed flat surface. The profile is available in the heights 4,5/6/8/10/12,5/15/20 mm and is equipped with end caps made of varnished plastic in brushed steel-effect finish. The design of this profile together with the completing elements make it an elegant and appreciated solution also for modern stairs.

PROSTAIR GRIP ACC


BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A






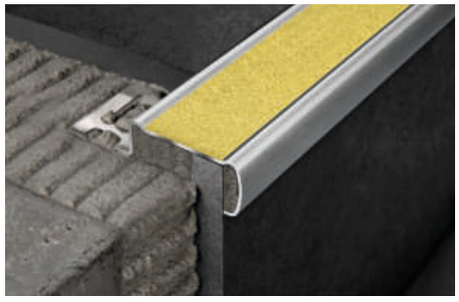

PTRGRACS ...35

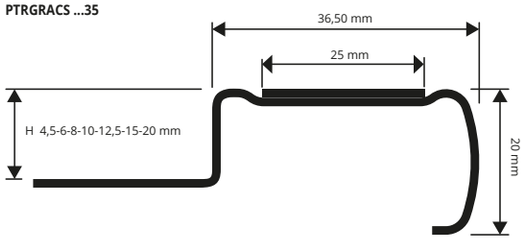

PTRGRACS ...55

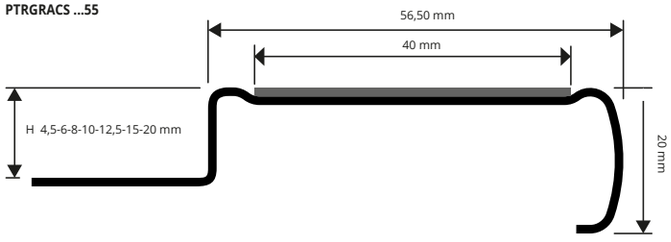

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2,7 lm** - width **36,50 mm**

Article	H mm	Pcs/Pack	€/lm	€/Pc
PTRGRACS 04535	4,5	20	32,96	88,99
PTRGRACS 0635	6	20	33,40	90,18
PTRGRACS 0835	8	20	33,71	91,02
PTRGRACS 1035	10	10	35,45	95,72
PTRGRACS 12535	12,5	10	37,50	101,25
PTRGRACS 1535	15	7	39,62	106,97
PTRGRACS 2035	20	7	43,41	117,21

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2,7 lm** - width **56,50 mm**

Article	H mm	Pcs/Pack	€/lm	€/Pc
PTRGRACS 04555	4,5	20	39,48	106,60
PTRGRACS 0655	6	20	40,43	109,16
PTRGRACS 0855	8	20	41,36	111,67
PTRGRACS 1055	10	10	42,91	115,86
PTRGRACS 12555	12,5	10	45,40	122,58
PTRGRACS 1555	15	7	47,26	127,60
PTRGRACS 2055	20	7	50,99	137,67

THE ADHESIVE CARBORUNDUM STRIP (PROGRIP) IS NOT INCLUDED WITH THE PROFILE.
FOR PTRGRACS ...35 ORDER PGR... 25 (SPECIFY THE CHOSEN COLOUR).
FOR PTRGRACS ...55 ORDER PGR... 40 (SPECIFY THE CHOSEN COLOUR).

COLOURS



ACS - Brushed stainless st. AISI 304/1.4301-V2A

END CAPS - R/L - pack. **2 Pcs** (1 R and 1 L)


Article	H mm	L mm	€/Pack.
TPTRGRACS 55/1	4,5÷20	56,5	3,12
TPTRGRACS 35/1	4,5÷20	36,5	3,12


Articles not for sale singly



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

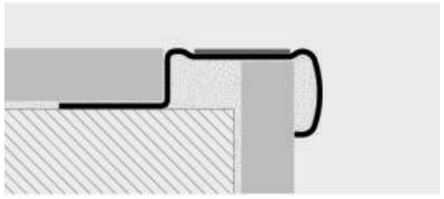

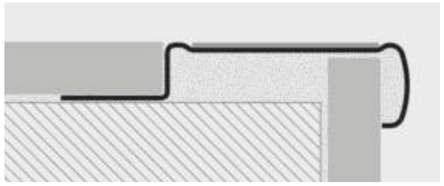

1. Choose the PROSTAIR GRIP ACC in the required height, according to the thickness of the floor covering and the desired profile width; **2.** Lay the floor covering on the stair riser and apply the adhesive on the of stair tread, where the profile will be installed; **3.** Fill the empty spaces under the profile with the adhesive for tiles. Lay the profile on the step tread, making sure that it is aligned with the stair riser; **4.** Lay the floor covering on the stair tread and align; 5. Plaster the joints between the profile and the tiles.

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aestetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.

PROGRIP

ADHESIVE CARBORUNDUM - 7 COLOURS

COLOURS



N - Black



B - White




T - Transparent




G - Gray



Y - Yellow



M - Brown



GN - Yellow/Black

The PGRT (trasparent) are not suitable for outside use.

ADHESIVE NON-SLIP STRIP for STEPS - rolls length **18,2 lm**

Article	Width mm	€/lm	€/Roll
PGRGN 20	20	2,03	36,95
PGRGN 25	25	2,72	49,50
PGRGN 50	50	5,58	101,56

ADHESIVE NON-SLIP STRIP for STEPS - rolls length **18,2 lm**

Article	Width mm	€/lm	€/Roll	
PGRN 25	25	2,68	48,78	
PGRB 25	25	4,02	73,16	
PGRT 25	25	2,68	48,78	
PGRG 25	25	4,56	82,99	
PGRY 25	25	4,42	80,44	
PGRM 25	25	3,08	56,06	
PGRN 40	40	4,02	73,16	
PGRB 40	40	7,12	129,58	
PGRT 40	40	4,02	73,16	*
PGRG 40	40	8,01	145,78	*
PGRY 40	40	8,01	145,78	*
PGRM 40	40	4,65	84,63	



* = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed

= News 2023


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy


PROSTYLE GRIP ACC

BRUSHED STAINLESS STEEL
AISI 304/1.4301-V2A


PROSTYLE GRIP ACC is a non-slip profile in AISI 304/1.4301–V2A brushed stainless steel, consisting of a 40 or 60 mm horizontal top with a groove for the insertion of a non-slip carborundum stripe and a 20mm vertical flat side. The profile can be fixed with adhesive film or with screws. The particular design of this profile makes it an elegant and appreciated solution also for modern stairs.

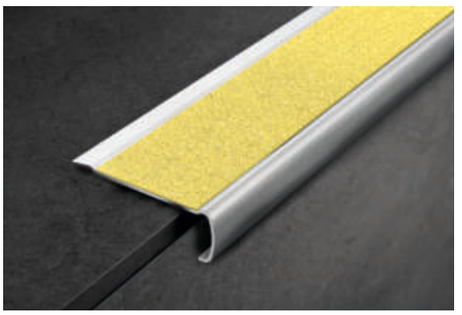

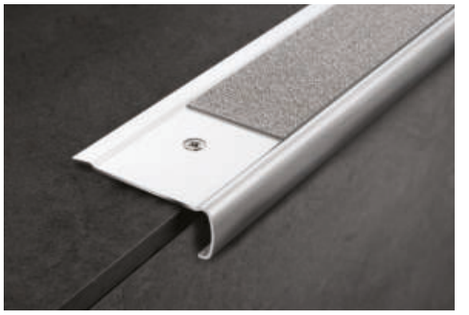


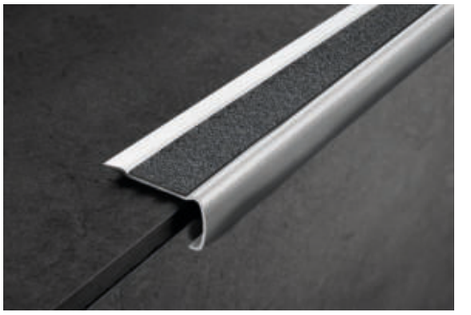


PSYGRACS 6020
scale 1:1

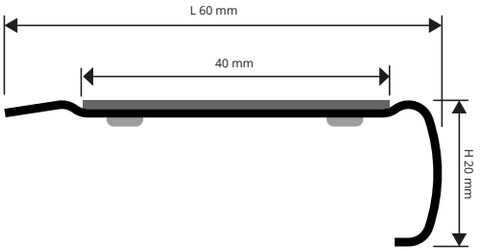

PSYGRACS 4020
scale 1:1

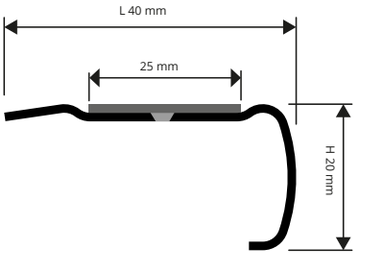

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

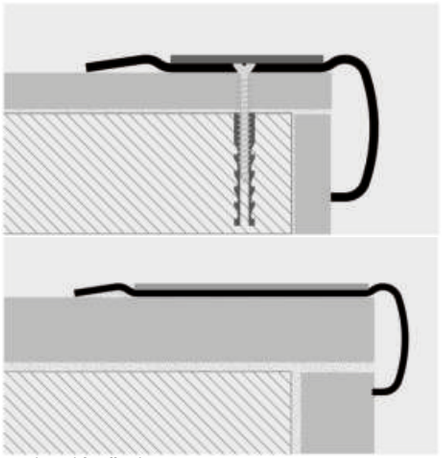

Version with adhesive
1. Choose the profile according to the desired width and cut it to the necessary length; **2.** Clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it; **3.** Apply the adhesive non-slip carborundum insert of the desired color.

Punched version
1. Choose the profile according to the desired width and cut it to the necessary length; **2.** Mark the position of the holes using the existing holes on the profile as reference; **3.** Drill the step using a drill with 5mm diameter and insert the 5x 25mm screws; **4.** Screw the profile to the step; **5.** Apply the adhesive non-slip carborundum insert of the desired color.

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSYGRACS 6020A	60	35,95	97,07	*
PSYGRACS 6020F	60	34,32	92,66	*

Without adhesive version deduct 3,00 €/LM to the gross price

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PSYGRACS 4020A	40	30,48	82,30
PSYGRACS 4020F	40	28,60	77,22

Without adhesive version deduct 3,00 €/LM to the gross price

The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PSYGRACS 6020A/F order PGR... 40 (Specify the chosen colour).
For PSYGRACS 4020A/F order PGR... 25 (Specify the chosen colour).

COLOURS



ACS - Brushed stainless steel
AISI 304/1.4301-V2A

END CAPS STAINLESS STEEL - R/L - pack. **2 Pcs -** (1 R and 1 L)

Article	L mm	€/Pack.	
TPSYGRACS 6020/1	60	3,28	*
TPSYGRACS 4020/1	40	3,28	

Articles not for sale singly

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

PROGRIP

ADHESIVE CARBORUNDUM - 7 COLOURS


PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aestetic requirement. If **PROGRIP** is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.



ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS
rolls length **18,2 lm**

Article	Width mm	€/lm	€/Roll	
PGRN 25	25	2,68	48,78	
PGRB 25	25	4,02	73,16	
PGRT 25	25	2,68	48,78	
PGRG 25	25	4,56	82,99	
PGRY 25	25	4,42	80,44	
PGRM 25	25	3,08	56,06	
PGRN 40	40	4,02	73,16	
PGRB 40	40	7,12	129,58	
PGRT 40	40	4,02	73,16	*
PGRG 40	40	8,01	145,78	*
PGRY 40	40	8,01	145,78	*
PGRM 40	40	4,65	84,63	

COLOURS

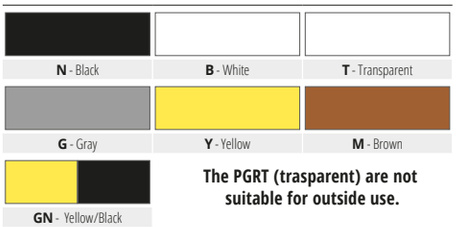

N - Black | **B** - White | **T** - Transparent
G - Gray | **Y** - Yellow | **M** - Brown
GN - Yellow/Black

The PGRT (trasparent) are not suitable for outside use.

ADHESIVE NON-SLIP STRIP for STEPS - rolls length **18,2 lm**

Article	Width mm	€/lm	€/Roll
PGRGN 20	20	2,03	36,95
PGRGN 25	25	2,72	49,50
PGRGN 50	50	5,58	101,56

*** = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed**

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSTAIR 50


NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

PROSTAIR 50 is a technical square used to make the step nonskid and non-slip, protects the ceramic stairs steps preventing from accidents. It is made up of a rigid aluminium base equipped with a particular toothing on the vertical stem which strengthens the anchorage of the adhesive/tile to the square. The aluminium base varies according to the thickness of the tile used in the step, and to a lined insert in vinyl rubber available in several colors. The insert is already applied to the aluminium base. It is compulsory in public places in compliance with EEC norms and prevents from accidents.







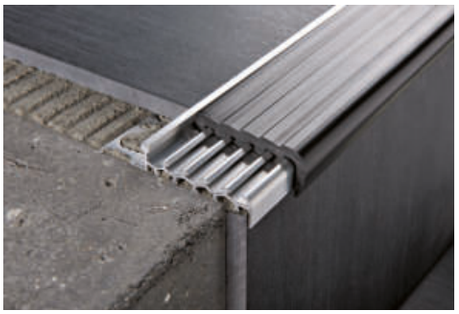


NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PTR50 08...	**8**	**21,44**	**57,89**
PTR50 10...	**10**	**22,31**	**60,24**
PTR50 125...	**12,5**	**23,00**	**62,10**
PTR50 15...	**15**	**24,18**	**65,29**

Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: PTR50 08... (chosen colour grey) PTR50 08G.

COLOURS



G - Gray **(E83)** | **N** - Black **(E85)** | **B** - Beige **(E84)**


A - Ivory **(E81)**


END CAP IN PVC - pack. **2 Pcs** (1 R and 1 L)

Article	H mm	€/Pack.
TPTR50 .../1	**8-10-12,5-15**	**3,28**


Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: TPTR50 ... (chosen colour grey) TPTR50 G.

Articles not for sale singly



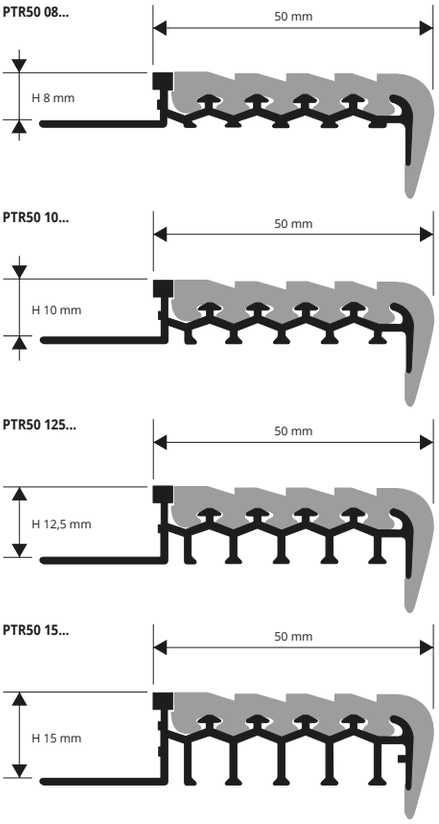

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

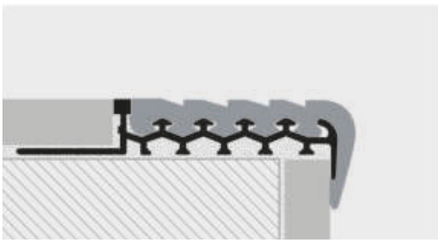

1. Choose a PROSTAIR 50 height and color corresponding to the thickness of the tile. **2.** Fix the riser laying it at the appropriate and definitive height. **3.** Fill the empty spaces under the square completely with adhesive. **4.** Rest the adhesive on the tread, lay the square with the base cut in the adhesive and line it up so that the square covers the tile edge of the riser. **5.** Lay the tiles of the tread lining them up with upper part of the square so that it meets with the edge.

INTERCHANGEABLE INSERT for Prostair 50

VINYL RESIN / RUBBER

INTERCHANGEABLE VINYL RESIN / RUBBER INSERT
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PTG50...	**8-10-12,5-15**	**7,44**	**20,09**

Universal insert suitable for four profile heights.
Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: PTG50... (chosen colour grey) PTG50 G.



© 2020. All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROSTAIR


NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

PROSTAIR is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid aluminium base and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.


PTR 08...
scale 1:1

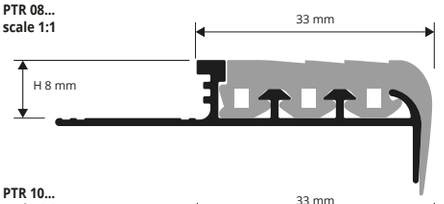


PTR 10...
scale 1:1

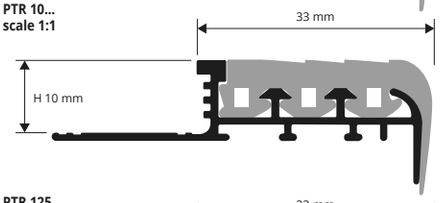

PTR 125...
scale 1:1

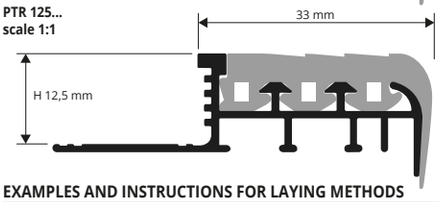

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

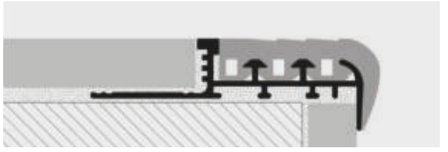


1. Choose the PROSTEP/PROSTAIR in the required width and colour according to the thickness of the tile. **2.** First fix the riser part, placing it at the correct and final height. **3.** Fill the empty spaces under the profile with the tile adhesive. **4.** Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile.



INTERCHANGEABLE VINYL RESIN / RUBBER INSERT
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	€/ml	€/Pack.
PTGRA	4,59	12,39
PTGRB	4,59	12,39
PTGRN	4,59	12,39
PTGRG	4,59	12,39



COLOURS



G - Gray **(E83)** | **N** - Black **(E85)** | **B** - Beige **(E84)**



A - Ivory **(E81)**

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length **2,7 lm** - pack.10 **Pcs** - **27 lm**


Article	H mm	€/ml	€/Pack.
PTR 08...	8	13,47	36,37
PTR 10...	10	14,54	39,26
PTR 125...	12,5	15,03	40,58

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.
E.g.: PTR 08... (chosen colour grey) PTR 08G.

END CAP IN PVC - pack. **2 Pcs** (1 R and 1 L)

Article	H mm	€/Pack.
TPT 08.../1	8	3,28
TPT 10.../1	10	3,28
TPT 125.../1	12,5	3,28

Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: TPT 08... (chosen colour grey) TPT 08G.
Articles not for sale singly




PROSTEP


RIGID VINYL RESIN
+ VINYL RESIN / RUBBER INSERT

PROSTEP is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid base in high-strength vinyl resin and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.


PTP 08...
scale 1:1

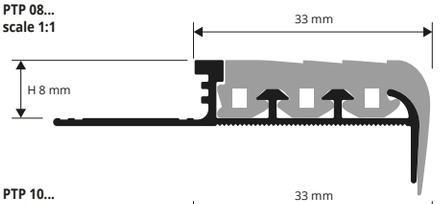

PTP 10...
scale 1:1

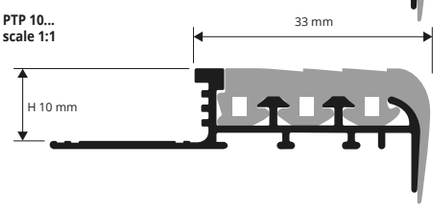

PTP 125...
scale 1:1

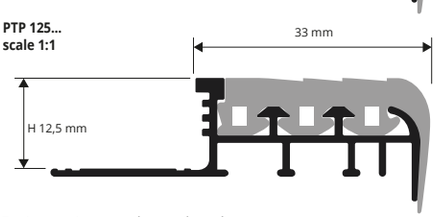


For instructions see the product above




INTERCHANGEABLE VINYL RESIN / RUBBER INSERT
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	€/lm	€/Pc
PTGRA	4,59	12,39
PTGRB	4,59	12,39
PTGRN	4,59	12,39
PTGRG	4,59	12,39



COLOURS



G - Gray **(E83)** | **N** - Black **(E85)** | **B** - Beige **(E84)** | **A** - Ivory **(E81)**

IMPACT PROOF VINYL RESIN + VINYL RESIN / RUBBER INSERT
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm (PTP 08... - 54 lm)**


Article	H mm	€/lm	€/Pc
PTP 08...	8	6,74	18,20
PTP 10...	10	7,44	20,09
PTP 125...	12,5	8,10	21,87

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.
E.g.: PTP 08... (chosen colour grey) PTP 08G.

END CAP IN PVC - pack. **2 Pcs** (1 R and 1 L)

Article	H mm	€/Pack.
TPT 08.../1	8	3,28
TPT 10.../1	10	3,28
TPT 125.../1	12,5	3,28

Available in the colours: G - N - B - A.
The code of the selected colour must be added to the article code.
E.g.: TPT 08... (chosen colour grey) TPT 08G.
Articles not for sale singly



© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


PROBRASTEP

KNURLED NATURAL AND POLISHED BRASS
NATURAL AND ANODIZED SILVER ALUMINIUM

PROBRASTEP is a very elegant step nosing profile used to improve slip and slide resistance on the step. Made in natural and polished brass or natural and anodized silver aluminium, the upper part is knurled to increase adherence. Compulsory in public buildings to comply with accident-prevention regulations. Recommended for elegant, refined surroundings and for steps in wood, tiles, melamine-coated/laminated wood, marble or natural stones. Width: 8, 10, 12.5 mm.





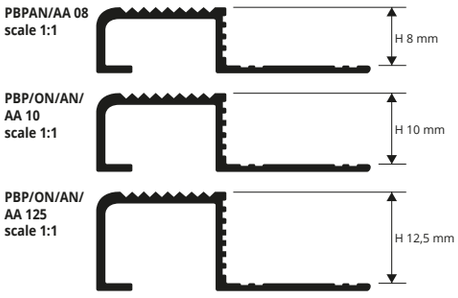

NATURAL BRASS thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PBPON 10	10	27,09	73,14	*
PBPON 125	12,5	28,66	77,38	*

NATURAL ALUMINIUM thermo packed 5 Pcs
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PBPAN 08	8	6,44	17,39
PBPAN 10	10	6,78	18,31
PBPAN 125	12,5	7,26	19,60

POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc	
PBPOL 10	10	30,81	83,19	*
PBPOL 125	12,5	32,34	87,32	*

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**


Article	H mm	€/lm	€/Pc
PBPAA 08	8	8,18	22,09
PBPAA 10	10	8,53	23,03
PBPAA 125	12,5	8,99	24,27

COLOURS



ON - Natural brass | **OL** - Polished brass | **AN** - Natural aluminium | **AA** - Anodized silver aluminium

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

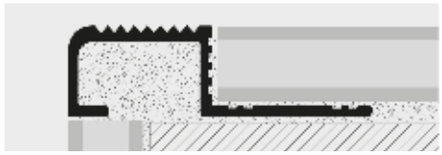

1. Choose the PROBRASTEP in the required width and colour according to the thickness of the tile (stairs). **2.** First fix the riser part, placing it at the correct and final height. **3.** Fill the empty spaces under the profile with the tile adhesive. **4.** Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.
Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidol-Smac).

PROSTAIR BOTTON / STRIP

POLISHED, BRUSHED STAINLESS
STEEL AISI 316/1.4404-V4A

PROSTAIR BOTTON / STRIP are a tactile anti-slip botton/strip made in stainless steel AISI 316/1.4401-V4A. **PROSTAIR BOTTON / STRIP** has the function to realize the signaling lanes to the floor, and warning stairs, able to guide the blind and visually impaired. It is available with a length of 28.5 cm, a width of 3.5 cm and a thickness of 5mm and is provided with 3 stems, 2 cm high, for its fastening.



PROSTAIR BOTTON
POLISHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. **20 Pcs**

Article	Ø mm	€/Pc	€/pack
PTRB 3520/20	35		129,33

INSTRUCTIONS FOR LAYING METHODS
1. Put PROSTAIR BOTTON TEMPLATE on the desired zone. **2.** Score on the support the position of the necessary holes. **3.** Remove the template and drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. **4.** Open the holes already made with a 8mm drill bit. **5.** Remove dust residues. **6.** Fill the hole with PROBAND FIX. **7.** Put in the hole PROSTAIR BOTTON.




PROSTAIR BOTTON STRIP
BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. **10 Pcs**

Article	L x H mm	€/Pc	€/pack
PTRB 28035/10	280 X 35		378,08


INSTRUCTIONS FOR LAYING METHODS
1. Put PROSTAIR BOTTON STRIP on the desired zone. **2.** Scoring on the support in correspondence of the stems the points at which pierce. **3.** Drill the substrate with a tip 4 mm for a depth of approximately 2.5 cm. **4.** Open the holes already made with a 8mm drill bit. **5.** Remove dust residues. **6.** Fill the hole with PROBAND FIX. **7.** Put in the hole PROSTAIR BOTTON STRIP.



PTRB 3520



PTRB 28035

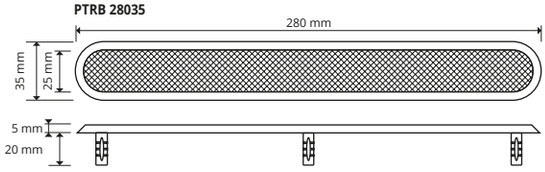

PROSTAIR BOTTON TEMPLATE for PROSTAIR BOTTON


ZINC-PLATED STEEL

PROSTAIR BOTTON TEMPLATE is a mold, made in zinc-plated steel, which allows to score the points where to drilling for the mounting of PROSTAIR BOTTONN. **PROSTAIR BOTTON TEMPLATE** has A Size of 30 x 44.5 cm and is Equipped with 48 holes of a diameter 4 mm. Provided with circular joints which can be connected to other molds.

ZINC-PLATED STEEL
pack. **4 Pcs**

Article	L x H mm	€/Pc	€/pack
PTRTEM/4	445 x 300		780,96

PTRTEM



*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2020. All rights reserved by Progress Profiles. Printed in Italy

PROTERMSTEP ACC


POLISHED, BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMSTEP ACC is the new step cover profile made of stainless steel. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile. Reversible profile.


PTSP... 0815




PTSP.. 10125




PTSP... 1530



PTSP... 2025



EXAMPLES OF LAYING for instructions see the product below

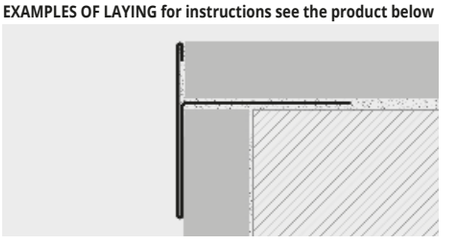



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **15 Pcs** - **40,5 lm**

Article	h / H mm	€/lm	€/Pc
PTSPAC 0815	08 / 15	17,88	48,28
PTSPAC 10125	10 / 12,5	17,88	48,28
PTSPAC 1530	15 / 30	34,23	92,42
PTSPAC 2025	20 / 25	34,23	92,42

EXTERNAL CORNERS - pack. **10 Pcs**

Article	h / H mm	€/Pc	€/Pack.
REPTSAC 0815/10	08 / 15	43,92	439,20
REPTSAC 10125/10	10 / 12,5	43,92	439,20
REPTSAC 1530/10	15 / 30	43,92	439,20
REPTSAC 2025/10	20 / 25	43,92	439,20

JUNCTION H 10 - 12,5 - 15 - 20 mm - pack. **10 Pcs**


Article	h / H mm	€/Pc	€/Pack.
GIPTSAC 0815/10	08 / 15	8,03	80,30
GIPTSAC 10125/10	10 / 12,5	8,03	80,30
GIPTSAC 1530/10	15 / 30	8,03	80,30
GIPTSAC 2025/10	20 / 25	8,03	80,30



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **15 Pcs** - **40,5 lm**

Article	h / H mm	€/lm	€/Pc
PTSPACS 0815	08 / 15	23,25	62,78 *
PTSPACS 10125	10 / 12,5	23,25	62,78 *
PTSPACS 1530	15 / 30	44,50	120,15 *
PTSPACS 2025	20 / 25	44,50	120,15 *


COLOURS




AC - Polished stainless st. AISI 304/1.4301-V2A

ACS - Brushed stainless st. AISI 304/1.4301-V2A

JOINT GIPTSAC ..



EXTERNAL CORNER (WELDED) REPTSAC ..




SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROTERMSTEP ALL


NATURAL AND ANODIZED SILVER ALUMINIUM

PROTERMSTEP ALL is the new step cover profile made of natural and anodized aluminium. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile.


PTSPAN/AA 08
scale 1:1




PTSPAN/AA 10
scale 1:1




PTSPAN/AA 125
scale 1:1



PTSPAN/AA 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

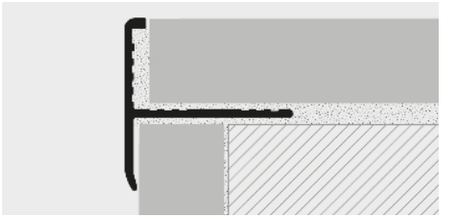




NATURAL ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PTSPAN 08	8	3,55	9,59
PTSPAN 10	10	3,68	9,94
PTSPAN 125	12,5	3,90	10,53
PTSPAN 15	15	4,23	11,42


1. Choose the PROTERMSTEP in the required width and colour according to the thickness of the tile (stairs). **2.** First fix the riser part, placing it at the correct and final height. **3.** Fill the empty spaces under the profile with the tile adhesive. **4.** Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.

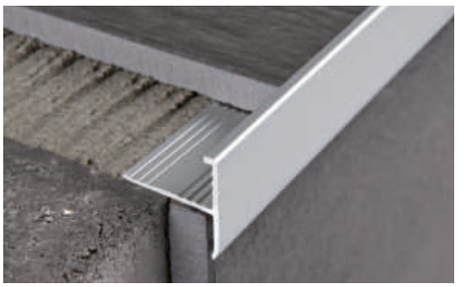

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PTSPAA 08	8	4,68	12,64
PTSPAA 10	10	4,83	13,04
PTSPAA 125	12,5	5,04	13,61
PTSPAA 15	15	5,35	14,45

COLOURS



AN - Natural aluminium

AA - Anodized silver aluminium

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

PROSIDE WALK


VARNISHED / COATED ALUMINIUM

PROSIDE WALK is a perimeter profile in varnished aluminium, available in grey and anthracite colour. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.





PSDWK 10AL / 125AL / 15AL

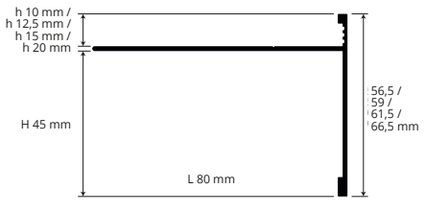

VARNISHED EMBOSSED ALUMINIUM

bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL...	10	45	80	21,22	57,29
PSDWK 125AL...	12,5	45	80	21,56	58,21
PSDWK 15AL...	15	45	80	21,87	59,05
PSDWK 20AL...	20	45	80	23,14	62,48

EMBOSSED COLOURS

A - Anthracite grey **(no RAL)** | **GF** - Gray **(7038)** | **TF** - Dark brown **(8019)**

EMBOSSED COLOURS ON DEMAND

BF - White **(9010)** | **C** - Corten | **EF** - Beige **(1019)**


EXTERNAL CORNERS - pack. **10 Pcs**

Article	h mm	H mm	L	€/Pc	€/Pack
AEPSDWK 10AL.../10	10	45	80	22,86	228,60
AEPSDWK 125AL.../10	12,5	45	80	23,51	235,10
AEPSDWK 15AL.../10	15	45	80	24,82	248,20
AEPSDWK 20AL.../10	20	45	80	26,69	266,90

JOINTS - pack. **10 Pcs**

Article	€/Pc	€/Pack
GINSDWK 10AL.../10	6,53	65,30
GINSDWK 125AL.../10	6,53	65,30
GINSDWK 15AL.../10	6,53	65,30
GINSDWK 20AL.../10	6,53	65,30


AEPSDWK external corner (welded)



GINSDWK joint



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

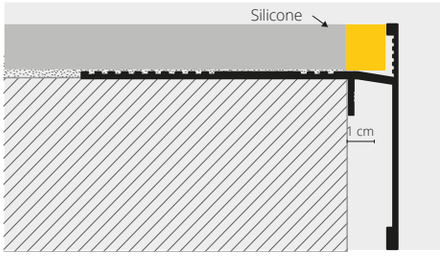

1. Choose PROSIDE WALK according to the tile thickness and desired colour. **2.** Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed. **3.** Fix the external corners with nails. **4.** Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element. **5.** Lay the tiles, leaving about 5 mm between tiles and profile. **6.** Seal the space between tiles and profile with **PROBAND FIX (PRBFX)**. **PROFILE BENDING: 1)** Cut the anchoring flange into sections and engrave the metal close to the vertical side **2)** bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add SD to the article's number
Example: PSDWK 10ALGF (seaside) = ***PSDWK 10ALGFSD***
price for seaside treatment +50% on the gross price.



*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROSTAIR LED


ANODIZED SILVER ALUMINIUM
- FLAT - LED

PROSTAIR LED is an aluminium profile available in the silver anodized finishes, that can be fixed with adhesive or dowels to the step tread. It has a grooved non-slip 52,5mm wide horizontal surface and an integrated LED lighting system, placed on its 43,5mm high vertical side. The integrated LED system generates cold or warm light and is protected by a matt or transparent polycarbonate plate, provided with a special fixing system, that allows it to be removed any time maintenance on the lighting system should be required. Its design and to the range of finishes available, together with its easy installation make **PROSTAIR LED** an appreciated solution both in public and in residential spaces.

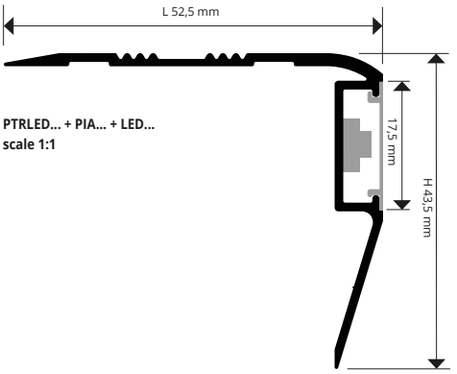

PTRLED... + PIA... + LED...
scale 1:1

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

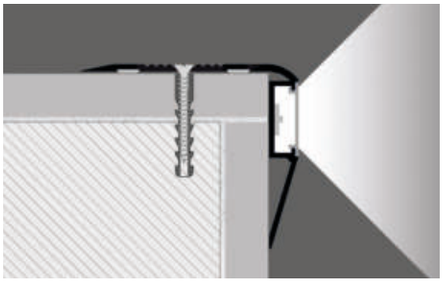

1. Choose PROSTAIR LED depending on the desired finish, light effect and polycarbonate plate; **2.** If you are using the version with adhesive, clean first the surface where the profile will be installed. Once the surface has dried , remove the protective film and install the profile, applying adequate pressure on it; **3**. If you are using the punched version, place the profile on the step tread and mark the position of the profile holes on the step tread; **4.** Drill the step tread and fasten the profile using plugs; **5.** Connect the LED to the low tension power supply and install the polycarbonate plate.



ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**
ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H x L mm	€/lm	€/Pc
PTRLEDAA 5040	43,5 X 52,5	25,47	68,77
PTRLEDAA 5040A	43,5 X 52,5	29,39	79,35
PTRLEDAA 5040F	43,5 X 52,5	27,42	74,03

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item


ADHESIVE FLEXIBLE LED COIL
length **5 lm** - pack. **1 ROLL**

Article	€/lm	€/Pack.
LEDN	22,47	112,35
LEDF	22,47	112,35
LEDC	22,47	112,35

"N" at the end of the product code = neutral light
"F" at the end of the product code = cold light
"C" at the end of the product code = hot light

COLOURS

AA - Anodized silver alum.

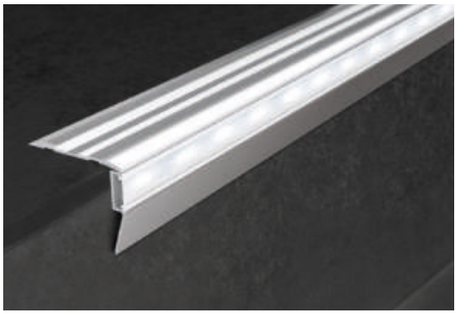

POLYCARBONATE FLAT bar length **2,7 lm** - pack. **20 Pc - 54 lm**
(AL = transparent / AO = matt)

Article	€/lm	€/Pc
PIAL 17	5,16	13,93
PIAO 17	5,16	13,93

ENDCAPS- R / L - pack. **6 Pcs** (3 R and 3 L)

Article	H x L mm	€/Pc	€/Pack.
TPTRLEDAA 5040/3	43,5 X 52,5		27,47



LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article	€/Pc
ALL 7512	82,27

LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article	€/Pc
ALL 2512	56,42



© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy




PROSTYLE


ROUNDED STEP NOSING
STAINLESS STEEL AISI 304/1.4301-V2A

PROSTYLE is a technical/decorative profile in stainless steel AISI 304/1.4301-V2A for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. Elegant profile for all public/private environments.
In order to perfect placing and to look after details, external angles and closing caps are available.


PSYAC 08
scale 1:1

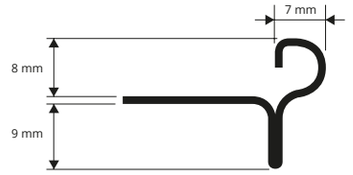


PSYAC 10
scale 1:1

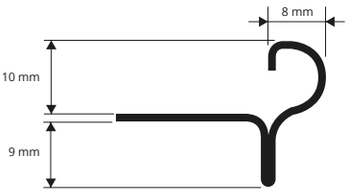


PSYAC 125
scale 1:1

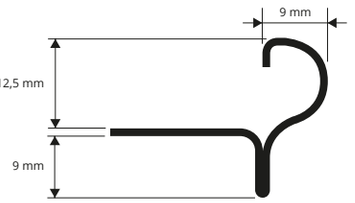



RPSYAC 08/10/125



TPSYAC 08/10/125



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10mm**

Article	H mm	€/lm	€/Pc
PSYAC 08	8	15,59	42,09
PSYAC 10	10	16,08	43,42
PSYAC 125	12,5	16,88	45,58

COLOURS



AC - Polished stainless st. AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTYLE with suitable height for the thickness of the floor (stairs). **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

VARNISHED PLASTIC STEEL EFFECT JOINT - pack. **20 Pcs**

Article	€/Pc	€/Pack.
RPSYAC 08/20	8,05	161,00
RPSYAC 10/20	8,05	161,00
RPSYAC 125/20	8,05	161,00

STAINLESS ST. END CAPS H 8 - 10 - 12,5 mm - pack. **20 Pcs**


Article	€/Pc	€/Pack.
TPSYAC 08/20	3,71	74,20
TPSYAC 10/20	3,71	74,20
TPSYAC 125/20	3,71	74,20

PROSTYLE


KNURLED, ROUNDED STEP NOSING
NATURAL, POLISHED AND CHROMED BRASS

PROSTYLE is a technical/decorative profile in natural brass, as well as with polished or chromed finish, for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.


PSYON/OL 08
PSYOC 08
scale 1:1

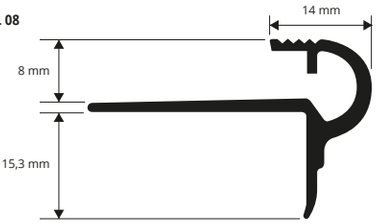

PSYON/OL 10
PSYOC 10
scale 1:1

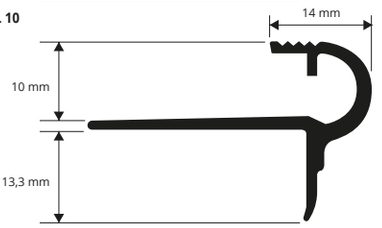

PSYON/OL 125
PSYOC 125
scale 1:1

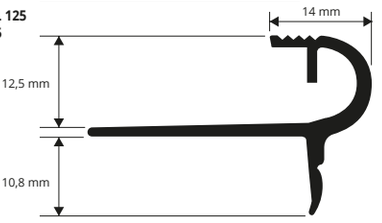



CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc	
PSYOC 08	8	33,66	90,88	*
PSYOC 10	10	34,71	93,72	*
PSYOC 125	12,5	36,26	97,90	*

NATURAL BRASS thermo packed
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc
PSYON 08	8	23,75	64,13
PSYON 10	10	24,59	66,39
PSYON 125	12,5	26,55	71,69

VARNISHED PLASTIC JOINT - pack. **20 Pcs**

Article	€/Pack	
RPSYOC 08-10-125/20	160,77	*
RPSYOL 08-10-125/20	160,77	*
RPSYON 08-10-125/20	160,77	



POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc	
PSYOL 08	8	28,94	78,14	*
PSYOL 10	10	29,78	80,41	*
PSYOL 125	12,5	31,34	84,62	*

COLOURS



OC - Chromed brass | **OL** - Polished brass | **ON** - Natural brass

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSTYLE

PROSTYLE is a technical/decorative profile for ceramic tile/wood steps made in gold-silver anodized aluminium. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

KNURLED, ROUNDED STEP NOSING
GOLD AND SILVER ANODIZED ALUMINIUM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

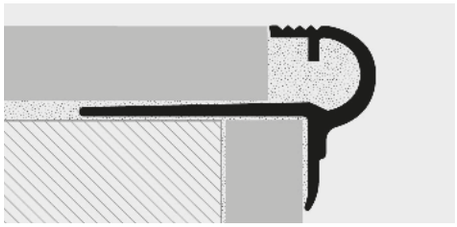

1. Choose the PROSTYLE in the required width and colour according to the thickness of the tile. **2.** First fix the riser part, placing it at the correct and final height. **3.** Fill the empty spaces under the profile with the tile adhesive. **4.** Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its vertical part covers the edge of the riser tile. **5.** Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidol-Smac).

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum.




ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PSYAA 08	8	9,31	25,14
PSYAA 10	10	9,80	26,46
PSYAA 125	12,5	10,46	28,24

ANODIZED GOLD ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PSYAO 08	8	9,31	25,14 *
PSYAO 10	10	9,80	26,46
PSYAO 125	12,5	10,46	28,24


PSYAA/AO 08
scale 1:1

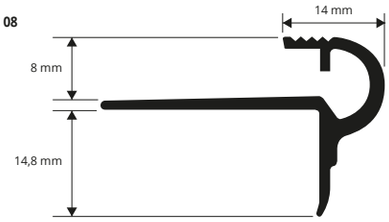

PSYAA/AO 10
scale 1:1



PSYAA/AO 125
scale 1:1

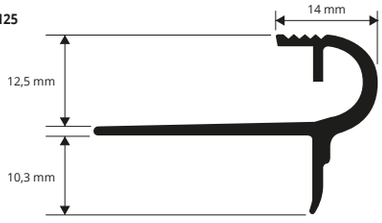

VARNISHED PLASTIC JOINT - pack. **20 Pcs**


Article	€/Pack
RPSYAO 08/20	160,77 *
RPSY... 08-10-125/20	160,77

Universal, suitable for three profile heights
Available: AA - AO.
The code of the selected colour must be added to the article code.
E.g.: RPSY... 08 (chosen colour polished brass) RPSYOL 08


ALUMINIUM CAPS H 8 - 10 - 12,5 mm - pack. **20 Pcs**

Article	€/Pack
TPSYAO 08/20	77,85 *
TPSY... 08/20	77,85
TPSY... 10/20	77,85
TPSY... 125/20	77,85

Available: AA - AO.
The code of the selected colour must be added to the article code.
E.g.: TPSY... 08 (chosen colour polished brass) TPSYOL 08.



RPSY... 08-10-125



TPSY...08/10/ 125

PROSTEP INS

PROSTEP INS is a non-slip profile in aluminium that allows to connect the rise and the tread in case of stairs covered with wooden or laminate flooring. The profile has to be laid together with rise and tread. It is equipped with a punched flange that guarantees its fixing. **PROSTEP INS** in anodized aluminium is suitable for any stair covered with wodden flooring.

ANODIZED SILVER ALUMINIUM




ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PTSAA 105	10,5	6,85	18,50
PTSAA 16	16	7,37	19,90


COLOURS



AA - Anodized silver alum.

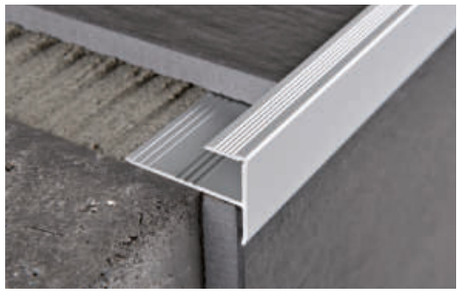


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

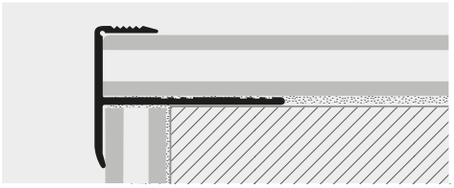


1. Choose "PROSTEP INS" according to the thickness of the tile. **2.** Cut "PROSTEP INS" to the desired length. **3.** Lay the wood or laminate on the step rise and apply adhesive on the area of the step tread, where the profile will be laid. **4.** Lay the profile on the step tread, aligning it with the edge of the rise covering. **5.** Lay the wood or laminate on the tread of the step taking care to insert it into the cavity.

PTSAA 105
scale 1:1

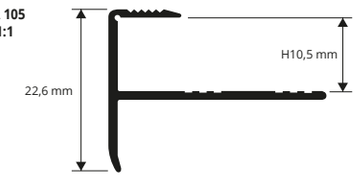

PTSAA 16
scale 1:1

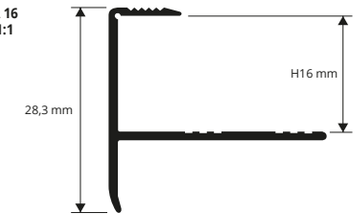

stair nosing profiles

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROSTAIR WOOD


NATURAL OAK
+ ALUMINIUM BASE

PROSTAIR WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/convex" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.
PROSTAIR WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

PTRW 10
scale 1:2

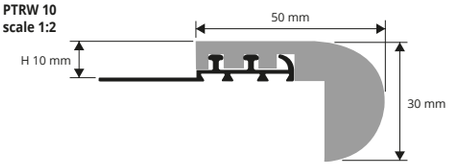

PTRW 125
scale 1:2

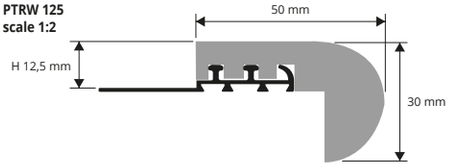

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROSTAIR WOOD with suitable height for the thickness of the covering of the step or staircase. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the step covering, aligning it so that the top edge of the profile is flush" with the covering. **5.** Fill the profile/covering area of contact with adhesive to prevent any infiltration.



NATURAL OAK + ALUMINIUM BASE
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc	
PTRW 10	10	41,98	113,35	*
PTRW 125	12,5	44,53	120,23	*

H 15 mm on demand

COLOURS


Natural oak



NATURAL OAK + ALUMINIUM BASE
bar length **1,20 lm** - pack. **10 Pcs** - **12 lm**

Article	H mm	€/Pc	
PTRW 1020	10	61,19	*
PTRW 12520	12,5	62,87	*

NATURAL OAK + ALUMINIUM BASE
bar length **1,80 lm** - pack. **10 Pcs** - **18 lm**

Article	H mm	€/Pc	
PTRW 1080	10	93,17	*
PTRW 12580	12,5	94,34	*


ITEMS SUPPLIED ALREADY ASSEMBLED
Treat the wood appropriately with paint or oil.

PROSTAIR WOOD Z


KNURLED NATURAL OAK
+ ALUMINIUM BASE

PROSTAIR WOOD Z is a step nosing profile in real oak with aluminium base. The rounded shape of the "knurled convex" torus with non-slip surface makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. **PROSTAIR WOOD Z** may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.


PTRWZ 10
scale 1:2

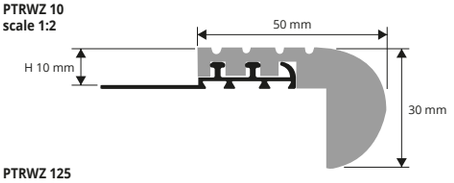

PTRWZ 125
scale 1:2

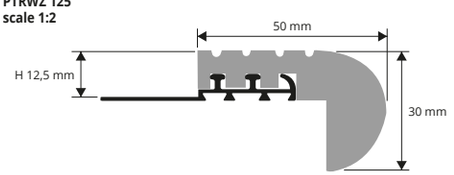

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

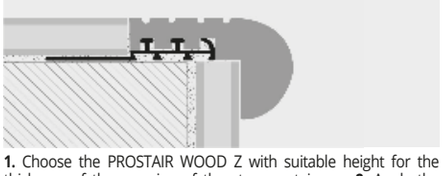

1. Choose the PROSTAIR WOOD Z with suitable height for the thickness of the covering of the step or staircase. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. **5.** Fill the profile/covering area of contact with adhesive to prevent any infiltration.



NATURAL OAK + ALUMINIUM BASE
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc	
PTRWZ 10	10	53,51	144,48	*
PTRWZ 125	12,5	54,99	148,47	*

H 15 mm on demand

COLOURS


Natural oak



NATURAL OAK + ALUMINIUM BASE
bar length **1,20 lm** - pack. **10 Pcs** - **12 lm**

Article	H mm	€/Pc	
PTRWZ 1020	10	64,19	*
PTRWZ 12520	12,5	65,99	*

NATURAL OAK + ALUMINIUM BASE
bar length **1,80 lm** - pack. **10 Pcs** - **18 lm**

Article	H mm	€/Pc	
PTRWZ 1080	10	96,31	*
PTRWZ 12580	12,5	98,98	*

ITEMS SUPPLIED ALREADY ASSEMBLED
Treat the wood appropriately with paint or oil.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROSTEP WOOD


PROSTEP WOOD is a step nosing profile in real oak with aluminium base. Its 90° shape makes a perfect and elegant nosing for modern stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.
PROSTEP WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

NATURAL OAK
+ ALUMINIUM BASE






PTPW 10
scale 1:2

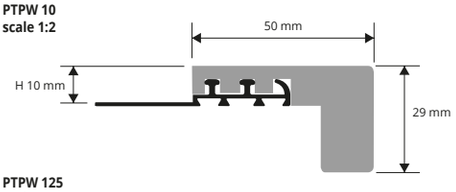

PTPW 125
scale 1:2

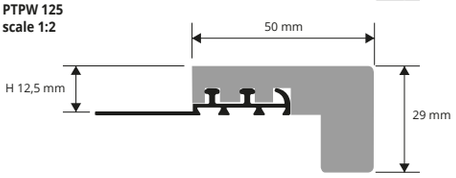

NATURAL OAK + ALUMINIUM BASE
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc	
PTPW 10	10	47,68	128,74	*
PTPW 125	12,5	48,95	132,17	*

NATURAL OAK + ALUMINIUM BASE
bar length **1,20 lm** - pack. **10 Pcs** - **12 lm**

Article	H mm	€/Pc	
PTPW 1020	10	48,94	*
PTPW 12520	12,5	50,68	*


NATURAL OAK + ALUMINIUM BASE
bar length **1,80 lm** - pack. **10 Pcs** - **18 lm**

Article	H mm	€/Pc	
PTPW 1080	10	73,30	*
PTPW 12580	12,5	75,99	*

COLOURS


Natural oak

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

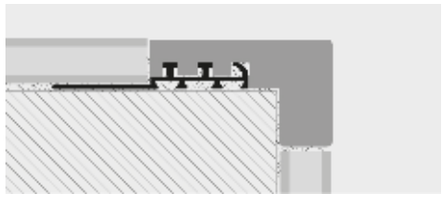

1. Choose the PROSTEP WOOD with suitable height for the thickness of the covering of the step or staircase. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. **5.** Fill the profile/covering area of contact with adhesive to prevent any infiltration.

ITEMS SUPPLIED ALREADY ASSEMBLED
Treat the wood appropriately with paint or oil.

PROSTYLE WOOD


PROSTYLE WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/fret" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive.
PROSTYLE WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.

NATURAL OAK
+ ALUMINIUM BASE






PSYW 10
scale 1:2

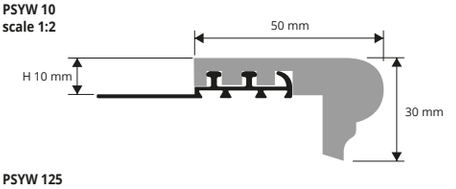

PSYW 125
scale 1:2

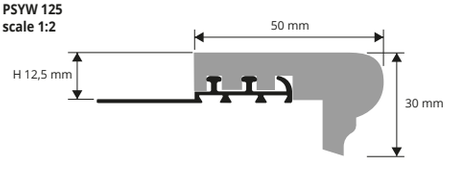

NATURAL OAK + ALUMINIUM BASE
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H mm	€/lm	€/Pc	
PSYW 10	10	46,26	124,90	*
PSYW 125	12,5	47,61	128,55	*

NATURAL OAK + ALUMINIUM BASE
bar length **1,20 lm** - pack. **10 Pcs** - **12 lm**

Article	H mm	€/Pc	
PSYW 1020	10	61,19	*
PSYW 12520	12,5	62,87	*


NATURAL OAK + ALUMINIUM BASE
bar length **1,80 lm** - pack. **10 Pcs** - **18 lm**

Article	H mm	€/Pc	
PSYW 1080	10	91,76	*
PSYW 12580	12,5	97,22	*

COLOURS


Natural oak

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

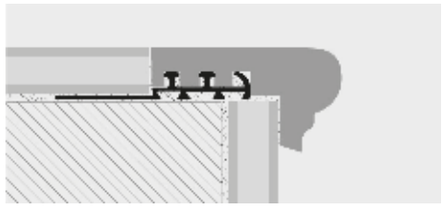

1. Choose the PROSTYLE WOOD with suitable height for the thickness of the covering of the step or staircase. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. **5.** Fill the profile/covering area of contact with adhesive to prevent any infiltration.

ITEMS SUPPLIED ALREADY ASSEMBLED
Treat the wood appropriately with paint or oil.


© 2026 All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy



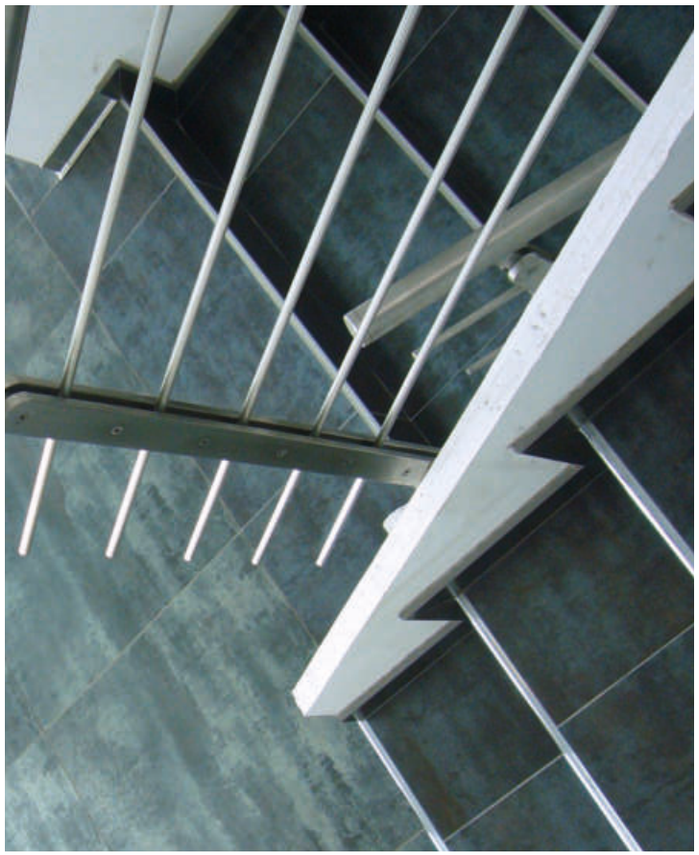



TUBE and **ACCESSORIES** for runners and stair-carpet guides, available in the finishes in polished painted brass, polished gold aluminium and polished chrome aluminium.

TUBES and ACCESSORIES

GOLD AND CHROME POLISHED ALUMINIUM
POLISHED VARNISHED BRASS



BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED SELF PACK
length tube **0,8 lm** - pack. **60 Pcs**


Article	Ø mm		€/Pc
TCTOL 118S	11		23,43
TCTOL 138S	13		25,44

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED SELF PACK
length tube **0,9 lm** - pack. **60 Pcs**

Article	Ø mm		€/Pc
TCTOL 119S	11		25,62
TCTOL 139S	13		27,80

BLISTER KIT - 2 TUBES AND 4 TUBE PLUGS - POLISHED BRASS COATED SELF PACK
length tube **1 lm** - pack. **60 Pcs**

Article	Ø mm		€/Pc
TCTOL 1110S	11		27,80
TCTOL 1310S	13		30,13

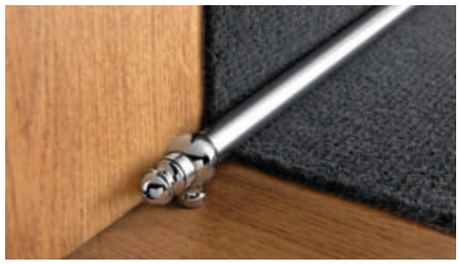

BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM. SELF PACK
length tube **0,8 lm** - pack. **60 Pcs**

Article	Ø mm		€/Pc
TCTBO 128S	12		16,31
TCTBC 128S	12		19,13

BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM. SELF PACK
length tube **0,9 lm** - pack. **60 Pcs**

Article	Ø mm		€/Pc
TCTBO 129S	12		17,77
TCTBC 129S	12		20,56

BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUM. SELF PACK
length tube **1 lm** - pack. **60 Pcs**

Article	Ø mm		€/Pc
TCTBO 1210S	12		19,18
TCTBC 1210S	12		22,00

TCTOL 11/13S



TCTBO 12S



TCTBC 12S



Varnished polished brass is not suitable for places subject to heavy foot-trafic and / orabrasion.

COLOURS



BO - Polished gold alum. **BC** - Polished chrome alum. **OL** - Polished brass coated

TUBE for runners and stair-carpet guides

GOLD AND CHROME POLISHED ALUMINIUM, POLISHED VARNISHED BRASS

POLISHED BRASS COATED
bar length **2 lm** - pack. **40 Pcs** - **80 lm**

Article	Ø mm	€/ml	€/Pc
TGSOL 112	11	18,49	36,98
TGSOL 132	13	21,66	43,32

For different size bars, contact the sales office.

POLISHED ALUMINIUM
bar length **2 lm** - pack. **40 Pcs** - **80 lm**

Article	Ø mm	€/ml	€/Pc
TGSBO 122	12	6,91	13,82
TGSBC 122	12	6,91	13,82

TGSOL 11/13 TGSBO 12 TGSBC 12



TUBE PLUGS/END CAPS for tube

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROMED BRASS - pack. **60 Pcs**

Article	Ø mm	€/Pack.
TETOL 11	11	44,63
TETOC 12	12	116,36
TETOL 12	12	52,60
TETOL 13	13	60,57

TETOL 11
TETOL 12
TETOL 13



TETOC 12



SUPPORT / EYELET for tube with screw

POLISHED BRASS AND CHROMED BRASS

POLISHED BRASS AND CHROMED BRASS - pack. **20 Pcs**

Article	Ø mm	€/Pack.
SOOL 12	12	49,15
SOOC 12	12	82,89
SOOL 14	14	52,06

SOOL 12
SOOL 14



SOOC 12



HINGE SUPPORT for tube

POLISHED BRASS

POLISHED BRASS - pack. **20 Pcs**

Article	Ø mm	€/Pack.
SCOL 11	11	163,11
SCOL 13	13	172,94

Articles without bar code.
For bar code add the letter "C" after the article code. E.g.: SCOL 11C and add € 0,40 x Pc (+ 0,20 x lm) to the gross price.
For cutting to required length 1 lm + 5 % x lm.

SCOL 11
SCOL 13



*** = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROWALK ACC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
PUNCHED OR SELF ADHESIVE

PROWALK ACC is steps protecting steel profile for existing scales. Its superior side level is crimped in order to increase its adhesion. Available in version or with holes either with adhesive. Available sizes: 30 x 10 , 30 x 20 , and 30 x 30 mm. All profiles are protected with protective film. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain.

stair nosing for existing steps

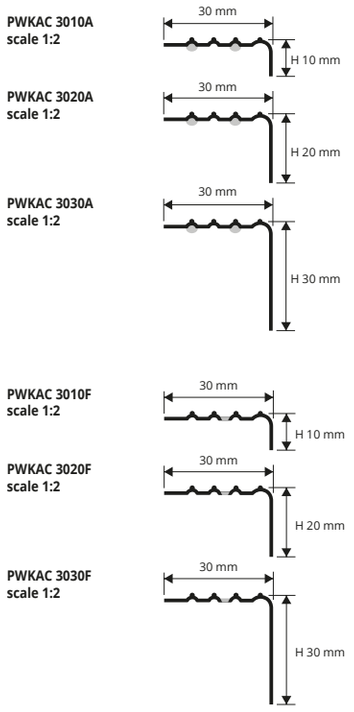





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10mm**

Article	L x H mm	€/lm	€/Pc
PWKAC 3010A	30 X 10	18,46	49,84
PWKAC 3020A	30 X 20	20,95	56,57
PWKAC 3030A	30 X 30	23,51	63,48

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A punched - with protective film - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** - **10/10mm**

Article	L x H mm	€/lm	€/Pc
PWKAC 3010F	30 X 10	16,54	44,66
PWKAC 3020F	30 X 20	19,03	51,38
PWKAC 3030F	30 X 30	21,59	58,29

INSTRUCTIONS FOR LAYING METHODS
Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



AC - Polished stainless st. AISI 304/1.4301-V2A

ON DEMAND HAND-BRUSHED STAINLESS STEEL (Price to be agreed. Production delay 4/5 weeks)


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROEND


GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
WITH/ WITHOUT ADHESIVE AND PUNCHED

PROEND is a step nosing profile in anodized aluminium with silver-gold-bronze finish, available with self-adhesive backing or punched. Ideal for protecting existing steps and with knurled flat surface, it guarantees excellent safety features to prevent accidents in public and private environments.
PROEND ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or using screws and screw anchors in the punched version.

stair nosing for existing steps

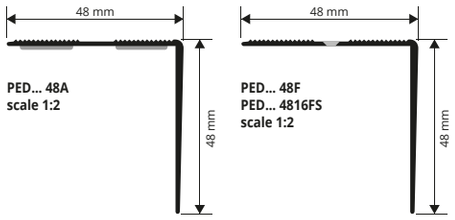

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

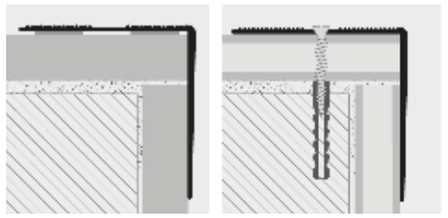

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.





ANOD. ALUMINIUM with and without adhesive thermo packed
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H x L mm	€/lm	€/Pc
PED... 48A	48 X 48	10,94	29,54
PED... 48	48 X 48	9,40	25,38

"A" at the end of the product code = Item with adhesive

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum. **AB** - Anodized bronze alum.

ANODIZED ALUMINIUM punched thermo packed
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	H x L mm	€/lm	€/Pc
PED... 48F	48 X 48	9,40	25,38

ANOD. ALU. punched with screws and screw anchors thermo packed - bar length **1,65 lm** - pack. **20 Pcs** SELF PACK

Article	H x L mm	€/lm	€/Pc
PED... 4816FS	48 X 48		19,17

Available in the colours: AA - AO - AB. The code of the selected colour must be added to the article code.
E.g.: PED... 48A (chosen colour anodized gold) PEDAO 48A.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROWALK is a step nosing profile in polished brass and anodized aluminium for existing steps. The upper part is knurled to increase slip and slide resistance and is applied after laying. Available with holes or with adhesive. Available in the widths 22 x 22 and 30 x 30 mm. All the profiles are shrink-wrapped.
Ideal for protecting and shielding the edges and corner between riser and tread, which are the areas subjected to most stress.

PROWALK

POLISHED BRASS and ANODIZED ALUMINIUM
ADHESIVE and PUNCHED

stair nosing for existing steps

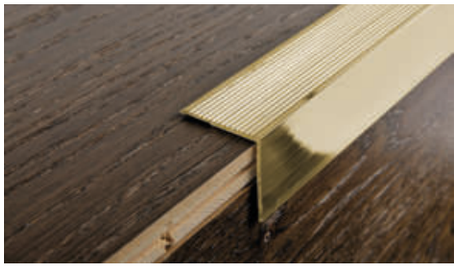

KNURLED POLISHED BRASS with adhesive thermo packed
bar length **2,7 lm** - pack. **15 Pcs** - **40,5 lm**

Article	H x L mm	€/lm	€/Pc	
PWKOL 22A	22 X 22	25,43	68,66	
PWKOL 30A	30 X 30	32,75	88,43	*



KNURLED POLISHED BRASS punched thermo packed
bar length **2,7 lm** - pack. **15 Pcs** - **40,5 lm**

Article	H x L mm	€/lm	€/Pc	
PWKOL 22F	22 X 22	22,62	61,07	
PWKOL 30F	30 X 30	29,94	80,84	*

KNURLED POLISHED BRASS without holes thermo packed
bar length **2,7 lm** - pack. **15 Pcs** - **40,5 lm**

Article	H x L mm	€/lm	€/Pc	
PWKOL 22	22 X 22	22,34	60,32	
PWKOL 30	30 X 30	29,35	79,25	*

KNURLED POLISHED BRASS with adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	H x L mm	€/lm	€/Pc	
PWKOL 229AS	22 X 22		22,47	
PWKOL 309AS	30 X 30		32,80	*

KNURLED POLI. BRASS punched with screws and screw anchors thermo packed - bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	H x L mm	€/lm	€/Pc	
PWKOL 309FS	30 X 30		26,55	*

COLOURS



OL - Polished brass



KNURLED ANODIZED ALUMINIUM with adhesive thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PWK... 22A	22 X 22	8,37	22,60
PWK... 30A	30 X 30	12,12	32,72



KNURLED ANODIZED ALUMINIUM punched thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PWK... 22F	22 X 22	6,31	17,04
PWK... 30F	30 X 30	9,17	24,76

KNURLED ANODIZED ALUM. WITHOUT HOLES thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PWK... 22	22 X 22	6,10	16,47
PWK... 30	30 X 30	8,85	23,89

KNURLED ANODIZED ALUMINIUM with adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	H x L mm	€/lm	€/Pc	
PWK... 229AS	22 X 22		9,10	
PWK... 309AS	30 X 30		12,42	*

KNURLED ANOD. ALU. punched with screws and screw anchors thermo packed - bar length **0,90 lm** - pack. **20 Pcs**

SELF PACK

Article	H x L mm	€/lm	€/Pc	
PWK... 229FS	22 X 22		7,43	
PWK... 309FS	30 X 30		10,12	*

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs).
The code of the selected colour must be added to the article code. E.g.: PWK... 22A (chosen colour anodized gold) PWKAO 22A.

COLOURS




AO - Anodized gold alum. **AA** - Anodized silver alum. **AB** - Anodized bronze alum.

ON DEMAND MINIMUM QUANTITY 100 PCS for color and height




AT - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anodized sand aluminium


PWK... 22A
PWK... 229AS
scale 1:1




PWK... 30A
PWK... 309AS
scale 1:1




PWK... 22F
PWK... 229FS
scale 1:1




PWK... 30F
PWK... 309FS
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

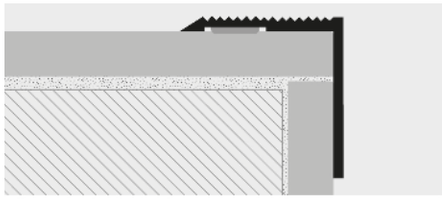

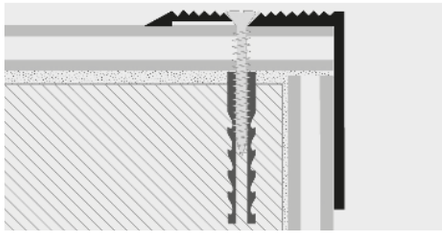

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROWALK 2510
PROWALK 2520


ALUMINIUM 30 WOOD FINISHES AND 6
ANODIZED FINISHES PUNCHED OR SELF ADHESIVE


PROWALK 2510 e **2520** are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium with silver, gold and bronze finish and available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

stair nosing for existing steps

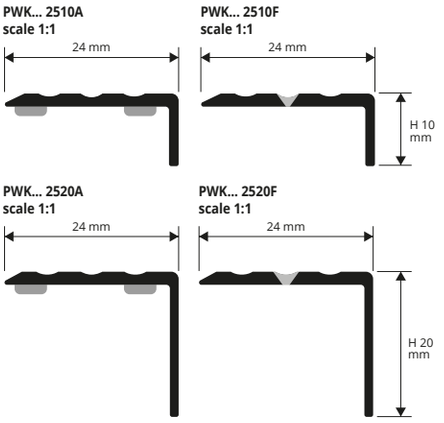

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

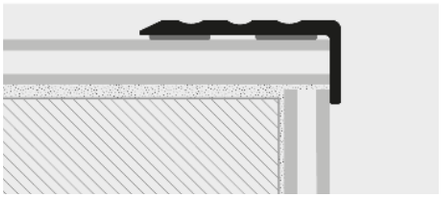

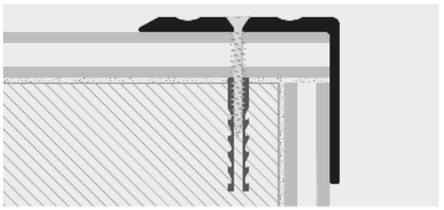

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.



ANODIZED ALUMINIUM with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PWK... 2510A	24 X 10	6,24	16,85
PWK... 2520A	24 X 20	6,85	18,50

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm		€/Pc
PWK... 25109AS	24 X 10		6,71
PWK... 25209AS	24 X 20		7,73



ANODIZED ALUMINIUM punched thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PWK... 2510F	24 X 10	4,68	12,64
PWK... 2520F	24 X 20	5,38	14,53

ANODIZED ALUM. punched, screws and screw anchors thermo packed - bar length **0,90 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm		€/Pc
PWK... 25109FS	24 X 10		5,64
PWK... 25209FS	24 X 20		6,49

ANODIZED ALUM. punched, screws and screw anchors thermo packed - bar length **1,35 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm		€/Pc
PWK... 251013FS	24 X 10		8,18 *

Available in the finishes: AO - AA - AB (AT, CH e SB on demand with a minimum order of 100 pcs).
The code of the selected finish must be added to the article code. E.g.:PWK... 2510A (chosen finish anodized silver) PWKAA 2510A.

ALUMINIUM WOODEN FINISHES with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc	
PWK... 2510A	24 X 10	10,38	28,03	*
PWK... 2520A	24 X 20	12,48	33,70	*

Available on demand in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W with a minimum quantity order of 100 pcs.
The code of the selected colour must be added to the article code.
E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A.

COLOURS

ANODIZED



AO - Anodized gold alum. **AA** - Anodized silver alum. **AB** - Anodized bronze alum.

ON DEMAND MINIMUM QUANTITY 100 PCS for color and height

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED



AT - Anodized titanium alum. **CH** - Anod. champagne alum. **SB** - Anodized sand aluminium



04W - Dark beech | **05W** - Light oak (strip) | **07W** - Light cherry (strip) | **09W** - Red walnut (merbau-apple-walnut) | **13W** - Indonesian teak | **18W** - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **29W** - White oak

30W - Grey oak | **31W** - Victoria oak | **32W** - Pink oak | **33W** - Sawed oak | **34W** - Havana oak | **35W** - Edinburgh oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak

39W - Grey elm | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak | **45W** - Marocco oak | **46W** - Black decape' | **48W** - Cork oak | **49W** - Sand oak | **53W**

54W | **55W** | **65W** - Tripoli | **73W** - Bangkok | **75W** - Liotard

On demand it is possible to produce samples of wood finishes. Contact the office for negotiation, small amounts, timing and costs.

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES


PROEND INS 75

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
ADHESIVE AND PUNCHED

PROEND INS 75 is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.
PROEND INS 75 ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.





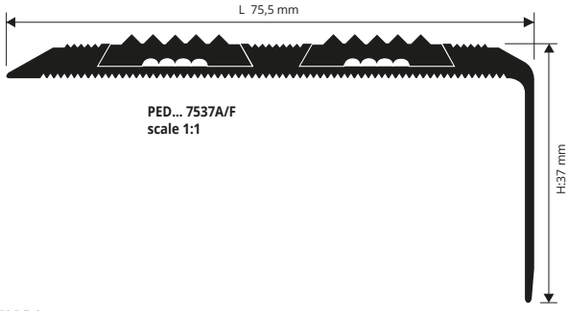

PED... 7537A/F
scale 1:1

stair nosing for existing steps

ANODIZED ALUMINIUM with DOUBLE INSERT
thermo packed - with adhesive
bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	H x L mm	€/lm	€/Pc
PED... 7537A	37 X 75,5	26,98	72,85


ANODIZED ALUMINIUM with DOUBLE INSERT
thermo packed - punched
bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**


Article	H x L mm	€/lm	€/Pc
PED... 7537F	37 X 75,5	23,08	62,32

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Available in the finishes: AA - AO - AB.
The code of the selected finish must be added to the article code.
E.g.:PED... 7537A (chosen finish anodized gold) PEDAO 7537A.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS
Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.

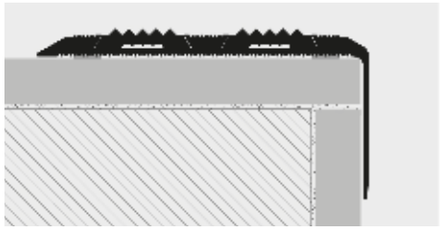

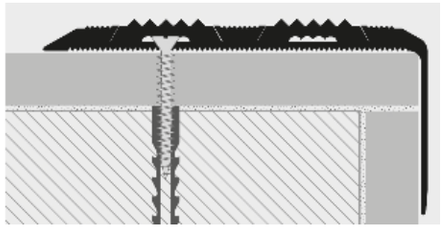

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum. **AB** - Anodized bronze alum.


PROEND INS

GOLD, SILVER AND BRONZE ANOD. ALUMINIUM
ADHESIVE AND PUNCHED

PROEND INS is a step nosing profile in anodized aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodized with gold, bronze or silver finish and with adhesive or punched.
PROEND INS ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.





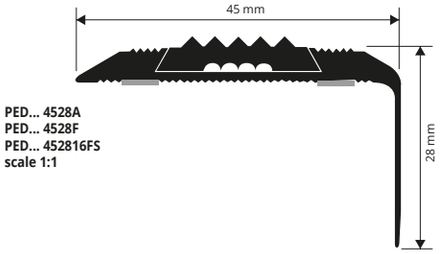

PED... 4528A
PED... 4528F
PED... 452816FS
scale 1:1

ANODIZED ALUM. with adhesive WITH INSERT thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PED... 4528A	28 X 45	17,10	46,17

ANODIZED ALUM. punched WITH INSERT thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H x L mm	€/lm	€/Pc
PED... 4528F	28 X 45	12,34	33,32

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

AN. ALUM. punched WITH INSERT, screws and screw anchors thermo packed - bar length **1,65 lm** - pack. **20 Pcs**

SELF PACK

Article	H x L mm	€/lm	€/Pc
PED... 452816FS	28 X 45		31,06 *


Available in the finishes: AA - AO - AB.
The code of the selected colour must be added to the article code.
E.g.: PED... 4528A (chosen finish anodized gold) PEDAO 4528A.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum. **AB** - Anodized bronze alum.

EXAMPLES OF LAYING

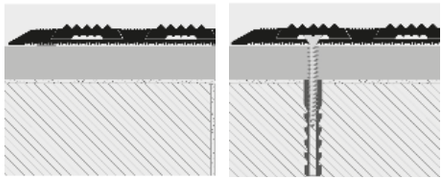


For instructions see the product above


BLACK INTERCHANGEABLE INSERT

VINYL RESIN / RUBBER

VINYL RESIN / RUBBER
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	€/lm	€/Pc
IIN 12	2,21	5,97





* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


stair nosing for existing steps

PROEND GRIP 70


SILVER, GOLD AND BRONZE ANOD. ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND GRIP 70 is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 50mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

PEGRAA 7032...

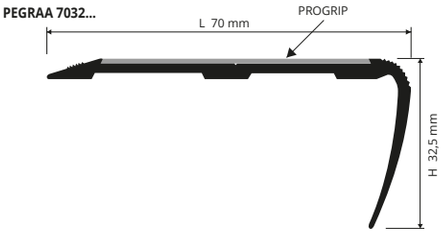


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

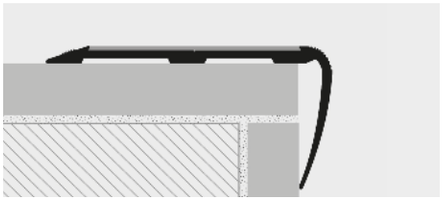

Adhesive version
1. Choose the suitable profile and cut it to the necessary length. **2.** Degrease, wash and clean the solid surface thoroughly. **3.** Remove the protective paper from the adhesive. **4.** Lay the profile by applying pressure evenly over the whole surface without using a hammer.
Punched version
1. Choose the suitable profile and cut it to the necessary length. **2.** Mark the position of the holes using the existing holes in the profile as reference. **3.** Insert the screw anchors into the drilled holes. **4.** Fix the profile using flathead screws suitable for the relative slots in the profile.



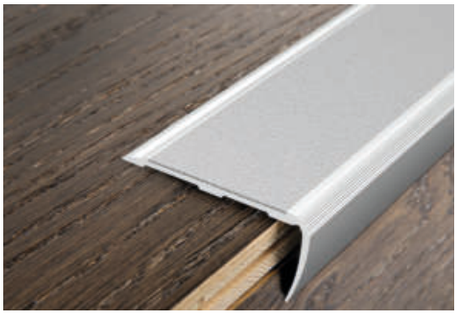

SILVER, GOLD AND BRONZE ANODIZED ALUM. with adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PEGR... 7032A	32,5 X 70	19,20	51,84

SILVER, GOLD AND BRONZE ANODIZED ALUM. punched thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PEGR... 7032F	32,5 X 70	15,72	42,44

Available in the finishes: AA - AO - AB.
The code of the selected finish must be added to the article code.
E.g.: PEGR... 7032A (chosen finish anodized gold) PEGRAO. 7032A.

COLOURS



AA - Anodized silver alum. **AO** - Anodized gold alum. **AB** - Anodized bronze alum.


On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.


The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGR... 7032... order PGR... 50 (Specify the chosen colour).


PROEND 5050

ANODIZED SILVER ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED

PROEND 5050 is a non-slip profile for stairs in anodized silver aluminium, with a visible surface of 50x50 mm. The profile, available in the adhesive or punched version, is characterized of a horizontal surface partially milled, equipped with a specific groove where the non-slip adhesive Progrip in carborundum could be applied. The profile has also a vertical inclined of 83-degrees surface completely smooth. The ease of application and the availability of the carborundum in different colours, make it a much-sought profile.

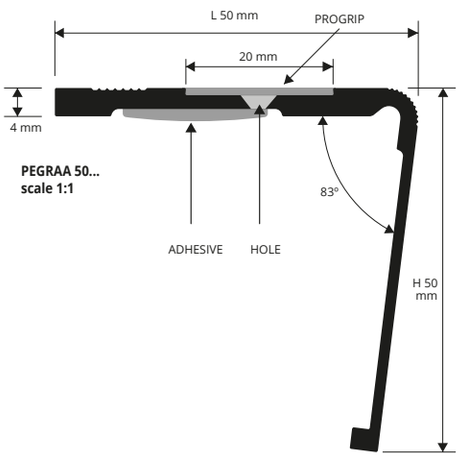

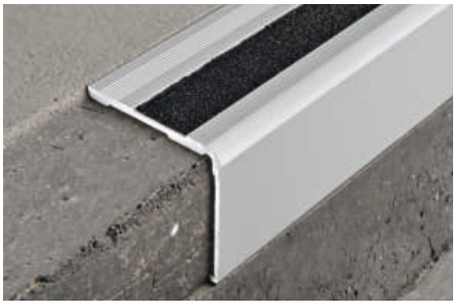

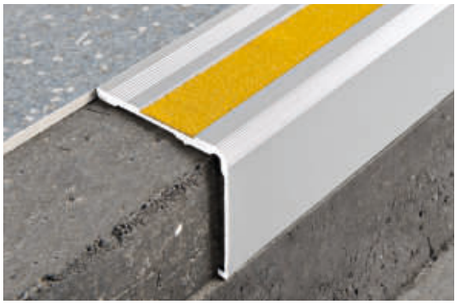

ANODIZED SILVER ALUMINIUM punched / with adhesive
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	HxL mm	€/lm	€/Pc	
PEGRAA 50F	50 X 50	13,45	36,31	*
PEGRAA 50A	50 X 50	16,07	43,39	*

COLOURS



AA - Anodized silver alum.

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGRAA 50... order PGR... 20 (Specify the chosen colour).

INSTRUCTIONS FOR LAYING METHODS
Adhesive version
1. Cut PROEND 5050 to the desired length; **2.** Remove all the remains of oil, grease and dirt from the surface where the profile will be laid; **3.** When the surface is perfectly dry, remove the protective film and press the profile exerting the appropriate pressure; **4.** Apply the non-slip strip in carborundum in the desired colour.
Punched version
1. Cut PROEND 5050 to the correct size; **2.** Mark on the support the position of the holes present on the profile; 3. Drill holes in the bracket with a 5 mm diameter bit and insert the 5 x 25 mm rawlplugs; **4.** Align the profiles over the holes and screw it to support; **5.** Apply the non-slip carborundum adhesive insert in the desired color.

EXAMPLES OF LAYING





© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROEND GRIP


PROEND GRIP is a non-slip step nosing profile in anodized aluminium with adhesive non-slip 20mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodized aluminium with silver, gold or bronze finish with anodizing coat of approx. 15/20 micron.

SILVER, GOLD AND BRONZE ANOD. ALUMINIUM
+ NON-SLIP INSERT ADHESIVE AND PUNCHED





PEGR... 5230A/F
scale 1:1

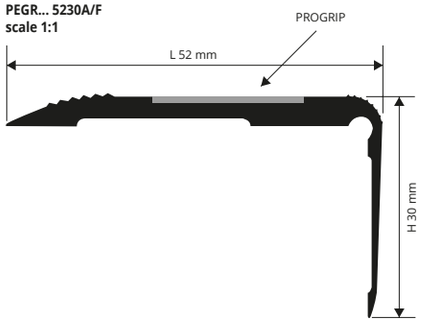

ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**


Article	H x L mm	€/lm	€/Pc
PEGR... 5230A	30 X 52	16,21	43,77

ANODIZED SILVER, GOLD AND BRONZE ALUM. punched thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H x L mm	€/lm	€/Pc
PEGR... 5230F	30 X 52	13,61	36,75

On demand bar length 3 lm with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

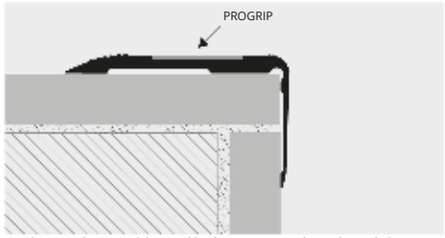

1. Choose the suitable profile for covering the edge of the step. **2.** Clean the surface on which the profile is to be laid, ensuring that it is grease-free and dry. Do not apply the strips at temperatures below 15°. **3.** Remove the protective paper from the adhesive and lay correctly by applying pressure evenly over the whole profile without using a hammer.
If the punched PROEND GRIP has been chosen, screw the profile to the step and apply the adhesive carborundum to hide the screws.

ANODIZED SILVER, GOLD AND BRONZE ALUM. with adhesive - thermo packed
bar length **1,66 lm** - pack. **20 Pcs** — SELF PACK

Article	H x L mm	€/lm	€/Pc
PEGR... 523016AS	30 X 52		32,06 *

ANODIZED SILVER, GOLD AND BRONZE ALUM. punched, screws and screw anchors - thermo packed
bar length **1,66 lm** - Pack **20 Pcs** — SELF PACK

Article	H x L mm	€/lm	€/Pc
PEGR... 523016FS	30 X 52		28,90 *

Available in the finishes: AA - AO - AB .
The code of the selected finish must be added to the article code. E.g.: PEGR... 523016AS (chosen finish anodized silver) PEGRAA 523016AS.

The adhesive carborundum strip (PROGRIP) is not included with the profile.
For PEGR... 5230... order PGR... 20 (Specify the chosen colour).

COLOURS



AO - Anodized gold alum. | **AA** - Anodized silver alum. | **AB** - Anodized bronze alum.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROGRIP

PROGRIP is a self-adhesive product in carborundum consisting of a plastic film plus abrasive granules with high resistance to wear. It is normally used to guarantee safety on steps in public and private environments, as required by accident-prevention laws. Available in various colours and widths to meet all technical and aesthetic requirements. It is advisable to apply 2 strips on each step, rounding off the ends.

ADHESIVE CARBORUNDUM - 6 COLOURS



ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS
rolls length **18,2 lm**

Article	Width mm	€/lm	€/Roll	
PGRN 20	20	2,02	36,76	
PGRB 20	20	3,56	64,79	*
PGRT 20	20	2,02	36,76	
PGRG 20	20	4,00	72,80	
PGRY 20	20	4,00	72,80	
PGRM 20	20	2,32	42,22	
PGRN 25	25	2,68	48,78	
PGRB 25	25	4,02	73,16	*
PGRT 25	25	2,68	48,78	
PGRG 25	25	4,56	82,99	
PGRY 25	25	4,42	80,44	
PGRM 25	25	3,08	56,06	
PGRN 50	50	5,50	100,10	
PGRB 50	50	8,18	148,88	*
PGRT 50	50	5,50	100,10	
PGRG 50	50	9,05	164,71	
PGRY 50	50	8,99	163,62	
PGRM 50	50	6,10	111,02	



COLOURS



N - Black | **B** - White | **T** - Transparent
G - Gray | **Y** - Yellow | **M** - Brown
GN - Yellow/Black

The PGRT (trasparent) are not suitable for outside use.

ADHESIVE NON-SLIP STRIP for STEPS - rolls length **18,2 lm**

Article	Width mm	€/lm	€/Roll
PGRGN 20	20	2,03	36,95
PGRGN 25	25	2,72	49,50
PGRGN 50	50	5,58	101,56

LAYING INSTRUCTIONS
1. Thoroughly clean and degrease the surface of application. 2. Round the ends of the strips. **3.** Remove the protective paper from the adhesive and lay the PROGRIP using a roller. **4.** Do not apply the strips at temperatures below 15°, otherwise heat the strips and the step. **5.** When necessary clean away impurities with a brush and preserve the PROGRIP. **6.** When laying on tiles, cut and round the corners of the strips on the inner part of the tile. **7.** Carefully seal the outer edges of the strips to prevent water infiltration.


= *News 2023*

* = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS®
PROFILES

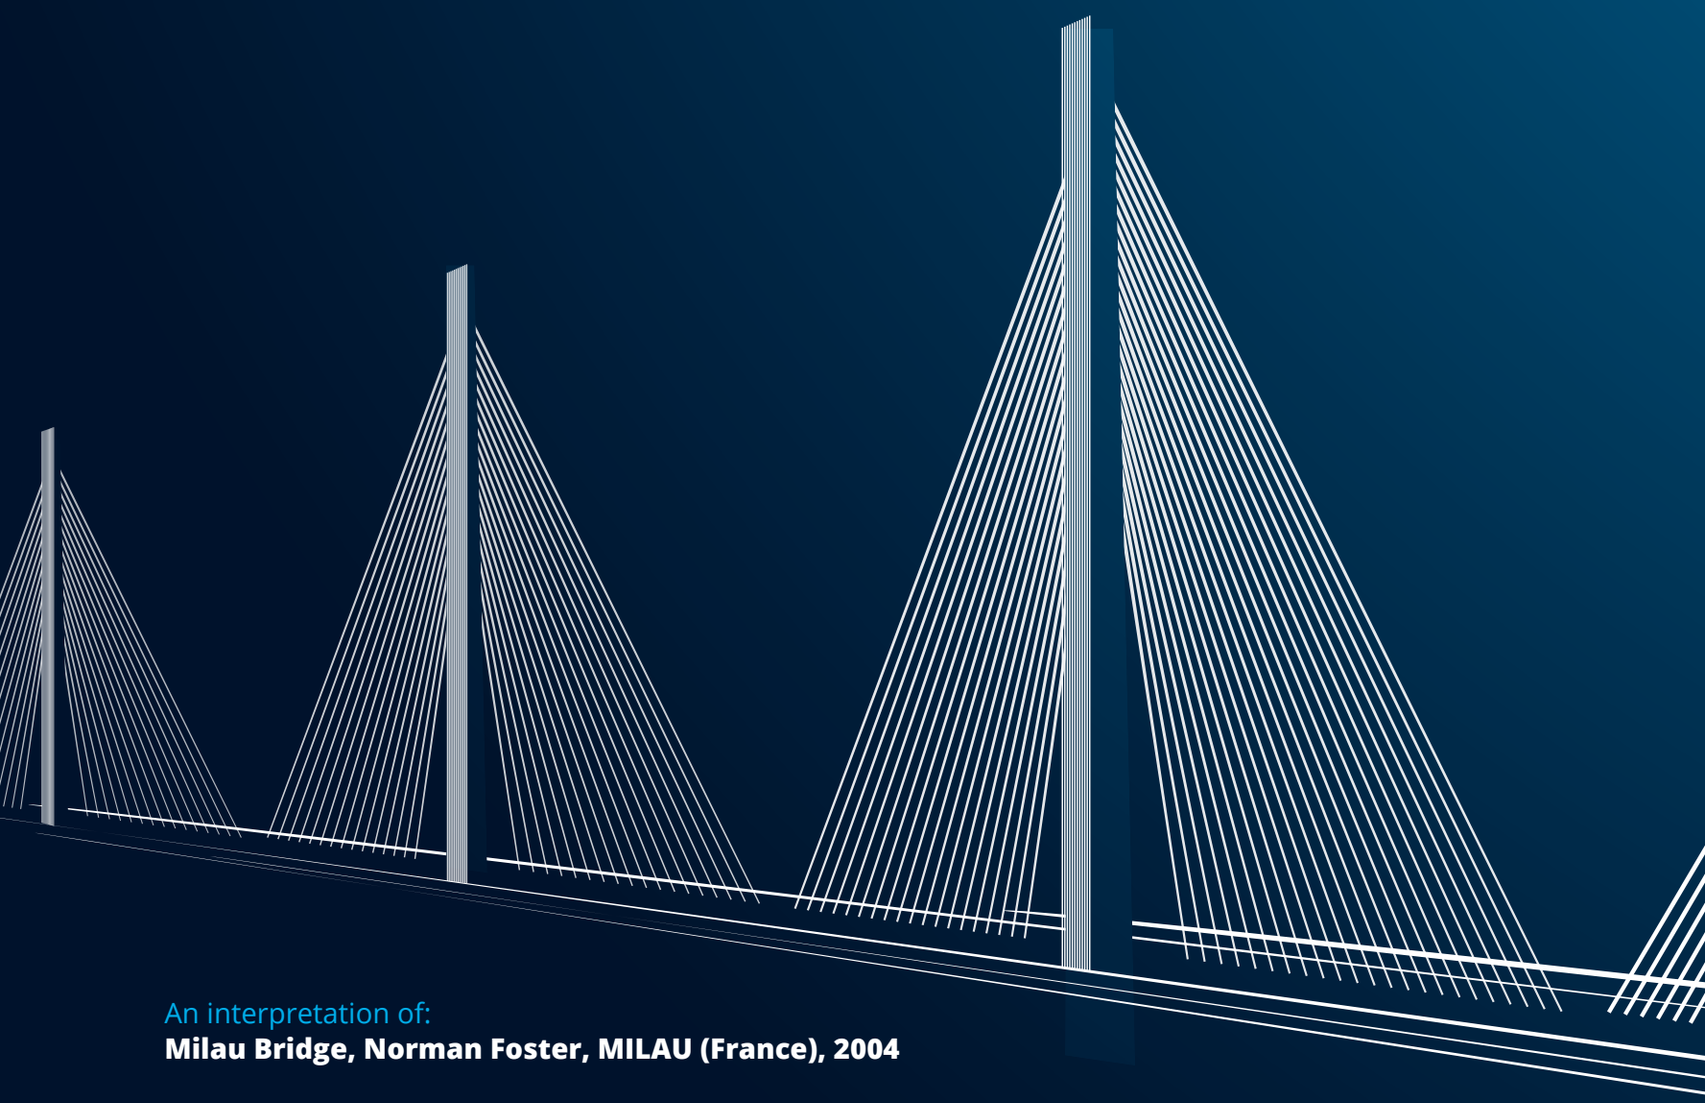

An interpretation of:
Milau Bridge, Norman Foster, MILAU (France), 2004



MOVEMENT AND EXPANSION JOINTS


PROFILES & SYSTEMS

JOINTS


PROFLEX ACC


STAINLESS STEEL AISI 304/1.4301-V2A
+ VINYL RESIN / RUBBER INSERT

PROFLEX ACC is a new, stainless steel expansion joint with interchangeable (H. 4,5 e 6 mm excluded) vinyl resin/rubber insert, available in black, grey, beige or ivory. **PROFLEX ACC** provides elastic expansion joints for various kinds of flooring, such as ceramic, marble, granite, Kerilite/Laminam or any other flooring material laid with glue/adhesive and having a thickness of 4.5 to 20 mm. The joint is specially designed to protect the edges of the tiles, and its exceptional strength makes it capable of supporting frequent traffic, both pedestrian and vehicular (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force.
HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.

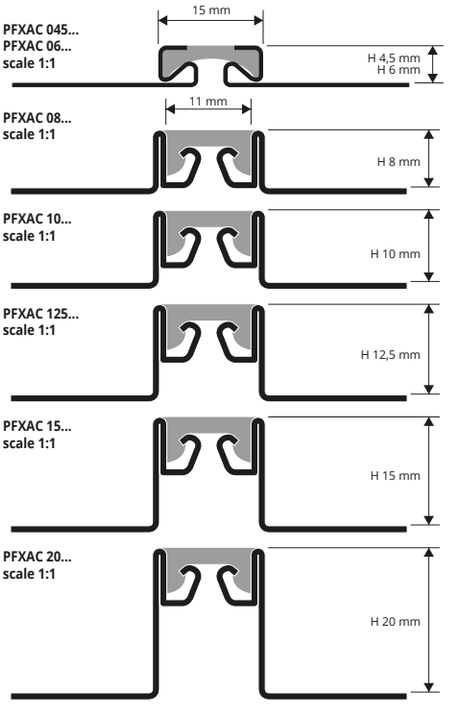

EXAMPLES OF LAYING

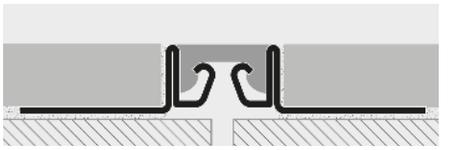

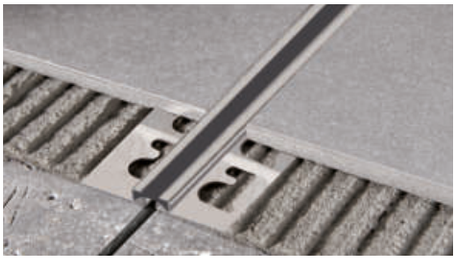

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
+ VINYL RESIN / RUBBER INSERT
bar length **2,5 lm** - pack. **10 Pcs - 25 lm (PFXAC 045/06/08 - 50 lm)**

Article	H mm	€/lm	€/Pc
PFXAC 045...	4, 5	24,64	61,60
PFXAC 06...	6	25,67	64,18
PFXAC 08...	8	30,91	77,28
PFXAC 10...	10	31,29	78,22
PFXAC 125...	12,5	32,19	80,47
PFXAC 15...	15	33,59	83,98
PFXAC 20...	20	36,02	90,05

LAYING INSTRUCTIONS

1. Choose the PROFLEX ACC with the same height as the thickness of the floor (tile) also choosing the colour of the insert. **2.** Using a notched spreader apply the adhesive in the point where the joint will be laid. **3.** Lay the PROFLEX ACC with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). **4.** Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. **5.** Use sealant to fill any spaces between the tile and the PROFLEX ACC joint.



VINYL RESIN/RUBBER INSERT length **2,5 lm**

Article	H mm	€/lm	€/Pc
ISPFXAC 820...	8-10-12,5-15-20	4,23	10,58

VINYL RESIN/RUBBER INSERT length **2,5 lm**

Article	H mm	€/lm	€/Pc
ISPFXAC 045...	4,5	3,90	9,75
ISPFXAC 06...	6	3,90	9,75

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs).
The code of the selected finish must be added to the article code.
E.g.: PFXAC 045... (chosen insert colour grey) PFXAC 045G.

COLOURS

N - Black **(E85)** | **G** - Grey **(E83)**

ON DEMAND MINIMUM QUANTITY 200 PCS for colour and height

B - Beige **(E84)** | **A** - Ivory **(E81)**


(Price to be agreed. Production delay 4/5 weeks)

PROFLEX ACC PR

STAINLESS STEEL AISI 304/1.4301-V2A
+ VINYL RESIN / RUBBER INSERT

PROFLEX ACC PR is a new perimeter joint made of AISI 304/1.4301-V2A stainless steel, with an interchangeable vinyl resin/rubber insert. **PROFLEX ACC PR** is applied on fixed parts, such as doors, windows and frames, and also on ceramic tiling, plaster and vertical walls. The visible part of the perimeter joint is the same as PROFLEX ACC, with an exposed steel flange. **PROFLEX ACC PR** joints prevent sound from propagating through the wall lining and reduce the transmission of noise caused by footfalls and vibrations. Available with grey (G), black (N), beige (B) or ivory (A) inserts and in various heights H 8-10-12.5-15-20 mm. Lay the joints according with the standards in force.

soundproof perimeter joints

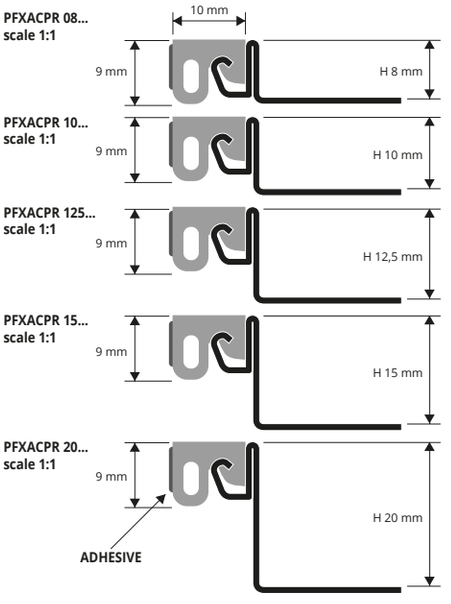



POLISHED STAINLESS STEEL AISI 304/1.4301- V2A
+ VINYL RESIN / RUBBER INSERT
bar length **2,5 lm** - pack. **20 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
PFXACPR 08...	8	21,26	53,15
PFXACPR 10...	10	21,51	53,78
PFXACPR 125...	12,5	22,23	55,58
PFXACPR 15...	15	23,06	57,65
PFXACPR 20...	20	24,47	61,17

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A



VINYL RESIN / RUBBER INTERCHANGEABLE INSERT length **2,5 lm**

Article	H mm	€/lm	€/Pc
ISPFXACPR 820...	8-10-12,5-15-20	4,23	10,58

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs).
The code of the selected finish must be added to the article code.
E.g.: ISPFXACPR 820... (chosen insert colour grey) ISPFXACPR 820G.

COLOURS

N - Black **(E85)** | **G** - Grey **(E83)**

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height

B - Beige **(E84)** | **A** - Ivory **(E81)**

(Price to be agreed. Production delay 4/5 weeks)

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROFLEX OT


NATURAL BRASS
+ VINYL RESIN / RUBBER INSERT

PROFLEX OT is an expansion joint in natural brass with the interchangeable PVC/rubber insert. It is available in black, grey, beige or ivory and serves to fabricate expansion joints for ceramic tile, marble or granite floors and any floor laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks, pallet trucks, cars) traffic. The joint must be placed level with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force.
HIGH RESISTANCE TO HEAVY LOADS AND TO FREQUENT PALLET TRUCK AND LIFT TRUCK TRAFFIC.





PFXOT 30
scale 1:1

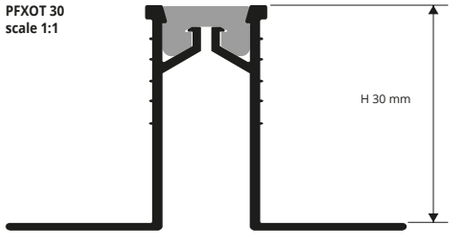

NATURAL BRASS + VINYL RESIN / RUBBER INSERT
bar length **2,5 lm** - pack. **10 Pcs - 25 lm**

Article	H mm	€/lm	€/Pc	
PFXOT 08...	8	33,79	84,47	
PFXOT 10...	10	35,41	88,52	
PFXOT 125...	12,5	37,38	93,45	
PFXOT 15...	15	39,62	99,05	*
PFXOT 20...	20	43,48	108,70	*
PFXOT 30...	30	46,79	116,97	

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs).
The code of the selected finish must be added to the article code.
E.g.: PFXOT 08... (chosen insert colour grey) PFXOT 08G.


VINYL RESIN/RUBBER INSERT
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
IGC....	14 X 6	4,88	12,20

Insert available in the colours: G - N (Beige and ivory available on demand).
The code of the selected finish must be added to the article code.
E.g.: IGC ... (chosen insert colour grey) IGCG.

***The inserts of the on demand profiles are also on demand**

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

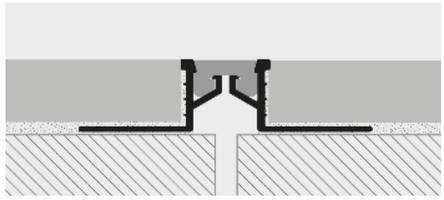


1. Choose the PROFLEX OT with the same height as the thickness of the floor (tile) also choosing the colour of the insert. **2.** Using a notched spreader apply the adhesive in the point where the joint will be laid. **3.** Lay the PROFLEX OT with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). **4.** Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. **5.** Use sealant to fill any spaces between the tile and the PROFLEX OT joint.

COLOURS



N - Black **(E85)** | **G** - Grey **(E83)**

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height



B - Beige **(E84)** | **A** - Ivory **(E81)**

(Price to be agreed. Production delay 4/5 weeks)

PROFLEX AL


NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

PROFLEX AL is an expansion joint in natural aluminium with the PVC/rubber insert. It is available in black, grey, beige or ivory and serves to fabricate expansion joints for ceramic tile, marble or granite floors and any floor laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks, pallet trucks, cars) traffic. The joint must be placed level with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force.
HIGH RESISTANCE TO HEAVY LOADS AND TO FREQUENT PALLET TRUCK AND LIFT TRUCK TRAFFIC.





PFXAL/OT 08
scale 1:1

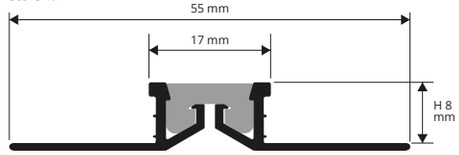


PFXAL/OT 10
scale 1:1




PFXAL/OT 125
scale 1:1



PFXAL/OT 15
scale 1:1



PFXAL/OT 20
scale 1:1

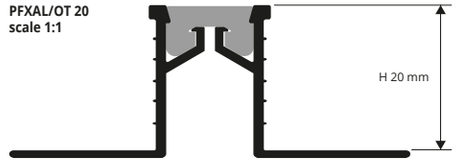

NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length **2,5 lm** - pack. **20 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
PFXAL 08...	8	14,48	36,20
PFXAL 10...	10	14,76	36,90
PFXAL 125...	12,5	15,16	37,90
PFXAL 15...	15	16,03	40,08
PFXAL 20...	20	17,37	43,43

Insert available in the colours: G - N (Beige and ivory available on demand with a minimum quantity order of 200 pcs).
The code of the selected finish must be added to the article code.
E.g.: PFXAL 08... (chosen insert colour grey) PFXAL 08G.

VINYL RESIN/RUBBER INSERT
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
IGC....	14 X 6	4,88	12,20


Insert available in the colours: G - N (Beige and ivory available on demand).
The code of the selected finish must be added to the article code.
E.g.: IGC ... (chosen insert colour grey) IGCG.

COLOURS



N - Black **(E85)** | **G** - Grey **(E83)**

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height



B - Beige **(E84)** | **A** - Ivory **(E81)**

(Price to be agreed. Production delay 4/5 weeks)

LAYING INSTRUCTIONS

1. Choose "PROFLEX AL" according to the tile thickness and desired colour. **2.** Cut "PROFLEX AL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Place the joint exactly over the screed joint and press the anchoring flange into the adhesive. **4.** Lay the tiles aligning them with the profile leaving a 2 mm joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all the remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

***= Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2020. All rights reserved by Progress Profiles. Printed in Italy


PROFLEX ACN

STAINLESS STEEL AISI 304/1.4301-V2A

PROFLEX ACN is a movement joint suitable for vehicular traffic composed by two interlocked sliding stainless steel profiles. The two stainless steel profiles have punched flanges which guarantee a perfect fixing to the support and a correct movement. **PROFLEX ACN** stainless steel is suitable for all areas with heavy chemical and mechanical stress. Lay the joints according to UNI 11493-1.

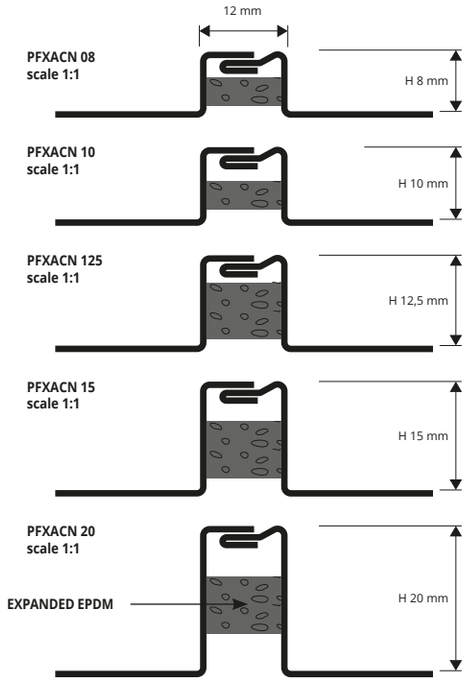

AVAILABLE
H 11mm - PFXACN 11, H 25mm - PFXACN 25, H 30mm - PFXACN 30

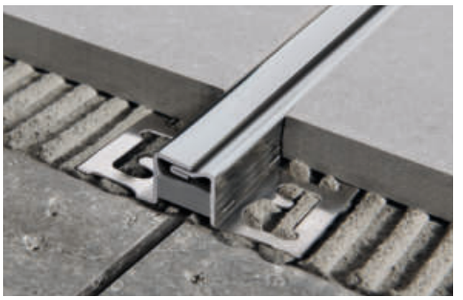

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,5 lm** - pack. **10 Pcs - 25 lm**

Article	H mm	€/lm	€/Pc
PFXACN 08	8	33,81	91,29
PFXACN 10	10	34,78	93,91
PFXACN 11	11	35,32	95,36
PFXACN 125	12,5	36,23	97,82
PFXACN 15	15	37,74	101,90
PFXACN 20	20	39,25	105,98
PFXACN 25	25	40,75	110,03
PFXACN 30	30	42,26	114,10

COLOURS


Stainless steel AISI 304/1.4301-V2A

ON DEMAND*

ACM - Polished stainless st. AISI 316LL

***Minimum quantity 200 pcs.**
Price to be agreed. Production delay 4/5 weeks.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

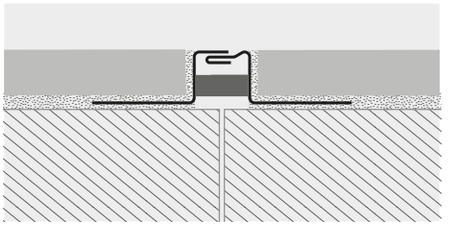


1. Choose the PROFLEX ACN with the same height as the thickness of the floor (tile). **2.** Using a notched spreader apply the adhesive in the point where the joint will be laid. **3.** Lay the PROFLEX ACN with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). **4.** Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. **5.** Use sealant to fill any spaces between the tile and the PROFLEX ACN joint.

PROFLEX ALN

NATURAL ALUMINIUM

PROFLEX ALN is a new, natural aluminium expansion joint consisting of two interlocked sliding profiles designed for glued floors. **PROFLEX ALN** provides elastic expansion joints for various kinds of flooring, such as ceramic, marble, granite, Kerilite or any other flooring material laid with glue/adhesive and having a thickness of 8 to 20 mm. The joint is specially designed to protect the edges of the tiles, and its exceptional strength makes it capable of supporting frequent traffic, both pedestrian and vehicular (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force. HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.

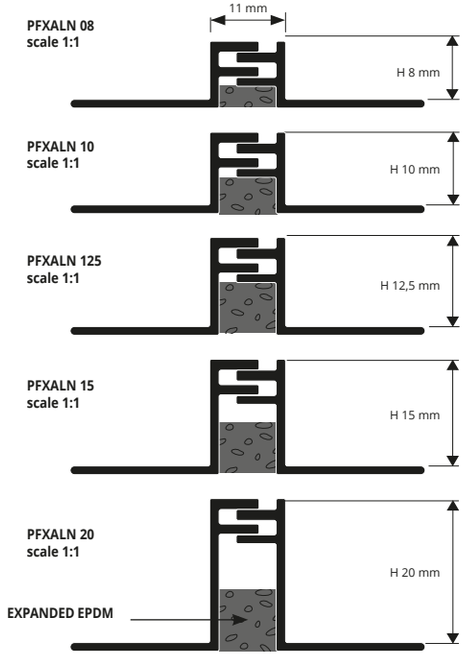





NATURAL ALUMINIUM
bar length **2,5 lm** - pack. **20 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc	
PFXALN 08	8	15,56	38,90	*
PFXALN 10	10	16,16	40,40	
PFXALN 125	12,5	16,71	41,78	
PFXALN 15	15	17,49	43,72	
PFXALN 20	20	18,71	46,78	

COLOURS

AN - Natural aluminium

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROFLEX ALN with the same height as the thickness of the floor (tile). **2.** Using a notched spreader apply the adhesive in the point where the joint will be laid. **3.** Lay the PROFLEX ALN with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). **4.** Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. **5.** Use sealant to fill any spaces between the tile and the PROFLEX ALN joint.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES


*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PRODILAT is an expansion joint in stainless steel inox AISI 304 / 1.4301 – V2A composed of two counterposed profiles in "L" shape, joined with a vulcanized EPDM which can be polished, available in black and grey colour. The counterposed profile in "L" shape have perforated wings for a perfect bond to the substrate and a correct movement of the joint. The expanding EPDM has a high resistance to mechanical & chemical stress, UV rays, to fungi and bacteria. **PRODILAT** in stainless steel is suitable to be used in all environments with high mechanical and chemical stress. Lay the joints according to UNI 11493-1 regulation.

PRODILAT

STAINLESS STEEL AISI 304/1.4301-V2A
WITH SANDABLE VULCANIZED EPDM

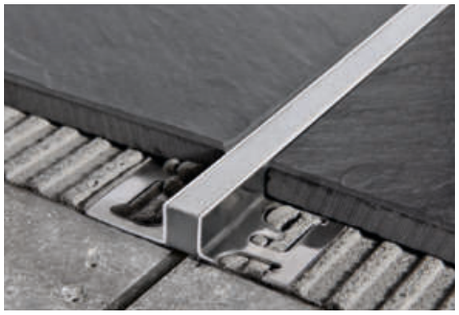



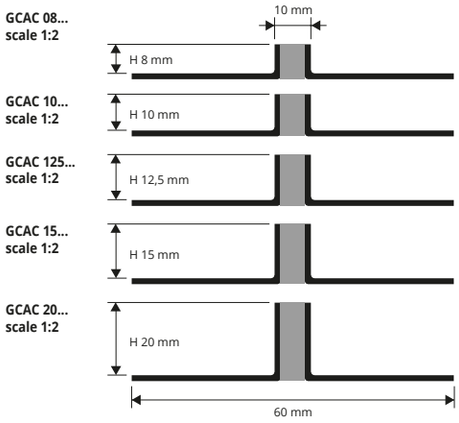

STAINLESS STEEL AISI 304/1.4301-V2A WITH SANDABLE VULCANIZED EPDM - bar length **2,7 lm** - pack. **20 Pcs - 54 lm** (**GCAC 20 - 27 lm**)

Article	H mm	€/lm	€/Pc
GCAC 08... (8x10)	8	43,17	116,56
GCAC 10... (10x10)	10	44,95	121,37
GCAC 125... (12,5x10)	12,5	48,66	131,38
GCAC 15... (15x10)	15	51,36	138,67
GCAC 20... (20x10)	20	59,20	159,84

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

Insert available in the colours: N - G.
The code of the selected finish must be added to the article code.
E.g.: GCAC 08... (chosen insert colour grey) GCAC 08G.
H 25 / H 30 on demand.


COLOURS

Stainless steel AISI 304/1.4301-V2A

COLOURS (EPDM)

N - Black | **G** - Grey

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PRODILAT with the same height as the thickness of the floor (tile) also choosing the colour of the insert. **2.** Using a notched spreader apply the adhesive in the point where the joint will be laid. **3.** Lay the PRODILAT with the punched flanges in the adhesive (we recommend the expansion joint being laid in line with the joint in the screed/floor rough). **4.** Lay the tiles, aligning them with and adjoining the upper edge of the profile (the joint must always be 0.5-1mm lower than the tile, never above). Always place the uncut side of the tile against the profile. **5.** Use sealant to fill any spaces between the tile and the PRODILAT.


Possible specks on the surface of the vulcanised rubber are due to the nature of the product itself, they disappear once the laid profile is polished or cleaned. Claims due to these specks will not be taken into consideration.


PRODILAT is an expansion joint in natural aluminium composed of two counterposed profiles in "L" shape, joined with a vulcanized EPDM which can be polished, available in black and grey colour. The counterposed profile in "L" shape have perforated wings for a perfect bond to the substrate and a correct movement of the joint. The expanding EPDM has a high resistance to mechanical & chemical stress, UV rays, to fungi and bacteria. PRODILAT in aluminium is suitable to be used in all environments with high mechanical and chemical stress. Lay the joints according to UNI 11493-1 regulation.

PRODILAT

ALUMINIUM WITH
SANDABLE VULCANIZED EPDM



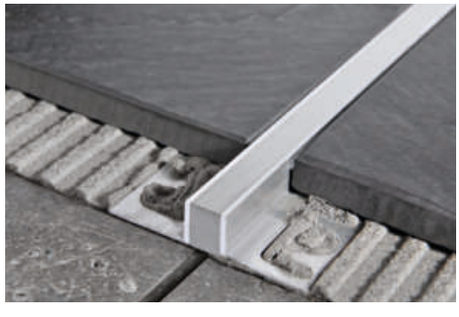

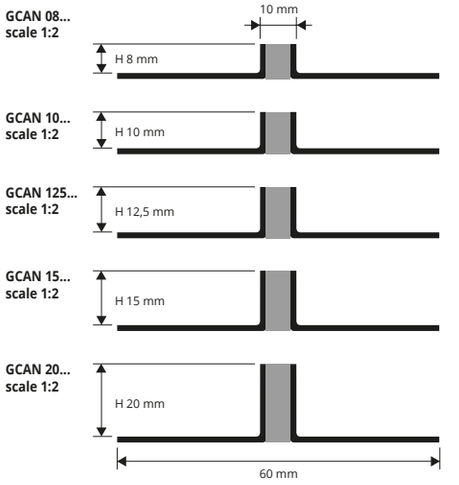

ALUMINIUM WITH SANDABLE VULCANIZED EPDM
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	€/lm	€/Pc
GCAN 08... (8x10)	8	29,70	80,19
GCAN 10... (10x10)	10	30,71	82,92
GCAN 125... (12,5x10)	12,5	32,66	88,18
GCAN 15... (15x10)	15	34,74	93,80
GCAN 20... (20x10)	20	38,77	104,68

COLOURS

Aluminium

COLOURS (EPDM)


N - Black | **G** - Grey

Insert available in the colours: N - G.
The code of the selected finish must be added to the article code.
E.g.: GCAN 08... (chosen insert colour grey) GCAN 08G.
H 25 / H 30 on demand.

EXAMPLES OF LAYING

1. Choose "PRODILAT" according to the desired finish, tile thickness and desired colour. **2.** Cut "PRODILAT" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Place the joint exactly over the screed joint and press the anchoring flange into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm. joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all the remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

LAYING INSTRUCTIONS

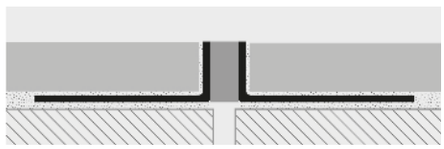

Possible specks on the surface of the vulcanised rubber are due to the nature of the product itself, they disappear once the laid profile is polished or cleaned. Claims due to these specks will not be taken into consideration.


© 2026 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROFLEX

NON-TOXIC IMPACT-RESISTANT
CO-EXTRUDED VINYL RESIN (PVC)

PROFLEX is an expansion joint in PVC with PVC/rubber insert. Available in 3 standard colours, **PROFLEX** serves to fabricate expansion joints for ceramic tile, marble or granite floors and any floor laid with glue/adhesive between 8 and 20 mm thick. The special structure of the joint is designed to protect the corners of the tiles and its high strength withstands frequent pedestrian and vehicular (lift trucks - pallet trucks - cars) traffic. The joint must be placed level with or 0.5-1 mm below the floor level, never above. Lay the joints according with the standards in force.

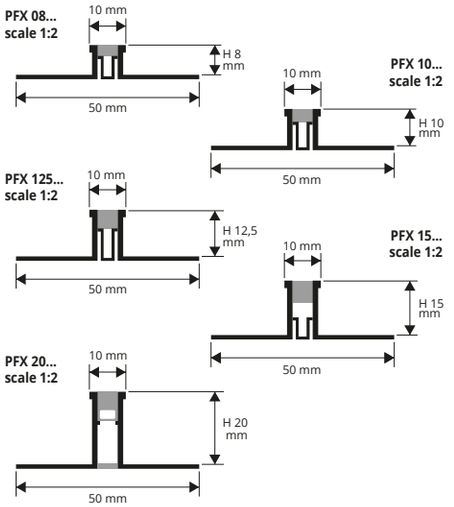

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

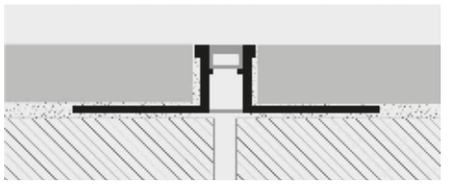



NON - TOXIC CO-EXTRUDED VINYL RESIN - bar length **2,5 lm**
pack. **40 Pcs - 100 lm (PFX 15** and **PFX 20** - pack. **20 Pcs)**

Article	H mm	€/lm	€/Pc
PFX 08...	8	4,08	10,20
PFX 10...	10	4,48	11,20
PFX 125...	12,5	4,89	12,22
PFX 15...	15	5,43	13,57
PFX 20...	20	6,51	16,27

1. Choose the PROFLEX with suitable height for the thickness of the floor. **2.** Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.




Available in the colours: GS-GT-GL (Beige and ivory available on demand). The code of the selected finish must be added to the article code. E.g.: PFX 08... (chosen colour dark grey) PFX 08GS.

COLOURS



GS - Dark grey for rigid and flexible part | **GT** - Dark grey for rigid part / Transparent for flexible part | **GL** - Light grey for rigid and flexible part

ON DEMAND MINIMUM QUANTITY 200 pcs




B - Beige **(E84)** | **A** - Ivory **(E81)**

(Price to be agreed. Production delay 4/5 weeks)


PROFLEX 5

NON-TOXIC IMPACT-RESISTANT
CO-EXTRUDED VINYL RESIN (PVC)

PROFLEX 5 is a range of technical expansion joint profiles for floors laid with glue/adhesive. They are made in non-toxic, impact-resistant, co-extruded PVC with perforated horizontal lateral flanges in rigid PVC while the elastic central part is made in flexible vinyl resin 5 mm in width. They are able to absorb moderate tensile and compressive stress, while being resistant to most chemical agents, to wear and to UV rays. They may be used indoors and outdoors. Thanks to the limited widths, **PROFLEX 5** may be considered a "gap cover" because it blends in with the gaps between tiles. The joint profile must never be placed over a tiled floor and should preferably always be 0.5-1 mm lower. Lay the joints according with the standards in force.

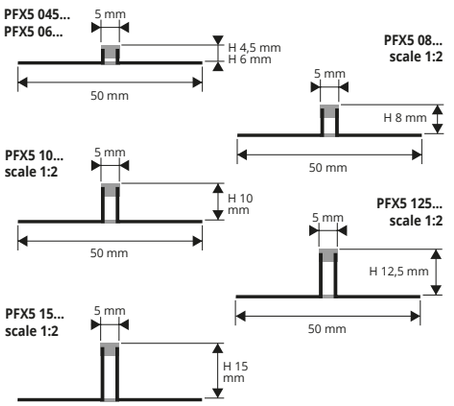

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

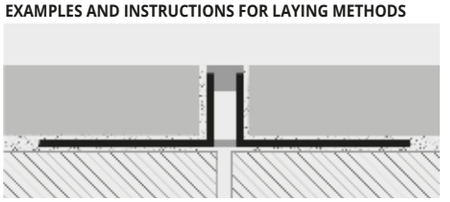



NON - TOXIC CO-EXTRUDED VINYL RESIN - bar length **2,5 lm**
pack. **40 Pcs - 100 lm** (**PFX5 15** - pack. **20 Pcs - 50 lm**)

Article	H mm	€/lm	€/Pc
PFX5 045...	4,5	3,21	8,03
PFX5 06...	6	3,49	8,73
PFX5 08...	8	3,61	9,03
PFX5 10...	10	4,02	10,05
PFX5 125...	12,5	4,37	10,93
PFX5 15...	15	4,68	11,70

1. Choose the PROFLEX 5 with suitable height for the thickness of the floor. **2.** Apply the adhesive onto the area of application of the profile. **3.** Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. **4.** Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. **5.** Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.




Available in the colours: GS-GL (Beige and ivory available on demand with a minimum quantity order of 200 pcs).
The code of the selected finish must be added to the article code.
E.g.: PFX5 08... (chosen colour dark grey) PFX5 08GS.

COLOURS



GS -Dark grey for rigid and flexible part | **GL** - Light grey for rigid and flexible part

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height



B - Beige **(E84)** | **A** - Ivory **(E81)**

(Price to be agreed. Production delay 4/5 weeks)

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROFLEX 5 PR is a perimeter joint made of coextruded vinyl resin that can be used to connect the floor to the wall lining or the wall lining to doors and windows and/or to any other kind of lining. The 5 mm elastic part (exposed) allows the floor/lining to expand as necessary. **PROFLEX 5 PR** prevents and dampens the propagation of sound waves and the forming of sound bridges. Available in dark grey, light grey, Beige and ivory, in various heights H 4,5-6-8-10-12,5 mm. Lay the joints according with the standards in force.

PROFLEX 5 PR

NON-TOXIC IMPACT-RESISTANT CO-EXTRUDED VINYL RESIN (PVC)



VINYL RESIN - bar length **2,5 lm** - pack. **40 Pcs - 100 lm**


Article	H mm	€/lm	€/Pc	
PFX5PR 045...	4,5	3,21	8,03	*
PFX5PR 06...	6	3,49	8,73	*
PFX5PR 08...	8	3,61	9,03	
PFX5PR 10...	10	4,02	10,05	
PFX5PR 125...	12,5	4,37	10,93	
PFX5PR 15...	15	4,68	11,70	

Available in the colours: GS-GL (Beige and ivory available on demand with a minimum quantity order of 200 pcs).
The code of the selected finish must be added to the article code.
E.g.: PFX5PR 045... (chosen insert colour dark grey) PFX5PR 045GS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROFLEX 5 PR" higher than the thickness of the tile 2. Cut "PROFLEX 5 PR" to the desired length and apply the adhesive on the support where the joint will be laid. 3. Position the profile along the perimeter and press the anchoring flap into the adhesive layer. 4. Lay the tiles. 5. Lay the skirting board taking care to rest it on the profile. 6. Silicone between the floor and skirting board

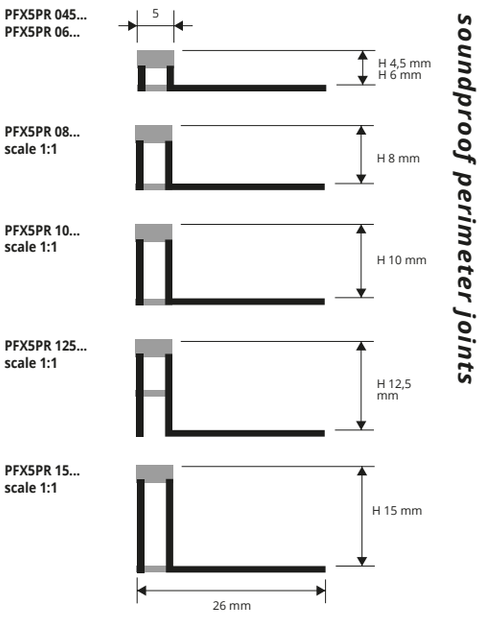


COLOURS



GS - Dark grey for rigid and flexible part

GL - Light grey for rigid and flexible part

ON DEMAND MINIMUM QUANTITY 200 pcs for colour and height



B - Beige **(E84)**

A - Ivory **(E81)**

(Price to be agreed. Production delay 4/5 weeks)



© 2023. All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

ADHESIVE-LAID JOINTS


CO-EXTRUDED VINYL RESIN

ADHESIVE-LAID MOVEMENT JOINTS are a range of joints in co-extruded vinyl resin with the flanges and vertical supports made in rigid synthetic vinyl resin and the elastic central part in flexible synthetic vinyl resin. The glue-laid joints must be placed at least 0.5-1 mm below the level of the flooring (usually tiles) and never above. Suitable for pedestrian traffic, they absorb compressive and slip stress. Laying modules between 16 and 30 m3 inclusive are recommended and the joint laid in line with the joints in the underlying screed. Available in various colours and heights. Lay the joints according with the standards in force.


movement joints

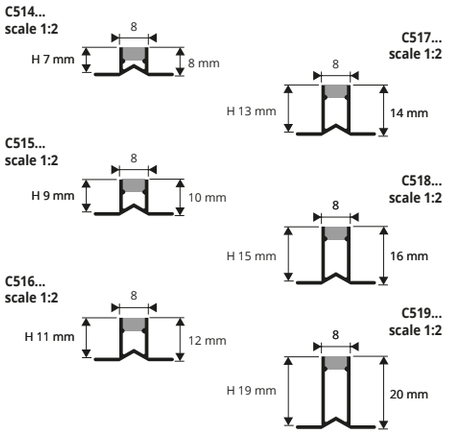

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

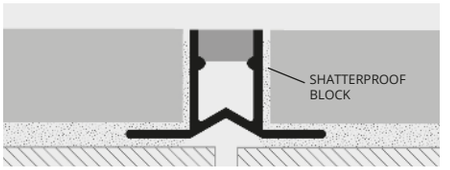

1. Choose the joint in accordance with the colour and thickness of the floor, calculating 0.5-1 mm less for laying the joint, which under no circumstances must protrude. **2.** Place the joint over the cut/joint in the screed; if there is none, make a cut of 2/3 the thickness of the screed. **3.** Apply the adhesive and lay the joint, pressing it into the glue. **4.** Lay the tiles, aligning them with the rigid vertical part of the joint. **5.** Using the special glue, fill the gap between the tiles and the profile.

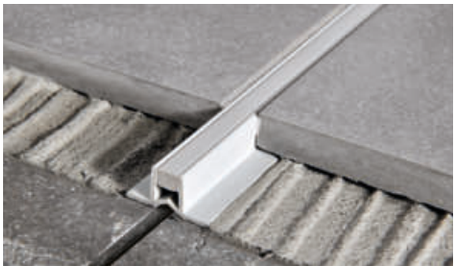




CO-EXTRUDED VINYL RESIN

bar length **2,5 lm** - pack. **40 Pcs** - **100 lm**

Article	H mm	€/lm	€/Pc
C514... (8x8)	7	1,05	2,63
C515... (10x8)	9	1,18	2,95
C516... (12x8)	11	1,32	3,30
C517... (14x8)	13	1,45	3,63
C518... (16x8)	15	1,61	4,03
C519... (20x8)	19	2,18	5,45

ARTICLES NOT FOR SALE SINGLY

Available combinations: GS-GT-GL (RT-MT-BIBI-B-A and N available on demand with a minimum quantity order of 400 pcs).
The code of the selected colour must be added to the article code.
E.g.: C514... (combination chosen colour Dark Grey / Transparent)
C514 GT




On demand (at same price) also available WITHOUT FLAP with a minimum order of 200 pcs.
N.B.: specify "WITHOUT FLAP" in order.

COLOURS




GS - Dark grey for rigid and flexible part
GT - Dark grey for rigid part / Transparent for flexible part
GL - Light grey for rigid and flexible part

ON DEMAND - MINIMUM QUANTITY 400 PCS for colour and height



RT - Red for rigid part / Transparent for flexible part
MT - Brown for rigid part / Transparent for flexible part
BIBI - White for rigid and flexible part




B - Beige **(E84)**
A - Ivory **(E81)**
N - Black for rigid and flexible par

(Price to be agreed. Production delay 4/5 weeks)


MORTAR-LAID JOINTS

POLISHED BRASS - STAINLESS STEEL AISI304/1.4301-V2A
NATURAL ALUMNINUM WITH SANDABLE VULCANIZED EPDM

The **MOVEMENT JOINT** has been specially created to relieve the stress in prestige floors (marble, granite, ceramic tiles or wood) laid on a mortar bed. The joint is simply inserted by hand and is levelled with a plastic hammer. It is available in brass and stainless steel with internal vulcanised expanded EPDM gasket. Strong, practical and top quality. Lay the joints according with the standards in force.

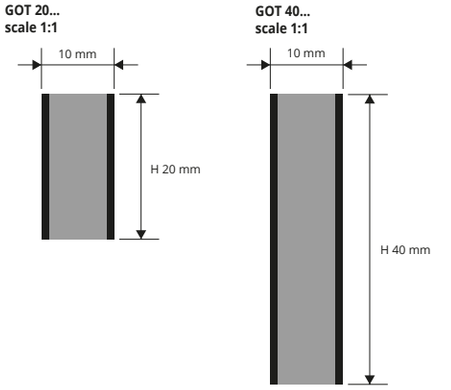

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

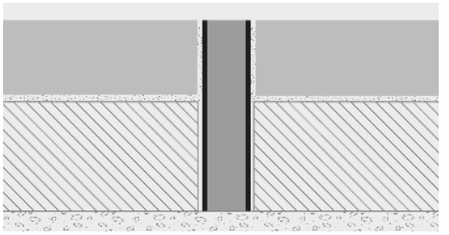

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. **2.** Insert the joint into the screed letting it protrude slightly. **3.** Proceed with laying the floor, aligning it with the rigid vertical part of the joint. **4.** Complete laying by levelling the joint with the floor. **5.** Using the mortar, grout the gap between the tiles and the profile.



POLISHED BRASS WITH SANDABLE VULCANIZED EPDM

bar length **2 lm** - pack. **25 Pcs - 50 lm** (**GOT 40... - 20 lm**)

Article	L x H mm	€/lm	€/Pc	
GOT 20...	10 X 20	50,11	100,22	*
GOT 40...	10 X 40	85,88	171,76	*

COLOURS



OL - Polished Brass
AC - Polished Stainless Steel AISI 304/1.4301-V2A
AN - Natural aluminium

COLOURS (EPDM)



N - Black
G - Grey



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A WITH SANDABLE VULCANIZED EPDM

bar length **2 lm** - pack. **25 Pcs - 50 lm** (**GAC 40... - 20 lm**)

Article	L x H mm	€/lm	€/Pc	
GAC 20...	10 X 20	42,86	85,72	*
GAC 40...	10 X 40	61,05	122,10	*

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

NATURAL ALUMINIUM WITH SANDABLE VULCANIZED EPDM

bar length **2 lm** - pack. **25 Pcs - 50 lm** (**GAL 40... - 40 lm**)

Article	L x H mm	€/lm	€/Pc	
GAL 20...	10 X 20	38,54	73,40	*
GAL 40...	10 X 40	58,76	111,92	*

Insert available in the colours: G - N.
The code of the selected finish must be added to the article code.
E.g.: GAC 20... (chosen insert colour grey) GAC 20G.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 500 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

MORTAR-LAID MOVEMENT JOINTS are a range of joints in co-extruded vinyl resin with the flanges and vertical supports made in rigid synthetic vinyl resin and the elastic central part in flexible synthetic vinyl resin. The mortar-laid joints must be placed at least 0.5-1mm below the level of the ceramic tile-marble-granite floor and never above. Suitable for pedestrian traffic, they absorb compressive and slip stress.
Laying modules between 16 and 30 m³ inclusive are recommended and the joint laid in line with the joints in the underlying screed. Available in various colours and heights. Lay the joints according with the standards in force.

MORTAR-LAID JOINTS

CO-EXTRUDED VINYL RESIN



COLOURS



GS - Dark grey for rigid and flexible part | **GT** - Dark grey for rigid part / Transparent for flexible part | **GL** - Light grey for rigid and flexible part

ON DEMAND MINIMUM QUANTITY 400 PCS for colour and height



RT - Red for rigid part / Transparent for flexible part | **MT** - Brown for rigid part / Transparent for flexible part | **BIBI** - White for rigid and flexible part



B - Beige **(E84)** | **A** - Ivory **(E81)** | **N** - Black for rigid and flexible par

(Price to be agreed. Production delay 4/5 weeks)


CO-EXTRUDED VINYL RESIN
bar length **2,5 lm** - pack. **40 Pcs** - **100 lm** (**C513** - pack. **50 lm**)

Article	L x H mm	€/lm	€/Pc
C511...	8 X 25	1,67	4,17
C512...	8 X 35	1,93	4,83
C513...	8 X 45	2,43	6,08


ARTICLES NOT FOR SALE SINGLY

Available combinations: GS-GT-GL (RT-MT-BIBI-B-A and N available on demand with a minimum quantity order of 400 pcs).
The code of the selected colour must be added to the article code.
E.g.: C511... (combination chosen colour dark grey/transparent) C511 GT.


C511...
scale 1:1




C512...
scale 1:1




C513...
scale 1:1



EXAMPLES OF LAYING

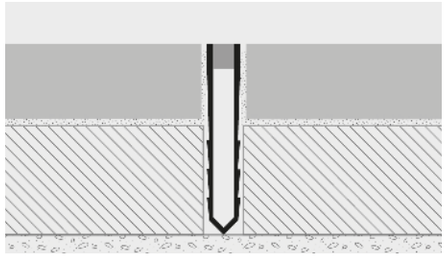



1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. **2.** Insert the joint into the screed letting it protrude slightly (stage 1-2-3). **3.** Proceed with laying the floor, aligning it with the rigid vertical part of the joint. **4.** Complete laying by levelling the joint with the floor. **5.** Using the mortar, grout the gap between the tiles and the profile.

movement joints

JOINTS

This **DOUBLE SILICONE JOINT** is a co-extruded profile in hard and soft PVC. The double internal silicone provides a high degree of resistance to any type of compressive stress, heavy loads and foot traffic. The extension is designed to lengthen the joint, extending it to the total depth of auxiliary or insulation castings as required.
Lay the joints according with the standards in force.

MORTAR-LAID DOUBLE JOINT

VINYL RESIN CO-EXTRUSION (PVC)





CO-EXTRUDED VINYL RESIN (PVC) WITH DOUBLE SILICONE
bar length **2,5 lm** - pack. **40 Pcs - 100 lm (GDSP 43 - CONF. 50 lm)**

Article	L x H mm	€/lm	€/Pc
GDSP 43...	10 X 43	4,21	10,53
GDS 23...	10 X 25	2,34	5,85
GP 20	8 X 20	1,51	3,77

ARTICLES NOT FOR SALE SINGLY


Available combinations: GS - GT - GL.
The code of the selected colour must be added to the article code.
E.g.: GDSP 43... (combination chosen colour dark grey/transparent)
GDSP 43GT.

COLOURS




GS - Dark grey for rigid and flexible part | **GT** - Dark grey for rigid part / Transparent for flexible part | **GL** - Light grey for rigid and flexible part


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

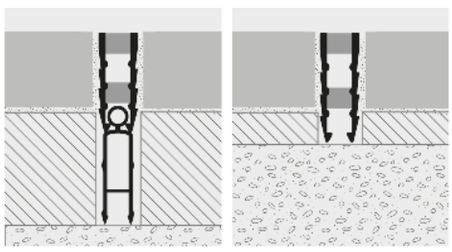


GDSP 43...
scale 1:1



GDS 23...
scale 1:1



GP 20
scale 1:1



1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. **2.** Insert the joint into the screed letting it protrude slightly. **3.** Proceed with laying the floor, aligning it with the rigid vertical part of the joint. **4.** Complete laying by levelling the joint with the floor. **5.** Using the mortar, grout the gap between the tiles and the profile.

movement joints


© 2023. All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

MORTAR LAYING FULL JOINT

CO-EXTRUDED VINYL RESIN (PVC)
WITH FULL SILICONE

FULL SILICONE JOINT is a co-extruded profile in hard and soft PVC. The double internal silicone provides a high degree of resistance to any type of compressive stress, heavy loads and foot traffic. The extension is designed to lengthen the joint, extending it to the total depth of auxiliary or insulation castings as required.
Lay the joints according with the standards in force.

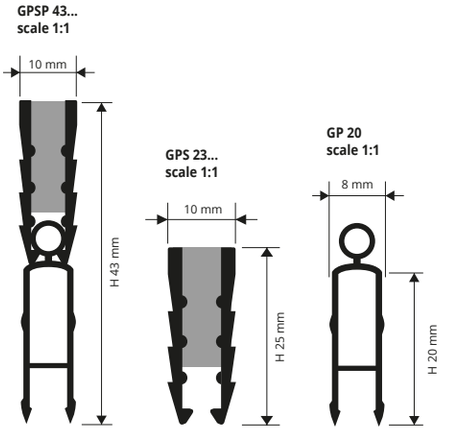





CO-EXTRUDED VINYL RESIN (PVC) WITH FULL SILICONE
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc	
GPSP 43...	10 x 43	5,64	14,10	*
GPS 23...	10 x 25	3,36	8,40	
GP 20	8 x 20	1,51	3,77	

COLOURS




GS - Dark grey for rigid and flexible part
GT - Dark grey for rigid part / Transparent for flexible part
GL - Light grey for rigid and flexible part

ARTICLES NOT FOR SALE SINGLY

The code of the selected colour must be added to the article code.
E.g.: GPSP 43... (combination chosen colour dark grey/transparent) GPSP 43GT.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

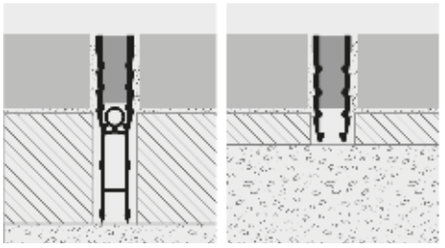


1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. **2.** Insert the joint into the screed letting it protrude slightly. **3.** Proceed with laying the floor, aligning it with the rigid vertical part of the joint. **4.** Complete laying by levelling the joint with the floor. **5.** Using the mortar, grout the gap between the tiles and the profile.

PROFLEX 25

NON-TOXIC IMPACT-RESISTANT
CO-EXTRUDED VINYL RESIN

PROFLEX 25 H 25 mm is a new expansion joint made of coextruded vinyl resin available in two standard colours – dark grey (GS) and light grey (GL). **PROFLEX 25** H 25 mm provides elastic expansion joints for various kinds of flooring, such as marble or granite, and especially floors made with Sasso Italia. The new decorative indoor and outdoor flooring also known as SASSO ITALIA is approx. 25 mm thick and laid over a 10-20 mm base of cement/ concrete. This kind of floor needs an expansion/control joint every 16-30 m3 of material to avoid cracking caused by the floor's expansion. PROFLEX H 25 mm lets you place a GP 20 EXTENSION JOINT at the bottom in order to apply/lay the joint inside the concrete base. It can withstand the frequent passage of pedestrians and vehicles (forklifts, pallet trucks, automobiles). The joint must be installed at the same level of the floor or 0.5-1 mm lower (never above). Lay the joints according with the standards in force. HIGH RESISTANCE TO LOADS AND TO FREQUENT TRAFFIC OF PALLET TRUCKS AND FORKLIFTS.

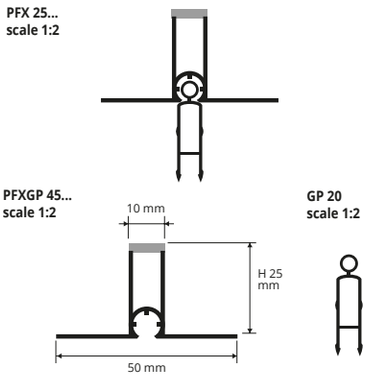





CO-EXTRUDED VINYL RESIN
bar length **2,5 lm** - pack. **20 Pcs** - **50 lm**

Article	H mm	€/lm	€/Pc	
PFXGP 45...	45	11,14	27,85	*
PFX 25...	25	8,53	21,32	
GP 20	20	1,51	3,77	


The code of the selected colour must be added to the article code.
E.g.: PFX 25 .. (chosen colour dark grey) PFX 25GS.

COLOURS



GS -Dark grey for rigid and flexible part
GL - Light grey for rigid and flexible part

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

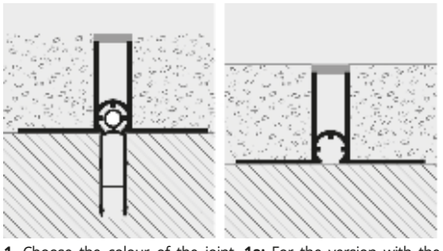

1. Choose the colour of the joint. **1a:** For the version with the extension, insert it onto the fresh cement base leaving the cylindrical part out, for subsequent fitting with PROFLEX 25. **2.** Place and fix with screws/nails to the cement floor and snap the PROFLEX 25 into protruding extension. **3.** Begin laying the floor from the inside, near the joint aligning it with the edges. **4.** Finish laying the floor by levelling the joint with the floor. **5.** Plaster the gap between floor and joint with specific mortar.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROEXPAN 115-130-190-210 is a range of structural expansion joints in natural aluminium with knurled flat surface and a black or grey synthetic rubber insert.
Made to withstand vertical, horizontal and transversal structural movements due to compressive and tensile stress in large buildings or complexes. The joint is laid on existing surfaces, also vertically, over the void between the two semi-detached surfaces of the same building or between two bays. It withstands frequent pedestrian traffic and also vehicles with rubber tyres that can load to 700 kgs. (PENF 190-210)


PROEXPAN 115-130-190-210

NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT




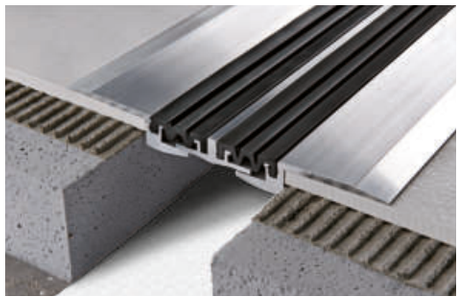

PENF 115...
scale 1:2



PENF 130...
scale 1:2



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length **2,7 lm** - pack. **10 Pcs - 27 lm**

Article	LxHxLa mm	€/lm	€/Pc
PENF 115...	21 x 12 x 115	39,21	105,87
PENF 130...	38 x 12 x 128	42,65	115,16

NATURAL ALUMINIUM + NEOPRENE INSERT
bar length **3 lm** - pack. **10 Pcs - 30 lm**

Article	LxHxLa mm	€/lm	€/Pc
PENF 190N	65 x 19 x 185	87,84	263,52
PENF 210...	90 x 19 x 210	141,50	424,50 *

Movement mm:-10/+16 (PENF 190N) -15/+10 (PENF 210...).
Available in the colours: G - N (PENF 190N excluded).
The code of the selected finish must be added to the article code.
E.g.: PENF 130... (chosen insert colour grey) PENF 130G.

INTERCHANGEABLE INSERT IN VINYL RESIN/RUBBER INSERT BLACK OR GREY - bar length **3 lm** - pack. **10 Pcs - 30 lm**


Article	L mm	€/lm	€/Pc
IPEN 20...	20	7,20	21,60
IPEN 40...	35	10,41	31,23

INTERCHANGEABLE NEOPRENE INSERT BLACK OR GREY
bar length **4 lm** - pack. **10 Pcs - 40 lm**

Article	L mm	€/lm	€/Pc
IPEN 65N	65	20,12	80,48
IPEN 452...	45 x 2	30,85	123,40

Insert available in the colours: G - N (IPEN 65N excluded).
The code of the selected finish must be added to the article code.
E.g.: IPEN 20... (chosen insert colour grey) IPEN 20G.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

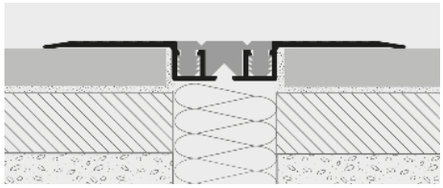

Fix the side wings/flanges in aluminium with:
1. Screws and screw anchors at 20 cm intervals along both sides of the whole joint **2.** Two-pack epoxy adhesive or with strong fast-setting silicone.

Due to the nature of the product itself, natural aluminium, and its specific use on the floor as technical joint with no decorative role, light scratches on its surface will not be accepted for claims.

INSERT COLOURS


N - Black **(RAL 9005)** | **G** - Grey **(RAL 7035)**

ON DEMAND - MINIMUM QUANTITY 100 lm
ONLY FOR: PENF 115, PENF 130


B - Beige **(E84)** | **A** - Ivory **(E81)**

(Price to be agreed. Production delay 4/5 weeks)

PENF 190N
scale 1:2

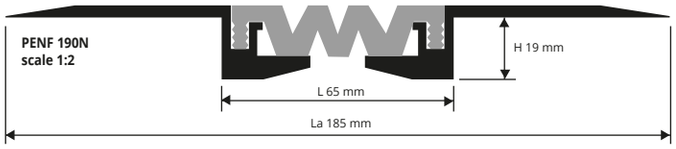

PENF 210...
scale 1:2

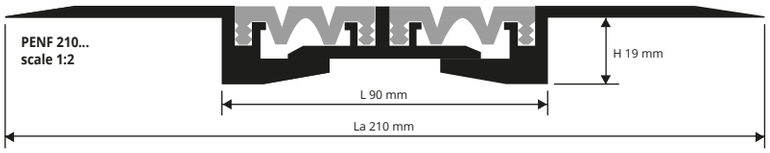

ANGLES BAR / WALL

NATURAL ALUMINIUM + NEOPRENE INSERT

ANGLE BAR NATURAL ALUMINIUM + NEOPRENE INSERT
bar length **3 lm** - pack. **10 Pcs - 30 lm**

Article	LxHxLa mm	€/lm	€/Pc
PENFP 190N	65 x 19 x 125	87,84	263,52 *
PENFP 210..	90 x 19 x 150	141,50	424,50 *

INTERCHANGEABLE BLACK OR GREY VINYL RESIN/RUBBER INSERT
bar length **3 lm** - pack. **10 Pcs - 30 lm**


Article	L mm	€/lm	€/Pc
IPEN 65N	65	20,12	60,36
IPEN 452...	45 x 2 Pz	30,85	92,55

Available in the colours: G - N.
The code of the selected finish must be added to the article code.
E.g.: PENFP 210... (chosen insert colour grey) PENFP 210G.


PRODUCT SUPPLIED NOT ASSEMBLED

Due to the nature of the product itself, natural aluminium, and its specific use on the floor as technical joint with no decorative role, light scratches on its surface will not be accepted for claims.

PENFP 190N
scale 1:2

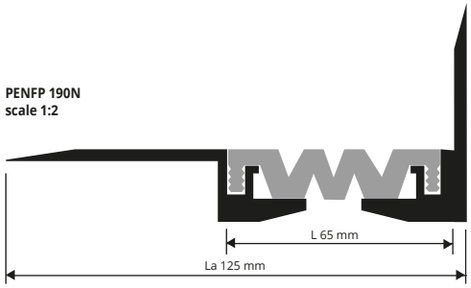

PENFP 210...
scale 1:2

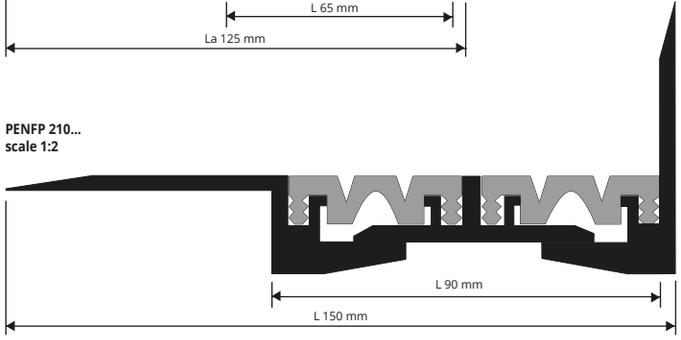

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROEXPAN H20
PROEXPAN H40


NATURAL ALUMINIUM
+ VINYL RESIN / RUBBER INSERT

PROEXPAN H20 - H40 is a range of professional structural joints for floors laid on mortar bed (PEN H20) and (PEN H 40). They are made with a punched aluminium base and a vinyl rubber insert available in black or grey. **PROEXPAN H20 - H40** profiles for laying with mortar must have the flanges fixed to the substrate by screws and screw anchors (approx. every 30 cm).

structural joints

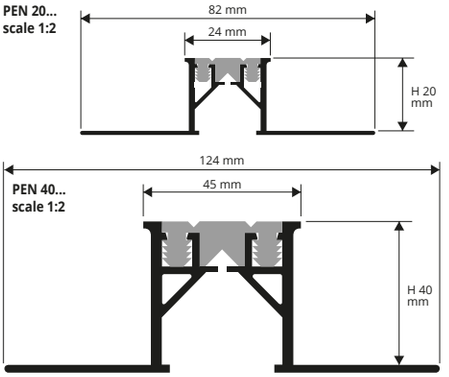

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

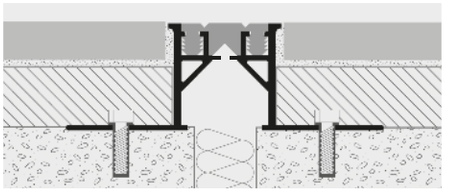

1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. **2.** Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. **3.** Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.



NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT
bar length **3 lm** - pack. **5 Pcs - 15 lm**

Article	HxL mm	€/lm	€/Pc
PEN 20...	20 x 24	56,87	170,61
PEN 40...	40 x 45	76,04	228,12

NATURAL ALUMINIUM ANGLE BAR / WALL + VINYL RESIN / RUBBER INSERT - bar length **3 lm** - pack. **5 Pcs - 15 lm**

Article	HxL mm	€/lm	€/Pc
PENP 20...	20 x 24	56,87	170,61 *
PENP 40...	40 x 45	76,04	228,12 *

Available in the colours: G - N (Beige and Ivory available on demand with a minimum quantity order of 300 lm).
The code of the selected finish must be added to the article code.
E.g.: PEN 20... (chosen insert colour grey) PEN 20G.



INTERCHANGEABLE INSERT IN VINYL RESIN/RUBBER INSERT BLACK OR GREY - bar length **3 lm** - pack. **10 Pcs - 30 lm**

Article	L mm	€/lm	€/Pc
IPEN 20...	20	7,20	21,60
IPEN 40...	35	10,41	31,23

INSERT COLOURS

N - Black **(E85)** | **G** - Grey **(E83)**

ON DEMAND - MINIMUM QUANTITY 100 PCS
(Price to be agreed. Production delay 4/5 weeks)


B - Beige **(E84)** | **A** - Ivory **(E81)**


GDA 25
GDA 35

NATURAL ALUMINIUM
+ NEOPRENE INSERT

GDA 25 - GDA 35 is a range of professional structural joints for floors laid on mortar bed. They are made with a punched aluminium base and a vinyl rubber insert available in black or grey. It withstands traffic of vehicles with tyreload to 700 kgs and also trucks with maximum tyreload to 1000 kgs.

structural joints

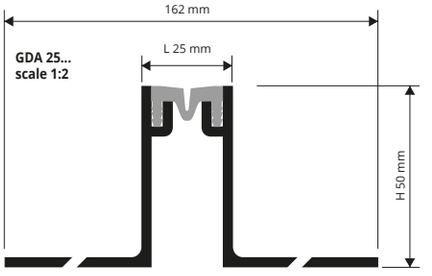

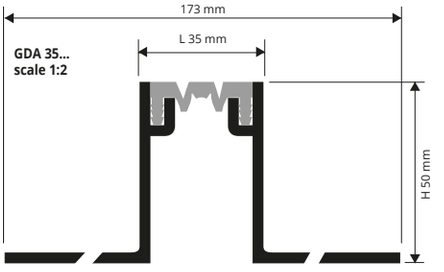

1. Choose the colour of the joint. **2.** Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. **3.** Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal. **4.** Using the special glue, fill the gap between the tiles and the profile.


INSERT COLOURS


N - Black **(RAL 9005)** | **G** - Grey **(RAL 7031)**

ON DEMAND

A - Ivory **(E81)**

On demand min. quantity 400 lm - GDA 25/ GDAP 25
On demand min. quantity 300 lm - GDA 35/ GDAP 35
(Price to be agreed. Production delay 4/5 weeks).

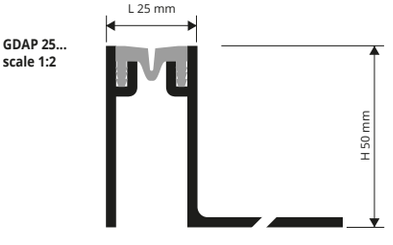

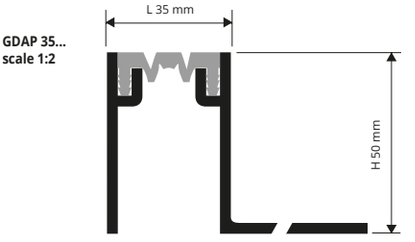



NATURAL ALUMINIUM + NEOPRENE INSERT
bar length **3 lm**

Article	HxL mm	€/lm	€/Pc
GDA 25...	50 x 25	64,39	193,17 *
GDA 35...	50 x 35	72,42	217,26 *

Movement mm: +/- 5.
Insert in smooth neoprene on demand.

NATURAL ALUMINIUM ANGLE BAR / WALL + NEOPRENE INSERT
bar length **3 lm**

Article	HxL mm	€/lm	€/Pc
GDAP 25...	50 x 25	64,39	193,17
GDAP 35...	50 x 35	72,42	217,26 *

Available in the colours: G - N (Ivory on demand).
The code of the selected finish must be added to the article code.
E.g.: GDA 25... (chosen insert colour grey) GDA 25G.

Insert in smooth neoprene on demand.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

GDA 55 is a structural joint for floors, 35, 50 and 80 mm, in good quality natural aluminium with the interchangeable neoprene insert allowing the joint to expand and contract. Visible thickness 55 mm (**GDA 55**), bar length 3 lm. Black or Grey insert. Bear weights of cars, with the wheel loads up to 650 kg and trucks with a maximum load of 1000 kg on the wheel.

GDA 55

ALUMINIUM
+ NEOPRENE INSERT

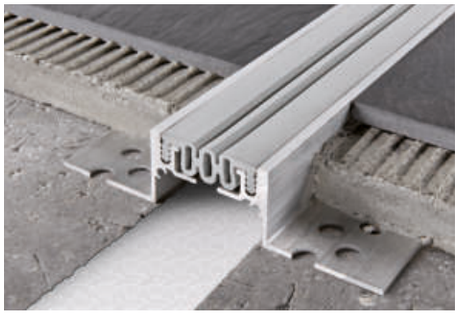



ALUMINIUM + BLACK / GREY NEOPRENE INSERT
bar length **3 lm**

Article	L x H x L1 mm	€/lm	€/Pc	
GDA 5535...	55 x 35 x 155	79,80	239,40	
GDA 5550...	55 x 50 x 155	91,88	275,64	*
GDA 5580...	55 x 80 x 155	129,42	388,26	*

Movement mm: +/- 10
Available in the colours: N - G.
The code of the selected finish must be added to the article code.
E.g.: GDA 5535.....(chosen insert colour black) GDA 5535N

Insert in smooth neoprene on demand.

ANGLES BAR ALUMINIUM + BLACK NEOPRENE INSERT
bar length **3 lm**


Article	L x H x L1 mm	€/lm	€/Pc	
GDAP 5535	55 x 35 x 105	79,80	239,40	*
GDAP 5550	55 x 50 x 105	91,88	275,64	*
GDAP 5580	55 x 80 x 105	129,42	388,26	*

Insert in smooth neoprene on demand.


COLOURS

N - Black **(RAL 9005)** | **G** - Grey **(7038)**

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

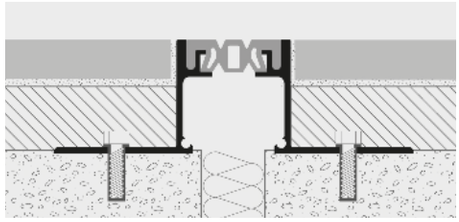

1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. **2.** Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30 cm intervals on both sides. **3.** Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

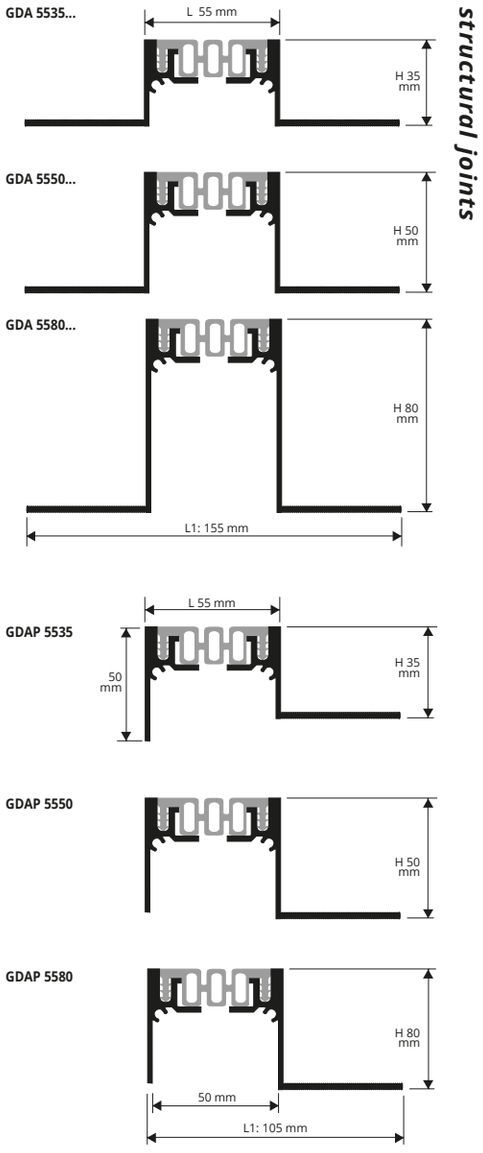

FIREPROOF CORD

MINERAL WOOL AND FIBREGLASS

FIREPROOF GLUE FOR CORD FIXING

Article	Pack. Kg	€/Kg	€/Pack.	
CIC 014	1,4	51,64	72,30	*
CIC 7	7	27,63	38,68	*

The delivery of the test certificate depends on the use of silicate glue for the fixing of the same.
The cord is certified in accordance with the new European Standard EN 13501-2.
Consumption of sealant is of about 50 g per linear metre of cord.

FIREPROOF CORD - Diameter **20 - 60 mm**

Article	Ø mm	lm Roll	€/lm	€/Roll	
CDT 20	20	30	11,40	342,00	*
CDT 30	30	30	12,08	362,40	*
CDT 40	40	30	17,43	522,90	*
CDT 50	50	25	18,77	563,10	*
CDT 60	60	25	22,13	663,90	*



*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

GNS 20
GNS 50

NATURAL ALUMINIUM

Structural joint **GNS 20 – GNS 50** is in good quality natural aluminium with neoprene in the lower central part and another aluminium profile in the upper visible part. It withstands heavy loads and frequent traffic of vehicles with a total truckload of 8 kgs/mmq. Bar length 3 m, visible head width 30 mm.

structural joints

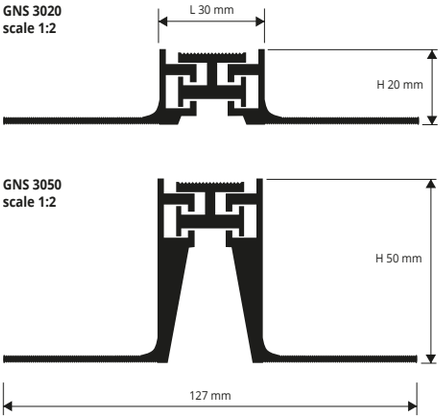




NATURAL ALUMINIUM
bar length **3 lm**

Article	L x H mm	€/lm	€/Pc	
GNS 3020	30 x 20	79,13	237,39	*
GNS 3050	30 x 50	93,89	281,67	

Movement mm: +/- 3


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

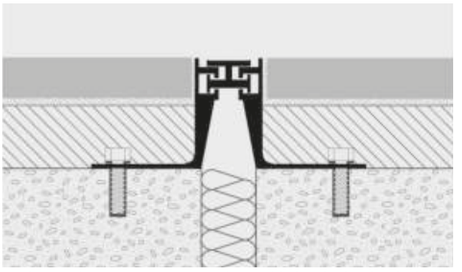

1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. **2.** Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. **3.** Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

ANGLES BAR / WALL

NATURAL ALUMINIUM

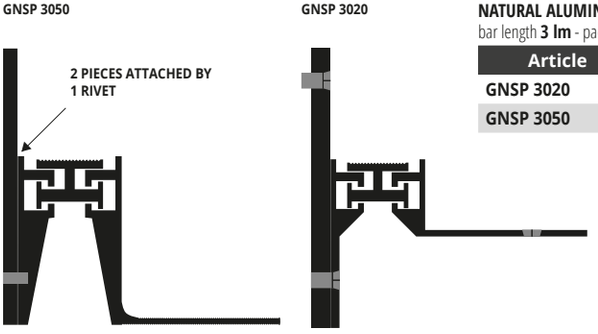

NATURAL ALUMINIUM ANGLES BAR
bar length **3 lm** - pack. **10 Pcs - 30 lm**

Article	L x H mm	€/lm	€/Pc	
GNSP 3020	30 x 20	79,13	237,39	*
GNSP 3050	30 x 50	93,89	281,67	*

COLOURS




AN - Natural aluminium

GNS 75...
18/50/80

NATURAL ALUMINIUM

Structural joint **GNS 75** is in good quality natural aluminium with neoprene in the lower central part and another aluminium profile in the upper visible part. It withstands heavy loads and frequent pedestrian traffic. Bar length 3 m, visible head width 75 mm. It withstands forklift trucks with rubber tyre and transpallets to a maximum total load of 6,5 kgs/mmq.

structural joints

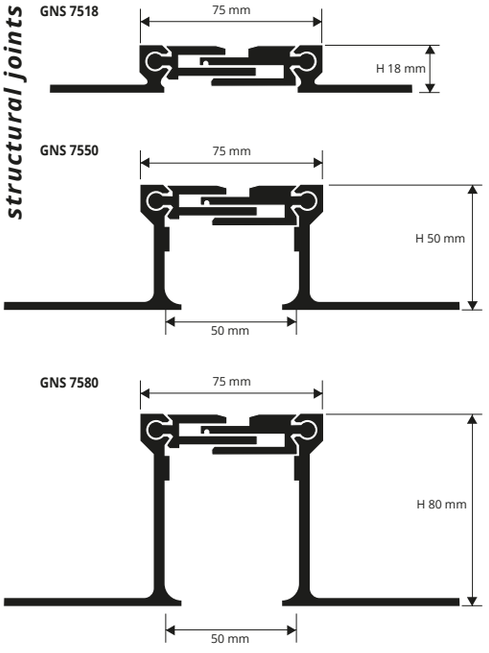




NATURAL ALUMINIUM
bar length **3 lm**

Article	H mm	€/lm	€/Pc	
GNS 7518	18	141,50	424,50	*
GNS 7550	50	168,98	506,94	*
GNS 7580	80	187,76	563,28	*

Movement mm: +10/-5 Horizz. +/-5 Vert.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

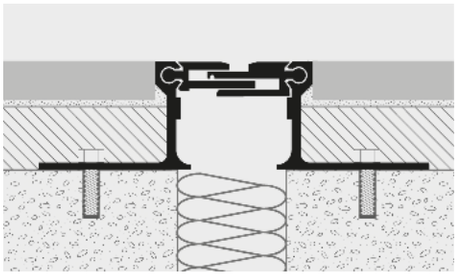

1. Choose the expansion joint with suitable height for the thickness of the floor and the screed/floor rough and choose the colour of the insert. **2.** Fix the punched flanges to the substrate using screws and screw anchors, calculating the fixing points at 30cm intervals on both sides. **3.** Make the screed over the punched flanges of the structural or expansion joint, calculating the thickness of the final floor, and then lay the floor as normal.

COLOURS



AN - Natural aluminium

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROPLATE FIX


FLAT AND ANGLE PROFILE
IN ALUMINIUM

PROPLATE FIX is a range of flat joint-cover profiles to cover structural movements (contraction due to flexural or compressive stress) of two different load-bearing structures.
PROPLATE FIX made in silver anodized aluminium is recommended for environments with intense pedestrian and vehicular traffic. Available upon request with stainless steel fixing clips (5 Pcs. for vertical/façade use 10 Pcs. for horizontal/floor use); corner profiles are also available.






PETFXPAA 50
scale 1:2




PETFXPAA 70
scale 1:2



PETFXAA 50
scale 1:2



PETFXAA 70
scale 1:2



FLAT PROFILE - SILVER ANOD. ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PETFXPAA 50	50	18,25	49,28
PETFXPAA 70	70	31,67	85,51

ANGLE PROFILE - SILVER ANOD. ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H x L mm	€/lm	€/Pc
PETFXAA 50	22 x 50	19,08	51,52 *
PETFXAA 70	24 x 70	28,37	76,60

PRODUCT SUPPLIED NOT ASSEMBLED


Article	H mm	€/Pc	€/Pack.
CPFXAC 40/10		40	23,06

COLOURS

AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the profile in the required width and material. **2.** Insert the fixing clips into the relative groove, one every 50/75 cm (5 Pcs. for wall applications - 10 Pcs. for floor applications). **3.** Insert/Lay the PROPLATE FIX in the existing void, applying uniform pressure or using a plastic hammer, thereby creating a perfect joint cover. The same method is used for laying the corner profile.

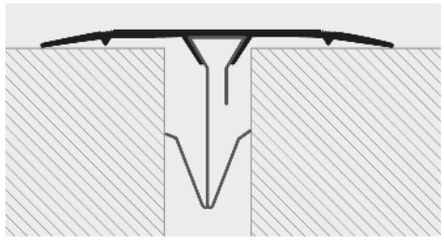

PROPLATE FIX


FLAT AND ANGLE PROFILE
IN VINYL RESIN (PVC)

PROPLATE FIX is a range of flat joint-cover profiles to cover structural movements (contraction due to flexural or compressive stress) of two different load-bearing structures.
PROPLATE FIX made in rigid PVC is recommended for walls and facades and for ceilings. Available upon request with stainless steel fixing clips (5 Pcs. for vertical/façade use 10 Pcs. for horizontal/floor use); corner profiles are also available.






PETFXP 50-01
scale 1:2



PETFX 50-01
scale 1:2



FLAT PROFILE - VINYL RESIN (PVC)
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PETFXP 50-01	50	12,14	32,78

ANGLE PROFILE - VINYL RESIN (PVC)
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H x L mm	€/lm	€/Pc
PETFX 50-01	22 x 50	12,54	33,86

PRODUCT SUPPLIED NOT ASSEMBLED

FIXING CLIPS BETWEEN 20 TO 45 mm - STAINLESS STEEL - pack. **10 Pcs**


Article	H mm	€/Pc	€/Pack.
CPFXAC 40/...		40	23,06

COLOURS


01 - White



CPFXAC 40
scale 1:2



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

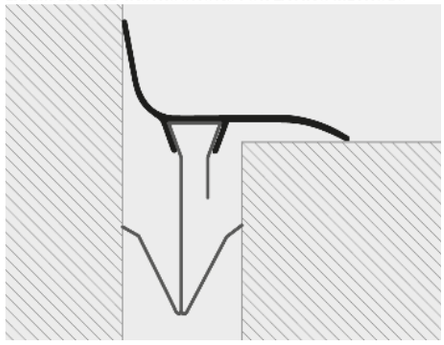


1. Choose the profile in the required width and material. **2.** Insert the fixing clips into the relative groove (5 Pcs. for wall applications - 10 Pcs. for floor applications). **3.** Insert/Lay the PROPLATE FIX in the existing void, applying uniform pressure or using a plastic hammer, thereby creating a perfect joint cover. The same method is used for laying the corner profile.

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


PROGRESS®
PROFILES

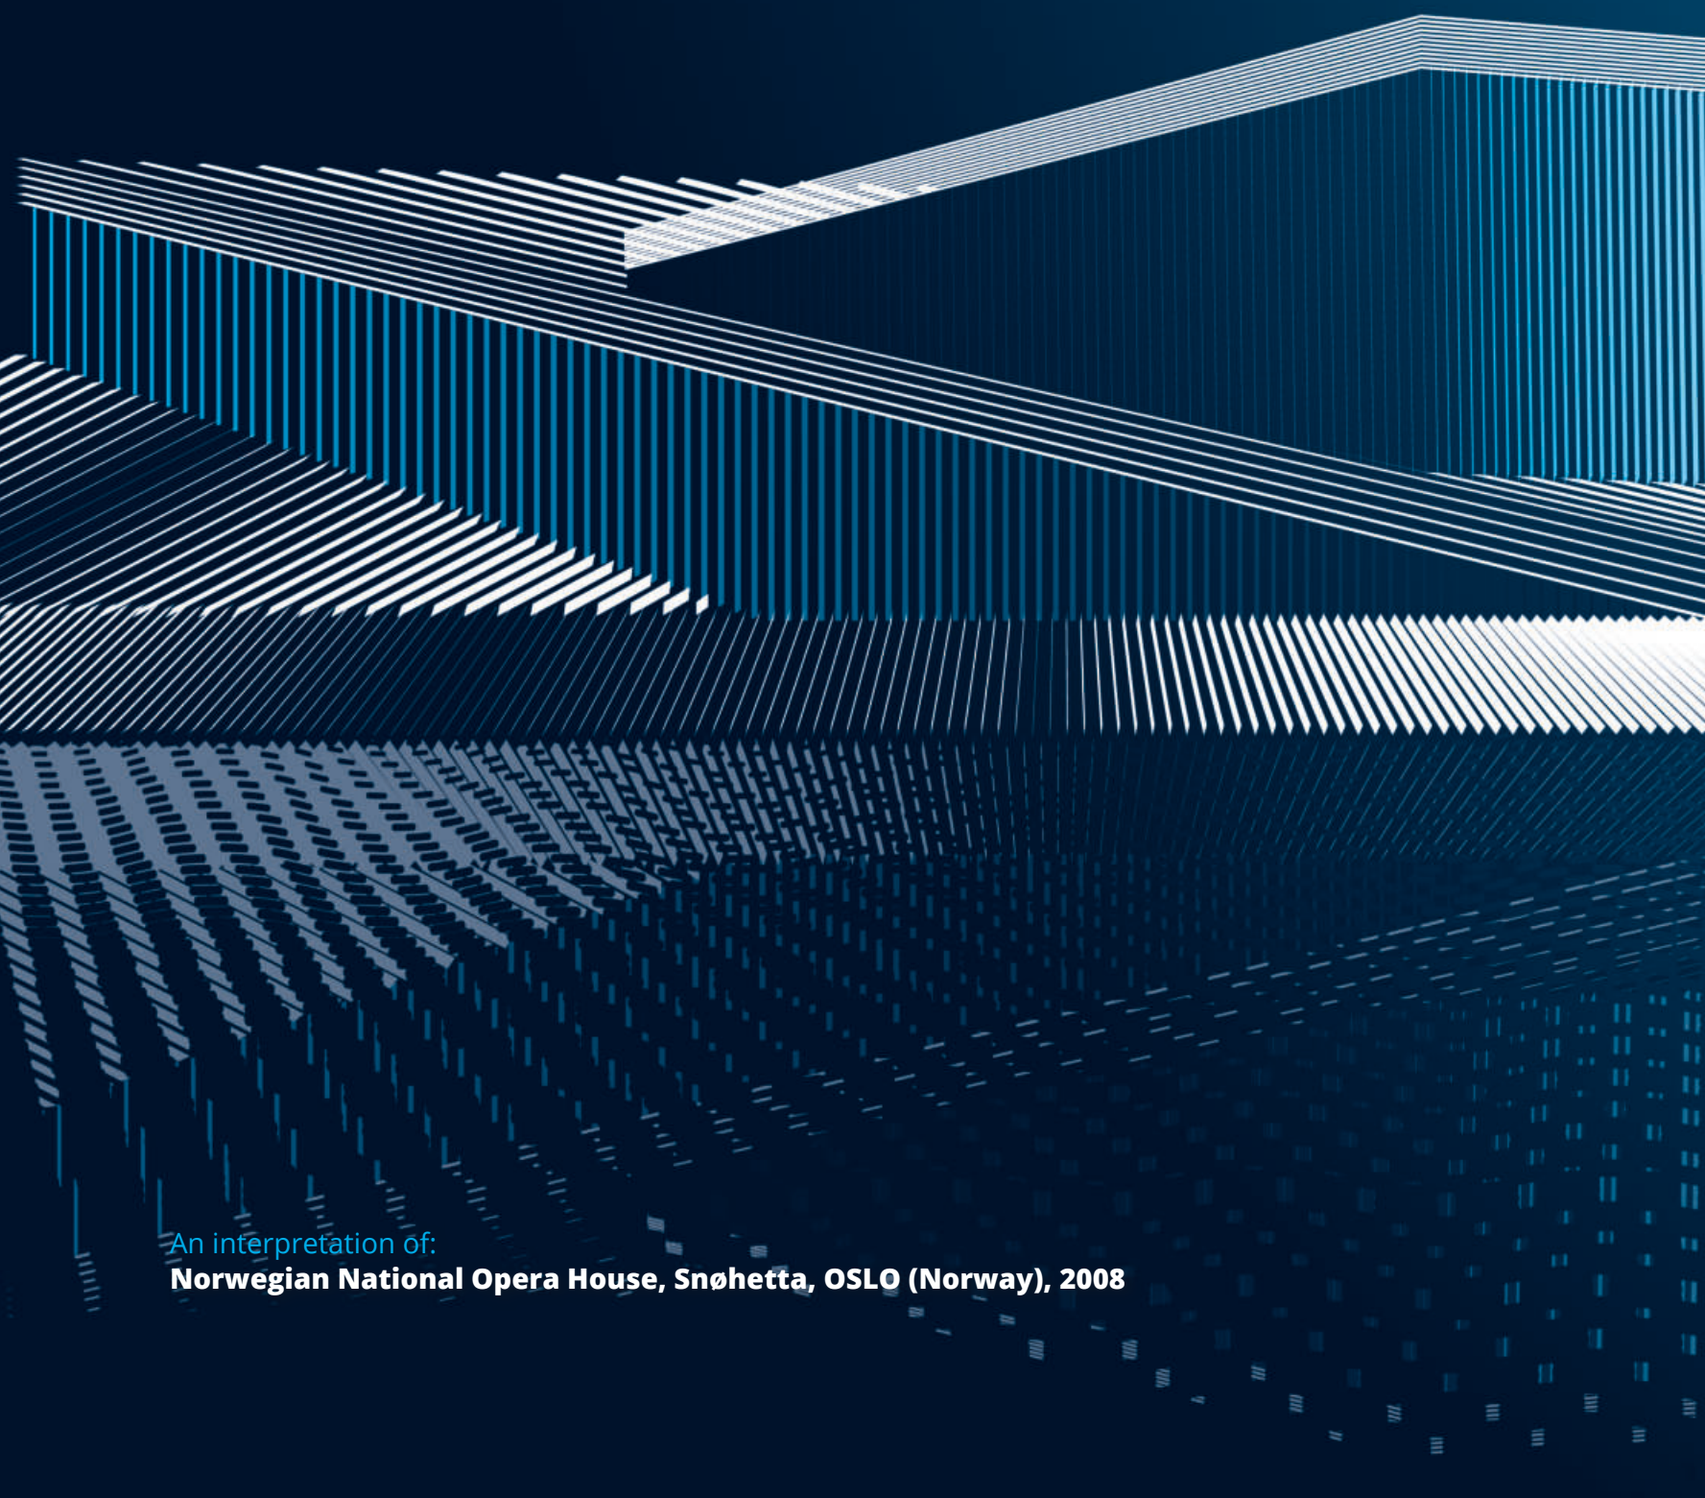

An interpretation of:
Norwegian National Opera House, Snøhetta, OSLO (Norway), 2008

PROFILES & SYSTEMS

LOW THICKNESS

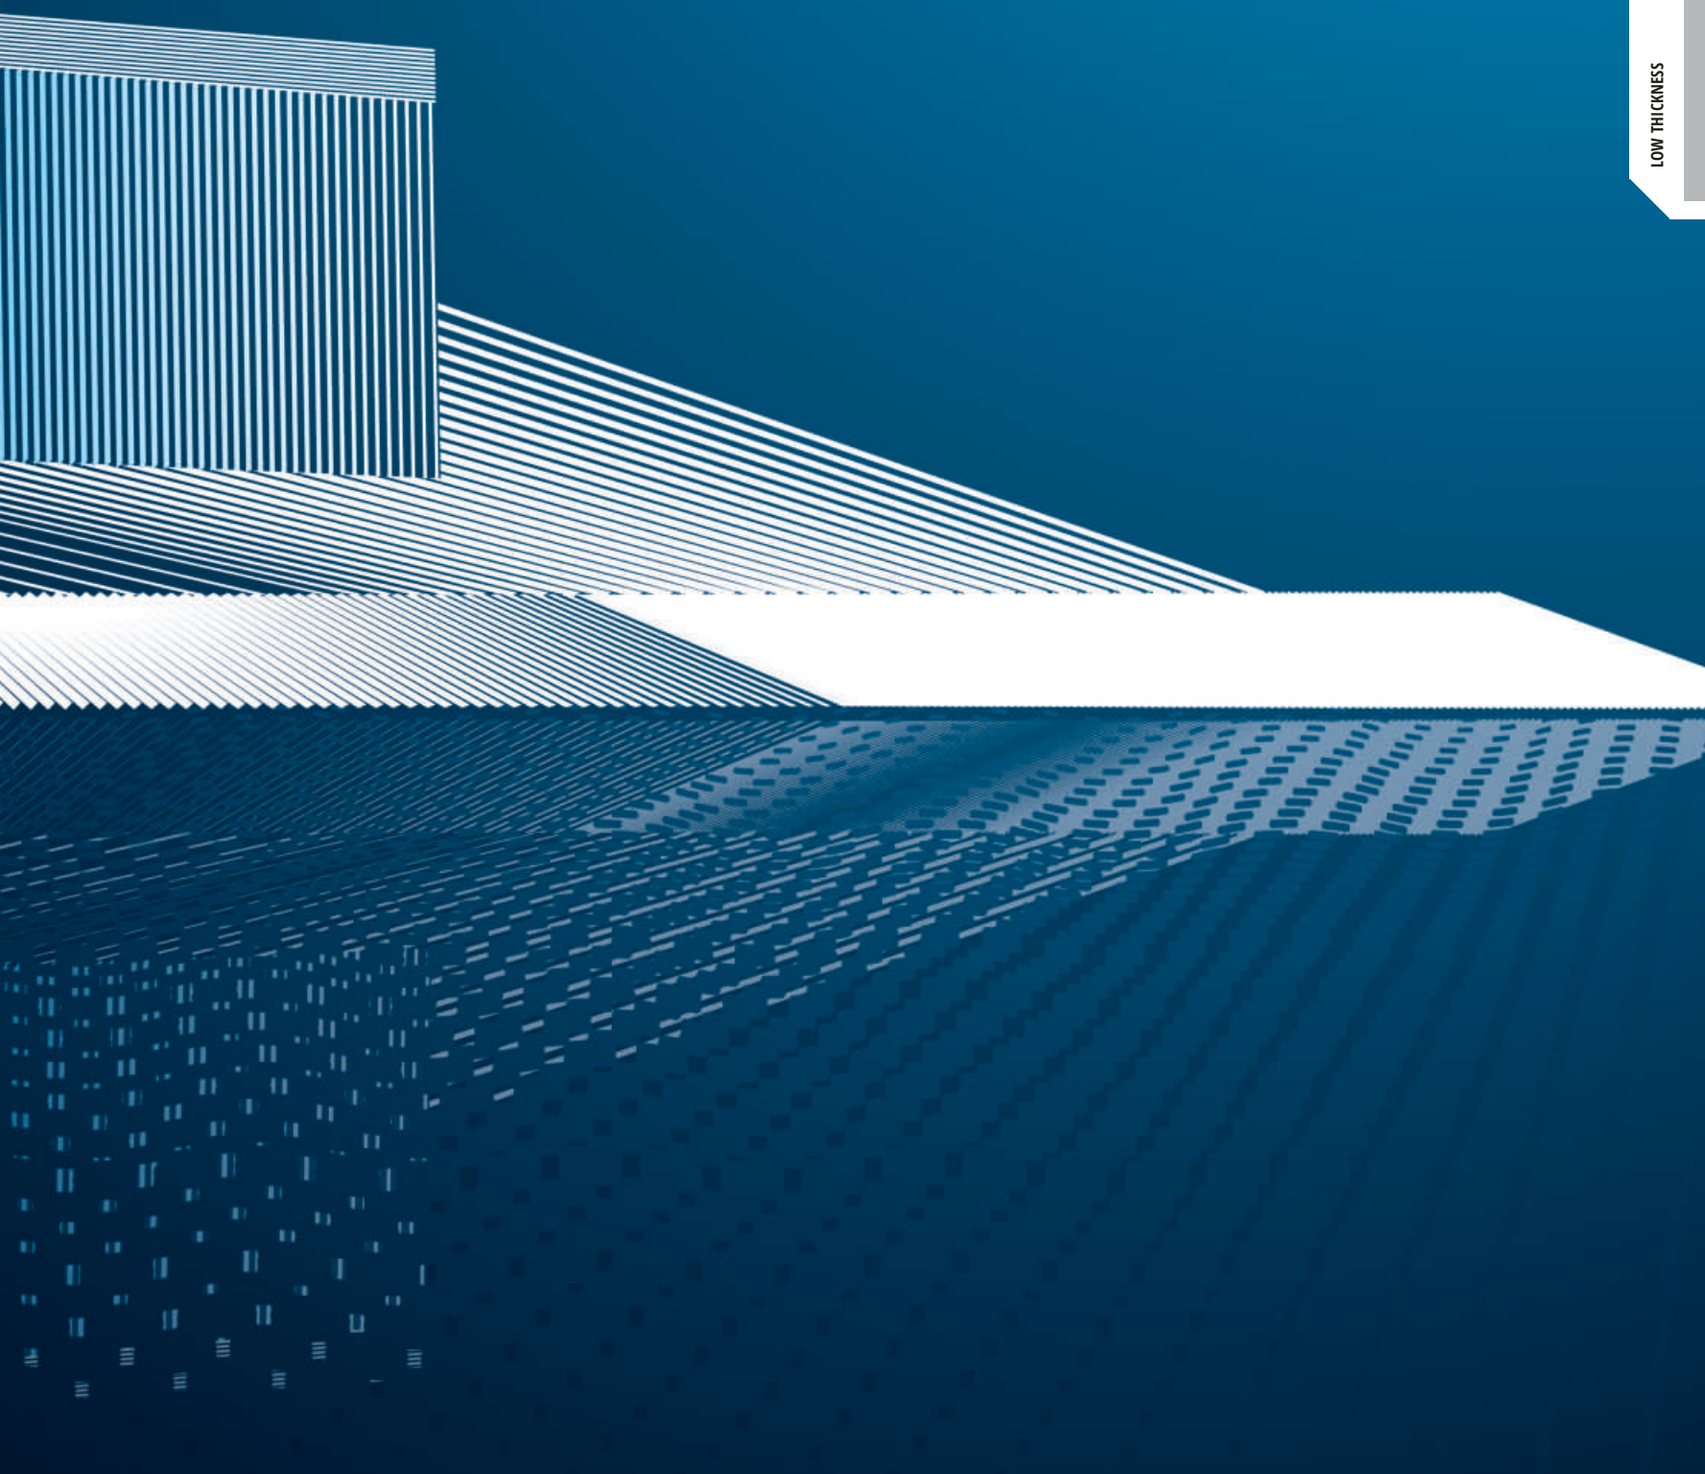


PROKERLAM SQUARE

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM

PROKERLAM SQUARE is a square corner bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM SQUARE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PKLQ... 045
scale 1:1







ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PKLQAA O45	4,5	6,85	18,50


POLISHED GOLD ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PKLQBO 045	4,5	10,58	28,57 *

POLISHED CHROME ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PKLQBC 045	4,5	10,58	28,57

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

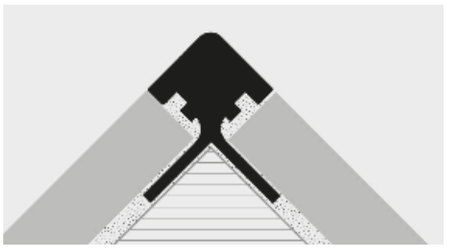

1. Choose "PROKERLAM SQUARE" according to the desired finish. **2.** Cut "PROKERLAM SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROKERLAM SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS




AA - Anodized silver alum. **BC** - Polished chrome alum. **BO** - Polished gold alum.

PROKERLAM JOLLY

ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

PROKERLAM JOLLY is a quarter-circle rounded bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM JOLLY** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PKLJ... 045
scale 1:1







ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PKLJAA 045	4,5	6,63	17,90 *

POLISHED CHROME ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PKLJBC 045	4,5	10,33	27,89 *

POLISHED GOLD ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PKLJBO 045	4,5	10,33	27,89 *

EXAMPLE FOR LAYING



1. Choose "PROKERLAM Jolly" according to the desired finish. **2.** Cut "PROKERLAM Jolly" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROKERLAM Jolly" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AA - Anodized silver alum. **BC** - Polished chrome alum. **BO** - Polished gold alum.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROKERLAM LINE is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PROKERLAM LINE

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pcs
PKLLAC 045	4,5	7,97	21,52
PKLLAC 06	6	8,21	22,17



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**


Article	H mm	€/lm	€/Pcs
PKLLACS 045	4,5	9,90	26,73
PKLLACS 06	6	10,26	27,70

COLOURS




AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

PKLLAC... 045
scale 1:1



PKLLAC... 06
scale 1:1



LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish. **2.** Cut "PROKERLAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROKERLAM LINE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

LOW THICKNESS

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROKERLAM LINE is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PROKERLAM LINE

ANODIZED, VARNISHED AND STONE LINE ALUMINIUM



ANODISED SILVER ALUMINIUM thermo packed
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pcs
PKLLAA 045	4,5	5,39	14,55
PKLLAA 06	6	5,71	15,42

VARNISHED ALUMINIUM (White-Black) thermo packed
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pcs
PKLLA 045-01	4,5	6,52	17,60
PKLLA 045-11	4,5	6,52	17,60
PKLLA 06-01	6	6,90	18,63
PKLLA 06-11	6	6,90	18,63




STONE LINE ALUMINIUM thermo packed
Bar lenght **2,7 lm** - Pack **40 PCS - 108 lm**

Article	H mm	€/lm	€/Pcs
PKLLA 045-SL...	4,5	8,65	23,36
PKLLA 06-SL...	6	9,17	24,76


The code of the selected colour must be added to the article code. E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.

COLOURS

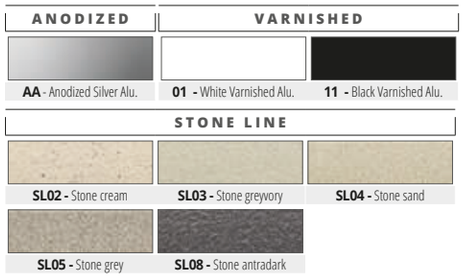


AA - Anodized Silver Alu.
01 - White Varnished Alu.
11 - Black Varnished Alu.
SL02 - Stone cream
SL03 - Stone greyvory
SL04 - Stone sand
SL05 - Stone grey
SL08 - Stone antradark


PKLL... 045
scale 1:1



PKLL... 06
scale 1:1



LAYING INSTRUCTIONS

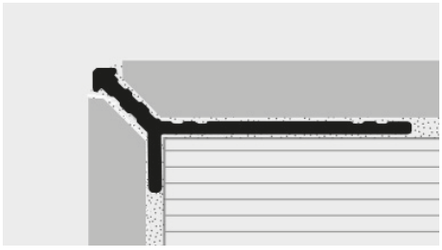

1. Choose "PROKERLAM LINE" according to the desired finish. **2.** Cut "PROKERLAM LINE to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROKERLAM LINE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy



PROSHELL D ALL is a profile in anodized and polished aluminum with a visible 45° sloping surface. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL D ALL** a much sought after profile.


PROSHELL D ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM





PSHD... 045
scale 1:1

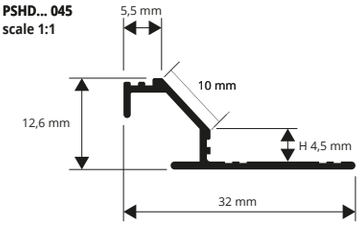

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PSHDAA 045	4,5	8,32	22,46	*

POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	H mm	€/lm	€/Pc	
PSHDBC 045	4,5	10,58	28,57	*
PSHDBO 045	4,5	10,58	28,57	*

COLOURS



AA - Anodized silver alum. **BC** - Polished chrome alum. **BO** - Polished gold alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

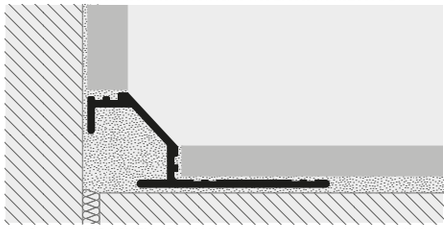

1. Choose "PROSHELL D ALL" according to the desired finish. **2.** Cut "PROSHELL D ALL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSHELL D ALL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

LOW THICKNESS

© 2020 All rights reserved by Progress Profiles. Printed in Italy


PROSHELL R ALL is a cove-shaped profile in anodized and polished aluminum. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL R ALL** a much sought after profile.

PROSHELL R ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM



PSHR... 045
scale 1:1

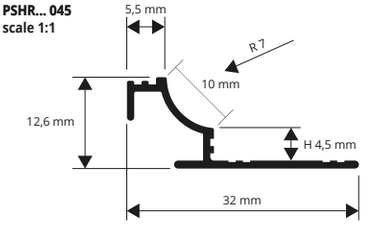

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc	
PSHRAA 045	4,5	8,32	22,46	*

POLISHED CHROME/GOLD ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	H mm	€/lm	€/Pc	
PSHRBC 045	4,5	10,58	28,57	*
PSHRBO 045	4,5	10,58	28,57	*

COLOURS



AA - Anodized silver alum. **BC** - Polished chrome alum. **BO** - Polished gold alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

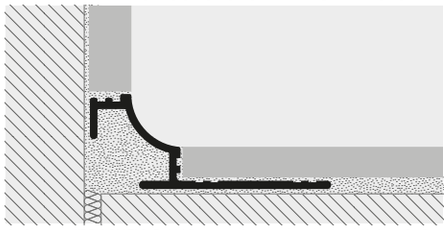

1. Choose "PROSHELL R ALL" according to the desired finish. **2.** Cut "PROSHELL R ALL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROSHELL R ALL" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROINTER KL ACC


STAINLESS STEEL AISI 304/1.4301-V2A

PROINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL** a much sought after profile.

PIKL... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

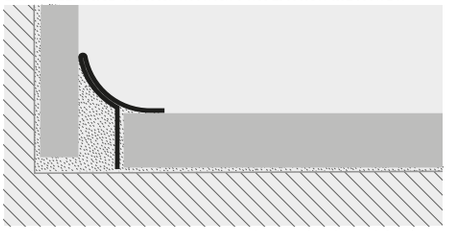

1. Choose "PROINTER KL ACC" according to the desired finish. **2.** Cut "PROINTER KL ACC" to the desired length. **3.** Apply the silicone along the floor-wall connection. **4.** Press the arrowhead of "PROINTER KL ACC" into the silicone evenly untili t is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 8/10mm**

Article	H mm	€/lm	€/Pc
PIKLAC 15	15	12,62	34,07


BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack.. **40 Pcs - 108 lm - 8/10mm**

Article	H mm	€/lm	€/Pc
PIKLACS 15	15	15,94	43,04

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

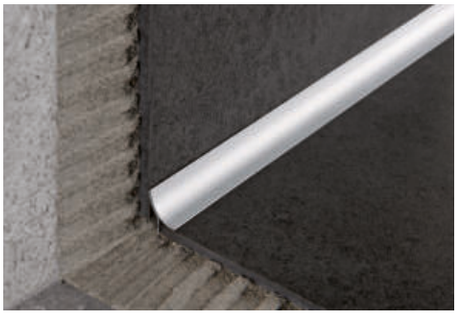

SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **40 Pcs - 108 lm - 8/10mm**

Article	H mm	€/lm	€/Pc
PIKLACSB 15	15	17,27	46,63 *

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack.. **40 Pcs - 108 lm - 8/10mm**

Article	H mm	€/lm	€/Pc
PIKLACML 15	15	16,54	44,66 *

AVAILABLE MINIMUM QUANTITY 100 PCS




ACSB - Sanded stainless st. AISI 304/1.4301-V2A
ACML - Super polished stainless steel AISI 304/1.4301-V2A

PROINTER KL ALL


POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make **PROSHELL KL ALL** a much sought after profile.

PIKL... 045
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

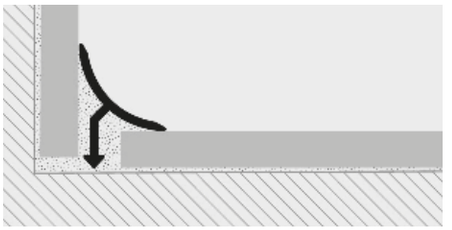

1. Choose "PROINTER KL ALL" according to the desired finish. **2.** Cut "PROINTER KL ALL" to the desired length. **3.** Apply the silicone along the floor-wall connection. **4.** Press the arrowhead of "PROINTER KL ALL" into the silicone evenly untili t is completely adherent to the floor and wall.



POLISHED / CHROMED BRASS thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PIKLOL 045	4,5	15,24	41,15
PIKLOC 045	4,5	23,82	64,31 *

CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL .../...	3,28	16,33



* **End caps of the on demand profiles are also on demand.**

COLOURS



OL - Polished brass
OC - Chromed brass



POLISHED CHROME ALUMINIUM / GOLD thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PIKLBC 045	4,5	8,43	22,76
PIKLBO 045	4,5	8,43	22,76

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/lm	€/Pc
PIKLAA 045	4,5	5,91	15,96

CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL .../...	3,28	16,33



COLOURS



AA - Anodized silver alum.
BC - Polished chrome alum.
BO - Polished gold alum.

LOW THICKNESS

© 2023 All rights reserved by Progress Profiles. Printed in Italy

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



PROSTYLE KL 10 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

PROSTYLE KL 10

ANODIZED SILVER ALUMINIUM



ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PSYKLAA 1045	4,5	8,79	23,73

COLOURS


AA - Anodized silver aluminium

CAPS - pack. **2 Pcs** (1 R and 1 L)

Article	H mm	€/Pack.
TPSYKLAA 1045/1	4,5	3,28


Articles not for sale singly

PSYKLAA 1045
scale 1:1



1. Cut "PROSTYLE KL 10" to the desired length. **2.** Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. **3.** Lay the profile on the step tread aligning it with the tiles of the step rise. **4.** Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. **5.** Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

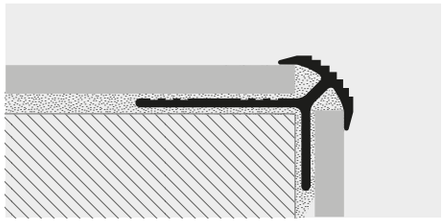

LOW THICKNESS

© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROSTAIR KL 20 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.

PROSTAIR KL 20

ANODIZED SILVER ALUMINIUM

ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	H mm	€/lm	€/Pc
PTRKLAA 2045	4,5	7,32	19,76


COLOURS

AA - Anodized silver aluminium




1. Cut "PROSTAIR KL 20" to the desired length. **2.** Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid. **3.** Fill the cavities on back of the profile with adhesive and lay it on the step tread aligning it with the tiles of the step rise. **4.** Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile. **5.** Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PTRKLAA 2045
scale 1:1

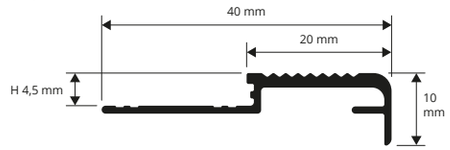

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

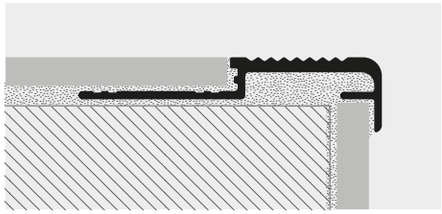







Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROGRESS®
PROFILES

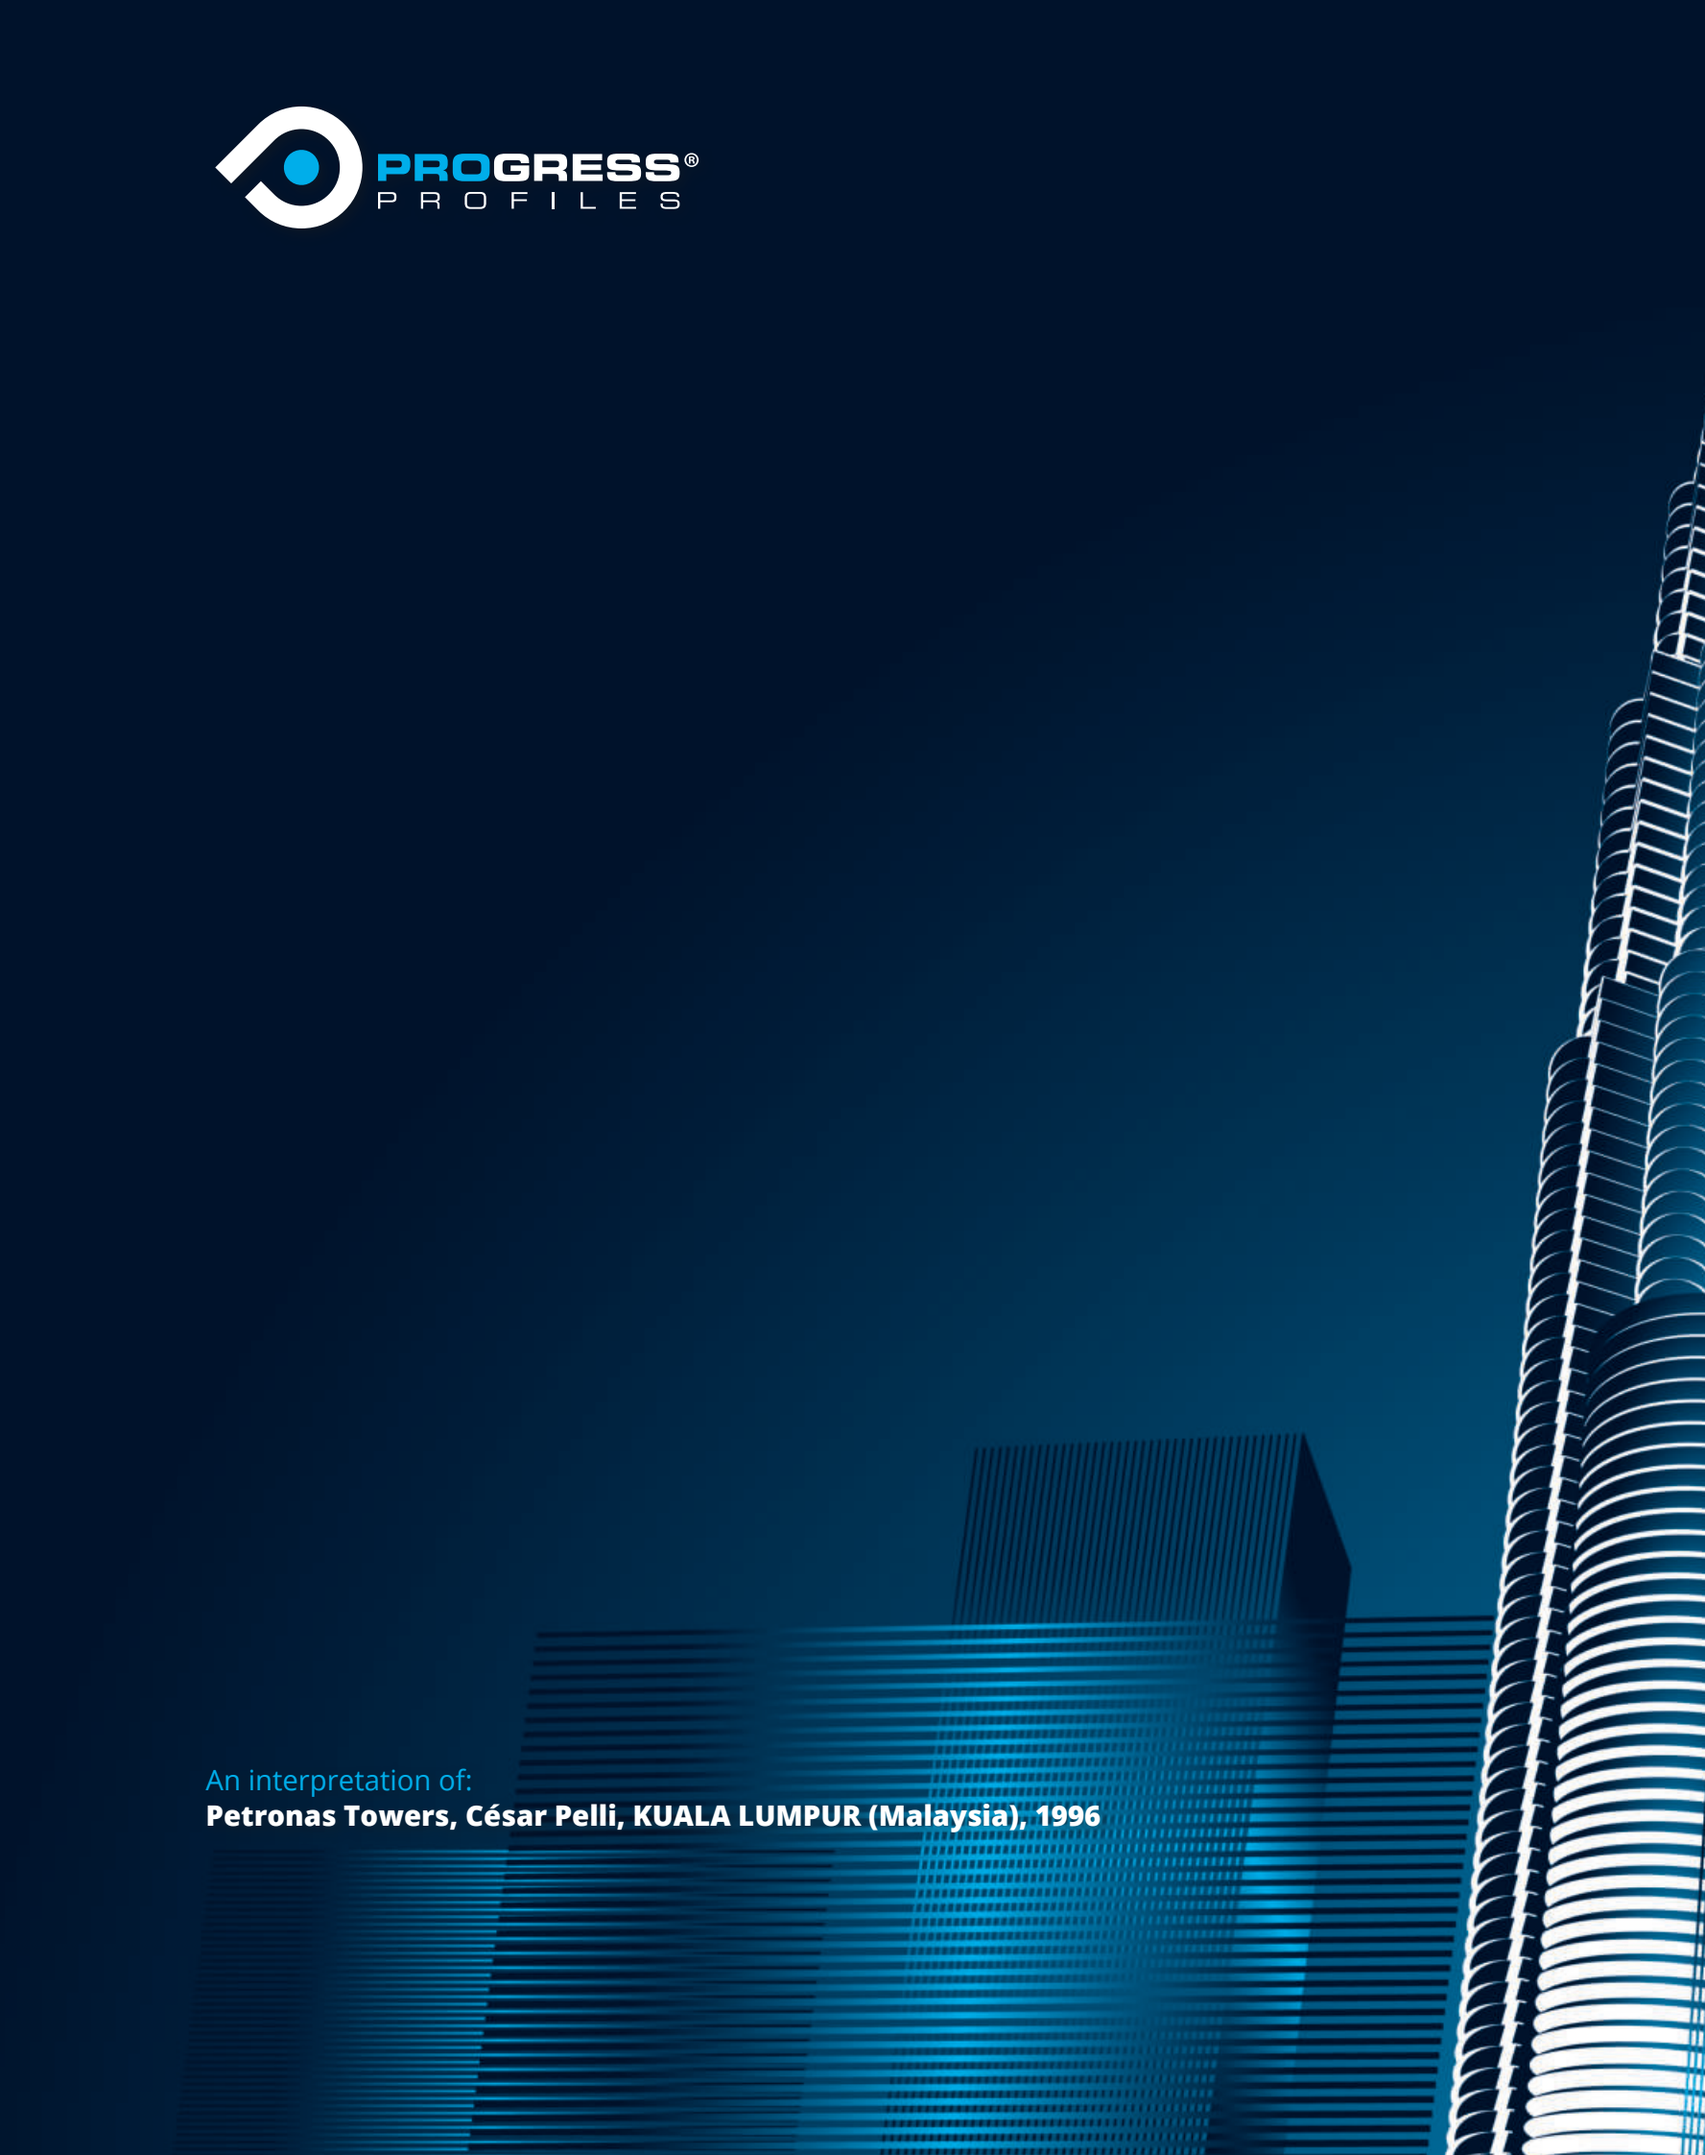

An interpretation of:
Petronas Towers, César Pelli, KUALA LUMPUR (Malaysia), 1996

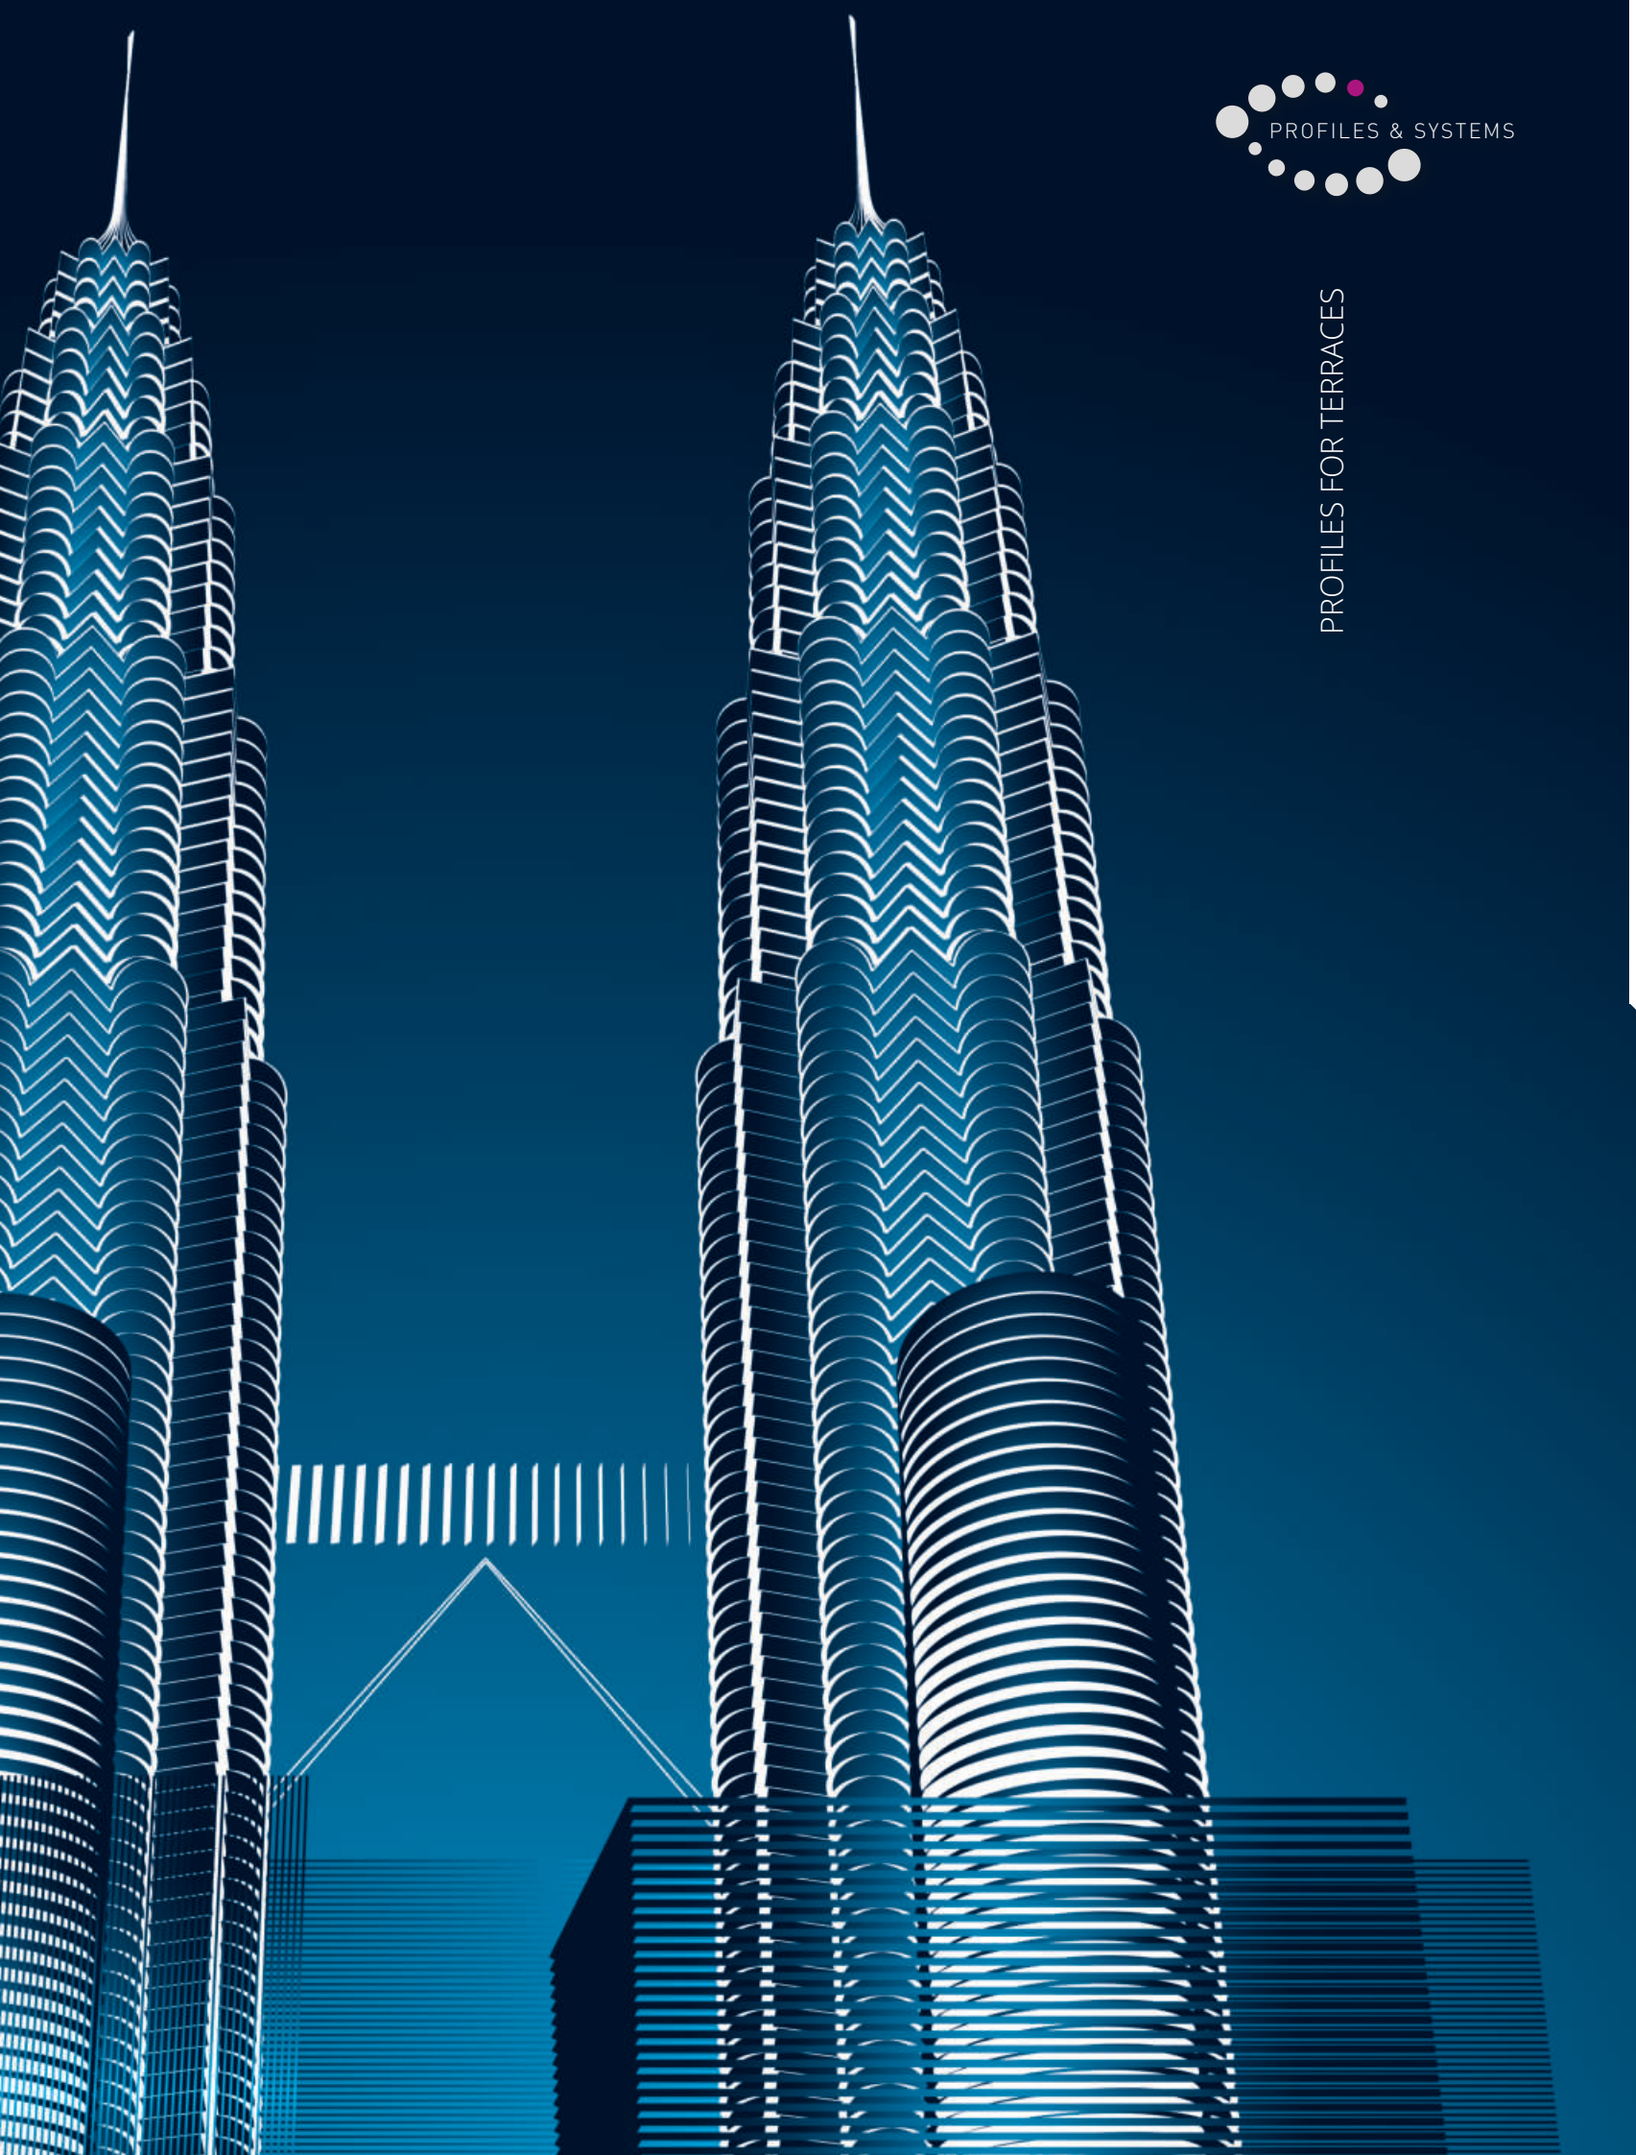

PROFILES & SYSTEMS
PROFILES FOR TERRACES

PROTERRACE DOUBLE DRIP

VARNISHED ALUMINIUM

PROTERRACE DOUBLE DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. The double drip allows the drainage water to flow out in case of application with PRODESO DRAIN draining membrane. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.


PDD ...AL...

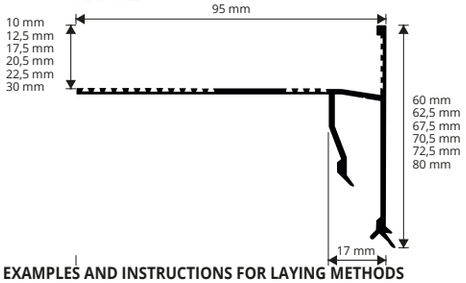





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

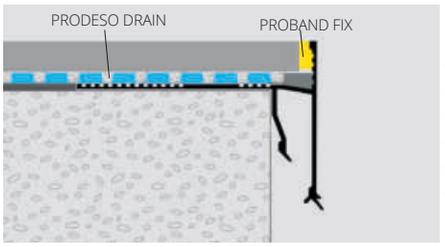

1. Choose PROTERRACE DOUBLE DRIP according to the tile thickness and desired colour. **2.** Fix the external corners to the screed (at least 1 cm from it) with nails. **3.** Fix the draining adhesive stripe in polyurethane on the vertical side of the profile. **4.** Cut the PROTERRACE DOUBLE DRIP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate. **5.** Lay the desired waterproofing system. **6.** Lay the tiles leaving at 5 mm between the tile and the profile. **7.** Seal the space between tile and profile with **PROBAND FIX (P.186)**.

VARNISHED/COATED ALUMINIUM

bar length **2,7 lm** - pack. **5 Pcs** - **13,5 lm**

Article	H mm	€/lm	€/Pc
PDD 10AL...	10	40,25	108,68
PDD 125AL...	12,5	41,67	112,51
PDD 175AL...	17,5	44,65	120,56
PDD 205AL...	20,5	45,98	124,15
PDD 225AL...	22,5	47,41	128,01
PDD 30AL...	30	51,82	139,91

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PDD 175AL... (white) PDD 175ALBF.

EXTERNAL CORNERS - pack. **10 Pcs**

Article	H mm	€/Pc	€/Pack
AEPDD 10AL.../10	10	52,92	529,20
AEPDD 125AL.../10	12,5	53,48	534,80
AEPDD 175AL.../10	17,5	55,13	551,30
AEPDD 205AL.../10	20,5	55,68	556,80
AEPDD 225AL.../10	22,5	56,23	562,30
AEPDD 30AL.../10	30	58,43	584,30

JOINTS - pack. **10 Pcs**

Article	H mm	€/Pc	€/Pack
GINPDD 10AL...	10	11,30	113,00
GINPDD 125AL...	12,5	11,85	118,50
GINPDD 175AL...	17,5	13,50	135,00
GINPDD 205AL...	20,5	14,06	140,60
GINPDD 225AL...	22,5	14,33	143,30
GIPDD 30AL...	30	15,99	159,90

INTERNAL CORNERS - pack. **10 Pcs**


Article	H mm	€/Pc	€/Pack
AIPDD 10AL.../10	10	55,13	551,30
AIPDD 125AL.../10	12,5	55,68	556,80
AIPDD 175AL.../10	17,5	57,33	573,30
AIPDD 205AL.../10	20,5	57,89	578,90
AIPDD 225AL.../10	22,5	58,43	584,30
AIPDD 30AL.../10	30	60,64	606,40

HOW TO REQUEST SEASIDE TREATMENT


When placing your order please add S to the article's number
Example: PDD 175ALGF (seaside) = ***PDD 175ALGFS***
price for seaside treatment +50% on the gross price.



GINPDD ...AL...




AEPDD ...




AIPDD ...

EMBOSSED COLOURS



BF - White **(9010)** | **GF** - Grey **(7038)** | **A** - Anthracite grey **(no RAL)** | **TF** - Dark brown **(8019)**

COLOURS ON DEMAND



EF - Beige **(1019)** | **C** - Corten | **B** - White **(9010)** | **G** - Grey **(7038)** | **E** - Beige **(1019)** | **T** - Dark brown **(8019)**



= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERRACE DRAIN DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.


PROTERRACE DRAIN DRIP

VARNISHED/COATED ALUMINIUM
While stocks last.



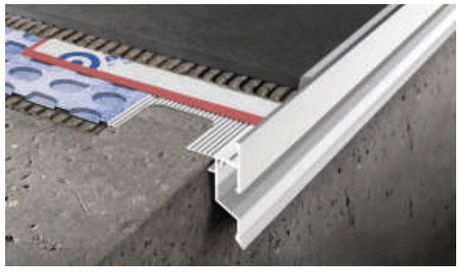

PFDPP ... AL...

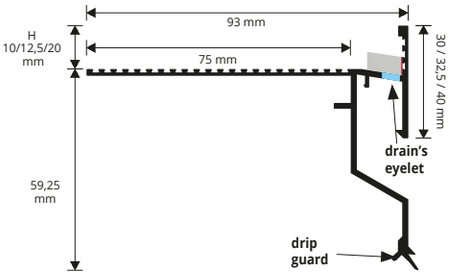


VARNISHED/COATED ALUMINIUM
bar length **2,7 lm** - pack. **5 Pcs** - **13,5 lm**

Article	H mm	€/lm	€/Pc
PFDPP 10AL...	10	36,51	98,58
PFDPP 125AL...	12,5	37,80	102,06
PFDPP 20AL...	20	41,71	112,62

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PFDPP 10 AL... (white) PFDPP 10 ALBF.

EXTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/pack
AEPFDPP 10AL.../10	46,16	461,60
AEPFDPP 125AL.../10	46,68	466,80
AEPFDPP 20AL.../10	50,97	509,70



AEPFDPP...

END CAPS - Pack. **2 PCS**

Article	€/Pc	€/pack
TPFDPP AL.../2	6,27	12,54



TPFDPP...

INTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/pack
AIPFDPP 10AL.../10	50,80	508,00
AIPFDPP 125AL.../10	51,45	514,50
AIPFDPP 20AL.../10	56,06	560,60



AIPFDPP...

JOINTS - pack. **1 upper + 1 lower**

Article	€/Pack
GINFDPP 10AL .../1	9,87
GINFDPP 125AL .../1	10,38
GINFDPP 20AL .../1	11,92




GINFDPP...

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDPP 10ALGF (seaside) = ***PFDPP 10ALGFS***
price for seaside treatment +50% on the gross price.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

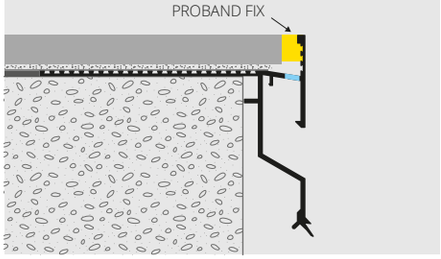


1. Choose PROTERRACE DRAIN DRIP according to the tile thickness and desired colour. **2.** Fix the external corners to the screed (at least 1 cm from it) with nails. **3.** Fix the draining adhesive stripe in polyurethane on the vertical side of the profile. **4.** Cut the PROTERRACE DRAIN FDP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate. **5.** Lay the desired waterproofing system. **6.** Lay the tiles leaving at 5 mm between the tile and the profile. **7.** Seal the space between tile and profile with **PROBAND FIX (P.186)**.

EMBOSSED COLOURS



BF - White **(9010)** | **GF** - Grey **(7038)** | **A** - Anthracite grey **(no RAL)** | **TF** - Dark brown **(8019)**

COLOURS ON DEMAND



EF - Beige **(1019)** | **C -** Corten | **B** - White **(9010)** | **G** - Grey **(7038)** | **E** - Beige **(1019)** | **T** - Dark brown **(8019)**



= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROTERRACE DRAIN FDP


VARNISHED/COATED ALUMINIUM

PROTERRACE DRAIN FDP is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is also provided with holes that allow the discharge of the water filtered between the profile and tiles. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PFDP 10AL...
scale 1:2

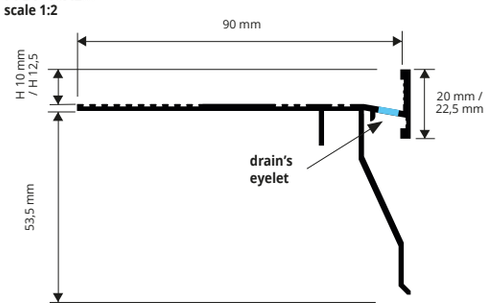

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

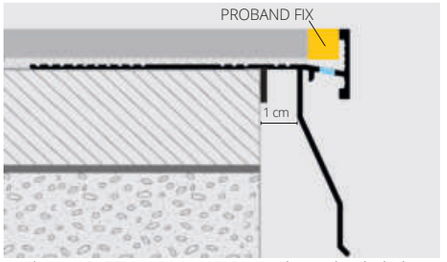

1. Choose PROTERRACE DRAIN FDP according to the tile thickness and desired colour. **2.** Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. **3.** Cut "PROTERRACE DRAIN FDP" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. **4.** Apply the desired waterproofing system. **5.** Lay the tiles, leaving about 5 mm between tiles and profile. **6.** Seal the space between tiles and profile with **PROBAND FIX (P.186)**.

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDP 10ALGF (seaside) = ***PFDP 10ALGFS***
price for seaside treatment +50% on the gross price.



VARNISHED/COATED ALUMINIUM
bar length **2,7 lm** - pack. **5 Pcs** - **13,5 lm**

Article	H mm	€/lm	€/Pc
PFDP 10AL...	10	33,31	89,94
PFDP 125AL...	12,5	33,82	91,31

Available in the colours: BF - GF - A - TF (EF - C - B - G - T - E on demand)
The code of the selected colour must be added to the article code.
E.g.: PFDP 10 AL... (white) PFDP 10 ALB.

EMBOSSED COLOURS

BF - White **(9010)**	**GF** - Grey **(7038)**	**A** - Anthracite grey **(no RAL)**	**TF** - Dark brown **(8019)**


COLOURS ON DEMAND

EMBOSSED

EF - Beige **(1019)**	**C** - Corten

SEMIGLOSSY

B - White **(9010)**	**G** - Grey **(7038)**	**E** - Beige **(1019)**	**T** - Dark brown **(8019)**

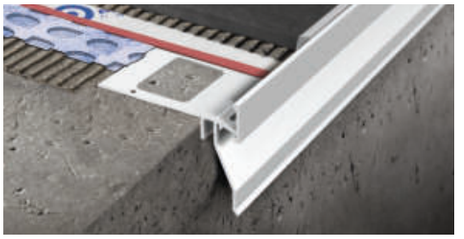

EXTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
AEPFDP 10AL.../10	42,04	420,40
AEPFDP 125AL.../10	42,43	424,30


INTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
AIPFDP 10AL.../10	46,29	462,90
AIPFDP 125AL.../10	46,68	466,80

JOINTS - pack. **1 Pc upper + 1 Pc lower**

Article	H mm	€/Pack.
GINFDP ...AL .../1	10/125	7,71

Choose the desired height and finish.
E.g.: 10 mm joint with finish A - **GINFDP 10ALA/10**




AEPFDP 10/125AL...



GINFDP 10/125AL .../1



AIPFDP 10/125AL...

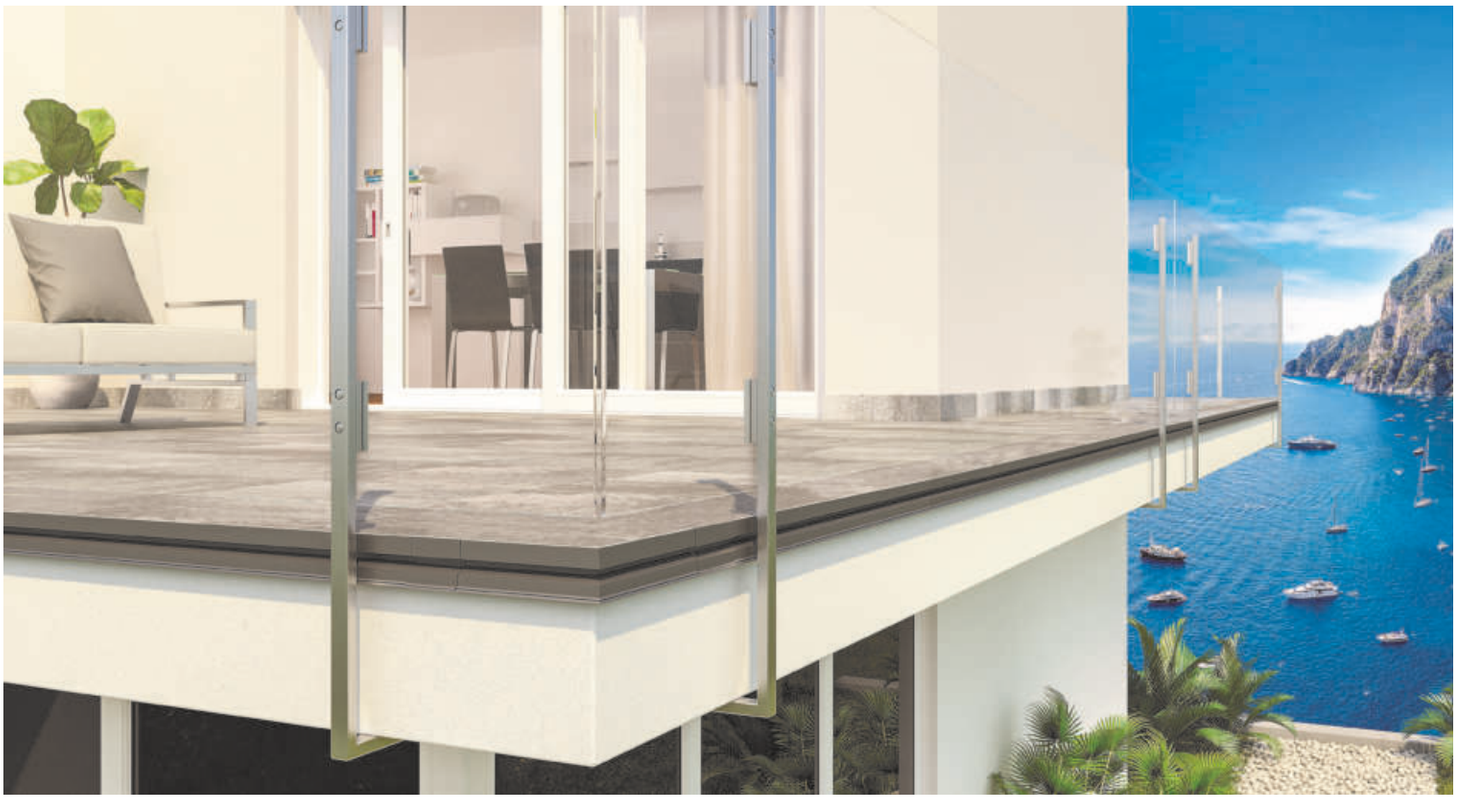

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES


= News 2023


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


PROTERRACE ECO DRIP is an edging profile in aluminium designed to protect the front of the screed from water penetration and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The front the profile is equipped with a double drip to improve the push away of water from the wall. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE ECO DRIP

VARNISHED/COATED ALUMINIUM

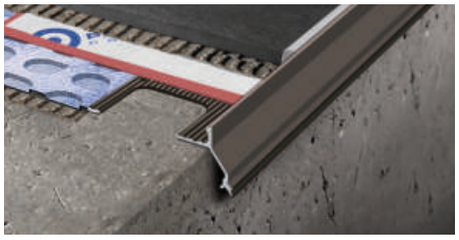

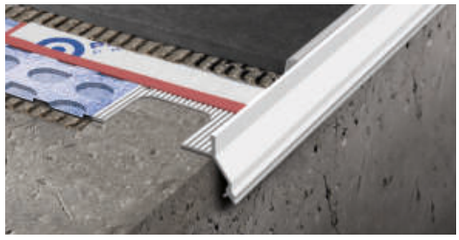

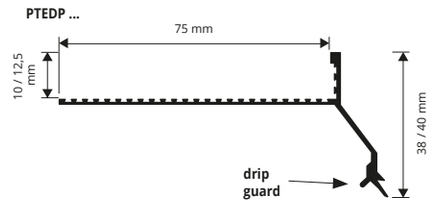

VARNISHED/COATED ALUMINIUM bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	H mm	€/lm	€/Pc
PTEDP 10AL...	10	15,97	43,12
PTEDP 125AL...	12,5	17,24	46,55

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand)
The code of the selected colour must be added to the article code.
E.g.: PTEDP 10AL... (gray) PTEDP 10GFAL.

JOINTS - pack. **2 / 10 Pcs**

Article	€/pack. 2Pcs	€/pack. 10Pcs
GINEDP 10AL... /...	15,48	70,36
GINEDP 125AL.../...	16,59	75,43

EMBOSSED COLOURS



BF - White **(9010)** | **GF** - Grey **(7038)** | **A** - Anthracite grey **(no RAL)** | **TF** - Dark brown **(8019)**


EXTERNAL CORNER - pack **10 Pc**

Article	€/Pc	€/Pack
AEEDP 10AL.../10	22,20	222,00
AEEDP 125AL.../10	22,82	228,20


GINEDP 10/125ALGF




AEEDP 10/125ALGF




COLOURS ON DEMAND





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

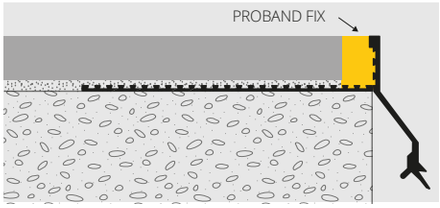

1. Choose "PROTERRACE ECO DRIP" according to the tile thickness. **2.** Cut "PROTERRACE ECO DRIP" to the desired length and fix it to the support with nails. **3.** Apply the desired waterproofing system, sealing the joint between profile and waterproofing. **4.** Lay the tiles, leaving about 5 mm between tiles and profile. **5.** Seal the space between tiles and profile using **PROBAND FIX (P.186)**. **PROFILE BENDING: 1)** Cut the anchoring flange into sections and engrave the metal close to the vertical side **2)** bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PTEDP 10ALGF (seaside) = ***PTEDP 10ALGFS***
price for seaside treatment +50% on the gross price.

PROFILES FOR TERRACES

© 2023. All rights reserved by Progress Profiles. Printed in Italy


PROSIDE WALK is a perimeter profile in varnished aluminium, available in grey and anthracite colour. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROSIDE WALK

VARNISHED/COATED ALUMINIUM





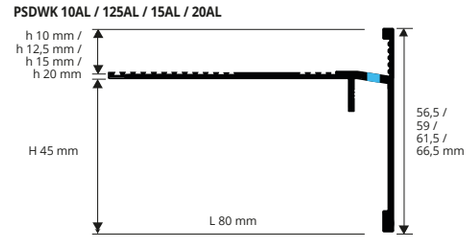

VARNISHED EMBOSSED ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL...	10	45	80	21,22	57,29
PSDWK 125AL...	12,5	45	80	21,56	58,21
PSDWK 15AL...	15	45	80	21,87	59,05
PSDWK 20AL...	20	45	80	23,14	62,48

EMBOSSED COLOURS



A - Anthracite grey **(no RAL)** | **GF** - Gray **(7038)** | **TF** - Dark brown **(8019)**

EMBOSSED COLOURS ON DEMAND



BF - White **(9010)** | **C** - Corten | **EF** - Beige **(1019)**

EXTERNAL CORNERS - pack. **10 Pcs**


Article	h mm	H mm	L	€/Pc	€/Pack.
AEPSDWK 10AL.../10	10	45	80	22,86	228,60
AEPSDWK 125AL.../10	12,5	45	80	23,51	235,10
AEPSDWK 15AL.../10	15	45	80	24,82	248,20
AEPSDWK 20AL.../10	20	45	80	26,69	266,90

JOINTS - pack. **10 Pcs**

Article	H mm	€/Pc	€/Pack.
GINSDWK ...AL.../10	10/125/15/20	6,53	65,30

Choose the desired height and finish.
E.g.: 10 mm joint with finish A - **GINSDWK 10ALA/10**


AEPSDWK external corner (welded)



GINSDWK joint



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

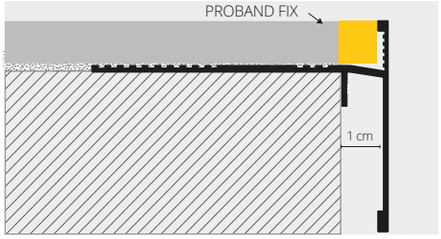

1. Choose PROSIDE WALK according to the tile thickness and desired colour. **2.** Waterproof with PROBAND 150 and PROBAND KOLL the front of the screed. **3.** Fix the external corners with nails. **4.** Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element. **5.** Lay the tiles, leaving about 5 mm between tiles and profile. **6.** Seal the space between tiles and profile with **PROBAND FIX (P.186)**. **PROFILE BENDING: 1)** Cut the anchoring flange into sections and engrave the metal close to the vertical side **2)** bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PSDWK 10ALGF (seaside) = ***PSDWK 10ALGFS***
price for seaside treatment +50% on the gross price.

= *News 2023*


*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROTERRACE PCG

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

PROTERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile.
The product is also available on request in **BENDABLE VERSION**

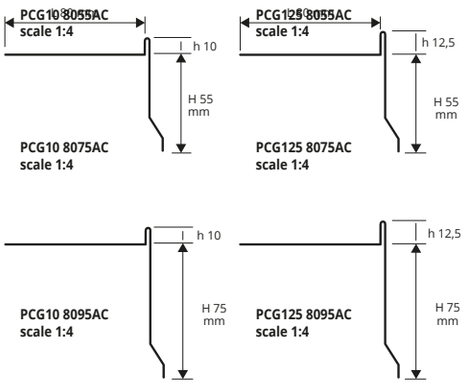



AEPG external corner (welded)




GING joints



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **5 Pcs** - **13,5 lm (H 55 mm - 18,9 lm)**

Article	h x H x L mm	€/lm	€/Pc	
PCG10 8055AC	10 x 55 x 80	34,43	92,96	
PCG10 8075AC	10 x 75 x 80	38,19	103,11	
PCG10 8095AC	10 x 95 x 80	42,78	115,51	
PCG125 8055AC	12,5 x 55 x 80	34,74	93,80	
PCG125 8075AC	12,5 x 75 x 80	38,58	104,17	*
PCG125 8095AC	12,5 x 95 x 80	42,92	115,88	*

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

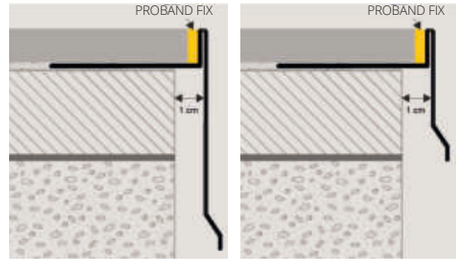

1. Choose "PROTERRACE PCG" according to the tile thickness. **2.** Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. **3.** Cut "PROTERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. **4.** Apply the desired waterproofing system. **5.** Lay the tiles, leaving about 5 mm between tiles and profile. **6.** Seal the space between tiles and profile with **PROBAND FIX (P.186)**.
PROFILE BENDING: 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side **2)** bend the profile with the help of a template;

EXTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
AEPG10 55AC/75AC/95AC/10	57,50	575,00
AEPG125 55AC/75AC/95AC/10	57,50	575,00

JOINTS - pack. **10 Pcs**


Article	€/Pc	€/Pack.
GING10 55AC/75AC/95AC/10	7,35	73,50
GING125 55AC/75AC/95AC/10	7,35	73,50

* **Corners and joints of the on demand profiles are also on demand**

PROTERRACE PCG


VARNISHED/COATED ALUMINIUM

PROTERRACE PCG is an edging profile designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support and which is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile.To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**

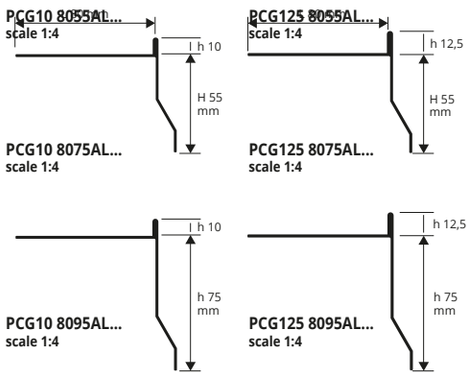

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PCG10 8055ALGF (seaside) = ***PCG10 8055ALGFS price for seaside treatment +50% on the gross price.***



AEPG external corner (welded)



GING joints




VARNISHED/COATED ALUMINIUM
bar length **2,7 lm** - pack. **5 Pcs** - **13,5 lm (H 55 mm - 18,9 lm)**


Article	h x H x L mm	€/lm	€/Pc	
PCG10 8055AL...	10 x 55 x 80	23,00	62,10	
PCG10 8055ALG	10 x 55 x 80	23,00	62,10	*
PCG10 8075AL...	10 x 75 x 80	26,16	70,63	
PCG10 8075ALG	10 x 75 x 80	26,16	70,63	*
PCG10 8095AL...	10 x 95 x 80	29,91	80,76	
PCG10 8095ALG	10 x 95 x 80	29,91	80,76	*
PCG125 8055AL...	12,5 x 55 x 80	23,00	62,10	
PCG125 8075AL...	12,5 x 75 x 80	26,16	70,63	
PCG125 8095AL...	12,5 x 95 x 80	29,91	80,76	

Available in the colours: BF - GF - A - TF (EF - C - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PCG10 8055AL... (white) PCG10 8055ALB.


EXEMPLES OF LAYING (for laying instructions, see above)

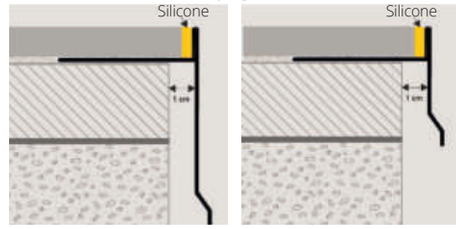

EMBOSSED COLOURS



COLOURS ON DEMAND

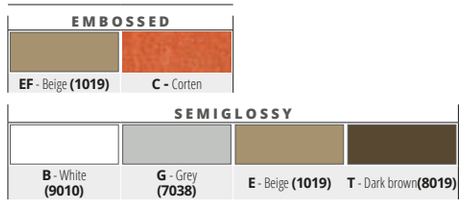

EXTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
AEPG10 55AL.../75AL.../95AL.../10	32,60	326,00
AEPG125 55AL.../75AL.../95AL.../10	32,60	326,00

JOINTS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
GING10 55AL.../75AL.../95AL.../10	6,44	64,40
GING125 55AL.../75AL.../95AL.../10	6,44	64,40

The code of the selected colour must be added to the article code. E.g.: AEPG10 55AL... (white) AEPG10 55ALB.

* **Corners and joints of the on demand profiles are also on demand**

= News 2023

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERRACE PC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A


PROTERRACE PC is a perimeter profile in polished stainless steel inox aisi 304/1.4301-V2A designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION.**



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length **2,7 lm** - pack. **7 Pcs** - **18,9 lm** (**H 75 mm** - **13,5 lm** - **H 95 mm** - **5,4 lm**)


Article	L x H mm	€/lm	€/Pc
PC 8055AC	80 x 55	32,52	87,80

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

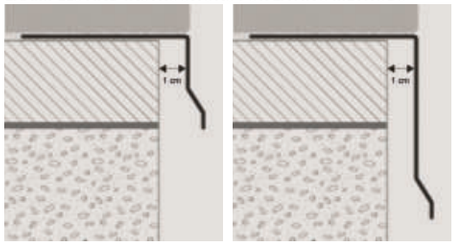

1. Choose "PROTERRACE PC" according to the desired height. **2.** Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. **3.** Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. **4.** Apply the desired waterproofing system. **5.** Lay the tiles. **PROFILE BENDING: 1)** Cut the anchoring flange into sections and engrave the metal close to the vertical side **2)** bend the profile with the help of a template;

PC 8055AC
scale 1:2

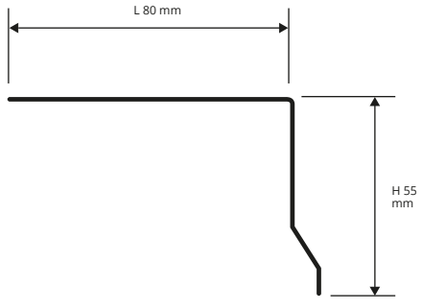


EXTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
AEPC 55AC 10	57,32	573,20

JOINTS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
GINC 55AC 10	8,05	80,50

AEPC external corner (welded)



GINC joints



✱ **Corners and joints of the on demand profiles are also on demand**

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROTERRACE PC

VARNISHED/COATED ALUMINIUM

PROTERRACE PC is a perimeter profile in varnished aluminium designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.The product is also available on request in **BENDABLE VERSION.**




VARNISHED/COATED ALUMINIUM - bar length **2,7 lm**
pack. **7 Pcs** - **18,9 lm** (**H 75 mm** - **13,5 lm** - **H 95 mm** - **5,4 lm**)

Article	L x H mm	€/lm	€/Pc
PC 8055AL...	80 x 55	21,53	58,13 ✱


The code of the selected colour must be added to the article code.
E.g.: PC 8055AL... (white) PC 8055ALB.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

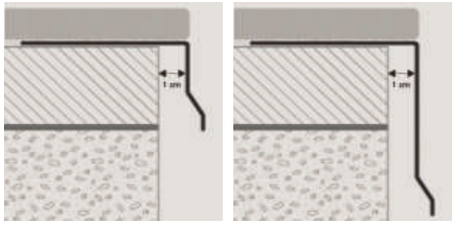


1. Choose "PROTERRACE PC" according to the desired colour and height. **2.** Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. **3.** Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. **4.** Apply the desired waterproofing system. **5.** Lay the tiles. **PROFILE BENDING: 1)** Cut the anchoring flange into sections and engrave the metal close to the vertical side **2)** bend the profile with the help of a template;


PC 8055AL
scale 1:2

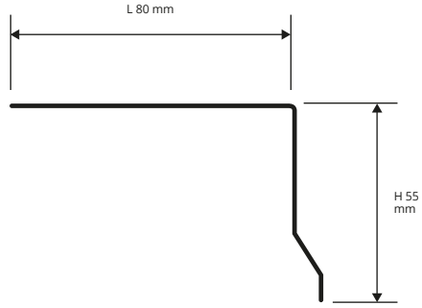

SEMIGLOSSY COLOURS ON DEMAND



EMBOSSED COLOURS ON DEMAND



HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PC 8055ALGF (seaside) = ***PC 8055ALGFS***
price for seaside treatment +50% on the gross price.


EXTERNAL CORNERS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
AEPC 55AL... 10	31,50	315,00

JOINTS - pack. **10 Pcs**

Article	€/Pc	€/Pack.
GINC 55AL... 10	6,09	60,90

AEPC external corners (welded)



GINC joints



The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... (white) AEPC 55ALB.

✱ **Corners and joints of the on demand profiles are also on demand**


= *News 2023*

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


PROTERRACE UNDER EDGE L


VARNISHED ALUMINIUM

PROTERRACE UNDER EDGE L is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies, or can be installed as a terminal of lower edges of outdoor terraces with drip function and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile.

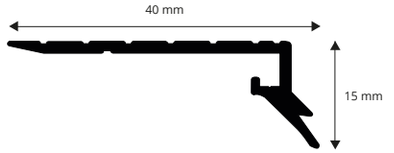


EXAMPLES AND INSTALLATION INSTRUCTIONS



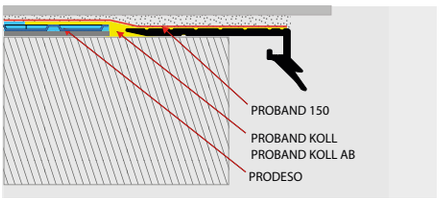

INSTALLATION UNDER TILES OR MARBLES:
1. Choose proterrace under edge l according to the desired colour. **2.** Cut proterrace under edge l to the required size and fix it with nails to the substrate taking care to leave 2 mm between two adjacent bars. **3.** Apply the desired waterproofing system. **4.** Lay the flooring. **5.** Fix the joints with proband fix.

INSTALLATION ON LOWER EDGES OF TERRACES AND BALCONIES:
1. Choose proterrace under edge l according to the desired colour. **2.** Cut proterrace under edge l to the required size and secure it with proband fix and screws to the substrate taking care to leave 2 mm between two adjacent bars **3.** Fix the joints by gluing them with proband fix.

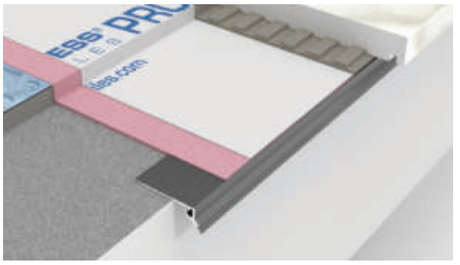

PROTERRACE UNDER EDGE L Varnished aluminium
Bar length **2.7 Lm** – pack **5 pcs** – **13.50 LM**

Article	H mm	€/ml	€/Pc
PTUEL...	15	16,54	44,66

CAPSULES
Varnished aluminium - pack **2 Pcs**

Article	€/Pc	€/pack.
CPPTUE...S (left)	15,44	30,88
CPPTUE...D (right)	15,44	30,88



JOINTS
Varnished aluminium

Article	€/pack. 2 Pcs	€/pack. 10 Pcs
GINPTUE...	11,03	49,61

END CAPS
Varnished aluminium - pack **2 Pcs**

Article	€/Pc	€/pack.
TPPTUE...S (left)	5,51	11,02
TPPTUE...D (right)	5,51	11,02

STANDARD COLOURS

BF - Embossed white **(9010)** | **GF** - Embossed grey **(7038)** | **AN** - Natural aluminium



GAMMA COLORI A RICHIESTA


GOFFRATI: **E** - Beige **(1019)** | **C** - Corten | **A** - Anthracite grey **(no RAL)** | **TF** - Dark brown **(8019)**

SEMILUCIDI: **B** - White **(9010)** | **G** - Grey **(7038)** | **E** - Beige **(1019)** | **T** - Dark brown **(8019)**


PROTERRACE UNDER EDGE C

VARNISHED ALUMINIUM


PROTERRACE UNDER EDGE C is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile.



EXAMPLES AND INSTALLATION INSTRUCTIONS

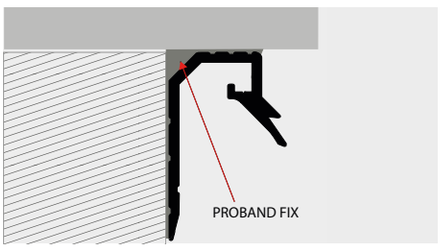

INSTALLATION UNDER TILES OR MARBLES:
1. Choose proterrace under edge c according to the desired colour; **2.** Cut proterrace under edge c to the required size; **3.** Glue the profile to the structure with proband fix and secure it with screws, taking care to leave 2 mm between two adjacent bars; **4.** Attach the joints with proband fix.

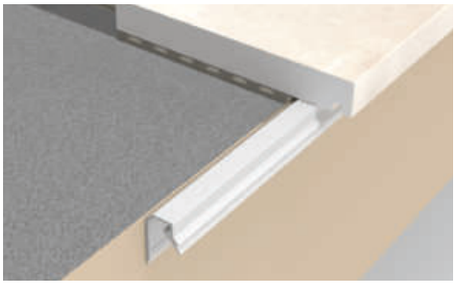

PROTERRACE UNDER EDGE C Varnished aluminium
Bar length **2.7 Lm** – pack **5 pcs** – **13.50 LM**

Article	H mm	€/ml	€/Pc
PTUEC...	15	16,76	45,25

CAPSULES
Varnished aluminium - pack **2 Pcs**

Article	€/Pc	€/pack.
CPPTUE...S (left)	15,44	30,88
CPPTUE...D (right)	15,44	30,88



JOINTS
Varnished aluminium

Article	€/pack. 2 Pcs	€/pack. 10 Pcs
GINPTUE...	11,03	49,61

END CAPS
Varnished aluminium - pack **2 Pcs**

Article	€/Pc	€/pack.
TPPTUE...S (left)	5,51	11,02
TPPTUE...D (right)	5,51	11,02

STANDARD COLOURS

BF - Embossed white **(9010)** | **GF** - Embossed grey **(7038)** | **AN** - Natural aluminium



GAMMA COLORI A RICHIESTA

GOFFRATI: **E** - Beige **(1019)** | **C** - Corten | **A** - Anthracite grey **(no RAL)** | **TF** - Dark brown **(8019)**

SEMILUCIDI: **B** - White **(9010)** | **G** - Grey **(7038)** | **E** - Beige **(1019)** | **T** - Dark brown **(8019)**

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	**1**	**158,49**
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	**1**	**133,13**

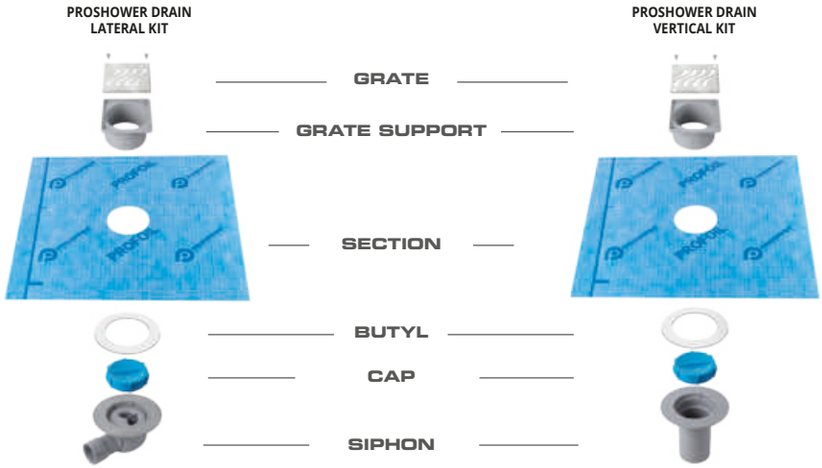



PROSHOWER DRAIN LATERAL KIT PSHLDK

PROSHOWER DRAIN VERTICAL KIT PSHVDK

AREA OF USE

- **Use -** Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- **Don't use -** In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.

PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains. PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360 ° adjustable siphon.

PROSHOWER DRAIN CENTRAL PRO


LATERAL DRAIN

PROSHOWER DRAIN CENTRAL PRO - GRATE + POLYSTYRENE CHANNEL PROTECTION + PROFOIL SECTION + DUCT BODY + SIPHON

Article	Description	Pc/Pack.	€/Pc
PSHWCP	PROSHOWER DRAIN CENTRAL PRO	**1**	**176,40**

AREA OF USE

- **Use -** PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.
- **Don't use -** In environments where very aggressive substances are used and a high concentrated load is expected.

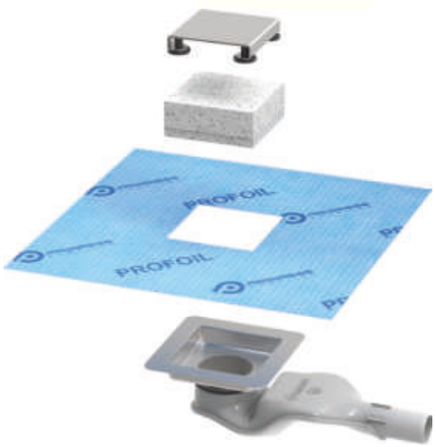

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.


PRODRIP

PERIMETRAL DRAIN

PERIMETER DRAIN

pack. per pallet = **192**

Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	**4**	**32,26**	**129,04**

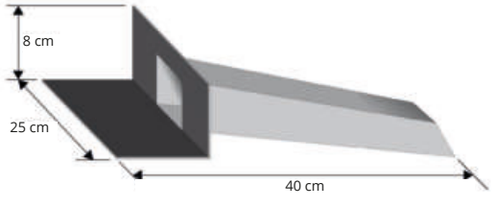

AREA OF USE

- **Use -** To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.
- **Don't use -** With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents.
Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROGRESS®
PROFILES



An interpretation of:
Museum of the Future, Shaun Killa,
The Frame, Fernando Domis, DUBAI (United Arab Emirates), 2018



MEMBRANE AND PANELS

PROFILES & SYSTEMS



PRODESO® DRAIN 5 SYSTEM

WEBSITE

Certified

- 12004 - Adhesion to the Substrate
- 12004 - Adhesion to the Tiles
- 12004 - Resistance to Substrate shear
- 12004 - Resistance to Tile shear
- ASTM C627-18 - Robinson Test with Screed
- ASTM C627-18 - Robinson Test with Plywood
- ANSI A118.12 - Uncoupling
- UNI EN 12667:2002 - Heat Resistance

Discover Prodeso® Drain 5!! The essential microventilation and desolidarization for a correct laying of large slabs inside.

PRODESO® DRAIN 5 is an uncoupling membrane that, thanks to its particular structure, guarantees a "micro ventilation" under the tiles that promotes a quick and uniform drying of the adhesive, especially in the case of large format tiles, and reduces the rise of triacetates and the appearance of efflorescence in joints. The membrane, with a total thickness of 5 mm, is composed of a high-density polyethylene sheet to which a polypropylene drainage fabric is thermowelded. On the back, there is a polypropylene spunbond, thermowelded to the polyethylene sheet, which guarantees the anchoring of the membrane to the support and the vapour management. The uncoupling and vapour management features of PRODESO DRAIN 5 allow its installation even on cracked and not perfectly cured supports.

Functions



UNCOUPLING



VAPOUR MANAGEMENT



DRAINAGE



MICRO VENTILATION



HEATING DISTRIBUTION

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PRODESO® DRAIN 5 MEMBRANE is a 3-layers uncoupling and draining membrane ideal for indoor environments.

PRODESO® DRAIN 5 SYSTEM



PRODESO® DRAIN 5 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll x Pallet	€/m	€/Roll	€/Pallet
PDESDR 201/E	1	20	5	6	27,88	557,60	3.345,60

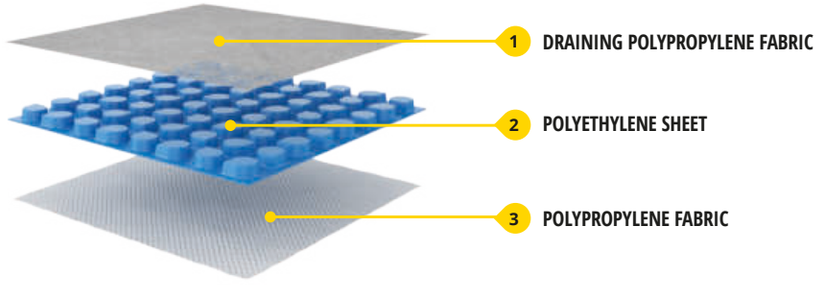

PROMEMBRANE KOLL is a C2ES1 class cementitious adhesive, with high workability and prolonged adjustability, specially designed to bond all the membranes of the "PRODESO®" family, even overlapping and on floor heating systems and the PROFOIL membrane.

PROMEMBRANE KOLL

CEMENTITIOUS ADHESIVE

PROMEMBRANE KOLL

Article	Kg/ Pack	Box/Pallet	kg/Pallet	€/kg	€/Pack	€/Pallet
PRMKL	25	25	625	1,45	36,25	906,25

Sold exclusively by the pallet.





= News 2023

Prices are referred to whole packs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PRODESO® DRAIN 8 SYSTEM

PATENTED

WEBSITE



PATENTED
102018000005884

Discover Prodeso® Drain 8!! The essential drainage and waterproofing function guaranteed by the most advanced system in the world.

PRODESO® DRAIN 8 is a draining, uncoupling and waterproofing patented membrane, with a total thickness of 8 mm, which can be installed even on not perfectly cured supports. The "air chamber" below the floor drains the water that has penetrated below it, it facilitates a fast drying of the adhesive and drastically reduces the rise of triacetates and the appearance of efflorescence.

The system, ideal for a correct laying on terraces and balconies even of large slabs, is completed with a band in polyethylene and elastic polypropylene and with a bicomponent waterproof adhesive. Quick and easy to install, the PRODESO® DRAIN 8 is very versatile and guarantees long life for outdoor flooring.


Functions


UNCOUPLING


WATERPROOFING


VAPOUR MANAGEMENT


DRAINAGE


MICRO VENTILATION

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PRODESO® DRAIN 8 MEMBRANE is a waterproofing, uncoupling and draining membrane with 5 layers ideal for outdoor environments.

PRODESO® DRAIN 8 SYSTEM



PRODESO® DRAIN 8 MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll x Pallet	€/m	€/Roll	€/Pallet
PDESDR 151/E	1	15	8	8	30,67	460,05	3680,40

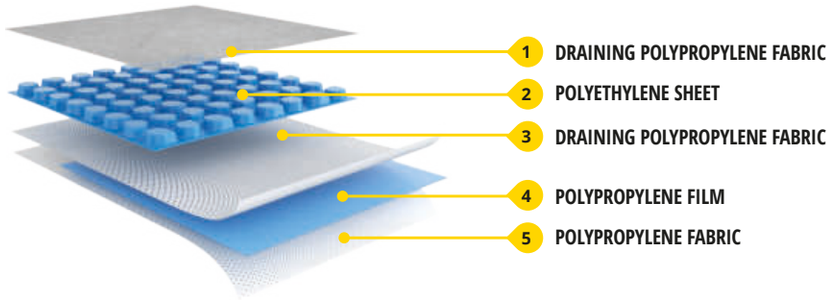

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROBAND 250

ROLLS IN HDPE AND PP

PROBAND 250

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Roll x Pack	€/m	€/Roll	€/Pallet
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250



PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE.

PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL AB

Article	Kg/Pack	Pack/pallet	Kg/Pallet	€/kg	€/Pack	€/Pallet
PRBKLAB	15	27	405	12,13	181,95	4912,65

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250



PROMEMBRANE KOLL is a C2ES1 class cementitious adhesive, with high workability and prolonged adjustability, specially designed to bond all the membranes of the "PRODESO®" family, even overlapping and on floor heating systems and the PROFOIL membrane.

PROMEMBRANE KOLL

CEMENTITIOUS ADHESIVE

PROMEMBRANE KOLL

Article	Kg/Pack	Pack/Pallet	Kg/Pallet	€/kg	€/Pack	€/Pallet
PRMKL	25	25	625	1,45	36,25	906,25

Sold exclusively by the pallet.




Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.

PRE-WELDED CORNERS

PRE-WELDED CORNERS

Article	H mm	L mm	Pcs/Pack	€/Pc	€/Pack
PRBI	60	120	10	8,23	82,30
PRBE	60	120	10	8,23	82,30



PRBE PRBI

= News 2023

Prices are referred to whole packs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PRODESO® HEAT GRIP SYSTEM

INSTRUCTION VIDEO

PATENTED



PATENTED

UA2016A002209
EP3225763 A1
003067388
2696795
CN 107268933 A
HK1238695
CA 2,935,062
US 9,726,383 B1
US, 10,502,434 B2
US 10,859,274 B2
US 10,215,423
US D818,615S
US D818,616S
US D818,617S
US D832,467S
US D841,837S
US D872,901S
US D874,028S
DESIGN PATENT
Patent pending

A New evolution

with the goal of flexibility, innovation and energy efficiency

The system is composed of three elements: PRODESO® HEAT GRIP MEMBRANE, PRODESO® HEAT GRIP CABLE e PRODESO® HEAT GRIP THERMOSTAT KIT. The polyethylene membrane with uncoupling, waterproofing and vapour management features has a 8,5 mm thickness and a thermowelded non-woven fabric on the back side, which guarantees the adhesion to the substrate.
The new membrane structure allows a perfect fixing of the heating cable and a crack-bridging ability 5 times more than the PRODESO® HEAT. The cables of last generation are composed of many resistances, each one 60 cm long, in a parallel circuit. If the cable is damaged, only the broken resistance stops working but not the whole cable. The thermostat of last generation interfaces with Android and Apple devices, that is why it is possible to adjust all settings and time schedule using an application with internet connection as remote control.

functions

- Only 8.5 mm thickness
- Higher crack-bridging ability
- Uncoupling
- Waterproofing
- Vapour management ducts
- Load distribution
- New constant power cable
- Remote controlled thermost




UNCOUPLING



WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT



LOAD DISTRIBUTION

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PRODESO® HEAT GRIP MEMBRANE is an uncoupling membrane, waterproofing in polyethylene, equipped with reliefs that allow the attachment of the electric heating cable.

PRODESO® HEAT GRIP SYSTEM

PRODESO® HEAT GRIP MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll/Pallet	€/m	€/Roll	€/Pallet
PDESHG 131/E	1	13	8,5	6	21,73	282,49	1694,94
PDESHG 451/E	1	4,5	8,5	15	21,73	97,79	1466,85

L 4,5m L 13m



it is a constant power electric heating cable to be embedded between the reliefs of **PRODESO® HEAT GRIP MEMBRANE**. The cable distance can be 6.2 or 9.3 cm

PRODESO® HEAT GRIP CABLE

PRODESO® HEAT GRIP CABLE

Article	Cable Lenght (m)	Heated surface on the WALL (6,2 cm)	Heated surface on the FLOOR (9,3 cm)	Total Power W	€/Roll
PDHGCB 20	19,80	1,19 m²	2,00 m²	250 W	221,31
PDHGCB 26	25,80	1,55 m²	2,50 m²	325 W	259,34
PDHGCB 31	30,80	1,83 m²	3,00 m²	385 W	299,67
PDHGCB 36	36,00	2,14 m²	3,50 m²	450 W	327,35
PDHGCB 40	40,20	2,38 m²	4,00 m²	500 W	357,30
PDHGCB 46	46,20	2,74 m²	4,50 m²	575 W	413,78
PDHGCB 52	52,20	3,10 m²	5,00 m²	650 W	458,73
PDHGCB 62	61,80	3,69 m²	6,00 m²	775 W	497,93
PDHGCB 72	72,00	4,29 m²	7,00 m²	900 W	571,70
PDHGCB 82	82,20	4,88 m²	8,00 m²	1025 W	662,76
PDHGCB 94	94,20	5,60 m²	9,00 m²	1175 W	752,66
PDHGCB 104	103,80	6,19 m²	10,00 m²	1300 W	826,42
PDHGCB 132	132,00	7,86 m²	12,50 m²	1650 W	962,43
PDHGCB 158	157,80	9,40 m²	15,00 m²	1975 W	990,10



PRODESO® HEAT GRIP CABLE - 450 M

Article	Diameter (mm)	Lenght ml	Power w/ml	Power supply V	€ / roll
PDHGCBB450	6,5	450 M	12,5W	230 V	2.723,63

It is composed of a Wi-Fi digital thermostat, a flush-mounting box, corrugated pipe, two floor temperature sensors and clips to fix the cable.

PRODESO® HEAT GRIP THERMOSTAT

PRODESO® HEAT GRIP DIGITAL THERMOSTAT - TOUCH SCREEN - WI-FI

Article	€/Kit
PDHTSMWTK	329,65



PDHSTSMWT 230 PDSOT PDSHI PDHCF 202

DIGITAL WIFI THERMOSTAT

Article	€/Kit
PDHTSMWT 230	285,27



PRODESO® HEAT GRIP SYSTEM OPTIONAL

ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO®HEAT e PRODESO® HEAT GRIP.

Article	L cm	Pc/Pack	€/Pc
PSC	15	1	86,20



PRODESO® HEAT GRIP CABLE KIT

Article	Lm shrink sheath	Cable Lugs Lm	€/Kit
PDHGCK110	1	10	14,57
PDHGCK550	5	50	71,00



PRODESO® HEAT CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT MEMBRANE (40 mm x 5 mm)

Article	Pcs/Pack	€/Pc	€/Pack
PCBLF	200	1,58	316,00



PROECOFON

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints - Pack. **2 Pcs**

Article	Thick. x H mm	Lm/Roll	€/Lm	€/Pack
PEF 550A	5 X 50	25	1,96	98,00



PRODESO® HEAT GRIP POWER CABLE

Article	Lm/Roll	€/Lm	€/Roll
PDHGCBF	2,5	17,76	44,40



MEMBRANE AND PANELS

© 2023. All rights reserved by Progress Profiles. Printed in Italy

= News 2023

Prices are referred to whole packs.

PRODESO® HEAT SYSTEM

INSTRUCTION VIDEO

PATENTED



PATENTED

002748822
EP 3,183,505 B1
US 8,176,694 B2
US 9,188,348 B2
US 9,416,979 B2
US 9,518,746 B2
US 9,625,163 B2
US 9,719,265 B2
US 9,777,931 B2
US 10,107,505 B2
US 10,006,644 B2
US 10,215,423 B2
US 10,408,469 B2
US 10,712,020 B2
US 10,739,016 B2
Patents Pending

A World of warmth and comfort in respect with the nature.

Progress Profiles innovative and patented PRODESO® HEAT SYSTEM for electrical walls and floors heating ensures pleasant warm and comfortable environment with short laying times and at low cost. The system can be used on all kinds of substrate thanks to the membrane uncoupling and waterproofing properties. Temperature and operating times can be controlled from a latest generation thermostat that also guarantees significant savings in energy costs. The system is quick and easy to install in all conditions and has an overall thickness of only 5.5 mm, far thinner than any alternative system. It is also maintenance free over time. This smart, responsible technology supports the growing demand for sustainable solutions and energy saving while also satisfying the needs of contemporary architecture and evolved home automation. A world of natural, warm wellbeing.

Functions




UNCOUPLING / CRACK ISOLATION



WATERPROOFING



VAPOR AND MOISTURE MANAGEMENT



LOAD DISTRIBUTION

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PRODESO® HEAT MEMBRANE is an uncoupling membrane, waterproofing in polyethylene, equipped with reliefs that allow the attachment of the electric heating cable.

PRODESO® HEAT SYSTEM

PRODESO® HEAT MEMBRANE

Article	H Roll (m)	L Roll (m)	Thickness (mm)	Roll/Pallet	€/m	€/Roll	€/Pallet
PDESH 151/E	1	15	5,5	6	21,77	326,55	1959,30
PDESH 051/E	1	5	5,5	15	23,02	115,10	1726,50

L 4,5m L 13m



it is a constant power electric heating cable to be embedded between the reliefs of **PRODESO® HEAT MEMBRANE**. The cable distance can be 6.2 or 9.3 cm

PRODESO® HEAT CABLE

PRODESO® HEAT CABLE

Article	Cable Lenght (m)	Heated surface on the WALL (6,2 cm)	Heated surface on the FLOOR (9,3 cm)	Total Power W	€/Roll
PDHCB 12	12,07 ml	0,70 m²	1,1 m²	150	187,88
PDHCB 17	17,66 ml	1,00 m²	1,6 m²	225	221,31
PDHCB 23	23,77 ml	1,40 m²	2,2 m²	300	247,81
PDHCB 29	29,87 ml	1,80 m²	2,7 m²	375	291,62
PDHCB 35	35,97 ml	2,20 m²	3,3 m²	450	335,41
PDHCB 41	41,56 ml	2,50 m²	3,8 m²	525	372,30
PDHCB 47	47,67 ml	2,90 m²	4,4 m²	600	427,61
PDHCB 53	53,77 ml	3,30 m²	5,0 m²	675	473,73
PDHCB 59	59,87 ml	3,70 m²	5,5 m²	750	507,15
PDHCB 71	71,57 ml	4,40 m²	6,6 m²	900	584,38

PRODESO® HEAT CABLE - 450 M

Article	Diameter (mm)	Lenght ml	Power w/ml	Power supply V	€ / roll
PDHCBB450	4,8	450 M	12,5W	230 V	2.593,37



It is composed by a digital or analogic programmable thermostat, flush-mounting box, corrugated pipe and two floor temperature sensors.

PRODESO® HEAT THERMOSTAT

PRODESO® HEAT GRIP DIGITAL THERMOSTAT - TOUCH SCREEN - WI-FI

Article	€/Kit
PDHTSMWTK	329,65



PDHSTSMWT 230 PDSOT PDSHI PDHCF 202

PRODESO® HEAT THERMOSTAT KIT - ANALOGIC

Article	€/Kit
PDHTSK 230V	261,19



PDSOT PDSHI PDHCF 202

DIGITAL WIFI THERMOSTAT

Article	€/Kit
PDHTSMWT 230	285,27



ANALOGIC THERMOSTAT

Article	€/Kit
PDHTSM 230	208,95



PRODESO® HEAT GRIP SYSTEM OPTIONAL

ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO®HEAT e PRODESO® HEAT GRIP.

Article	L cm	Pc/Pack	€/Pc
PSC	15	1	86,20



Article	Lm shrink sheath	Cable Lugs Lm	€/Kit
PDHGCK110	1	10	14,57
PDHGCK550	5	50	71,00



PRODESO® HEAT CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT MEMBRANE (40 mm x 5 mm)

Article	€/Pc	Pc/Pack
PCBLF	200 1,58	316,00



PROECOFON

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints - Pack. **2 Pcs**

Article	Thick. x H mm	Lm/Roll	€/Lm	€/Pack
PEF 550A	5 X 50	25	1,96	98,00



PRODESO® HEAT GRIP POWER CABLE

Article	Lm/Roll	€/Lm	€/Roll
PDHGCBF	2,5	17,76	44,40



= News 2023

Prices are referred to whole packs.

* = Production on demand with minimum quantity of 450 lm Production delay 4 weeks. Price to be agreed

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PRODESO® HEAT KIT SYSTEM

Floor and wall electric heating system kit, composed of 3 pieces: **PRODESO® HEAT MEMBRANE, PRODESO® HEAT CABLE AND PRODESO® HEAT THERMOSTAT KIT.** The polyethylene membrane, with its uncoupling, waterproofing and vapour management properties, has a thickness of just 5.5 mm.



PRODESO® HEAT KIT SYSTEM
Wall and floor electric heating system

Article	mq membrane	Cable	Power tot W	Thermostat kit	Wall heated surface (with a cable distance of 6,2 cm)	Floor heated surface (with a cable distance of 9,3 cm)	price €/ kit
PDESHK 4	3,2	PDHCB 23	300	1	1,40	2,20	627,60
PDESHK 7	5,6	PDHCB 41	520	1	2,50	3,80	836,80
PDESHK 10	8,0	PDHCB 59	750	1	3,70	5,50	1039,66

heating cable PDHCB included in the kit

PRODESO® HEAT THERMOSTAT KIT: digital touch screen thermostat, 2 temperature sensors, flush mounting box, flexible corrugated pipe.



PRODESO HEAT MEMBRANE



PRODESO® HEAT CABLE



DIGITAL TOUCH



PRODESO® HEAT THERMOSTAT KIT




© 2023 All rights reserved by Progress Profiles. Printed in Italy

Uncoupling and waterproofing membrane in polypropylene with a thickness of 5.5 mm. The membrane is provided on top with pseudo-square reliefs which create channels for fixing the electric heating cable. On the back of the membrane there is a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring.

PRODESO® HEAT STICK MEMBRANE

UNCOUPLING AND WATERPROOFING MEMBRANE

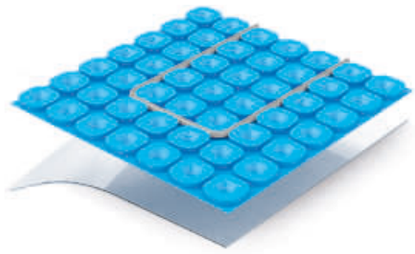

PRODESO® HEAT STICK MEMBRANE


Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESHST 151/E	1	15	5,5	6	26,13	391,95	2351,70
PDESHST 051/E	1	5	5,5	15	27,62	138,10	2071,50

L 5m



L 15m



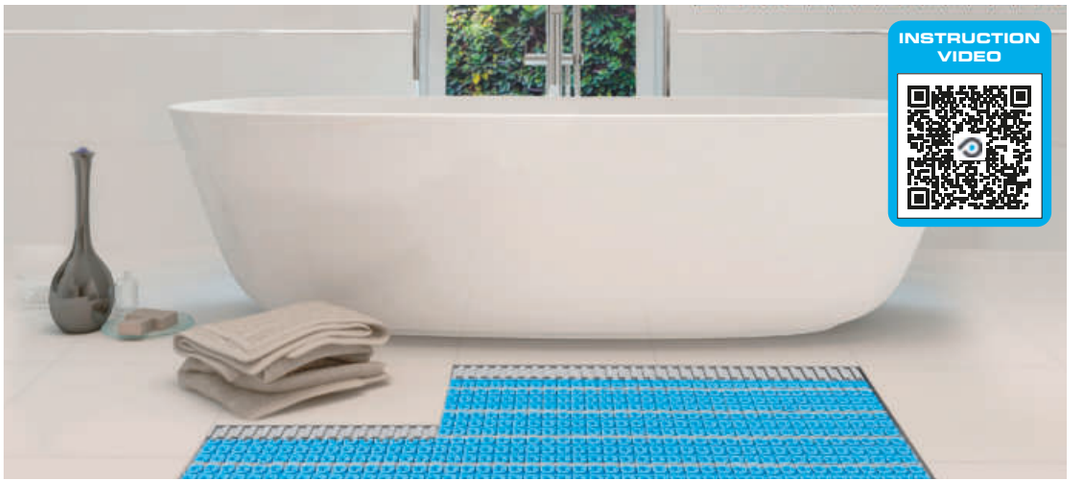

PRODESO® ECO / ECO STICK MEMBRANE is an uncoupling and waterproofing membrane in polyethylene with a thickness of 3.5 mm. The membrane is provided on top with dovetail square cavities and on bottom with a layer of adhesive which guarantees its fixing to the support, clean plywood, OSB, metal or old flooring. Thanks to its particular geometry PRODESO® ECO / ECO STICK MEMBRANE transfers loads directly to the support and guarantees the laying of any flooring and the waterproofing even in case of cracked and moisture-sensitive substrates. (*) available in the self-adhesive version **PRODESO® ECO STICK** for wood and ceramic substrates.


PRODESO® ECO / PRODESO® ECO STICK MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE

PRODESO® ECO STICK MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet	
PDESECST 3530/EN	1	30	3,5	6	19,56	586,80	3520,80	
PDESECST 3505/EN	1	5	3,5	30	22,46	112,30	3369,00	*


PRODESO ECO STICK



PRODESO® ECO MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDESEC 3530/EN	1	30	3,5	6	16,30	489,00	2934,00
PDESEC 3505/EN	1	5	3,5	30	18,71	93,55	2806,50

PRODESO ECO



L 30m




PRODESO ECO

L 30m



PRODESO ECO STICK

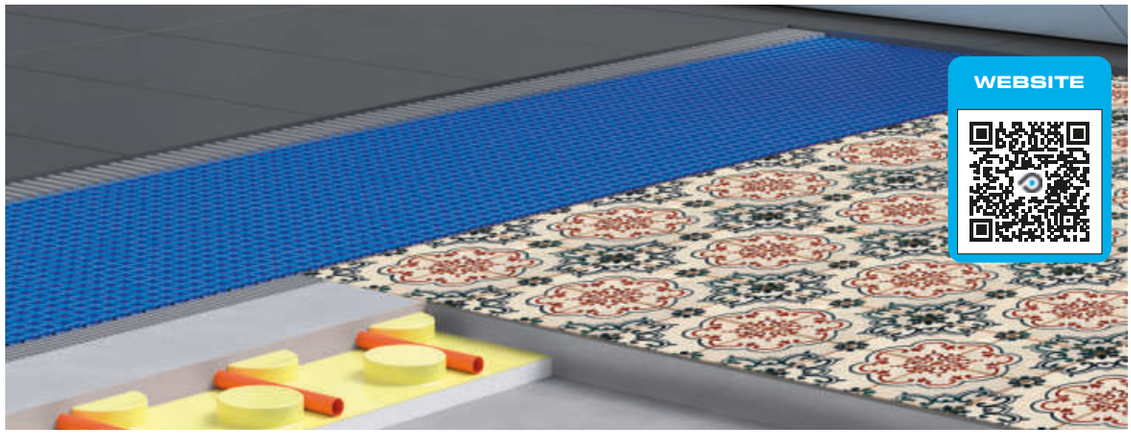

= News 2023

* = Production on demand with minimum quantity of 1000 lm Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PRODESO® MEMBRANE SYSTEM


LAYING VIDEO

PATENTED


PATENTED
003368984

Uncoupling and waterproofing system, particularly good for problematic screeds substrates.


PRODESO® MEMBRANE SYSTEM SECTION

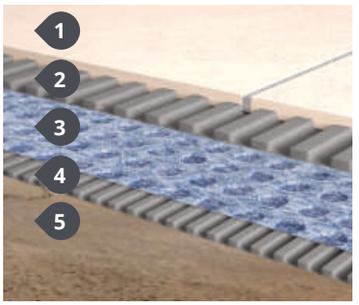


1. Ceramic / Stone or Porcelain Tiles
2. Adhesive
3. PRODESO®
4. Adhesive
5. Screed, Plywood, OSB etc.

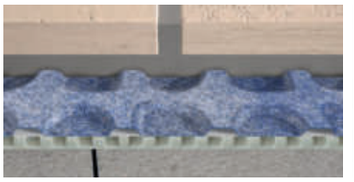


UNCOUPLING

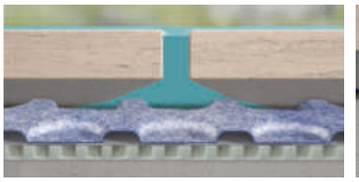


WATERPROOFING

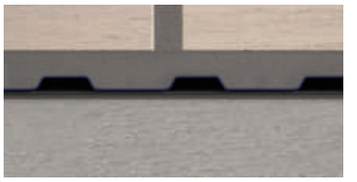


UNCOUPLING

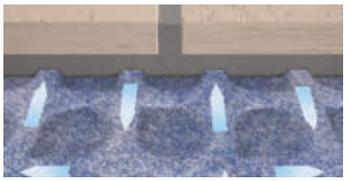

VAPOR AND MOISTURE MANAGEMENT

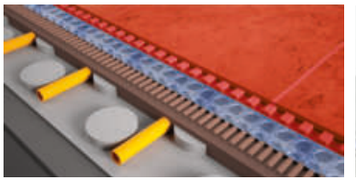

FLOOR HEATING DISTRIBUTION

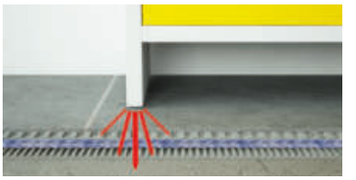

SUPPORT/LOAD DISTRIBUTION

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

Prices are referred to whole packs.

It is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any size without expansion joints in the screed before the laying of ceramic and natural stone. **PRODESO®** ensures the laying of the flooring and the waterproofing of the substrate also in case of old tiles, on cracked and not perfectly cured substrates, and therefore with possible vapour pressure.

PRODESO® MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE

PRODESO® MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDES 3530/EN	1	30	3,5	8	19,29	578,70	4629,60
PDES 3505/EN	1	5	3,5	56	22,46	112,30	6288,80




WHY USE PRODESO® MEMBRANE SYSTEM

Time Efficient: PRODESO® Membrane reduces drastically the installation times because from the installation of the membrane up to the laying of flooring you can work without interruption.

Flexible: it is suitable for every types of subfloor including very large surfaces both indoor and outdoor.

Safe: it is suitable for substrates with cracks as it does not transmit tension of the substrate to the tile coverings and vice versa. It is also suitable on substrates not perfectly cured since it allows the vapour management.



WARNINGS

Do not lay tiles with a size less than 5 x 5 cm. The technical and application details can be found in the **PRODESO® MEMBRANE SYSTEM** brochure. For other informations not described in the brochure **PRODESO® MEMBRANE SYSTEM**, refer to the technical department.

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROBAND 150/250

ROLLS IN HDPE AND PP

PROBAND 150/250

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pack.
PRBPE 1507	150	7,5	0,42	16	5,70	42,75	684,00
PRBPE 1530	150	30	0,42	6	4,18	125,40	752,40
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20



For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

AREA OF USE

• **Use -** Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of **PROFOIL, PRODESO® MEMBRANE SYSTEM and PRODESO® HEAT/GRIP SYSTEM**

• **Don't use -** On bituminous coverings, over thermal-insulating layer and lightweigh screed. With adhesives containing solvents.

WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department

RECOMMENDED ADHESIVES FOR THE LAYING OF PRODESO® MEMBRANE (grey color)

KERAKOLL The GreenBuilding Company	LITOKOL	index A SIKA COMPANY	Grigolin evoluzioni costruttive	Sika	weber SAINT-GOBAIN	PCI Für Bau-Profis
H40 NO LIMITS H40 REVOLUTION H40 EXTREME	SUPERFLEX K77 POWERFLEX K50 LITOSTONE K99	FLEXBOND C2S1 FLEXBOND LIGHT C2S1 WETBOND RAPID C2F	GRIGOKOLL TEX GRIGOKOLL MAX GRIGOKOLL VELOX	CERAM 255 STARFLEX CERAM 255 EASY S1 CERAM 270 MULTIFLOW	ULTRAGRES 440 ULTRAGRES FLEX ULTRAGRES FAST	PERICOL R-FLEX PERICOL EXTRA FLEX PERICOL FLEX
LATICRETE	ARDEX	MUREXIN	Opera	sey	imo	FASSA BORTOLO
335 MAXI S 335 SUPER FLEX 325 RAPID FL	ARDEX X 78 ARDEX X 90 OUTDOOR ARDEX AF 495	MUREFLEX MFK 45 ADESIVO FBS 75 MAXIMO M 41	RT UNIVERSAL RT HI TECH RT RAPID FLEX	SEYFLEX S1 SEYULTRA T TIXOSEY	KRISTAL C2TE EXTRA C2S1	AZ 59 RAPID MAXI SPECIAL ONE
CERMIX SOLUTIONS EXPERTES	AQUILAPREM	Benfer®	CerCol Adesivi e prodotti speciali per l'edilizia	ADESITAL	MAPEI	
CERMIPLUS 2.0 CERMIPLUS XL FLEX 2.0	FORTEM MAXIM	BENFERFLEX+S1 BENFERFLEX C2 BENFERFLEX + FAST-S1	F.55 CERMONO PLUS F.55 CERFIX F.55 CERMONO RAPIDO	EXTRA 30 MAXI ADEFLEX GREEN S1 EXTRA 30 POWER	KERAFLEX EASY ULTRALITE S1 KERAFLEX MAXI S1	

Prices are referred to whole packs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PREFORMED CORNERS

Internal and external preformed corners in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.



PRBE
EXTERNAL CORNER



PRBI
INTERNAL CORNER

PREFORMED CORNERS

Article	H mm	L mm	Pc/Pack	€/Pc	€/Pack
PRBI	60	120	10	8,23	82,30
PRBE	60	120	10	8,23	82,30

Don't use - On bituminous coverings, over thermal-insulating layer and lightweigh screed. With adhesives containing solvents. adhesive.

PROBAND BU

BUTYLE TAPE

PROBAND BU is an adhesive tape in butyle provided on one side with non-woven polypropylene that guarantees hight adhesion. use for the Realization of perimeter junctions in case of bituminous coverings, PVC, wood, polycarbonate, glass, plastic and metal on balconies, terraces and external surfaces of any size.



PROBAND BU

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Rolls/Pack	€/m	€/Roll	€/Pack
PRBBU 7515	75	15	1	8	3,91	58,65	469,20

WARNINGS: Don't use - On dirty, incoherent and wet surfaces.

PROBAND KOLL

SINGLE-COMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL is a single-component hygro-hardener adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE.



PROBAND KOLL

Article	Kg/Pack	Pack/Pallet	kg/ Pallet	€/kg	€/Pack	€/Pallet
PRBKL	6	100	600	10,97	65,82	6582,00

For the indicative consumption of proband koll during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

AREA OF USE

- **Use -** For the sealing of the tape PROBAND 150/250 with PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE on balconies, terraces, bathrooms, kitchens, saunas and external surfaces of any size.
- **Don't use -** On bituminous coverings, to glue tiles and to waterproof cement based support. Do not use outside with PRODESO® HEAT/GRIP MEMBRANE

PROBAND KOLL AB

BICOMPONENT HYDROPHOBIC ADHESIVE

PROBAND KOLL AB is a bicomponent hydrophobic adhesive for the sealing of PROBAND 150/250 on PRODESO® MEMBRANE and PRODESO® HEAT/GRIP MEMBRANE.



PROBAND KOLL AB

Article	Kg/Pack	Pack/Pallet	kg/ Pallet	€/kg	€/Pack	€/Pallet
PRBKLAB	15	27	405	12,13	181,95	4912,65

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

AREA OF USE

- **use -** Balconies, terraces , bathrooms, kitchens, saunas and external surfaces of any size.
- **Don't use -** as waterproofing sheet, to glue tiles and PRODESO® family membranes, PROFOIL and PROFOIL PANEL.

PROMEMBRANE KOLL

CEMENTITIOUS ADHESIVE

PROMEMBRANE KOLL is a C2ES1 class cementitious adhesive, with high workability and prolonged adjustability, specially designed to bond all the membranes of the "PRODESO®" family, even overlapping and on floor heating systems and the PROFOIL membrane.



PROMEMBRANE KOLL

Article	Kg/Pack	Pack/Pallet	kg/ Pallet	€/kg	€/Pack	€/Pallet
PRMKL	25	25	625	1,45	36,25	906,25

Sold exclusively by the pallet.

WARNINGS: Do not use PROMEMBRANE KOLL for bonding natural or recomposed stone sensitive to moisture. Consult the technical data sheet before application; in case of particular applications, it's advisable to consult the technical department.

PROBAND FIX

MOISTURE-CURE SEALANT

PROBAND FIX is a moisture-cure sealant with high adhesion and elasticity. It guarantees the adhesion of PROBAND 150/250 with aluminium frames, plastic and metal and between adjacent sheets of PROFOIL.
Don't use On bitumen membranes. To seal proband with PRODESO®.

MOISTURE-CURE SEALANT
pack. of **12** cartridges - **B** (white) - **G** (grey)

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	17,64	211,68
PRBFXG	290	17,64	211,68



GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

Article	Pc/Pack	€/Pc
PRBFXGUN	1	352,60



MOISTURE-CURE SEALANT CARTRIDGE
pack. of **12** cartridges - **B** (white) - **G** (grey)

Articolo	Cartuccia ml	€/PZ	€/scatola
PRBFXUB	600	34,61	415,32
PRBFXUG	600	34,61	415,32



= News 2023

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES


It is a membrane in high density polyethylene. It is covered on top with a polypropylene spunbond and on the back with a non-woven fabric in polypropylene. Both of them are thermo-welded to the polyethylene sheet to guarantee the adhesion of the membrane with the adhesive. PRODESO® SOUND is an uncoupling and soundproof membrane, with a thickness of 2,3 mm, which does not require any expansion joints before tiling with ceramic or natural stone. PRODESO® SOUND guarantees the laying of any flooring and the soundproofing up to 17dB in any indoor environment, even in the case of problematic supports and old tiles.

PRODESO® SOUND

UNCOUPLING AND SOUNDPROOF MEMBRANE

PRODESO® SOUND MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDSND 30	1	20	2,3	12	30,29	605,80	7269,60



L 20m



LAYING VIDEO

AREA OF USE

• **Use -** Uncoupling and soundproof membrane also for cracked screeds. It can be laid on cement and gypsum based screed, old ceramic, natural stone floorings, concrete and wood structure. Very resistant to saline solutions, acids and alkalis, alcohol and oils. In case of particular products, contact our technical department.

• **Don't use -** On lightweight screeds not suitable for the laying of flooring. Do not lay with adhesives containing solvents.

WARNINGS

For the laying of PRODESO® SOUND use a C2S1 cement based adhesive. Tile immediately after the membrane laying to avoid damages. If it is not possible to tile immediately, the membrane must be protected using running boards. Do not use PRODESO® SOUND on substrates subject to continuous rising moisture. For information not included in the Technical Details, please contact our technical department.

PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL WITH ADHESIVE

CLOSED-CELL EXPANDED POLYETHYLENE WITH ADHESIVE - (PEF 550A - Pack 2 Pcs)

Article	Thick. x H mm	lm/roll	€/lm	€/Pack
PEF 550A	5 X 50	25	2,06	103,00
PEF 5100A	5 X 100	100	0,83	83,00



Adhesive junction tape for the membrane PRODESO® SOUND

PRODESO® SOUND TAPE

PRODESO® SOUND TAPE - height **50 mm**

Article	lm/roll	Pc/Pack	Pc/box	€/roll	€/pack	€/box
PDSNDTP 550	50	6	36	12,36	74,16	444,96



PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	158,49
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	1	133,13



PROSHOWER DRAIN LATERAL KIT PSHLDK



PROSHOWER DRAIN VERTICAL KIT PSHVDK

AREA OF USE

• **Use -** Balconies, terraces, outdoor surfaces of any size, kitchens and showers.

• **Don't use -** In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.


PRODRIP

SCARICO PERIMETRALE

PERIMETER DRAIN

pack. per pallet = **192**

Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	4	24,82	99,28

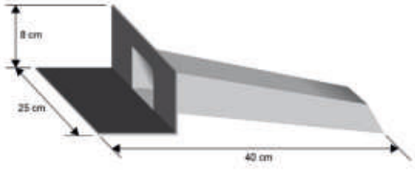

AREA OF USE

• **Use -** To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.

• **Don't use -** With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents.

Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs.

PROFOIL
PROFOIL PRO

ROLLS IN HDPE AND PP

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

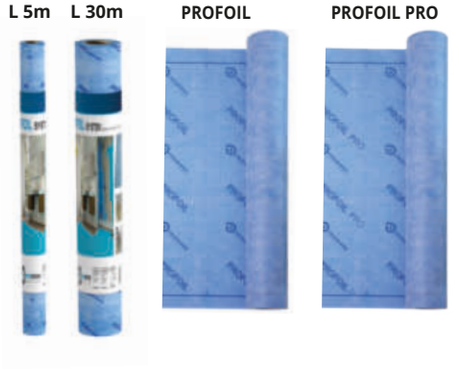

PROFOIL MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PFLO 0430	1	30	0,42	40	13,86	415,80	16632,00
PFLO 0405	1	5	0,42	154	19,29	96,45	14853,00

PROFOIL PRO MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PFLOPR 0430	1	30	0,42	40	16,28	488,40	19536,00

PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.



WATERPROOFING ELASTIC MEMBRANE

Article	Kg./Bucket	Bucket/ Pallet	€/Kg.	€/Bucket	€/Pallet
PFLOPST 04	4	64	12,74	53,38	3416,32
PFLOPST 10	10	36	12,09	126,65	4559,40

WARNINGS

Don't use. For external application, on wet surfaces or substrates subject to moisture rising, in environments where water is always present, pools and tanks. Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

PROBAND 150/250

ELASTIC ROLLS IN HDPE AND PP

PROBAND 150/250 is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.




PROBAND 150/250

Article	H Roll (mm)	L Roll (m)	Thickness (mm)	Roll/Pack	€/m	€/Roll	€/Pallet
PRBPE 1507	150	7,5	0,42	16	5,70	42,75	684,00
PRBPE 1530	150	30	0,42	6	4,18	125,40	752,40
PRBPE 2530	250	30	0,42	3	7,68	230,40	691,20

PREFORMED CORNERS and PIPE COLLAR

Internal and external preformed corners and pipe collar in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support.Use on Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of PROFOIL, PRODESO® MEMBRANE SYSTEM and PRODESO® HEAT/GRIP SYSTEM


EXTERNAL CORNER
PRBE


INTERNAL CORNER
PRBI


PIPE COLLAR
PRBT

PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP
Thickness **0,42 mm**

Articolo	H x L mm	€/PZ	€/conf.
PRBI	60 x 120	8,23	82,30
PRBE	60 x 120	8,23	82,30
PRBT	125 x 125	7,29	72,90


WARNINGS

• **Don't use -** On bituminous coverings, over thermal-insulating layer and lightweigh screed. With adhesives containing solvents. adhesive.

PRODRAIN 10

DRAINING MEMBRANE

PRODRAIN 10 is a drainage membrane composed by an high density polyethylene (HDPE) sheet provided with truncated cone reliefs. On the top of the reliefs a non-woven polypropylene fabric, in grey colour, permeable to water is thermowelded.

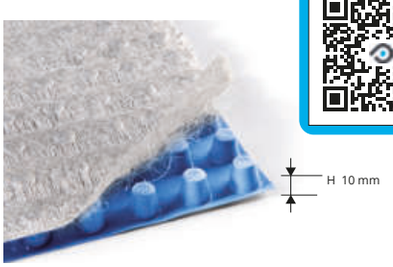

PRODRAIN 10 MEMBRANE

Article	H roll (m)	L roll (m)	Thickness (mm)	Rolls/Pallet	€/m	€/Roll	€/Pallet
PDRI 10	0,96	12,5	10	6	15,04	188,00	1128,00

AREAS OF USE

• **Use.** Outside on concrete sloping suitably waterproofed such as terraces, balconies and pavements and in contact with waterproofed vertical structures such as foundation walls. Highly resistant to saline solutions, acid and alkaline, alcohol and oils. In case of special products consult the technical department.
• **Don't use.** On concrete waterproofed without adequate slope to the drained water runoff. As soundproof and thermal-insulating layer.

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

PROFOIL PANEL

HIGH DENSITY EXTRUDED POLYSTYRENE PANEL


PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN1327	12,70	60	148,20	48,04	118,66	6780,00
PFLPAN2527	25,00	30	74,10	57,75	142,64	4.279,20
PFLPAN5027	50,80	15	37,05	80,85	199,70	2.995,50


PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN6	6,35	85	118,49	37,80	52,69	4.478,65

WEBSITE

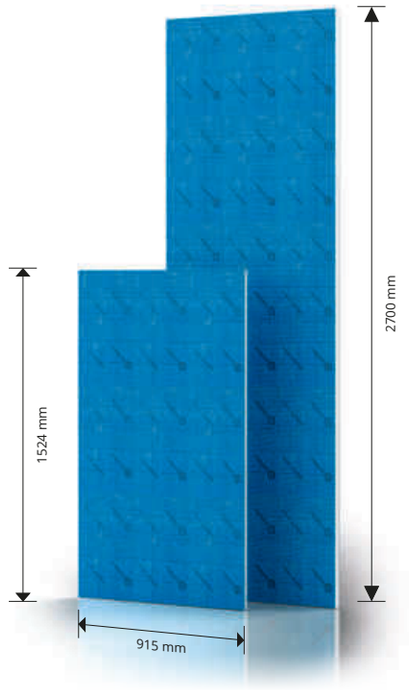

THICKNSS PROFOIL PANEL

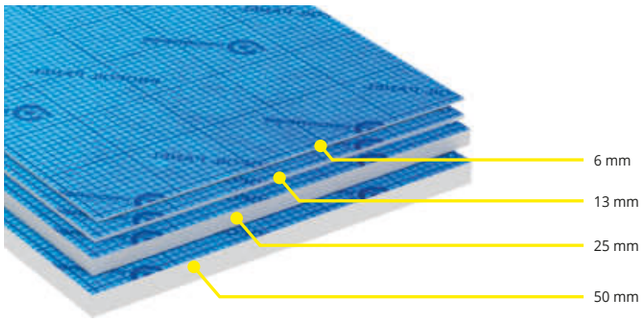

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



PROFOIL DOWELS - ZINC-COATED METAL - pack. **250 Pc**

Article	L mm	€/Pc	€/Pack.
TZPFP 110	100	1,70	425,00
TZPFP 140	140	1,89	472,50
TZPFP 170	170	2,09	522,50
TZPFP 200	200	2,28	570,00



PROFOIL DOWELS - STAINLESS STEEL - pack. **250 Pc**

Article	L mm	€/Pc	€/Pack.
TIPFP 110	110	3,28	820,00
TIPFP 140	140	3,53	882,50
TIPFP 170	170	3,79	947,50
TIPFP 200	200	4,04	1010,00
TIPFP 250	250	4,70	1175,00



PROFOIL WASHERS (ZINC-COATED METAL) - pack. **100 Pc**

Article	Pcs/Pack.	ø mm	€/Pc	€/Pack.
RFPFP 36	100	35	0,32	32,00



PROFOIL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACPFP 35	1000	35	0,04	4,00
VACPFP 55	1000	45	0,05	5,00
VACPFP 80	1000	80	0,10	10,00

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.


PRO GOBOARD PANEL

HIGH DENSITY POLYISOCYANURATE FOAM PANEL

PRO GOBOARD PANEL - highdensity polyisocyanurate foam

Article	Description	Pcs/pallet	m²/pallet	€/m²	€/Pc	€/Pallet
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m²	75	105	40,75	57,05	4278,75
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m²	60	84	45,28	63,39	3803,40
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m²	30	89,4	80,84	240,90	7227,00
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m²	15	44,70	125,52	374,05	5610,75


PGOBOR...



© 2023. All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROGRESS® PROFILES

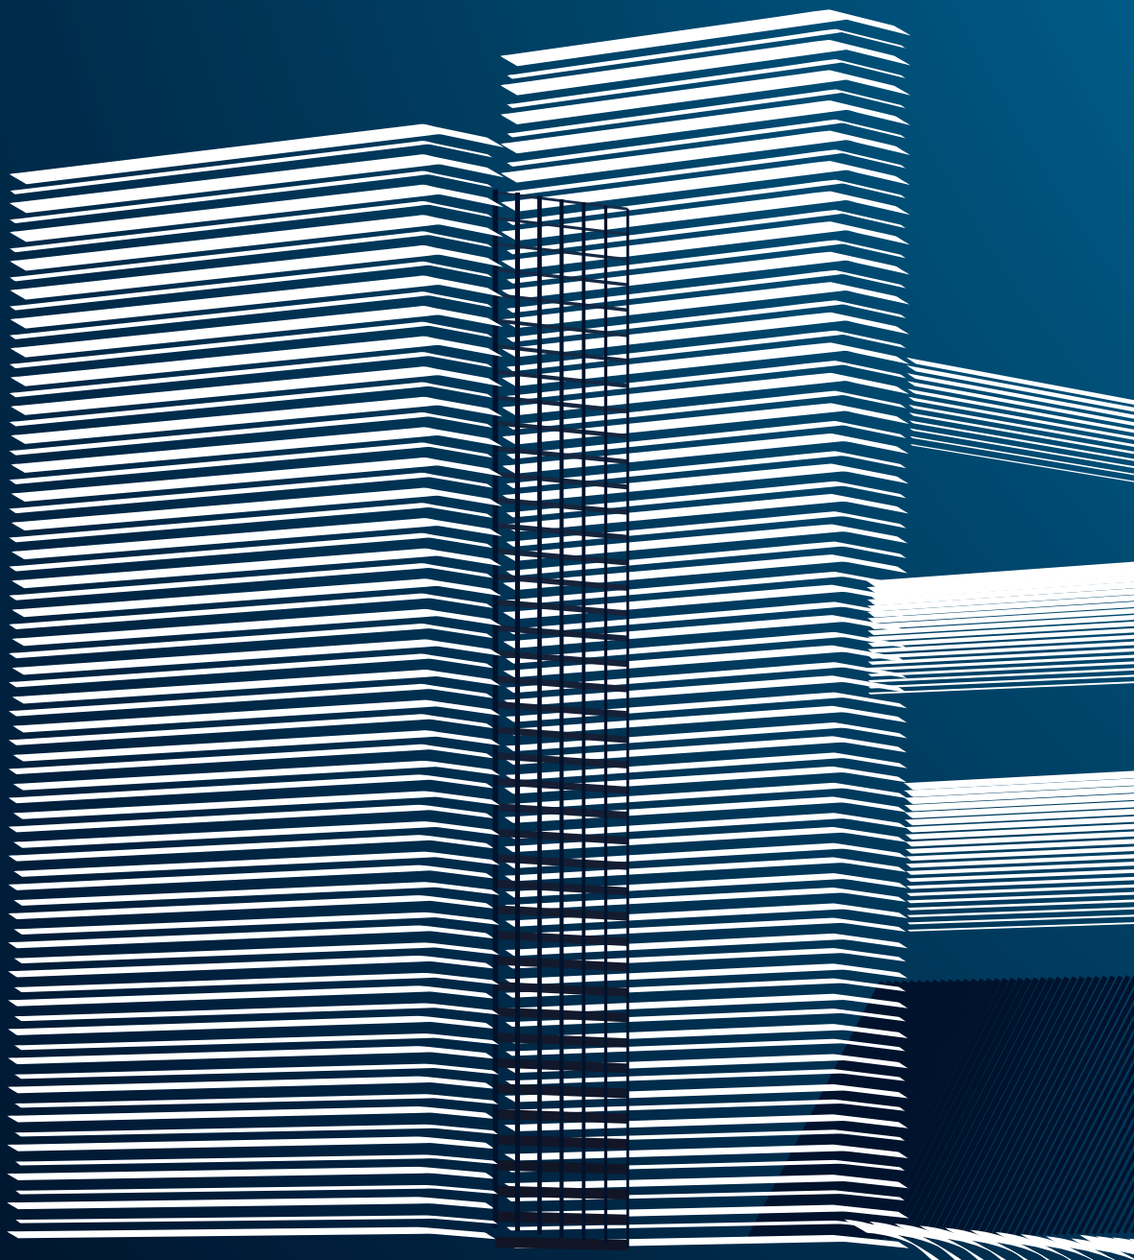


An interpretation of:

Kaufmann "Fallingwater" House, Frank Ll. Wright, Pennsylvania (USA), 1939

PROFILES & SYSTEMS

SHOWER AND DRAINAGE SYSTEMS

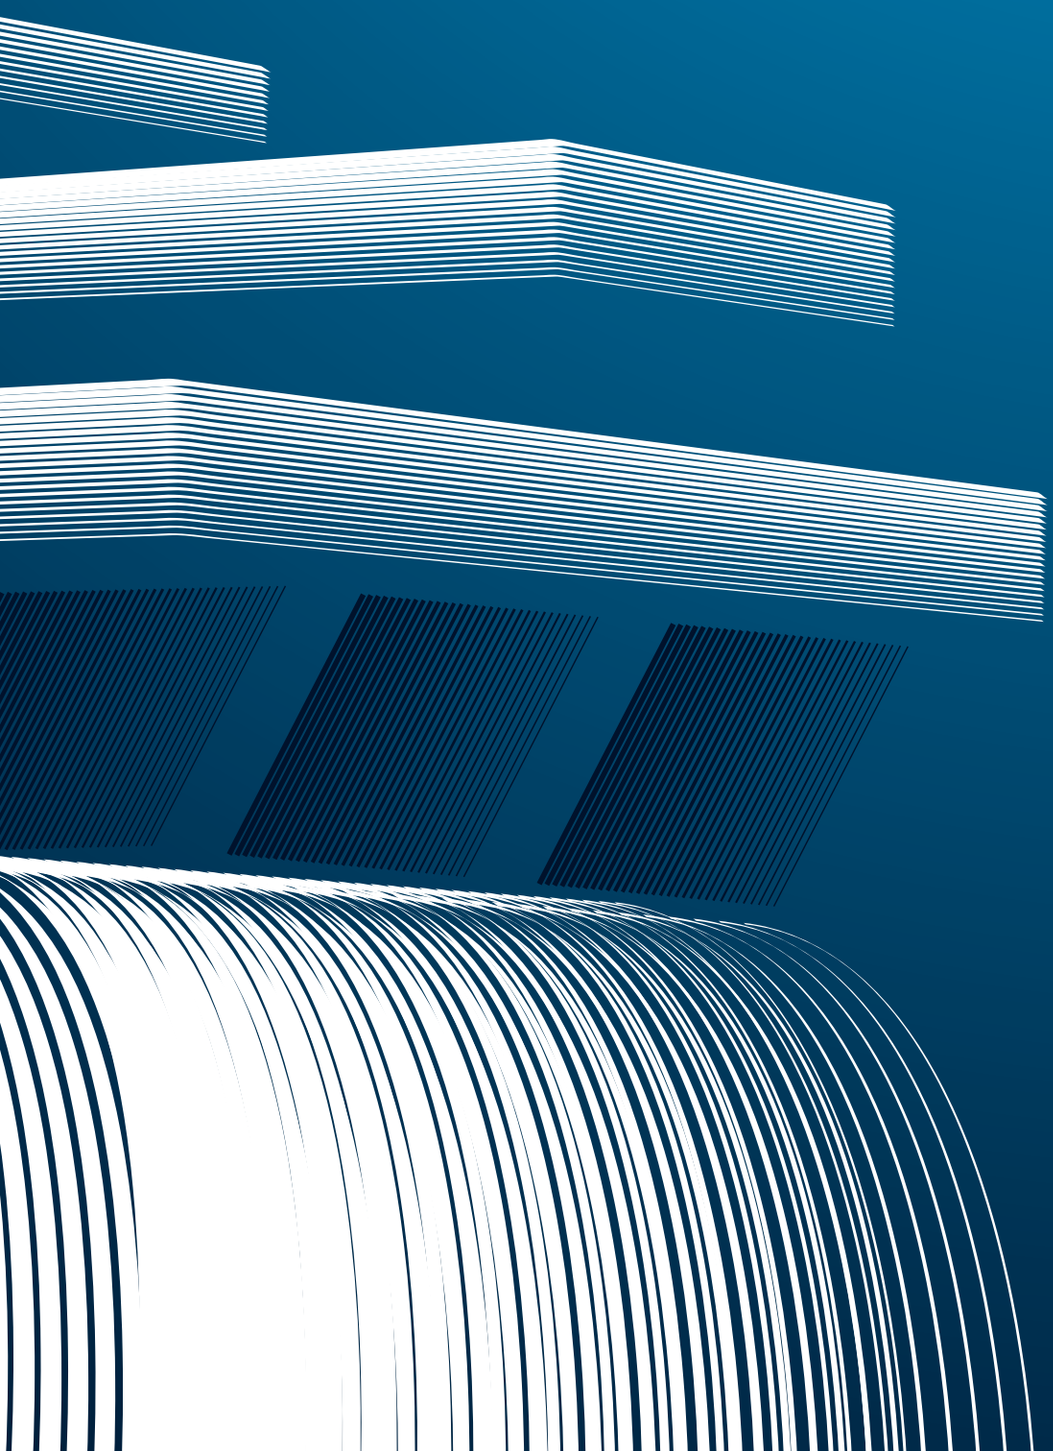

SHOWER SYSTEMS

PROSHOWER LINEAR KIT SYSTEM

PROSHOWER LINEAR KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.




Article	Description	Pc/Pack.	€/Pc
PSHPANEK	PROSHOWER LINEAR KIT BASE	**1**	**450,09**

Article	Kit components	Pc/Pack.
PSHPAN...	PROSHOWER PANEL in moulded polystyrene 120x120 cm with glued Profoil	**1**
PRBFXB	PROBAND FIX white	**2**
PRBPE 1507	ROLL PROBAND 150 - 7,5 lm	**1**
PFLO 0405	PROFOIL ROLL - 5 lm	**1**
PIAA 40212	ALUMINUM PROFILES (screed leveling profile) length 120 cm	**2**
PRSPD 10	PVC TOWEL	**1**



PROSHOWER PANEL LINEAR
PSHPAN



PROFOIL
PFLO 0405



PROBAND 150
PRBPE 1507



PROBAND FIX
PRBFXB




PVC TOWEL
PRSPD 10




ALUMINUM PROFILES
PIAA 40212


PROSHOWER PANEL EXTENSION
EXEMPLES OF LAYING

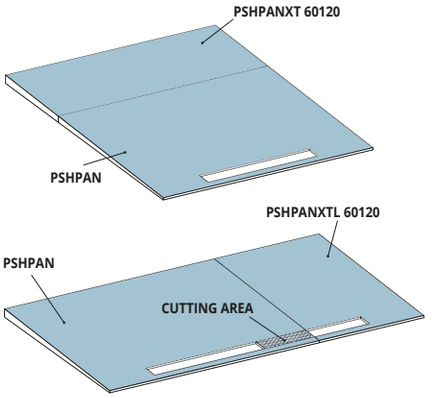

Article	Description	Pc/Pack.	€/Pc
PSHPAN	Proshower panel in moulded polystyrene 120x120 cm with glued Profoil	**1**	**234,41**



Article	Description	Pc/Pack.	€/Pc
PSHPANXT 60120	PROSHOWER PANEL EXTENSION 120x60 cm for PROSHOWER PANEL LINEAR - Slope 2%	**1**	**117,21**
PSHPANXTL 60120	LATERAL PROSHOWER PANEL EXTENSION 60x120 cm for PROSHOWER PANEL LINEAR - Slope 2%	**1**	**117,21**

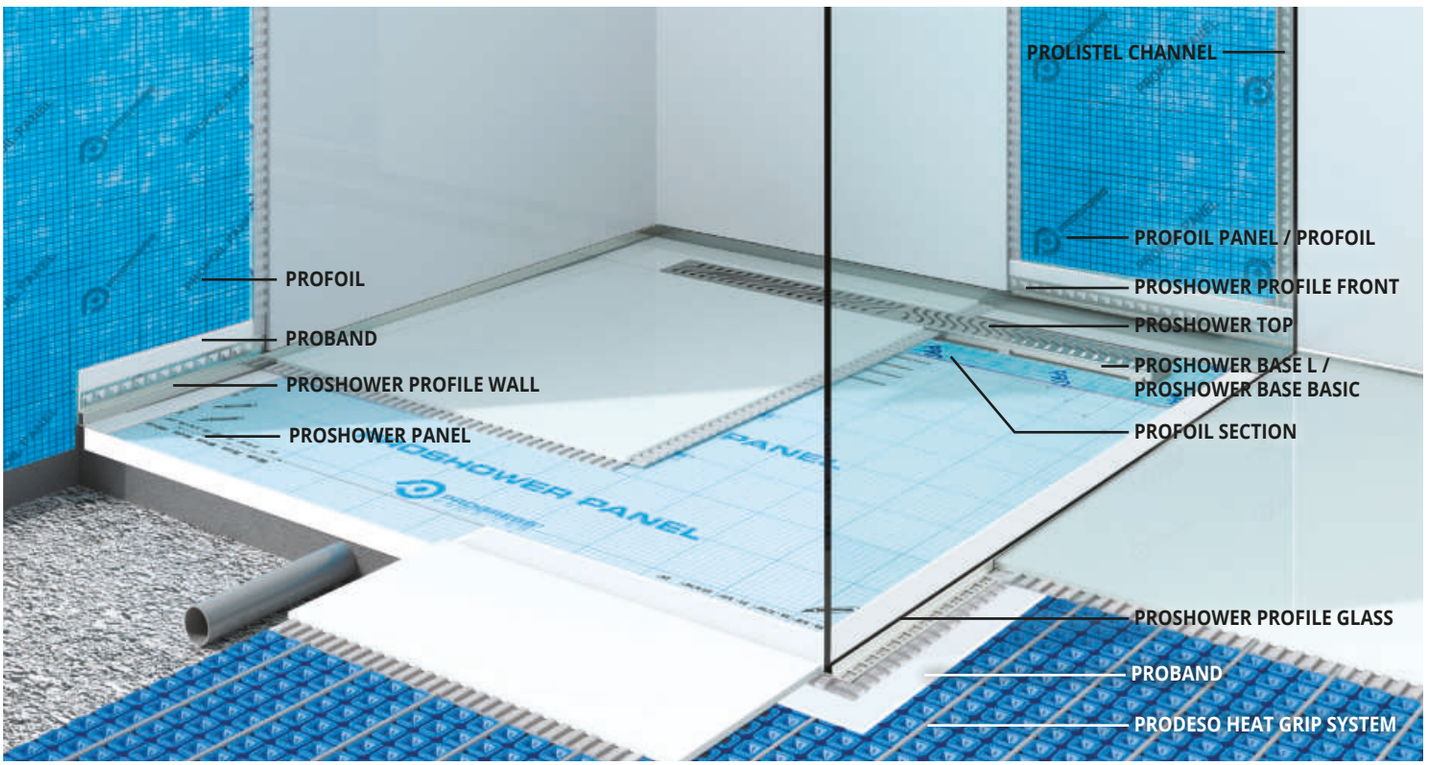

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROSHOWER BASE L is a channel body in stainless steel AISI 304/1.4301 – V2A steel for the realisation of floor-level shower. The body channel, with an overall height of 85 mm, is completed by 6 different grids in stainless steel. **PROSHOWER BASE L** undergoes electro-polishing and subsequent passivation, which guarantees excellent resistence in any environment. Its low thickness combined with the fully adjustable siphon, the modularity and the high number of grids make it a much sought-after solution.


PROSHOWER BASE L

SUPER POLISHED STAINLESS STEEL
AISI 304/1.4301-V2A



*** L 30 cm**

PSHWDL 30 / 70 / 80 / 90 / 100 / 120

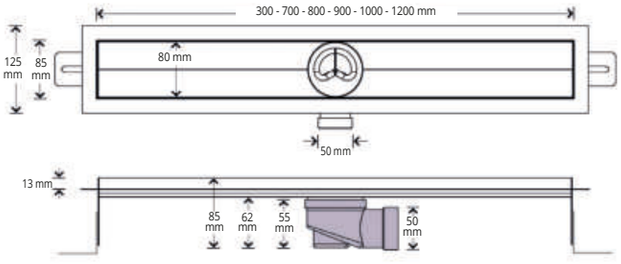

DUCT BODY MADE OF AISI 304 STAINLESS STEEL

Article	Description	Pc/Pack.	€/Pc
PSHWDL 30	PROSHOWER BASE L-ACC-L 30 x 8 cm	**1**	**333,01**
PSHWDL 70	PROSHOWER BASE L-ACC-L 70 x 8 cm	**1**	**424,42**
PSHWDL 80	PROSHOWER BASE L-ACC-L 80 x 8 cm	**1**	**450,53**
PSHWDL 90	PROSHOWER BASE L-ACC-L 90 x 8 cm	**1**	**476,66**
PSHWDL 100	PROSHOWER BASE L-ACC-L 100 x 8 cm	**1**	**502,77**
PSHWDL 120	PROSHOWER BASE L-ACC-L 120 x 8 cm	**1**	**568,07**



UPON REQUEST
PROSHOWER BASE L with vertical siphon complete of installed Profoil membrane
(code ref. PSHWDVS...).
Drain Ø 50 mm.


PROSHOWER BASE BASIC is a water collecting duct system in polypropylene for floor showers, available in several lengths and grids.

PROSHOWER BASE BASIC

GREY POLYPROPYLENE



PSHWBB 60 / 70 / 80 / 90

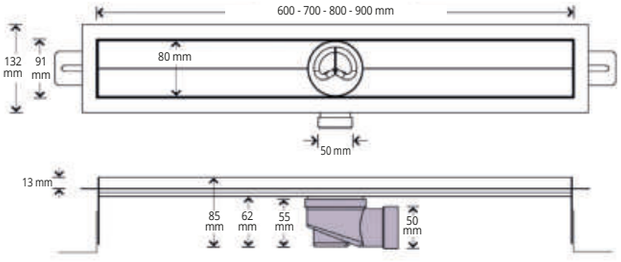

GREY POLYPROPYLENE DUCT BODY

Article	Description	Pc/Pack.	€/Pc
PSHWBB 60	PROSHOWER BASE BASIC - 60 x 8 cm PP	**1**	**195,88**
PSHWBB 70	PROSHOWER BASE BASIC - 70 x 8 cm PP	**1**	**208,95**
PSHWBB 80	PROSHOWER BASE BASIC - 80 x 8 cm PP	**1**	**222,00**
PSHWBB 90	PROSHOWER BASE BASIC - 90 x 8 cm PP	**1**	**235,06**




UPON REQUEST
PROSHOWER BASE BASIC with vertical siphon complete of installed Profoil membrane
(code ref. PSHWBBVS...).
Drain Ø 50 mm.

PROFOIL SECTION

HDPE E PP GUAINE

PROFOIL SECTION AND DOUBLE SIDED TAPE 3 lm

Article	L	Pc/Pack.	€/Pc
PSHANT 30	30 cm	**1**	**19,59**
PSHANT 60	60 cm	**1**	**22,21**
PSHANT 70	70 cm	**1**	**24,82**
PSHANT 80	80 cm	**1**	**30,03**
PSHANT 90	90 cm	**1**	**35,26**
PSHANT 100	100 cm	**1**	**40,49**
PSHANT 120	120 cm	**1**	**47,01**

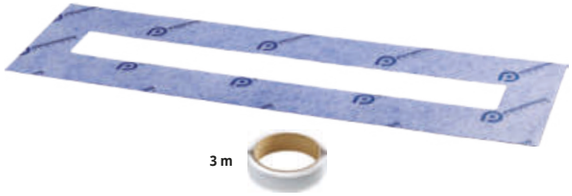

3 m

PROFOIL SECTION AND DOUBLE SIDED TAPE

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROSHOWER TOP
SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A

PROSHOWER TILE - tileable
PSHWT 30/60/70/80/90/100/120



PROSHOWER TILE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc
PSHWT 30*	30	8	137,12
PSHWT 60**	60	8	156,71
PSHWT 70	70	8	163,23
PSHWT 80	80	8	169,76
PSHWT 90	90	8	176,31
PSHWT 100*	100	8	195,88
PSHWT 120*	120	8	215,47

*PSHWT 30,100,120 Provided only combined with Proshower Base L.
**PSHWT 60 Provided only combined with Proshower Base Basic.

PROSHOWER LINE
PSHWL 60/70/80/90/100/120



PROSHOWER LINE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc
PSHWL 60**	60	8	156,71
PSHWL 70	70	8	163,23
PSHWL 80	80	8	169,76
PSHWL 90	90	8	176,31
PSHWL 100*	100	8	195,88
PSHWL 120*	120	8	215,47

*PSHWL 100,120 Provided only combined with Proshower Base L.
**PSHWL 60 Provided only combined with Proshower Base Basic.

PROSHOWER DESIGN
PSHWD 30/60/70/80/90/100/120



PROSHOWER DESIGN - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc	
PSHWD 30*	30	8	137,12	*
PSHWD 60**	60	8	156,71	
PSHWD 70	70	8	163,23	
PSHWD 80	80	8	169,76	
PSHWD 90	90	8	176,31	
PSHWD 100*	100	8	195,88	
PSHWD 120*	120	8	215,47	

*PSHWD 30,100,120 Provided only combined with Proshower Base L.
**PSHWD 60 Provided only combined with Proshower Base Basic.

PROSHOWER STRIPS
PSHWST 60/70/80/90/100/120



PROSHOWER STRIPS - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc	
PSHWST 60**	60	8	156,71	*
PSHWST 70	70	8	163,23	*
PSHWST 80	80	8	169,76	*
PSHWST 90	90	8	176,31	*
PSHWST 100*	100	8	195,88	*
PSHWST 120*	120	8	215,47	*

*PSHWST 100,120 Provided only combined with Proshower Base L.
**PSHWST 60 Provided only combined with Proshower Base Basic.

PROSHOWER GRILL
PSHWGR 60/70/80/90/100/120



PROSHOWER GRILL - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc	
PSHWGR 60**	60	8	156,71	*
PSHWGR 70	70	8	163,23	*
PSHWGR 80	80	8	169,76	*
PSHWGR 90	90	8	176,31	*
PSHWGR 100*	100	8	195,88	*
PSHWGR 120*	120	8	215,47	*

*PSHWGR 100,120 Provided only combined with Proshower Base L.
**PSHWGR 60 Provided only combined with Proshower Base Basic.

PROSHOWER SQUARE
PSHWSQ 60/70/80/90/100/120



PROSHOWER SQUARE - SUPER-POLISHED STAINLESS STEEL AISI 304 / 1.4301 - V2A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc	
PSHWSQ 60**	60	8	156,71	*
PSHWSQ 70	70	8	163,23	*
PSHWSQ 80	80	8	169,76	*
PSHWSQ 90	90	8	176,31	*
PSHWSQ 100*	100	8	195,88	*
PSHWSQ 120*	120	8	215,47	*

*PSHWSQ 100,120 Provided only combined with Proshower Base L.
**PSHWSQ 60 Provided only combined with Proshower Base Basic.

= News 2023

* = Production on demand with minimum quantity of 10 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


DRAIN REDUCTION


POLYPROPYLENE


Article	Description	Pc/Pack.	€/Pc
PSHWRD 5040	50 to 40 mm polypropylene drain reduction	**1**	**13,06**



REDUCTION



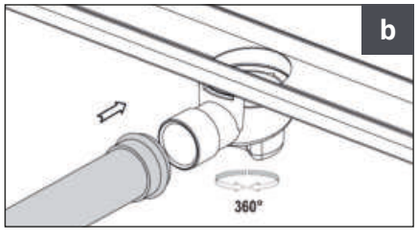

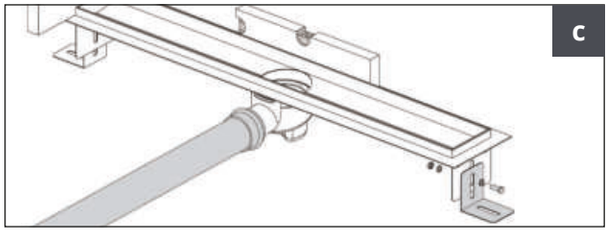



MODULAR ASSEMBLY KIT


Article	Description	Pc/Pack.	€/Pc
PSHWRD	Modular assembly kit to make drain ducts of any length	**1**	**33,96**




MODULAR ASSEMBLY KIT

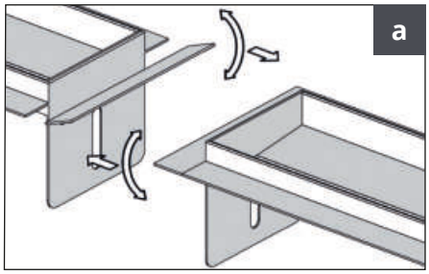

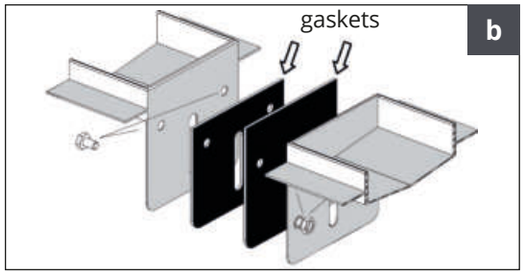

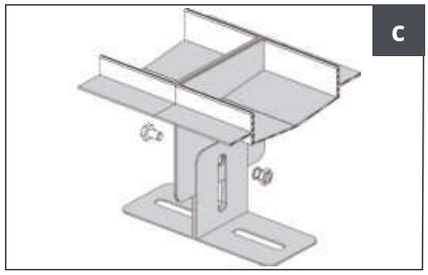


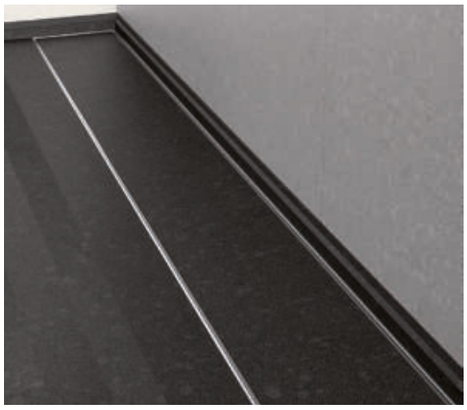







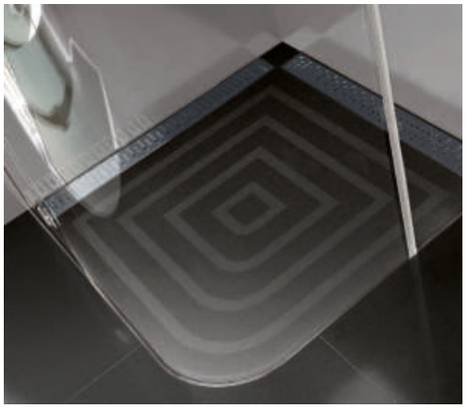



© 2026 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.


PROSHOWER BASE L PRO

SUPER-POLISHED
STAINLESS STEEL AISI 316L / 1.4404 – V4A

PROSHOWER BASE L PRO is a stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level and for wall shower drain. This drain is available in different lengths and equipped with different grids. The reduced thickness grid has excellent chemical resistance and is equipped with a 360° adjustable siphon.

PSHWP...



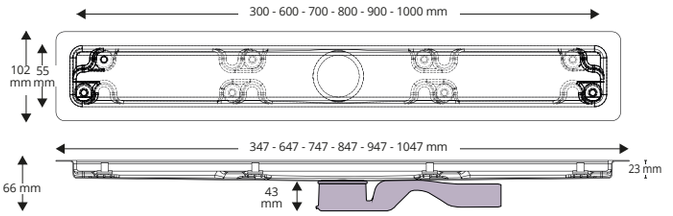

DUCT BODY MADE OF A STAINLESS STEEL AISI 316L / 1.4404 – V4A

Article	Description	Pc/Pack.	€/Pc
PSHWP 30	PROSHOWER BASE L PRO - L 30 x 5,5 cm	**1**	**170,89**
PSHWP 60	PROSHOWER BASE L PRO - L 60 x 5,5 cm	**1**	**187,43**
PSHWP 70	PROSHOWER BASE L PRO - L 70 x 5,5 cm	**1**	**198,45**
PSHWP 80	PROSHOWER BASE L PRO - L 80 x 5,5 cm	**1**	**209,48**
PSHWP 90	PROSHOWER BASE L PRO - L 90 x 5,5 cm	**1**	**220,50**
PSHWP 100	PROSHOWER BASE L PRO - L 100 x 5,5 cm	**1**	**231,53**

Article	Kit components	Pc/Pack.
PSHWPNN...	PROSHOWER BASE L PRO DUCT BODY	**1**
TASPRF...	PROFOIL SECTION	**1**
SPSHWPT...	POLYSTYRENE TEMPORARY CHANNEL PROTECTION	**1**



PROSHOWER BASE L PRO DUCT BODY PSHWPNN...



PROFOIL SECTION TASPRF...




POLYSTYRENE TEMPORARY CHANNEL PROTECTION SPSHWPT...

PROSHOWER TOP PRO

SUPER-POLISHED STAINLESS STEEL AISI 316L / 1.4404 – V4A

PROSHOWER TILE/LINE PRO

PSHWPT 30/60/70/80/90/100

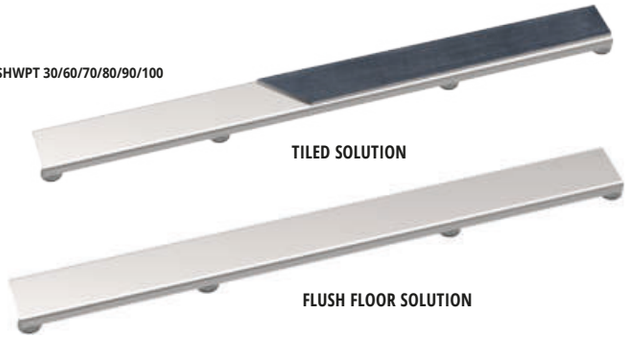

PROSHOWER TILE/LINE PRO - SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc
PSHWPLT 30	**30**	**5,5**	**44,10**
PSHWPLT 60	**60**	**5,5**	**66,15**
PSHWPLT 70	**70**	**5,5**	**71,66**
PSHWPLT 80	**80**	**5,5**	**77,17**
PSHWPLT 90	**90**	**5,5**	**82,69**
PSHWPLT 100	**100**	**5,5**	**88,20**

Sold only in combination with Proshower Base L PRO

PROSHOWER DESIGN PRO

PSHWPD 30/60/70/80/90/100



PROSHOWER DESIGN PRO - - SUPER-POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A - Pack. **1 Pc**

Article	Lenght cm	Width cm	€/Pc
PSHWPD 30	**30**	**5,5**	**55,13**
PSHWPD 60	**60**	**5,5**	**77,17**
PSHWPD 70	**70**	**5,5**	**82,69**
PSHWPD 80	**80**	**5,5**	**88,20**
PSHWPD 90	**90**	**5,5**	**93,71**
PSHWPD 100	**100**	**5,5**	**99,23**

Sold only in combination with Proshower Base L PRO

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES

= News 2023
Prices are referred to whole packs.

PROSHOWER BASE L PRO is also equipped with a wall drain box made of AISI 316L / 1.4404 - V4A stainless stel which recessed into the wall, allows to realize wall drains without compromising the water flow and the ease of cleaning.

WALL DRAIN BOX


WALL DRAIN BOX STAINLESS STEEL AISI 316L/1.4404-V4A

Article	Description	Pc/Pack.	€/Pc
KBPSHWPAC 30	PROSHOWER BASE L PRO wall drain box 30 cm	1	143,33
KBPSHWPAC 60	PROSHOWER BASE L PRO wall drain box 60 cm	1	170,89
KBPSHWPAC 70	PROSHOWER BASE L PRO wall drain box 70 cm	1	181,91
KBPSHWPAC 80	PROSHOWER BASE L PRO wall drain box 80 cm	1	192,94
KBPSHWPAC 90	PROSHOWER BASE L PRO wall drain box 90 cm	1	231,53
KBPSHWPAC 100	PROSHOWER BASE L PRO wall drain box 100 cm	1	242,55

KPSHWPW...



INSTALLATION SECTION OF THE WALL DRAIN PROSHOWER BASE L PRO

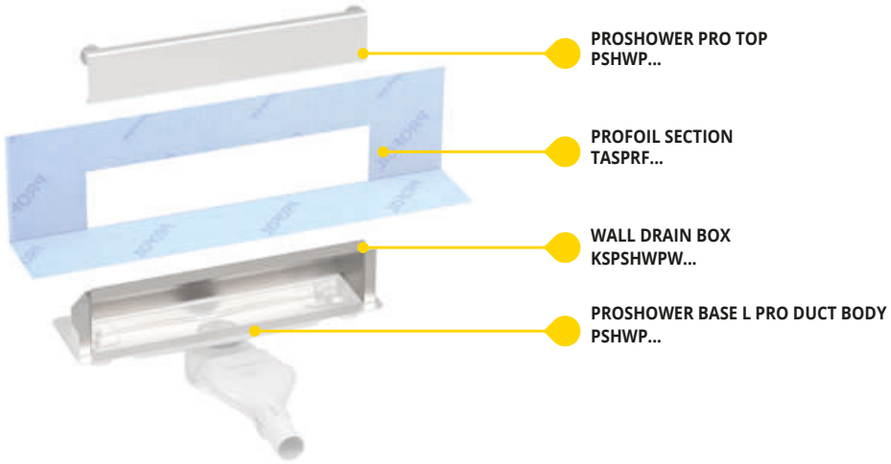



© 2023 All rights reserved by Progress Profiles. Printed in Italy

= News 2023


Prices are referred to whole packs.

PROSHOWER PROFILE GLASS


SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A


PROSHOWER PROFILE GLASS Suitable profile for fixing glass slabs in case of floor level showers with a a slope of 2%. Due to its particular shape and finish in satin-finish stainless steel AISI 304 / 1.4301 – V2A, it covers and decorates the visible side of the screed.

PSHWPGACS...SX

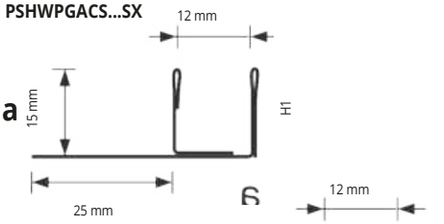

PSHWPGACS...DX

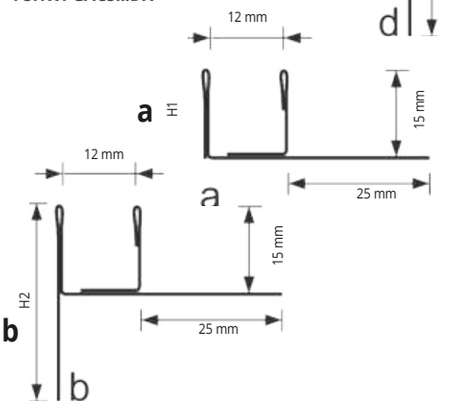

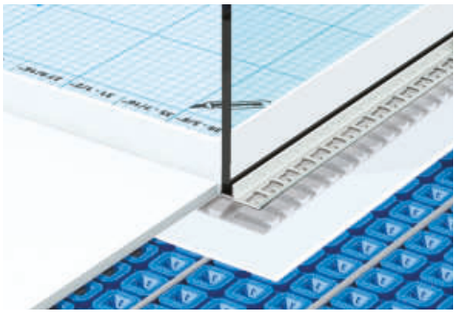

PSHWPGACS ...SX **2% SLOPE**



PSHWPGACS ...DX **2% SLOPE**




SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - **thermo packed** - Pack. **1 Pc**

Article	H1 mm	H2 mm	L cm	€/Pc
PSHWPGACS 100SX	15	33	100	125,00
PSHWPGACS 150SX	15	43	150	170,00
PSHWPGACS 200SX	15	53	200	225,00

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - **thermo packed** - Pack. **1 Pc**

Article	H1 mm	H2 mm	L cm	€/Pc
PSHWPGACS 100DX	15	33	100 cm	125,00
PSHWPGACS 150DX	15	43	150 cm	170,00
PSHWPGACS 200DX	15	53	200 cm	225,00

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

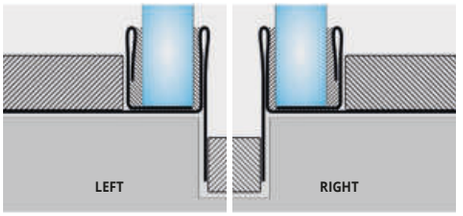


1. Choose "PROSHOWER PROFILE GLASS" according to the desired length. **2.** Cut "PROSHOWER PROFILE GLASS" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal.

PROSHOWER PROFILE


SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A


PROSHOWER PROFILE is a profile for floor level showers in stainless steel for the protection of the floor edges and as decoration of the screed visible side. The profile has a 2% slope. Its specific shape makes it an easy to lay profile to be used with all kind of floor.

PSHWPACS... SX

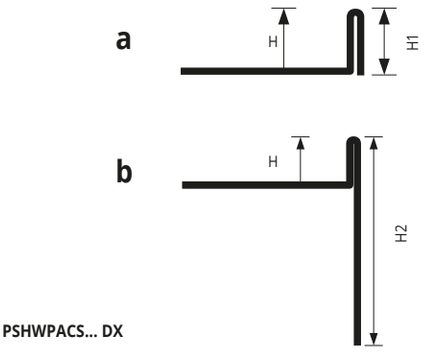


PSHWPACS... DX

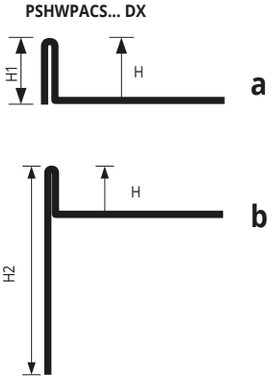


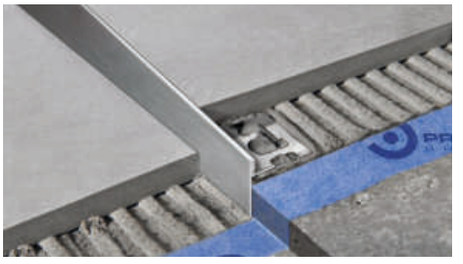


PSHWPACS ... DX



PSHWPACS ... SX



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

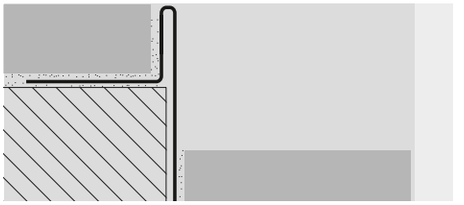

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - **thermo packed** - Pack. **1 Pc**

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPACS 1010DX	10	11	28	100	120,00
PSHWPACS 1015DX	10	11	38	150	140,00
PSHWPACS 1020DX	10	11	48	200	155,00
PSHWPACS 12510DX	12,5	13,5	30	100	120,00
PSHWPACS 12515DX	12,5	13,5	40	150	140,00
PSHWPACS 12520DX	12,5	13,5	50	200	155,00

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - **thermo packed** - Pack. **1 Pc**

Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPACS 1010SX	10	11	28	100	120,00
PSHWPACS 1015SX	10	11	38	150	140,00
PSHWPACS 1020SX	10	11	48	200	155,00
PSHWPACS 12510SX	12,5	13,5	30	100	120,00
PSHWPACS 12515SX	12,5	13,5	40	150	140,00
PSHWPACS 12520SX	12,5	13,5	50	200	155,00

1. Choose "PROSHOWER PROFILE" according to the desired length. **2.** Cut "PROSHOWER PROFILE" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.


PROSHOWER PROFILE FRONT is a satin-finish stainless steel AISI 304/1.4301-V2A profile. It is suitable to cover and decorate the visible part of wall in front of the shower tray in case of floor level showers with slope.


PROSHOWER PROFILE FRONT

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A


SATINED STAINLESS STEEL AISI 304/1.4301-V2A
degreased and passivated - **thermo packed** - Pack. **1 Pc**

Article	H mm	H1 mm	L cm	€/Pc
PSHWPFACS 101028	10	28	100	77,00
PSHWPFACS 101038	10	38	100	79,00
PSHWPFACS 101048	10	48	100	81,00
PSHWPFACS 101528	10	28	150	97,00
PSHWPFACS 101538	10	38	150	100,00
PSHWPFACS 101548	10	48	150	103,00
PSHWPFACS 1251028	12,5	28	100	77,00
PSHWPFACS 1251038	12,5	38	100	79,00
PSHWPFACS 1251048	12,5	48	100	81,00
PSHWPFACS 1251528	12,5	28	150	97,00
PSHWPFACS 1251538	12,5	38	150	100,00
PSHWPFACS 1251548	12,5	48	150	103,00

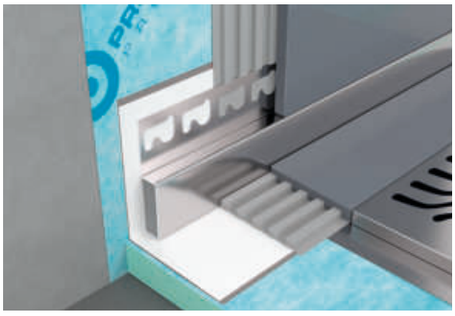





PSHWPFACS 101028
PSHWPFACS 101528




PSHWPFACS 1251028
PSHWPFACS 1251528




PSHWPFACS 101038
PSHWPFACS 101538




PSHWPFACS 1251038
PSHWPFACS 1251538




PSHWPFACS 101048
PSHWPFACS 101548



PSHWPFACS 1251048
PSHWPFACS 1251548



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

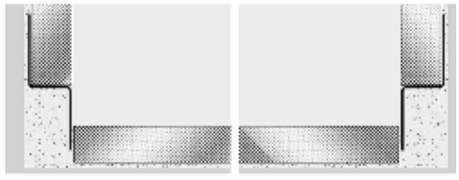

1. Choose "PROSHOWER PROFILE FRONT" according to the desired length. **2.** Cut "PROSHOWER PROFILE FRONT" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal.

PROSHOWER PROFILE WALL Profile in satin-finish stainless steel AISI 304 / 1.4301 – V2A. It is suitable to cover and decorate the visible part of wall beside the shower tray in case of floor level showers with a slope of 2%.

PROSHOWER PROFILE WALL

SATINED STAINLESS STEEL AISI 304 / 1.4301 - V2A

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - RIGHT
degreased and passivated - **thermo packed** - Pack. **1 Pc**


Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010DX	10	10	28	100	65,00
PSHWPLACS 1015DX	10	10	38	150	80,00
PSHWPLACS 1020DX	10	10	48	200	105,00
PSHWPLACS 12510DX	12,5	10	28	100	65,00
PSHWPLACS 12515DX	12,5	10	38	150	80,00
PSHWPLACS 12520DX	12,5	10	48	200	105,00

SATINED STAINLESS STEEL AISI 304/1.4301-V2A - LEFT
degreased and passivated - **thermo packed** - Pack. **1 Pc**


Article	H mm	H1 mm	H2 mm	L cm	€/Pc
PSHWPLACS 1010SX	10	10	28	100	65,00
PSHWPLACS 1015SX	10	10	38	150	80,00
PSHWPLACS 1020SX	10	10	48	200	105,00
PSHWPLACS 12510SX	12,5	10	28	100	65,00
PSHWPLACS 12515SX	12,5	10	38	150	80,00
PSHWPLACS 12520SX	12,5	10	48	200	105,00




PSHWPLACS ...SX 2% SLOPE



PSHWPLACS ...DX 2% SLOPE





EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

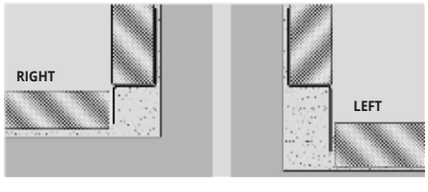


1. Choose "PROSHOWER PROFILE WALL" according to the desired length. **2.** Cut "PROSHOWER PROFILE WALL" to the desired length and apply the adhesive on the support where the profile will be laid. **3.** Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. **4.** Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. **5.** Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. **6.** Insert the sheet of glass and seal


PSHWPLACS ...SX



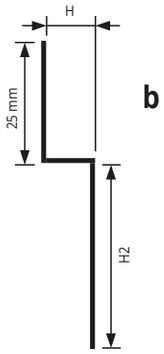

PSHWPLACS ...DX

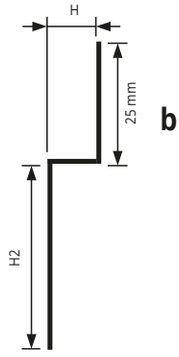



© 2023. All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs.

PROLISTEL CHANNEL


STAINLESS STEEL AISI 304/1.4301-V2A

PROLISTEL CHANNEL is a F-shaped strip in polished an satin-finish stainless steel AISI 304/1.4301-V2A suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.

PLTCH... 08 - 10 - 11 -12,5
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

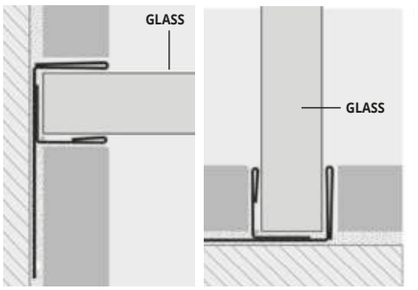


1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. **2.** Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. **3.** Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. **4.** Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A

ACS - Satin finish stainless steel AISI 304/1.4301-V2A

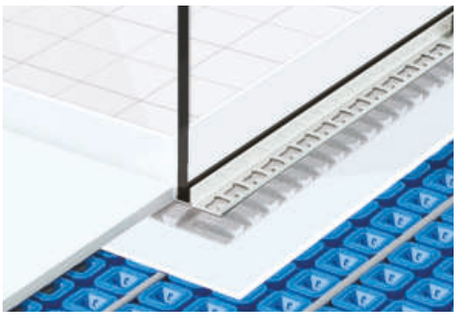



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/ml	€/Pc
PLTCHAC 0812	8	12	45,64	123,23
PLTCHAC 1012	10	12	48,18	130,09
PLTCHAC 1112	11	12	50,71	136,92
PLTCHAC 12512	12,5	12	53,25	143,78

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/ml	€/Pc
PLTCHACS 0812	8	12	49,44	133,49
PLTCHACS 1012	10	12	51,99	140,37
PLTCHACS 1112	11	12	54,52	147,20
PLTCHACS 12512	12,5	12	57,06	154,06

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/ml	€/Pc	
PLTCHAC 0808	8	08	45,64	123,23	*
PLTCHAC 1008	10	08	48,18	130,09	*
PLTCHAC 1108	11	08	50,71	136,92	*
PLTCHAC 12508	12,5	08	53,25	143,78	*

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/ml	€/Pc	
PLTCHACS 0808	8	08	49,44	133,49	*
PLTCHACS 1008	10	08	51,99	140,37	*
PLTCHACS 1108	11	08	54,52	147,20	*
PLTCHACS 12508	12,5	08	57,06	154,06	*

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/ml	€/Pc	
PLTCHAC 0810	8	10	45,64	123,23	*
PLTCHAC 1010	10	10	48,18	130,09	*
PLTCHAC 1110	11	10	50,71	136,92	*
PLTCHAC 12510	12,5	10	53,25	143,78	*

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length **2,7 lm** - pack. **1 Pc**

Article	H mm	L mm	€/ml	€/Pc	
PLTCHACS 0810	8	10	49,44	133,49	*
PLTCHACS 1010	10	10	51,99	140,37	*
PLTCHACS 1110	11	10	54,52	147,20	*
PLTCHACS 12510	12,5	10	57,06	154,06	*


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROLISTEL CHANNEL


ANODIZED AND POLISHED ALUMINIUM

PROLISTEL CHANNEL is a F-shaped strip in anodized and polished aluminum suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.


PLTCH... 08 - 10 - 11 -12,5
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

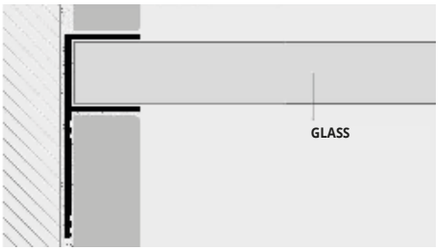

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. **2.** Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. **3.** Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. **4.** Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

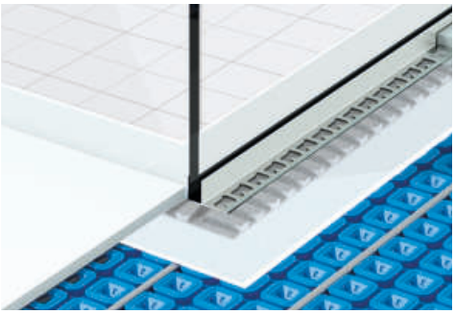




ANODIZED SILVER ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/ml	€/Pc
PLTCHAA 08	8	15,03	40,58
PLTCHAA 10	10	16,33	44,09
PLTCHAA 11	11	17,30	46,71
PLTCHAA 125	12,5	18,28	49,36

POLISHED CHROME ALUMINIUM
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**

Article	H mm	€/ml	€/Pc
PLTCHBC 08	8	17,64	47,63
PLTCHBC 10	10	18,94	51,14
PLTCHBC 11	11	19,92	53,78
PLTCHBC 125	12,5	20,89	56,40

COLOURS



AA - Anodized silver alum.


BC - Polished chrome alum.

= News 2023

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

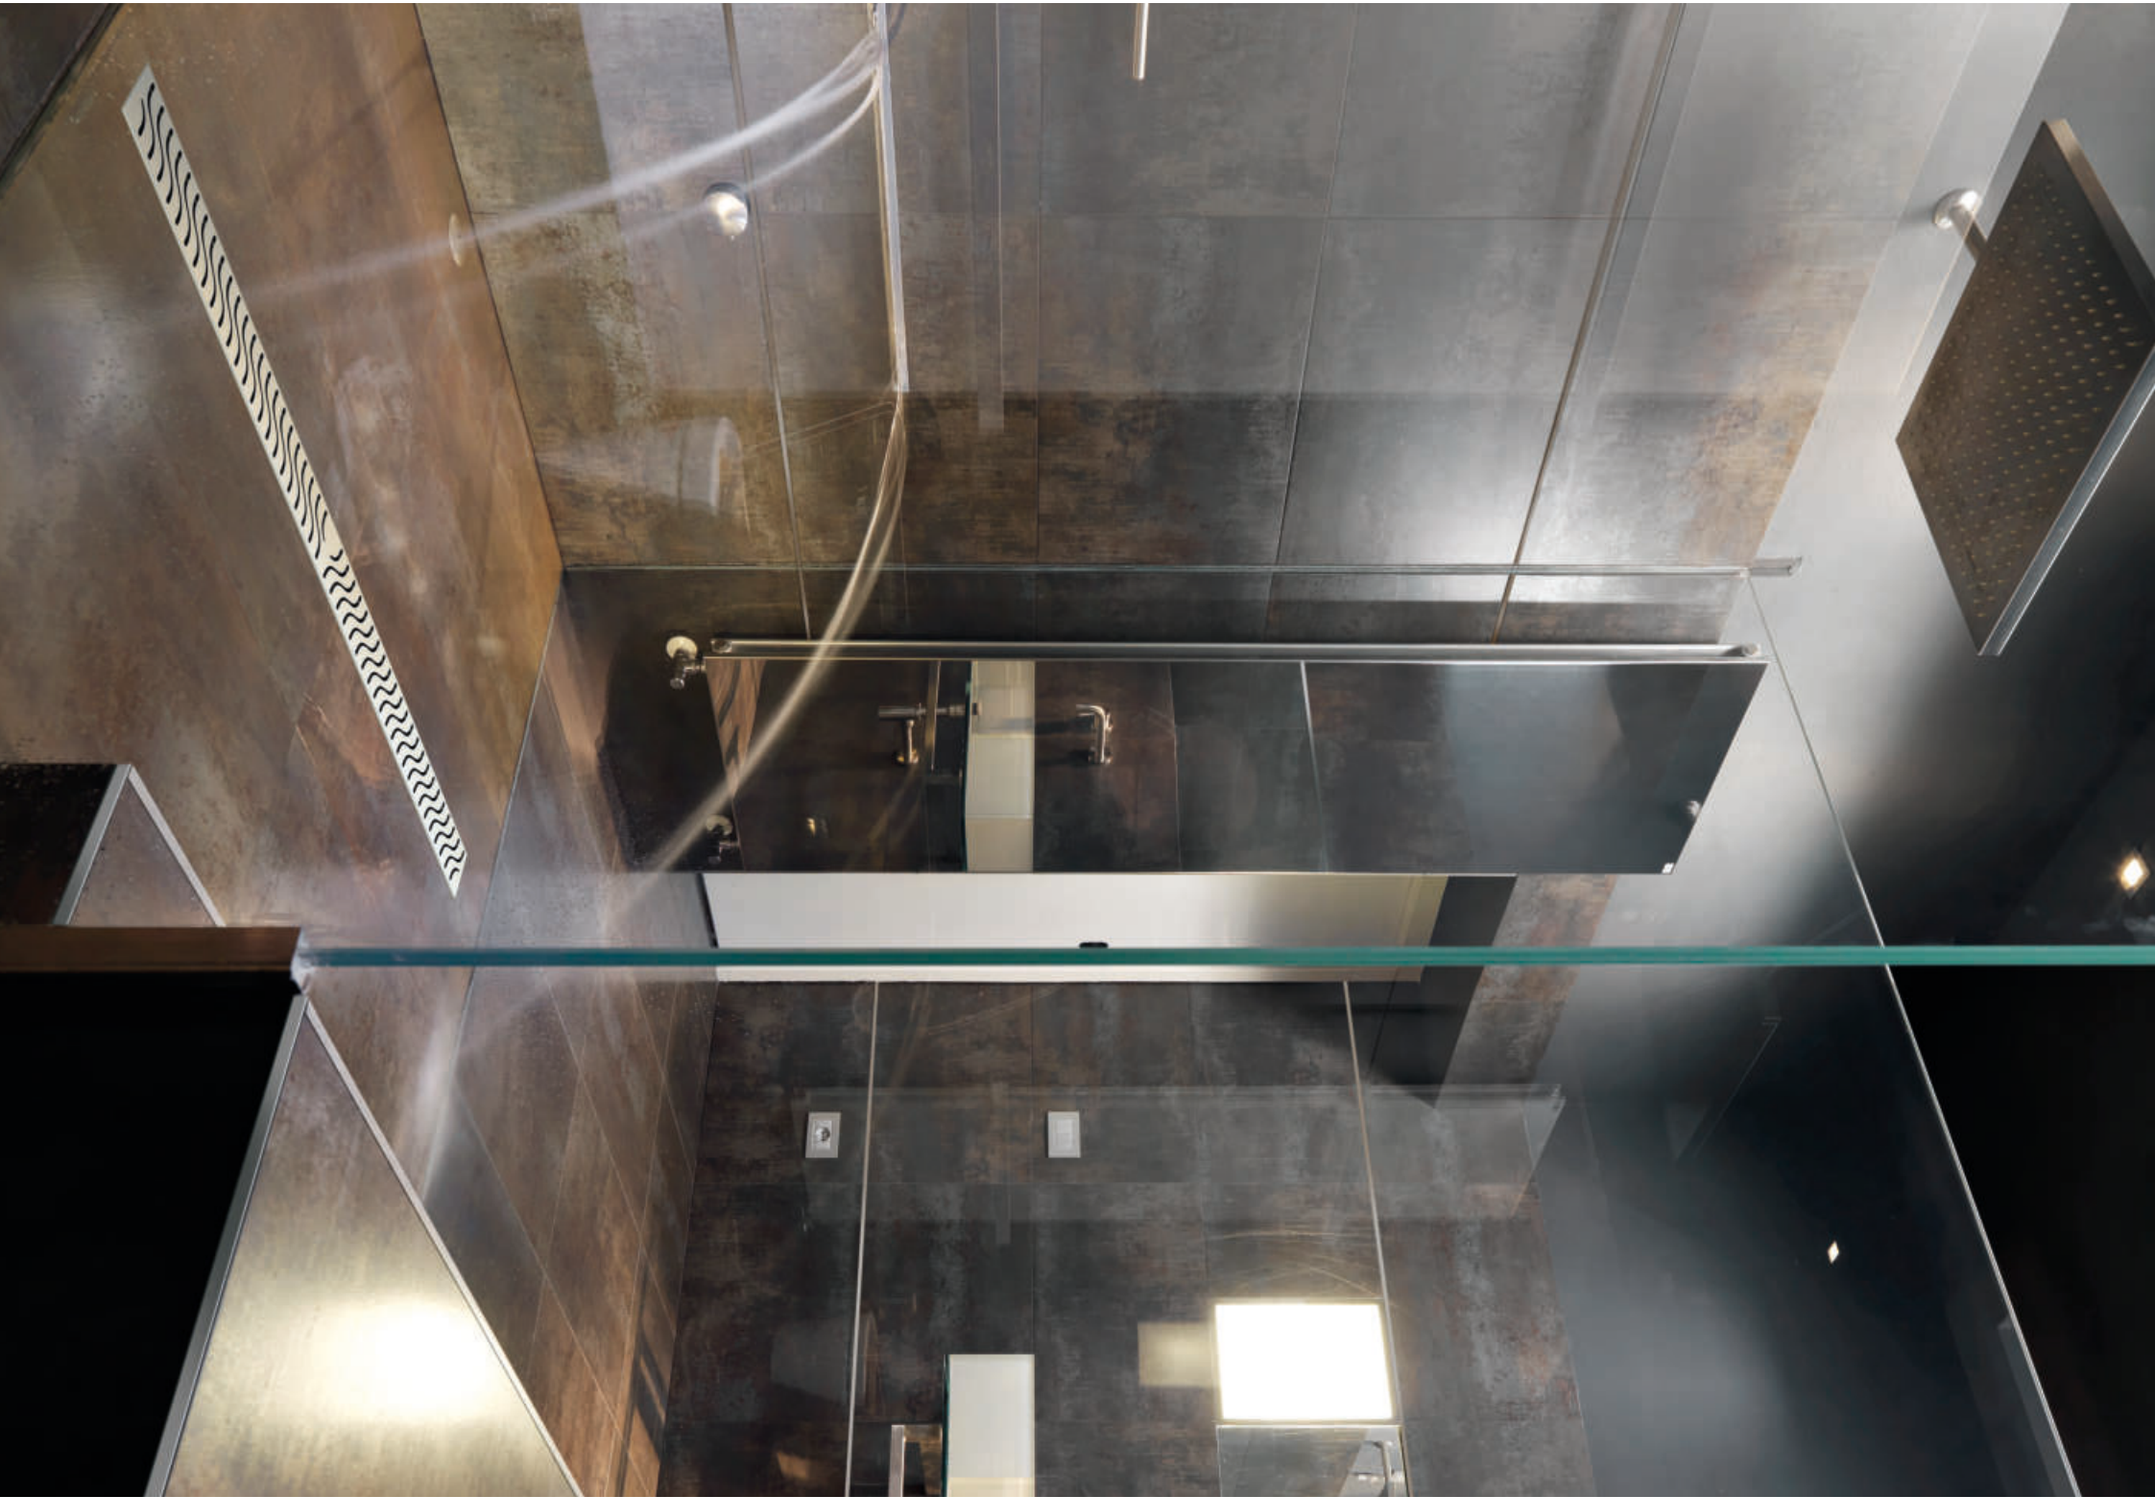

PROSHOWER CENTRAL KIT SYSTEM

PROSHOWER CENTRAL KIT SYSTEM is an innovative solution, which combines functionality and design to answer to all requirements of the shower.



Article	Description	Pc/Pack.	€/Pc
PSHPANCEK	PROSHOWER CENTRAL KIT SYSTEM	**1**	**450,38**

Article	Kit components	Pc/Pack.
PSHPANC	PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm	**1**
PRBFXB	PROBAND FIX white	**2**
PRBPE 1507	PROBAND 150 - 7,5 lm	**1**
PFLO 0405	PROFOIL ROLL - 5 lm	**1**
PRSPD 10	PVC TOWEL	**1**
PSHLDK	PROSHOWER DRAIN LATERAL KIT	**1**



PROSHOWER PANEL CENTRAL
PSHPANC



PROFOIL
PFLO 0405



PROBAND 150
PRBPE 1507




PROBAND FIX
PRBFXB




PVC TOWEL
PRSPD 10

Article	Description	Pc/Pack.	€/Pc
PSHPANC	PROSHOWER PANEL CENTRAL - moulded polystyrene 120 cm x 120 cm	**1**	**223,38**





PROSHOWER PANEL CENTRAL
PSHPANC

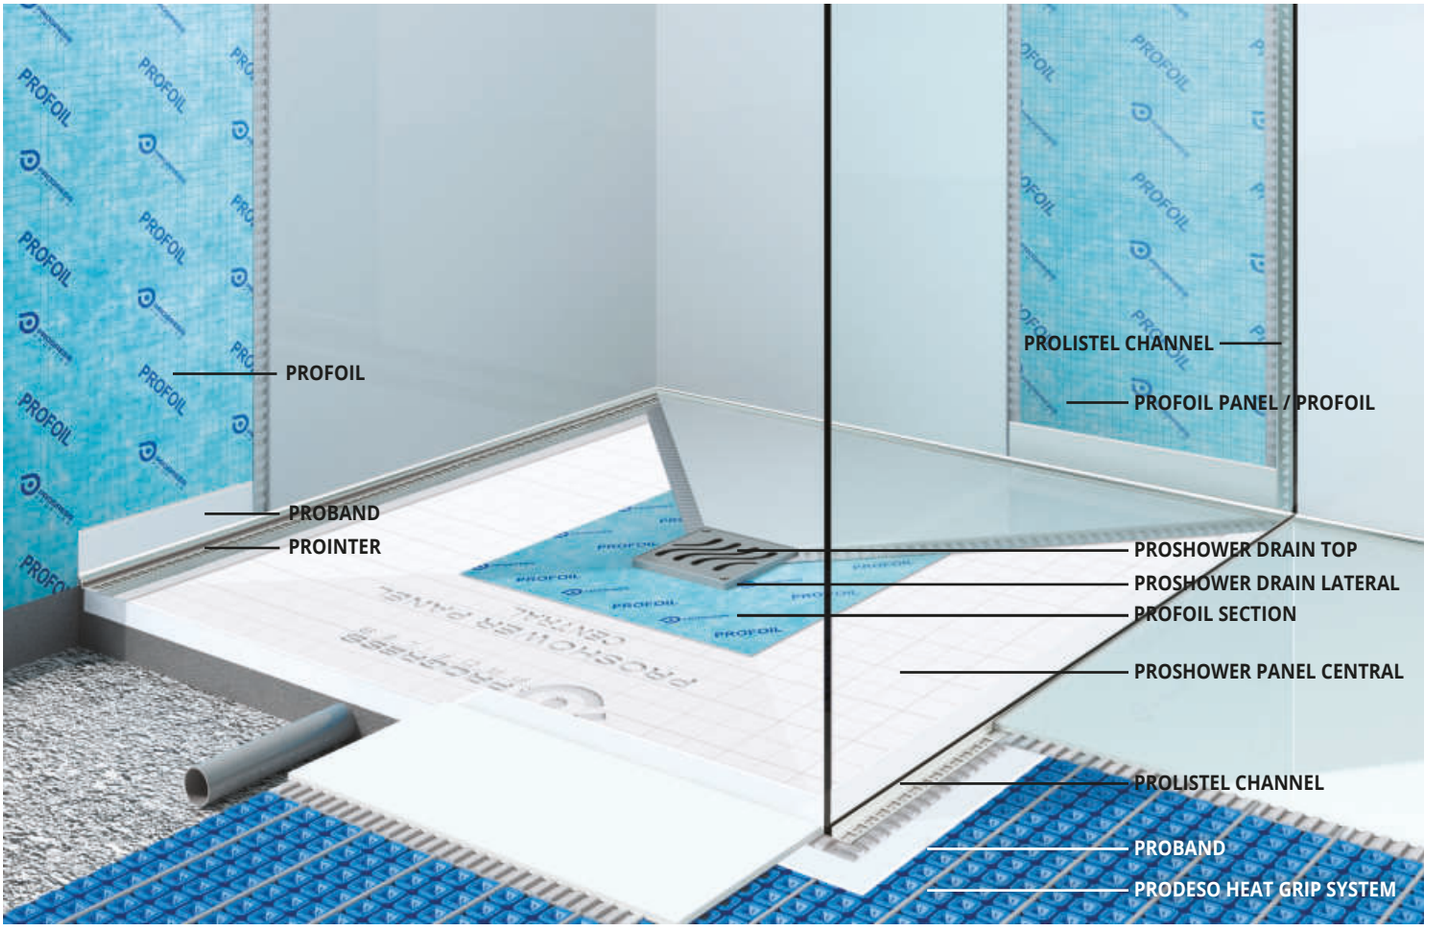

© 2023 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs.

PROSHOWER LATERAL DRAIN KIT are 2 central drain systems with lateral outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	**1**	**158,49**

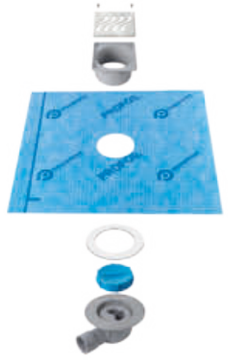

AREA OF USE

- **Use -** PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.
- **Don't use -** In environments where very aggressive substances are used and a high concentrated load is expected.


PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains. PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360 ° adjustable siphon.

PROSHOWER DRAIN CENTRAL PRO

LATERAL DRAIN

PROSHOWER DRAIN CENTRAL PRO - GRATE + POLYSTYRENE CHANNEL PROTECTION + PROFOIL SECTION + DUCT BODY + SIPHON

Article	Description	Pc/Pack.	€/Pc
PSHWCP	PROSHOWER DRAIN CENTRAL PRO	**1**	**176,40**

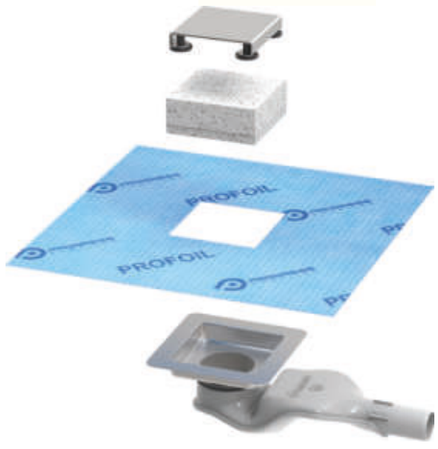

AREA OF USE

- **Use -** Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- **Don't use -** In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


= News 2023

Prices are referred to whole packs.

PROFOIL PANEL

HIGH DENSITY EXTRUDED
POLYSTYRENE PANEL

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

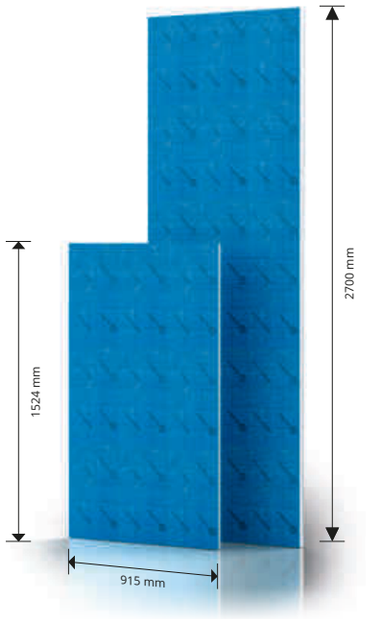

WEBSITE


PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN1327	12,70	60	148,20	48,04	118,66	7119,60
PFLPAN2527	25,00	30	74,10	57,75	142,64	4279,20
PFLPAN5027	50,80	15	37,05	80,85	199,70	2995,50

PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²

Article	H mm	Pcs/pallet	Mq/pallet	€/Mq	€/Pc	€/Pallet
PFLPAN6	6,35	85	118,49	37,80	52,69	4478,65

PROFOIL PANEL THICKNESS

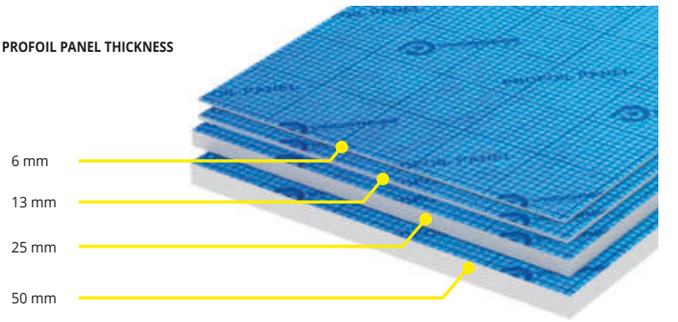
















PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET




PROFOIL DOWELS - ZINC-COATED METAL - pack. **250 Pc**

Article	L mm	€/Pc	€/Pack.
TZPFP 110	100	1,70	425,00
TZPFP 140	140	1,89	472,50
TZPFP 170	170	2,09	522,50
TZPFP 200	200	2,28	570,00



PROFOIL DOWELS - STAINLESS STEEL - pack. **250 Pc**

Article	L mm	€/Pc	€/Pack.
TIPFP 110	110	3,28	820,00
TIPFP 140	140	3,53	882,50
TIPFP 170	170	3,79	947,50
TIPFP 200	200	4,04	1010,00
TIPFP 250	250	4,70	1175,00



PROFOIL PANEL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm	€/Pc	€/Pack.
VACPFP 35	1000	35	0,04	40,00
VACPFP 55	1000	45	0,05	50,00
VACPFP 80	1000	80	0,10	100,00



PROFOIL PANEL WASHERS (ZINC-COATED METAL) - pack. **100 Pc**

Article	Pcs/Pack.	ø mm	€/Pc	€/Pack.
RFPFP 36	100	35	0,32	32,00

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROFOIL PANEL NICHE are prefabricated built-in elements of PROFOIL PANEL to make indoor wall niches and support surfaces. The niches can be linked to the waterproofing systems PROFOIL and PROFOIL PANEL. The fixing of the shelf inside the niche is optional. The shelf, part of the, can be fixed at the needed height. It is available in 4 sizes.


PROFOIL PANEL NICHE

HIGH DENSITY EXTRUDED POLYSTYRENE


PROFOIL PANEL NICHE - WATERPROOFING NICHE

Article	Description	Pcs/Pack.	€/Pc
PFLPANICH 88	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 203,2 mm	**1**	**69,67**
PFLPANICH 1212	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 304,8 mm	**1**	**81,01**
PFLPANICH 821	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 203,2 x 533,4 mm	**1**	**107,13**
PFLPANICH 1221	WATERPROOFING NICHE MADE OF PROFOIL PANEL of 12,5mm, Inside size of the niche 304,8 x 533,4 mm	**1**	**120,33**


PFLPANICH 88




PFLPANICH 1212




PFLPANICH 821




PFLPANICH 1221




PFLPANICH 1212




PFLPANICH 88



PFLPANICH 1221

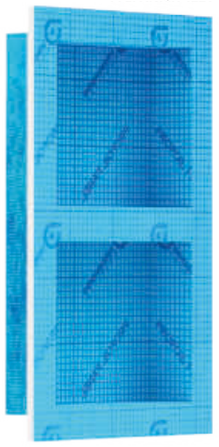

PFLPANICH 821

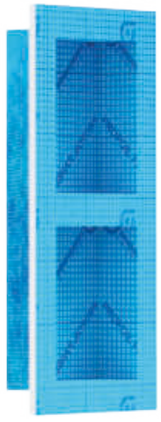



© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROFOIL
PROFOIL PRO

ROLLS IN HDPE AND PP

PROFOIL is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL PRO is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

PROFOIL - ROLLS IN HDPE AND PP - Thickness **0,42 mm** **ROLLS IN HDPE AND PP** - Thickness **0,42 mm**

Article	Width roll H x L lm	total m²	Rolls/pallet	€/m²	€/Roll	€/pallet
PFLO 0430	1 x 30	30	40	14,55	436,50	17460,00
PFLO 0405	1 x 5	5	154	20,25	101,25	15592,50

PROFOIL PRO - ELASTIC ROLLS IN HDPE AND PP - Thickness **0,42 mm PP**

Article	Width roll H x L lm	total m²	Rolls/pallet	€/m²	€/Roll	€/pallet
PFLOPR 0430	1 x 30	30	40	17,09	512,70	20508,00

AREAS OF USE
• **Use.** Waterproofing of substrates and vertical structures before the laying of ceramic in areas subject to occasional contact with water like bathrooms and kitchens, saunas and Turkish baths. **PROFOIL PRO** can also be used in environments with permanent contact with water like swimming pools and tanks. • **Don't use.** On bituminous coverings, over insulating panels and lightweigh screed.

WARNINGS
Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

L 5m L 30m



PROFOIL



PROFOIL PRO



WEBSITE

PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE

PROFOIL PASTE is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.



WATERPROOFING ELASTIC MEMBRANE

Article	Kg./ Bucket	Bucket/ Pallet	€/Kg.	€/ Bucket	€/Pallet
PFLOPST 04	4	64	12,74	53,38	3416,32
PFLOPST 10	10	36	12,09	126,65	4559,40

AREAS OF USE
• **Use.** Waterproofing for bathrooms, kitchens, showers, gypsum-based plasters, cement-based plaster and plasterboard walls.
• **Don't use.** For external application, on wet surfaces or substrates subject to moisture rising, in environments where water is always present, pools and tanks.

WARNINGS
Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

SHOWER SYSTEMS

PROBAND150/250

ELASTIC ROLLS IN HDPE AND PP



ROLLS IN HDPE AND PP - Thickness **0,42 mm**


Article	Roll width H mm x L lm	Rolls/ Pack.	€/lm	€/Roll	€/Pack.
PRBPE 1507	150 x 7,5	16	5,70	42,75	684,00
PRBPE 1530	150 x 30	6	4,18	125,40	752,40
PRBPE 2530	250 x 30	3	7,68	230,40	691,20

CORNERS and PIPE COLLAR

HDPE E PP



PRBE



PRBI



PRBT

PREFORMED ELASTIC CORNERS AND PIPE COLLAR IN HDPE AND PP
Thickness **0,42 mm**

Article	H x L mm	€/Pc	€/Pack.
PRBI	60 x 120	8,23	82,30
PRBE	60 x 120	8,23	82,30
PRBT	125 x 125	7,29	72,90

PROBAND FIX

MOISTURE-CURE SEALANT



PRBFX...

MOISTURE-CURE SEALANT
pack. of **12** cartridges - **B** (white) - **G** (grey)

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	17,64	211,68
PRBFXG	290	17,64	211,68



PRBFXGUN

GUN FOR MOISTURE-CURE SEALANT CARTRIDGE

Article	Pc/Pack	€/Pc
PRBFXGUN	1	352,60



PRBFXU...

MOISTURE-CURE SEALANT CARTRIDGE
pack. of **12** cartridges - **B** (white) - **G** (grey)

Articolo	Cartridge lm	€/Pc	€/Pack.
PRBFXUB	600	34,61	415,32
PRBFXUG	600	34,61	415,32

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROSHELF are tileable shelves in stainless steel AISI 316/1.4404-V4A for the underile installation. Thanks of their perforated fixing flaps, they are easily installed on the wall during the laying of the ceramic coating. They are available in 2 shapes, triangular for the corner installation and rectangular. These shelves are suitable for the installation in Bathroom and kitchens.

PROSHELF

STAINLESS STEEL AISI 316/1.4404-V4A


PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR TILEABLE SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFTP24	170 mm x 240 mm	1	83,04
PRSHLFTP30	212 mm x 300 mm	1	95,09


PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A RECTANGULAR TILEABLE SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFRP40	150 mm x 400 mm	1	145,80
PRSHLFRP30	115 mm x 300 mm	1	133,13


PRSHLFTP24

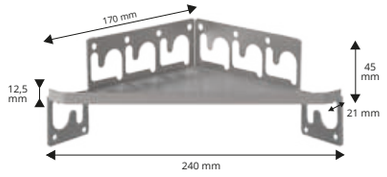


PRSHLFTP30

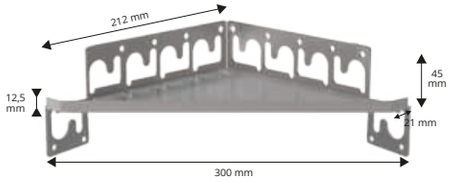

PRSHLFRP30



PRSHLFRP40

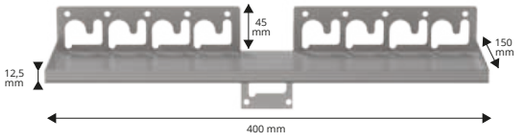


PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A TRIANGULAR SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFTD24	170 mm x 240 mm	1	126,79
PRSHLFTD30	212 mm x 300 mm	1	139,47


PROSHELF - STAINLESS STEEL AISI 316/1.4404-V4A RECTANGULAR SHELF

Article	size	Pc/Pack.	€/Pc
PRSHLFRD40	150 mm x 400 mm	1	190,19
PRSHLFRD30	115 mm x 300 mm	1	171,16


PRSHLFTD24




PRSHLFTD30

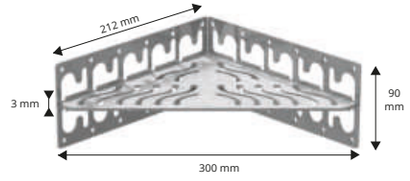


PRSHLFRD30



PRSHLFRD40

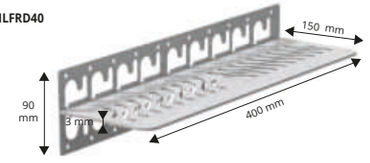


EXAMPLES OF LAYING

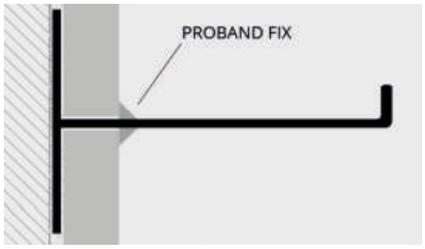



1. Choose "PROSHELF" according to the desired shape and size. 2. apply the adhesive on the support where the shelf will be installed. 3. Press the anchoring flap into the adhesive; 4. Lay the tiles taking care to align them with the shelf. Immediately remove adhesive residues from the surface of the shelf. 5. Carefully seal the joints between the shelf and tiles with PROBAND FIX to avoid water stagnation. Remove any grout residue from the shelf surface.

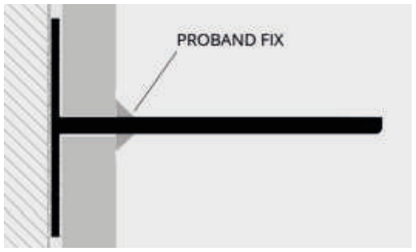



PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.


PRO GOBOARD PANEL

HIGH DENSITY POLYISOCYANURATE FOAM PANEL

PRO GOBOARD PANEL - highdensity polyisocyanurate foam

Article	Description	Pcs/pallet	m²/pallet	€/m²	€/Pc	€/Pallet
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m²	75	105	40,75	57,05	4278,75
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m²	60	84	45,28	63,39	3803,40
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m²	30	89,4	80,84	240,90	7227,00
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m²	15	44,70	125,52	374,05	5610,75

PGOBOR...




= News 2023

Prices are referred to whole packs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROHEATER SYSTEM

PROHEATER is a wall porcelain stone tiled design heater that warms your bathroom with elegance and style

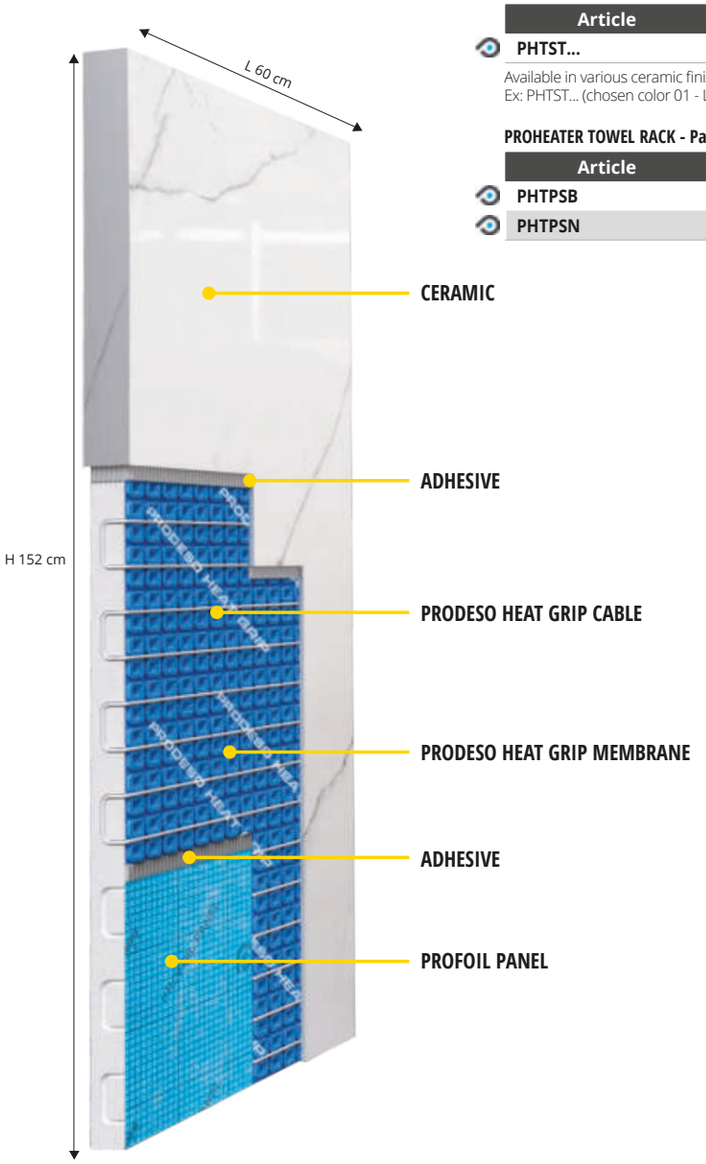

PROHEATER - WALL PORCELAIN STONE TILED HEATING SYSTEM

Article	Description	€/pc	
PHTST...	Proheater 60 x 152 cm	**4955,74**	*

Available in various ceramic finishes. The code of the chosen color must be added to the article code.
Ex: PHTST... (chosen color 01 - Lincoln); PHTST01.


PROHEATER TOWEL RACK - Pack. 2 Pcs

Article	Description	€/Pack.	
PHTPSB	White varnished metal towel rack	**556,76**	*
PHTPSN	Black varnished metal towel rack	**556,76**	*

PROHEATER WITH TOWEL RACK



CERAMIC COLOR RANGE

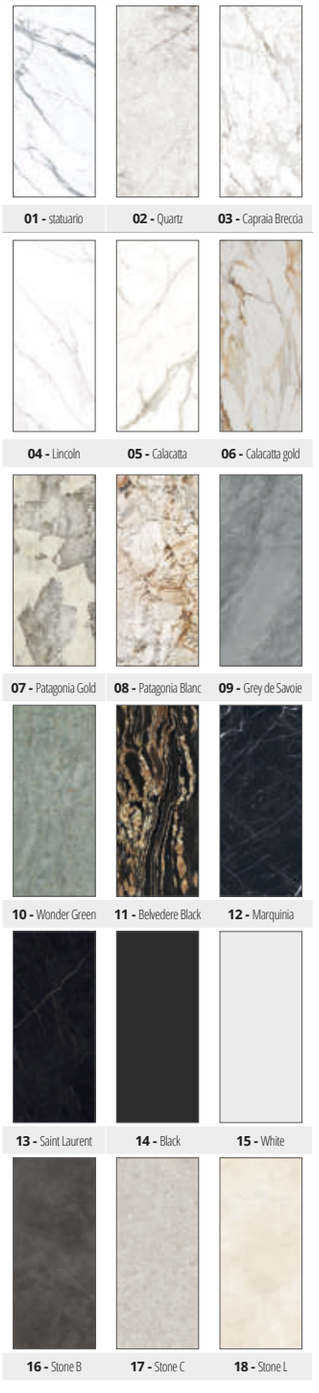







© 2023 All rights reserved by Progress Profiles. Printed in Italy

= News 2023


* = Production on demand. Production delay 4/5 weeks.

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy



PROGRESS®
PROFILES

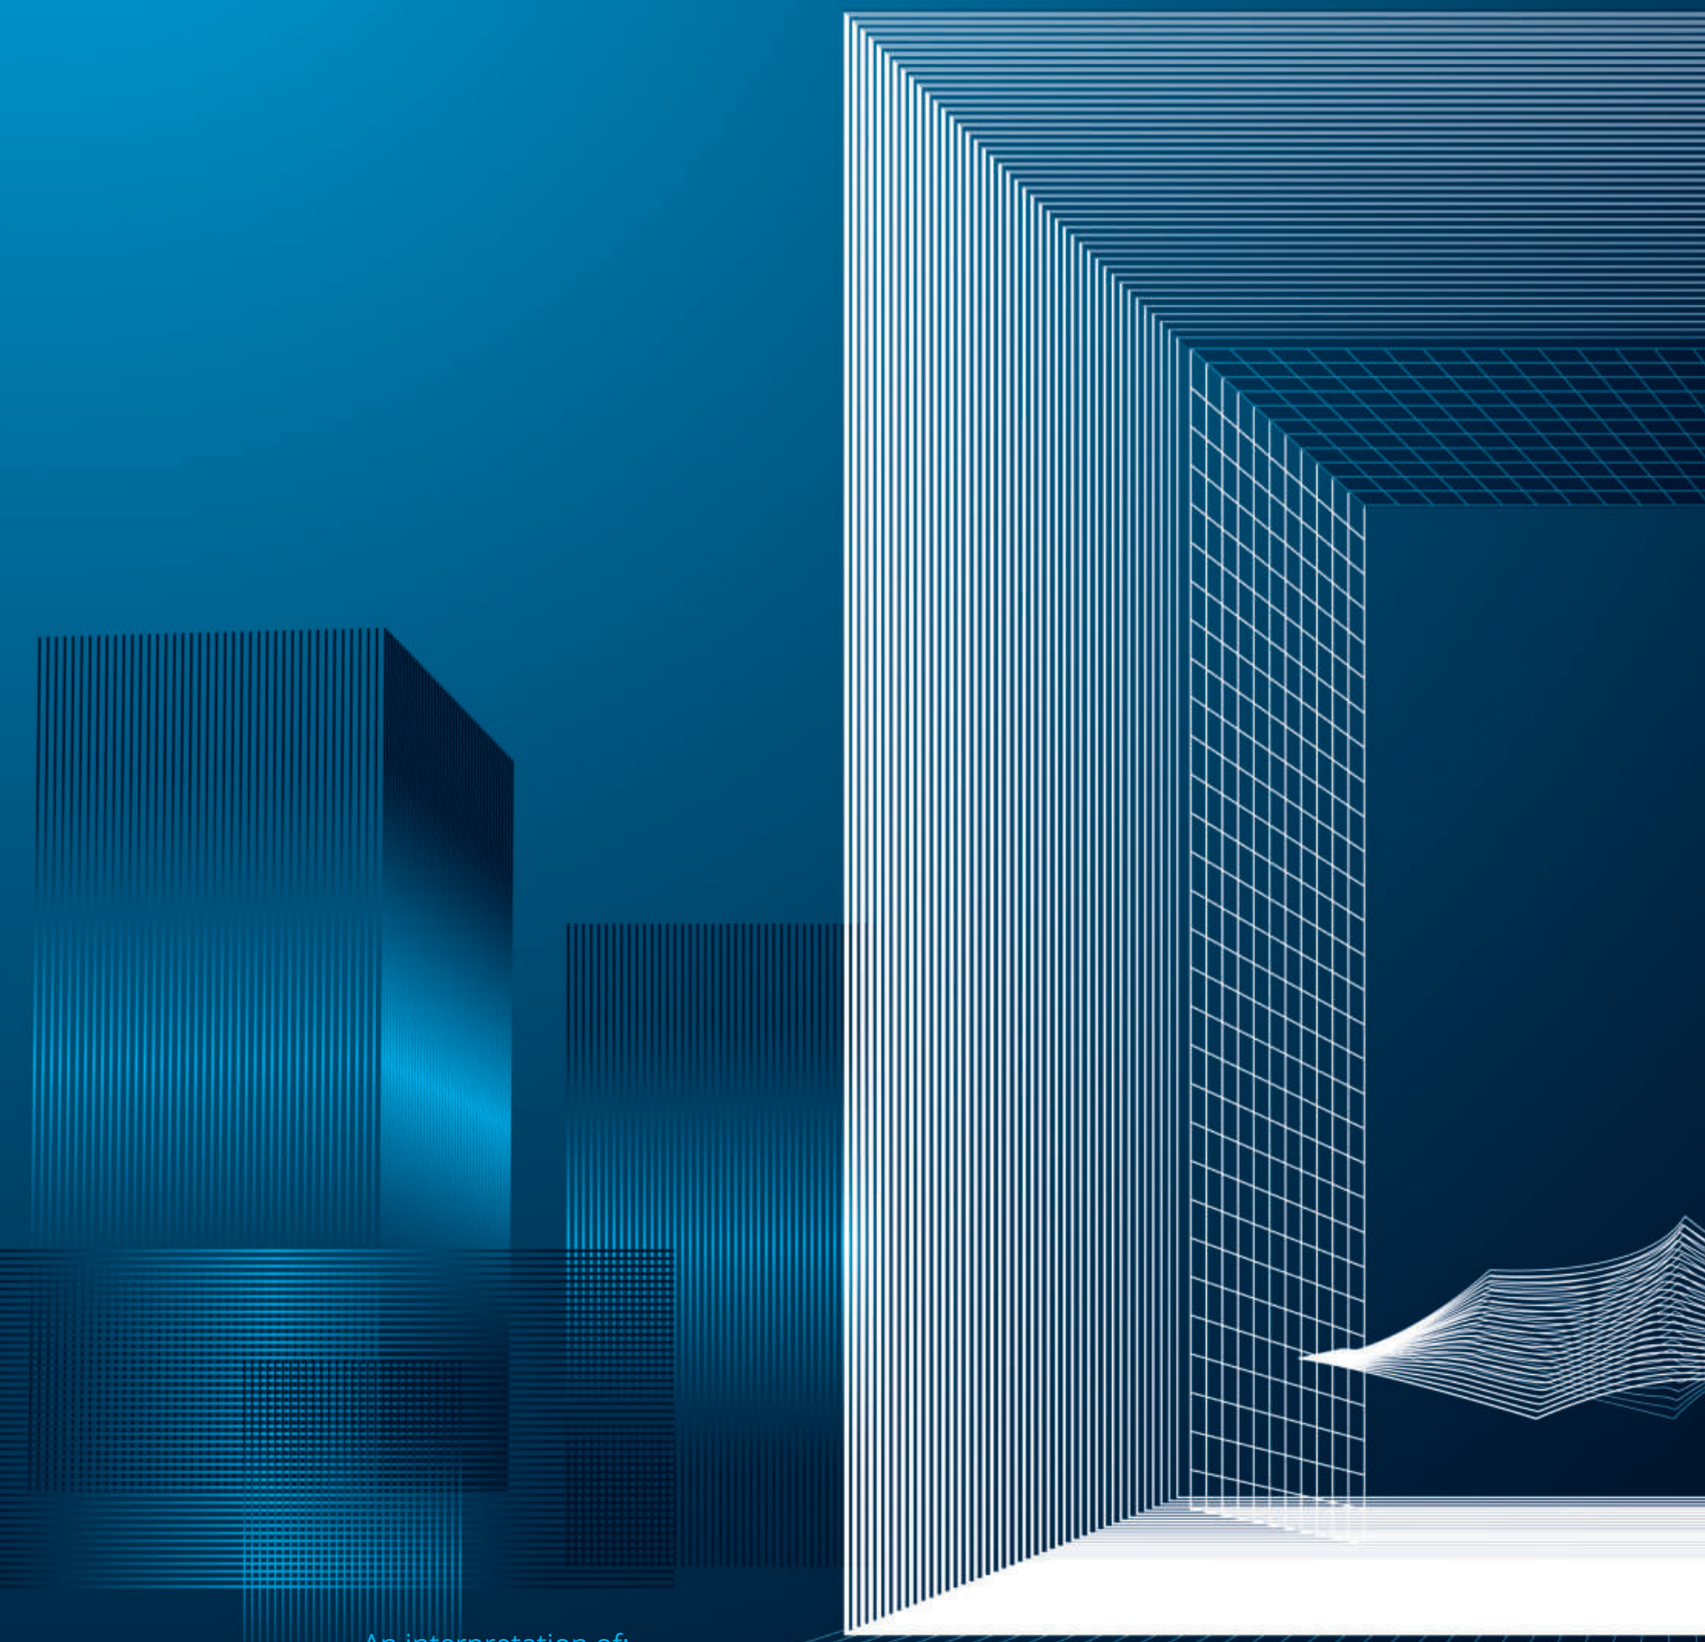

An interpretation of:
Grande Arche De la Défense, J. Otto von Spreckelsen, PARIS (France), 1989

PROFILES & SYSTEMS

SKIRTING BOARDS



© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSKIRTING CHANNEL is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a skirting flush to the wall with decorative inner grooves for a modern and contemporary touch.

PROSKIRTING CHANNEL

ANODIZED, BRUSHED, VARNISHED ALUMINIUM



SUPPORT/ PERFORATED BASE - ANODIZED SILVER ALUM.
thermo packed - bar length **2 lm** - pack. **20 Pcs - 40 lm**


Article	H mm	€/lm	€/Pc
PKGCFAA 75	75	11,10	22,20

ORDER THE SUPPORT AND THE TOP YOU WISH


VISIBLE TOP - ANODIZED, BRUSHED, WHITE VARNISHED ALUM.
thermo packed bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
PKCHAA 55	55	10,77	21,54
PKCHBS 55	55	12,74	25,48
PKCHA 55-01	55	12,13	24,26

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimum quantity, timing and price.

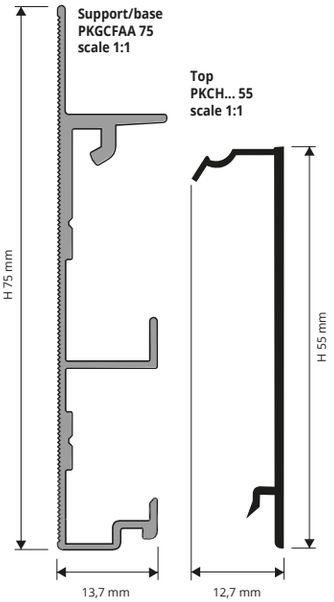

EXAMPLES OF LAYING for instructions see the product below



EXTERNAL /INTERNAL CORNER - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. - pack. **5 Pcs**

Article	H mm	€/Pack
REPKCHAA 55/5	55	53,25
REPKCHBS 55/5	55	62,44
REPKCHA 55-01/5	55	62,44




END CAPS - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. - pack. **10 Pcs**

Article	H mm	€/Pack
TPKCHAA 55/10	60	88,12
TPKCHBS 55/10	60	105,86
TPKCHA 55-01/10	60	105,86



COLOURS



PROSKIRTING FLAT is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a skirting flush to the wall for a modern and contemporary touch.

PROSKIRTING FLAT

ANODIZED, BRUSHED, VARNISHED ALUMINIUM



SUPPORT/ PERFORATED BASE - ANODIZED SILVER ALUM.
thermo packed - bar length **2 lm** - pack. **20 Pcs - 40 lm**


Article	H mm	€/lm	€/Pc
PKGCFAA 75	75	11,10	22,20

ORDER THE SUPPORT AND THE TOP YOU WISH


VISIBLE TOP - ANODIZED, BRUSHED, WHITE VARNISHED ALUM.
thermo packed - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
PKFLAA 60	60	10,77	21,54
PKFLBS 60	60	12,74	25,48
PKFLA 60-01	60	12,74	25,48

On demand may be realised in other finishes of the colour chart.
Contact our customer service for minimum quantity, timing and price.

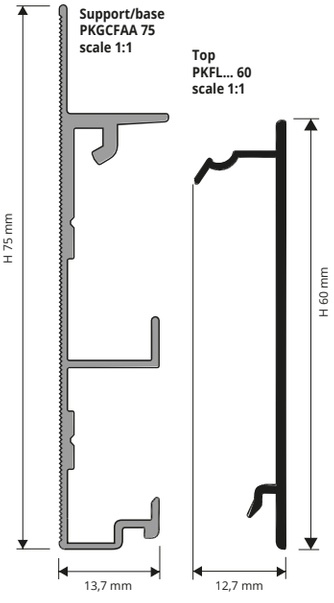

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix the substrate/perforated base to the wall before laying the plasterboard, calculating all the heights and distances. **2.** Lay the plasterboard aligning the lower part flush to the "PROSKIRTING CHANNEL" and/or FLAT. **3.** Plaster and carry out the surface finishing on the plasterboard. **4.** Choose the required Top "PROSKIRTING CHANNEL" and/or FLAT finish, cut and lay the profile fitting the lower part and then the upper part by pressing gently. **IMPORTANT:** Pay attention to the external edges of the aluminium Proskirting. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

EXTERNAL / INTERNAL CORNER - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. - pack. **5 Pcs**

Article	H mm	€/Pack
REPKFLAA 60/5	60	53,25
REPKFLBS 60/5	60	62,44
REPKFLA 60-01/5	60	62,44



END CAPS - ANODIZED, BRUSHED, WHITE VARNISHED ALUM. - pack. **10 Pcs**

Article	H mm	€/Pack
TPKCHAA 55/10	60	88,12
TPKCHBS 55/10	60	105,86
TPKCHA 55-01/10	60	105,86



COLOURS



= *News 2023*


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSKIRTING INS

ANODIZED SILVER ALUMINIUM

PROSKIRTING INS is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a recessed skirting for a modern and minimalist design in line with the latest trends.

PKINSAA 60
scale 1:1

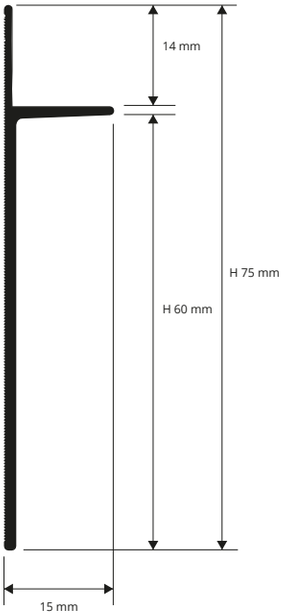



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **30 Pcs - 60 lm**

Article	H x L mm	€/lm	€/Pc
PKINSAA 60	60 X 15	11,89	23,78


ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

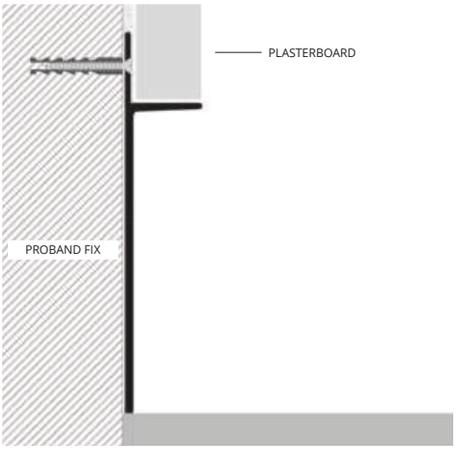

1. Fix "PROSKIRTING INS" using screws (concealed part) and glue/silicone (exposed side), before laying the plasterboard, calculating all the heights and distance. **2.** Lay the plasterboard aligning the lower part flush to the "PROSKIRTING INS". **3.** Plaster and carry out the surface finishing on the plasterboard.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




PROSKIRTING LINE

ANODIZED SILVER ALUMINIUM

PROSKIRTING LINE in the innovative skirting suitable for smoothed lime, marmorino, stucco, and Venetian coats on civil plaster or plasterboard.

PKLIAA 60
scale 1:1

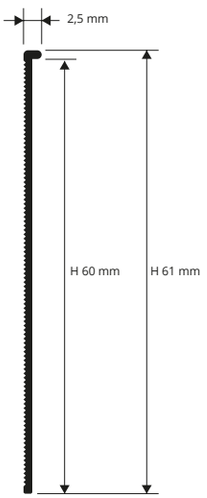



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H x L mm	€/lm	€/Pc
PKLIAA 60	61 x 2,5	10,32	20,64


ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY (MINIMUM QUANTITY ORDER OF 500 LM), TIMING AND PRICE.

COLOURS



AA - Anodized silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

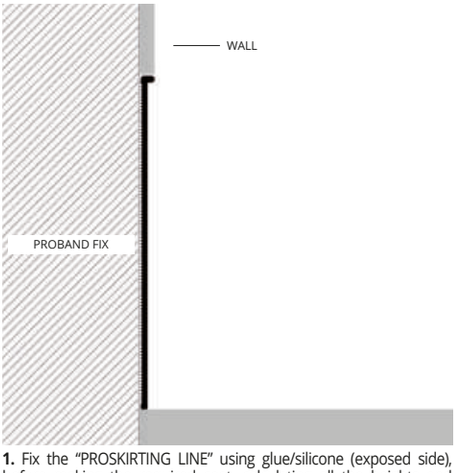

1. Fix the "PROSKIRTING LINE" using glue/silicone (exposed side), before making the required coat, calculating all the heights and distances. **2.** Carry out the surface finishing aligning the lower part flush to the "PROSKIRTING LINE".

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROSKIRTING ISP is a joint, inspectional "cable duct" baseboard in aluminium, conceived and designed to hide and protect the passage of electric cables, the ones for computer, telephones and other plants as well, allowing an easy and quick access. The supports that are to be fixed on the wall consent accommodate different utility wires/ cables as well. Aesthetically pleasant, it is recommended for various public and private environments: offices, schools, residences, commercial centers etc. Available in silver anodized aluminium (H: 100 mm) and in polished titanium and brushed titanium aluminium (H: 70 mm). In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

PROSKIRTING ISP

SILVER ANODIZED ALUMINIUM, TITANIUM POLISHED AND BRUSHED ALUM. (H:70 MM)





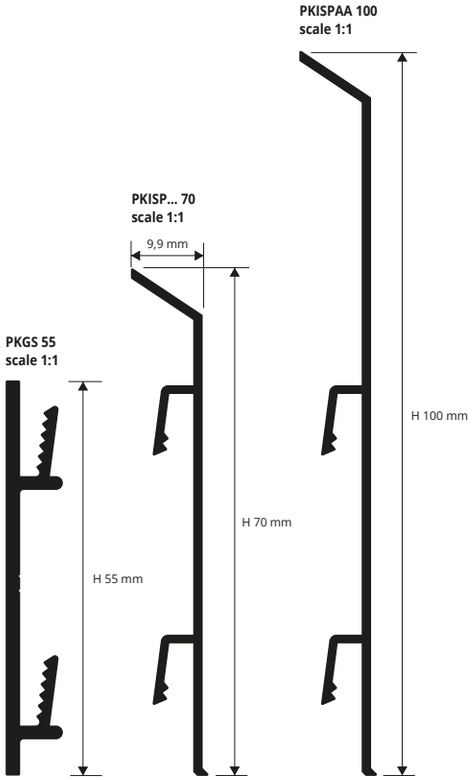

SKIRTING ANODIZED SILVER ALUMINIUM
thermo packed - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
PKISPAA 70	70	10,65	21,30
PKISPAA 100	100	15,41	30,82

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

SKIRTING POLISHED TITANIUM ALUMINIUM
thermo packed - bar length **2 lm** - pack. **25 Pcs - 50 lm**


Article	H mm	€/lm	€/Pc
PKISPBT 70	70	14,95	29,90

SKIRTING POLISHED BRUSHED TITANIUM ALUMINIUM
thermo packed - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
PKISPTS 70	70	19,86	39,72 *

UPON REQUEST AVAILABLE IN H 100mm (MINIMUM QUANTITY 200 lm) Skirtings in polished brushed titanium aluminium match with capsules and joints in varnished PVC with polished titanium aluminium effect (see below).


COLOURS




AA - Anodized silver alum. **BT** - Polished titanium alum. **TS** - Brushed titanium alum.

PUNCHED SUPPORT
support length **2 cm** - pack. **10 Pcs**

Article	H mm	€/Pack.
PKGS 55	55	3,55



ARTICLES NOT FOR SALE SINGLY

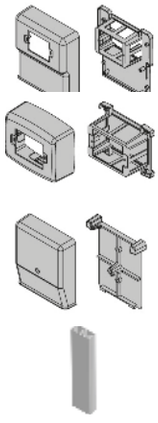

POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article	€/Pc
SPA 1820	17,77

SWITCH BOX
with BOX BASIS

Article	€/Pc
SI 1410	14,99

JUNCTION BOX
with FASTENING BASIS

Article	€/Pc
SD 1210	13,32


VERTICAL CABLE DUCT PROFILE
bar length **2,7 lm**

Article	€/lm
PSPV	10,00

It matches with CSPPK 80. Pag. 197.

LAYING INSTRUCTIONS
1. Choose "PROSKIRTING ISP" in the desired finish and height. **2.** Fix the punched support to the wall with screws every 50 cm. **3.** If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. **4.** Attach the profile to the support applying low pressure.

EXAMPLES OF LAYING

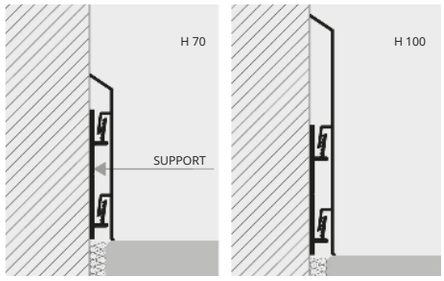

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (finishes anodized silver, polished titanium)

IN/EXTERNAL CORNER - VARNISHED PLASTIC anod. silver - pack. **5 Pcs**

Article	H mm	€/Pack.
PKIAGI .../5	70/100	20,42
PKIAGE .../5	70/100	20,42

JOINTS - VARNISHED PLASTIC anod. silver - pack. **10 Pcs**

Article	H mm	€/Pack.
PKIGIN .../10	70 / 100	40,82

END CAPS R / L - VARNISHED PLASTIC ANODIZED silver
pack. **10 Pcs** (5 right and 5 left)

Article	H mm	€/Pack.
PKITDSAA .../5	70 / 100	40,82

IN/EXTERNAL CORNER - VARNISHED PLASTIC polished titanium - pack. **5 Pcs**

Article	H mm	€/Pack.
PKIAGIBT 70/5	70	32,20
PKIAGEBT 70/5	70	32,20

JOINTS - VARNISHED PLASTIC polished titanium - pack. **10 Pcs**

Article	H mm	€/Pack.
PKIGINBT 70/10	70	64,41

END CAPS R / L - VARNISHED PLASTIC poli. titanium - pack. **10 Pcs** (5 right and 5 left)

Article	H mm	€/Pack.
PKITDSBT 70/5	70	64,41

Available on demand aluminium prewelded internal and external flush corners. Price to be agreed. Production delay 4/5 weeks.



PKIAGE.. 70 / 100
external corner



PKIAGI.. 70 / 100
internal corner



PKIGIN.. 70 / 100
joint



PKITDS.. 70 / 100/5
end caps



PKIAGE 70 / 100
external corner



PKIAGI 70 / 100
internal corner



PKIGIN 70 / 100
joint



PKITDS 70 / 100/5
end caps

*** = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROSKIRTING LIST 40

ANODISED, BRUSHED, VARNISHED ALUMINIUM


PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized, polished, brusched, varnished aluminium, 40 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 40A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 40). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 40 in aluminum is suitable in any indoor environment.

PKGS 37
scala 1:1


PKLT... 40
scala 1:1



PKGS 37



LAYING EXAMPLE

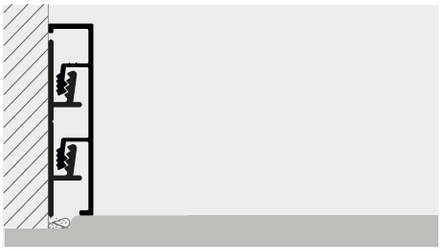

LAYING INSTRUCTIONS
1. Choose "PROSKIRTING LIST" in the desired finish and height. **2.** Fix the punched support to the wall with screws every 50 cm. **3.** If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. **4.** Attach the profile to the support applying low pressure.



PROSKIRTING LIST 40 - ANODISED SILVER ALUMINIUM thermo packed - bar lenght **2 ml** - pack. **20 PCS - 40 ml**

Article	H mm	€/ml	€/Pcs
PKLTAA 40	40	9,51	19,02
PKLTAA 40A	40	12,36	24,72

"A" at the end of the product code = Item with adhesive

PROSKIRTING LIST 40 - VARNISHED ALUMNIUM WHITE thermo packed - bar lenght **2 ml** - pack. **20 PCS - 40 ml**

Article	H mm	€/ml	€/Pcs
PKLTA 40-01	40	11,28	22,56
PKLTA 40-01A	40	14,71	29,42

"A" at the end of the product code = Item with adhesive

COLOURS



01 - Aluminium varnished white | **AA** - Anodised silver aluminium | **BS** - Brushed silver aluminium



PROSKIRTING LIST 40 - BRUSHED SILVER ALUMINIUM thermo packed - bar lenght **2 ml** - pack. **20 PCS - 40 ml**

Article	H mm	€/ml	€/Pcs
PKLTBS 40	40	11,28	22,56
PKLTBS 40A	40	14,71	29,42

"A" at the end of the product code = Item with adhesive

PUNCHED SUPPORT - Natural aluminium - bar lenght **2 cm** - pack. **10 PCS**

Article	H mm	€/pack.
PKGS 37	37	3,55

COLOURS ON DEMAND 100 PCS / 200 LM



01O - Varnished aluminium matt white | **BT** - Polished titanium aluminium | **TS** - Brushed titanium aluminium



RS - Brushed copper aluminium

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED, BRUSHED AND VARNISHED ALUMINIUM

Internal / external corners
REPKLT... 40



End caps
TPKLT... 40



INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM pack. **5 PCS**

Article	H mm	€/Pack
REPKLTAA 40/5	40	41,21

INTERNAL / EXTERNAL CORNER - BRUSHED SILVER ALUMINIUM pack. **5 PCS**

Article	H mm	€/Pack
REPKLTBS 40/5	40	49,44

INTERNAL / EXTERNAL CORNER - VARNISHED ALUMINIUM WHITE pack. **5 PCS**

Article	H mm	€/Pack
REPKLTA 40-01/5	40	49,44

END CAPS - ALL. ANODISED SILVER ALUMINIUM pack. **4/10 PCS**

Article	H mm	€/Pack 4 Pcs	€/Pack 10 Pcs	
TPKLTAA 40/...	40	27,70	65,93	*

END CAPS - BRUSHED SILVER ALUMINIUM pack. **4/10 PCS**

Article	H mm	€/Pack 4 Pcs	€/Pack 10 Pcs	
TPKLTBS 40/...	40	33,29	79,24	*

END CAPS - VARNISHED ALUMINIUM WHITE pack. **4/10 PCS**

Article	H mm	€/Pack 4 Pcs	€/Pack 10 Pcs	
TPKLTA 40-01/...	40	33,29	79,24	*

Choose the desired packaging.
E.g.: TPKLTA... 40/4 (pack. 4 Pcs)
TPKLTA... 40/10 (pack. 10 Pcs)



© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROSKIRTING LIST is a skirting/baseboard profile in different finishes anodized, polished, brusched, varnished aluminium, 80 mm high and 10 mm wide which can be fixed directly to the wall with adhesive (PKLT .. 80A non-inspectable version) or with aluminum supports (inspectable version PKLT .. 80). The aluminum supports, 20 mm long, are fixed with plugs to the wall, every about 50 cm. PROSKIRTING LIST 80 in aluminum is suitable in any indoor environment.

PROSKIRTING LIST 80

ANODISED, BRUSHED, VARNISHED ALUMINIUM





PROSKIRTING LIST 80 - ANODISED SILVER ALUMINIUM thermo packed - bar lenght **2 ml** - pack. **20 PCS - 40 ml**

Article	H mm	€/ml	€/Pcs
PKLTAA 80	80	13,88	27,76
PKLTAA 80A	80	18,07	36,14

"A" at the end of the product code = Item with adhesive

PROSKIRTING LIST 80 - VARNISHED ALUMNIUM WHITE thermo packed - bar lenght **2 ml** - pack. **20 PCS - 40 ml**

Article	H mm	€/ml	€/Pcs
PKLTA 80-01	80	16,41	32,82
PKLTA 80-01A	80	21,30	42,60

"A" at the end of the product code = Item with adhesive

COLOURS



01 - Aluminium varnished white | **AA** - Anodised silver aluminium | **BS** - Brushed silver aluminium

COLOURS ON DEMAND 100 PCS / 200 LM



01O - Varnished aluminium matt white | **BT** - Polished titanium aluminium | **TS** - Brushed titanium aluminium | **RS** - Brushed copper aluminium

PROSKIRTING LIST 80 - BRUSHED SILVER ALUMINIUM thermo packed - bar lenght **2 ml** - pack. **20 PCS - 40 ml**


Article	H mm	€/ml	€/Pcs
PKLTBS 80	80	16,41	32,82
PKLTBS 80A	80	21,30	42,60


"A" at the end of the product code = Item with adhesive


PUNCHED SUPPORT - Natural aluminium - bar lenght **2 cm** - pack. **10 PCS**

Article	H mm	€/pack.
PKGS 55	55	3,55

EXAMPLE FOR THE LAYING



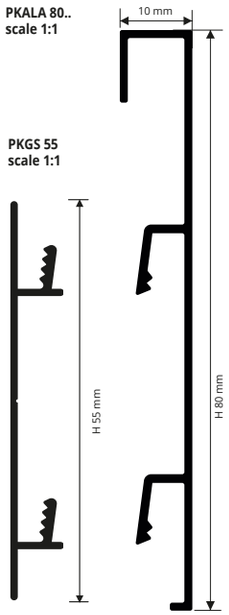



ISTRUZIONI TECNICHE DI POSA

1. Choose "PROSKIRTING LIST" in the desired finish and height. **2.** Fix the punched support to the wall with screws every 50 cm. **3.** If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV. **4.** Attach the profile to the support applying low pressure.

INTERNAL and EXTERNAL CORNERS, END CAPS

ANODISED, BRUSHED AND VARNISHED ALUMINIUM

INTERNAL / EXTERNAL CORNER - ANODISED SILVER ALUMINIUM pack. **5 PCS**

Article	H mm	€/pack.
REPKLTAA 80/5	80	55,47

INTERNAL / EXTERNAL CORNER - BRUSHED SILVER ALUMINIUM pack. **5 PCS**

Article	H mm	€/pack.
REPKLTBS 80/5	80	66,56

INTERNAL / EXTERNAL CORNER - VARNISHED ALUMINIUM WHITE pack. **5 PCS**

Article	H mm	€/pack.
REPKLTA 80-01/5	80	66,56

END CAPS - ALL. ANODISED SILVER ALUMINIUM pack. **4/10 PCS**

Article	H mm	€/pack. 4 Pcs	€/pack. 10 Pcs	
TPKLTAA 80/...	80	37,27	88,76	*

END CAPS - BRUSHED SILVER ALUMINIUM pack. **4/10 PCS**

Article	H mm	€/pack. 4 Pcs	€/pack. 10 Pcs	
TPKLTBS 80/...	80	44,73	106,50	*

END CAPS - VARNISHED ALUMINIUM WHITE pack. **4/10 PCS**

Article	H mm	€/pack. 4 Pcs	€/pack. 10 Pcs	
TPKLTA 80-01/...	80	44,73	106,50	*

Choose the desired packaging.
E.g.: TPKLTA... 80/4 (pack. 4 Pcs)
TPKLTA... 80/10 (pack. 10 Pcs)

End caps TPKLT... 80



Internal / external corners REPKLT... 80





*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROSKIRTING LED is an innovative patented baseboard called "cable duct" in anodized aluminium, with illumination led system incorporated. Conceived and designed to illuminate the passage zone such as corridors and house and office entrances as well. It generates soft and indirect light. Moreover, it solves many other problems such as the laying of the baseboard itself, the passage of the electric cables, the ones for PC, telephone and other plants as well. **PROSKIRTING LED** has been designed with double function and utility: 1- **PROSKIRTING LED** complete PKLEDAA 80 is an inspectional joint baseboard composed of PKGS 66 support for fixing it with screws on the wall and the **PROSKIRTING LED** PKLEDAA 80 at sight profile. 2- **PROSKIRTING LED** PKLEDAA 80 is a at sight baseboard profile to be fixed directly wtth silicone/ adhesive. It is not an inspectional one like **PROSKIRTING LED** complete, and is available also in auto adhesive version (PKLEDAA 80A).

PROSKIRTING LED

ANODIZED SILVER ALUMINIUM
WITH LED AND POWER SUPPLY BOX





SKIRTING BOARD IN ANOD. SILVER ALU. WITHOUT ADHESIVE. ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article) thermo packed - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	H mm	€/lm	€/Pc
PKLEDAA 80	80	27,42	54,84

SKIRTING BOARD IN ANOD. SILVER ALUM. WITH ADHESIVE, ADAPTOR LED, LED & FLAT NOT INCLUDED (indicate the article) thermo packed - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	H mm	€/lm	€/Pc
PKLEDAA 80A	80	30,69	61,38 *

Please, specify in your order the code of the FLAT you choose : matt or gloss. Eg.: PKLEDAA 80 + PKGPIAL




POLYCARBONATE FLAT - bar length **2 lm**

Article	€/lm	€/Pc
PKGPIAL	5,23	10,46
PKGPIAO	5,23	10,46

ADHESIVE FLEXIBLE LED COIL
length **5 lm** - pack.**1 ROLL**


Article	€/lm	€/Pack.
LEDN	22,47	112,35
LEDF	22,47	112,35
LEDC	22,47	112,35

"N" at the end of the product code = neutral light
"F" at the end of the product code = cold light
"C" at the end of the product code = hot light



POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article	€/Pc
SPA 1820	21,45



LED POWER SUPPLY 75W - 12V

Article	€/Pc
ALL 7512	82,27


CABLE RACEWAY/ SUPPORT- COEXTRUDED PVC
bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
CSPPK 80	70	5,69	11,38

PUNCHED SUPPORT - NATURAL ALUMINIUM
support length **2 cm** - pack. **10 Pcs**

Article	H mm	€/Pack.
PKGS 66	66	3,55

ARTICLES NOT FOR SALE SINGLY




COLOURS




AA - Anodized silver alum.

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.



SWITCH BOX
with BOX BASIS

Article	€/Pc
SI 1410	18,10



JUNCTION BOX
with FASTENING BASIS

Article	€/Pc
SD 1210	16,09



VERTICAL CABLE DUCT PROFILE
bar length **2,7 lm**


Article	€/lm
PSPV	12,08

It matches with CSPPK 80.


PKLEDAA 80 / PKLEDAA 80A
scale 1:1

CSPPK 80
scale 1:1

PKGS 66
scale 1:1

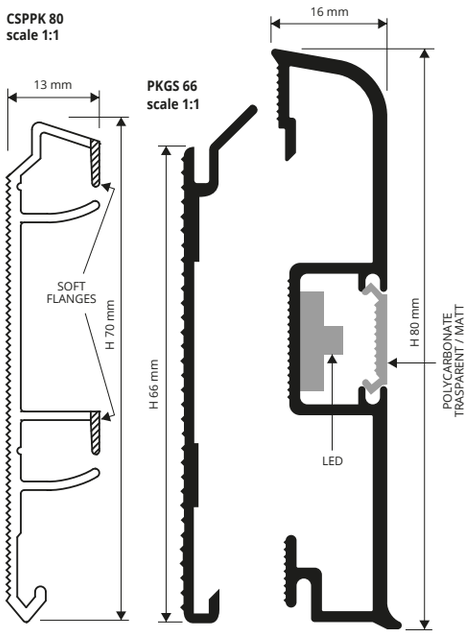

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

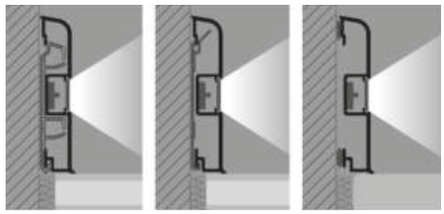

1. Fix the support one the wall putting the screws and plugs every 50 cm (recommended). Make a test with "PROSKIRTING LED" in order to value the height and the correct position of supports. **2.** Fix in the chosen spaces the socket/ power supply box basis, switch box basis and, eventually, the junction box. **3.** Connect 220V supply to power/ transformer unit, and afterwards, connect the "PROSKIRTING LED" bar next to power unit. **4.** Connect the pre-applied led bars inside the "PROSKIRTING LED" with the supplied cables/ wires in continuous way. **5.** The power supply unit guarantees about 15 lm of led illumination, beyond that distance it is necessary to add another power supply box/socket.
When fixing without support, clean the surface carefully so that it's dry and with no grass trace, apply the silicone on the knurled sides of the profile and lay down correctly, pressing uniformly and with no hammering. For the application of "PROSKIRTING LED" with adhesive, we recommend the temperature not below 15°.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC SILVER FINISH



PKAGI 80
internal corner



PKAGE 80
external corner



PKGIN 80
joint



PKTDSAA 80/5
end caps

IN/EXTERNAL CORNER - VARNISHED PLASTIC (SILVER FIN.)
pack. **5 Pcs**

Article	H x L mm	€/Pack.
PKAGI 80/5	80 X 40	24,66
PKAGE 80/5	80 X 40	24,66

JOINTS - VARNISHED PLASTIC (SILVER FIN.) - pack. **10 Pcs**

Article	H mm	€/Pack.
PKGIN 80/10	80	40,07

END CAPS R / L - VARNISHED PLASTIC (SILVER FIN.)
pack. **10 Pcs** (5 right and 5 left)

Article	H mm	€/Pack.
PKTDSAA 80/5	80	40,07



PKAGE 80
external corner



PKAGI 80
internal corner



PKGIN 80
joint



PKTDSAA 80/5
end caps

*** = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROSKIRTING GILED is an innovative profile in silver anodized aluminum and polished chrome, with 80 and 100 mm height, with a rigid vinyl resin TOP PROFILE, with a 17,5mm exposed surface, available in 9 different marmorised finishes, provided with an integrated LED lighting system generating a soft and indirect light. **PROSKIRTING GILED** can be used instead of the classic skirting board or rotated 180 degrees and installed along the ceiling edges, allowing to cover up to 15mm wide joints. The reflection of the LED light by the aluminum surface of the profile creates a modern atmosphere. **PROSKIRTING GILED** is equipped with all the trim pieces available such as inside and outside corner, joints, end caps and power supply box. ***Conceived and designed by the designer Gilberto Toneguzzi.***

PROSKIRTING GILED

ANODIZED ALUMINIUM
POLISHED ALUMINIUM





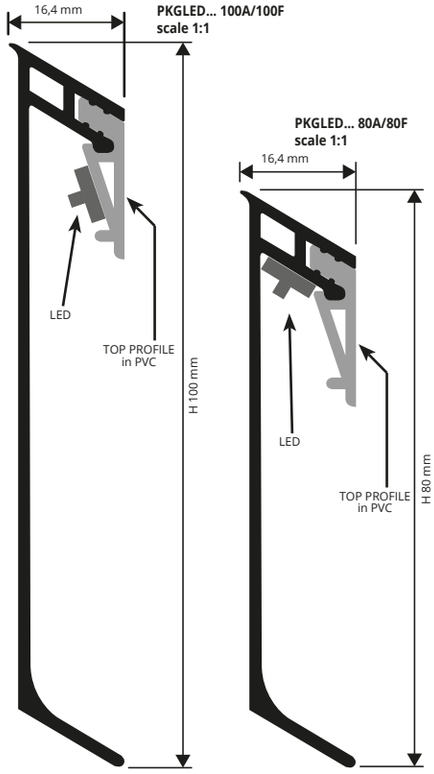

SKIRTING H 80 mm IN ANOD. SILVER, POLI. CHROME ALUM.
TOP PROFILE NOT INCLUDED (indicate the article)
thermo packed - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc	
PKGLEDAA 80	80	16,65	33,30	
PKGLEDBC 80	80	18,94	37,88	*
PKGLEDAA 80A	80	20,56	41,12	
PKGLEDBC 80A	80	22,86	45,72	*
PKGLEDAA 80F	80	18,61	37,22	*
PKGLEDBC 80F	80	20,89	41,78	*

"F" at the end of the product code = Punched Item

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL





TOP PROFILE IN PVC - bar length **2 lm**

Article	€/lm
TOPPKGL...	3,92

In the order specify the chosen colour of the TOP PROFILE. E.g. TOPPKGL... (colour gold) TOPPKGLMBO.

Specify the chosen colour of the PVC TOP PROFILE (see below).

PVC TOP PROFILE COLOURS



MAA - Anodized silver | **MBC** - Polished chrome | **MBO** - Polished gold

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

SKIRTING COLOURS



AA - Anodized silver alum. | **BC** - Polished chrome alum.

SKIRTING H 100 mm IN ANOD. SILVER, POLI. CHROME ALUM.
TOP PROFILE NOT INCLUDED (indicate the article)
thermo packed - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc	
PKGLEDAA 100	100	18,28	36,56	
PKGLEDBC 100	100	21,87	43,74	*
PKGLEDAA 100A	100	22,21	44,42	
PKGLEDBC 100A	100	25,79	51,58	*
PKGLEDAA 100F	100	20,25	40,50	*
PKGLEDBC 100F	100	23,84	47,68	*

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

ADHESIVE FLEXIBLE LED COIL
length **5 lm -** pack.**1 ROLL**

Article	€/lm	€/Pack.
LEDN	22,47	112,35
LEDF	22,47	112,35
LEDC	22,47	112,35

"N" at the end of the product code = neutral light
"F" at the end of the product code = cold light
"C" at the end of the product code = hot light

LED ADAPTOR AC/DC 75W - 12V (15 lm)
LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article	€/Pc
ALL 7512	82,27
ALL 2512	56,42

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROSKIRTING GILED" depending on the desired finish and fixing system; **2.** If you are installing the version with adhesive: clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it. If you are installing the punched version, drill the surface on which the profile is to be laid using a drill with 5mm diameter and insert the 5x 25mm screws. Screw the profile; **3.** Connect the 12/24 V adaptor; **4.** Fix the LED light to the inclined side of the aluminum profile or to the vinyl resin support and install electrical wiring; 5. Apply the rigid vinyl resin insert to the aluminum profile.









SKIRTING BOARDS

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC

FLUSH CORNERS - varnished plastic

IN/EXTERNAL CORNER - FLUSH CORNERS
VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. **5 Pcs**

Article	H x L mm	€/Pack.	
REPKGLEDAA 80/5	80 x 10	25,80	
RIPKGLEDAA 80/5	80 x 10	25,80	
REPKGLEDBC 80/5	80 x 10	35,94	*
RIPKGLEDBC 80/5	80 x 10	35,94	*

FLUSH JOINT - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME
pack. **5 Pcs**

Article	H mm	€/Pack.	
GIPKGLEDAA 80/5	80	21,56	
GIPKGLEDBC 80/5	80	31,01	*

FLUSH END CAPS R / L - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. **6 Pcs** (3 right and 3 left)

Article	H mm	€/Pack.	
TPKGLEDAA 80/3	80	25,86	
TPKGLEDBC 80/3	80	37,20	*

FLUSH CORNERS - varnished plastic

IN/EXTERNAL CORNER - FLUSH CORNERS
VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. **5 Pcs**

Article	H x L mm	€/Pack.	
REPKGLEDAA 100/5	100 x 10	29,41	
RIPKGLEDAA 100/5	100 x 10	29,41	
REPKGLEDBC 100/5	100 x 10	39,18	*
RIPKGLEDBC 100/5	100 x 10	39,18	*

FLUSH JOINT - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME
pack. **5 Pcs**

Article	H mm	€/Pack.	
GIPKGLEDAA 100/5	100	24,78	
GIPKGLEDBC 100/5	100	35,25	*

FLUSH END CAPS R / L - VARNISHED PLASTIC ANOD. SILVER, POLI. CHROME - pack. **6 Pcs** (3 right and 3 left)

Article	H mm	€/Pack.	
TPKGLEDAA 100/3	100	29,75	
TPKGLEDBC 100/3	100	42,29	*

INTERNAL CORNER RIPKGLED... 80/100



EXTERNAL CORNER REPKGLED... 80/100



JOINT GIPKGLED... 80/100



END CAPS TPKGLED... 80/100



*** = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2020 All rights reserved by Progress Profiles. Printed in Italy


PROSKIRTING

ANODIZED SILVER ALUMINIUM

PROSKIRTING is an innovative patented "cable channel" skirting in anodized aluminium. Studied and designed to resolve various problems related to the installation of skirting and to the laying of electrical, computer and telephone cables and other service systems. **PROSKIRTING** has been designed to offer a dual function: 1- **PROSKIRTING** complete PKAA 80 is a snap-on inspectable skirting consisting of a support PKGS 66 to be screwed to the wall and the visible profile **PROSKIRTING** PKAA 80. 2- **PROSKIRTING** PKAA 80 is the visible skirting profile to be fixed directly with silicone/adhesive. It is not inspectable like **PROSKIRTING** complete; it is also available in a self-adhesive version (PKAA 80A).

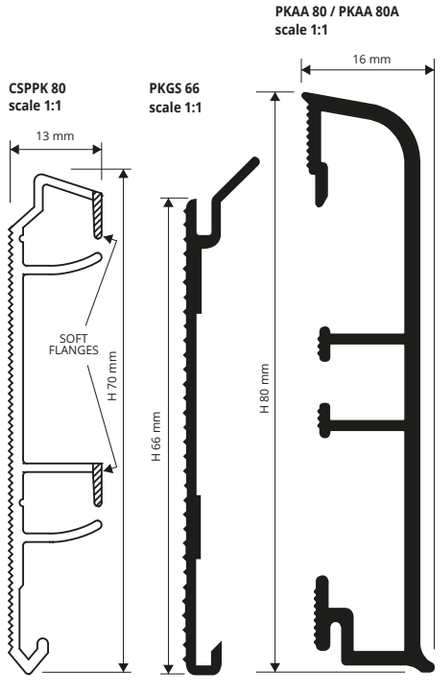

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

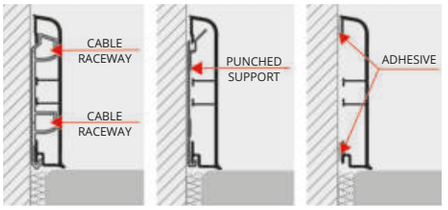

1. Choose the system with or without support **2.** Fix the support to the wall with screws and screw anchors at 50 cm intervals (recommended). **3.** When laying without support, thoroughly clean the surface ensuring that it is grease-free and dry, apply the silicone on the knurled sides of the profiles and lay correctly by applying pressure evenly over the whole profile without using a hammer. **4.** For the "PROSKIRTING" with adhesive, application is recommended at a temperature of at least 15°.
Always use the inside/outside corner linking elements and end caps for impeccable, faultless laying.



ONLY SKIRTING (for sale singly) - ANODIZED SILVER ALUMINIUM thermo packed - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	H mm	€/lm	€/Pc
PKAA 80	80	15,24	30,48
PKAA 80A	80	20,03	40,06

"A" at the end of the product code = Item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



Advantages: profile to be glued. Aesthetically superior thanks to the HI-TECH design with rounded shell-shape top and bottom edges that are easy to clean. PROSKIRTING is made in anodized aluminium with silver finish; the anodizing layer is approx. 15/20 micron. Recommended for indoor and outdoor use thanks to its good anti-oxidation properties.

- Single visible skirting profile, which may be inspectable or fixed.
- Minimum stock investment with just 2 products for three functions.
- Easy to install and clean.
- Patented innovative HI-TECH design.
- Inside-outside corners-end caps and joints varnished in the same finish as the profile.
- The PROSKIRTING profile is antistatic and stops electromagnetic and electrostatic discharge.




CABLE RACEWAY/ SUPPORT- COEXTRUDED PVC
bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	€/lm	€/Pc
CSPPK 80	5,69	11,38

PUNCHED SUPPORT - NATURAL ALUMINIUM
support length **2 cm** - pack. **10 Pcs**

Article	H mm	€/Pack.
PKGS 66	66	3,55




ARTICLES NOT FOR SALE SINGLY

COLOURS




AA - Anodized silver alum.




POWER SUPPLY BOX
SOCKET with FASTENING BASIS

Article	€/Pc
SPA 1820	21,45



SWITCH BOX
with BOX BASIS

Article	€/Pc
SI 1410	18,10



JUNCTION BOX
with FASTENING BASIS

Article	€/Pc
SD 1210	16,09



VERTICAL CABLE DUCT PROFILE
bar length **2,7 lm**

Article	€/lm
PSPV	12,08

It matches with CSPPK 80

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC SILVER FINISH.



PKAGI 80
internal corner



PKAGE 80
external corner



PKGIN 80
JOINT



PKTDSAA 80/5
end caps

IN/EXTERNAL CORNER - VARNISHED PLASTIC (silver finish.)
pack. **5 Pcs**

Article	H x L mm	€/Pack.
PKAGI 80/5	80 x 40	24,66
PKAGE 80/5	80 x 40	24,66

JOINTS - VARNISHED PLASTIC (silver finish.) - pack. **10 Pcs**

Article	H mm	€/Pack.
PKGIN 80/10	80	40,07

END CAPS R / L - VARNISHED PLASTIC (silver finish.)
pack. **10 Pcs** (5 right and 5 left)

Article	H mm	€/Pack.
PKTDSAA 80/5	80	40,07









© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSKIRTING 40 is an anodized silver aluminium skirting profile, with a height of 40 mm. It can be fixed directly to the wall with adhesive (non-inspectionable adhesive version PKAA 40A) or to a support (inspectionable version PKAA 40) in punched aluminum, pieces 20 mm long to be fixed to the wall with screws, every about 50 cm.

PROSKIRTING 40

ANODIZED SILVER ALUMINIUM



SKIRTING - SILVER ANODIZED ALUMINIUM thermo packed
bar length **2 lm** - pack. **20 Pcs - 40 ml**

Article	H mm	€/lm	€/Pc
PKAA 40	40	7,96	15,92
PKAA 40A	40	10,38	20,76

"A" at the end of the product code = Item with adhesive


PUNCHED SUPPORT - NATURAL ALUMINIUM
support length **2 cm** - pack. **10 Pcs**

Article	H mm	€/Pack.
PKGS 37	37	3,38

It maches with PKAA 40

COLOURS

AA - Anodized silver alum.

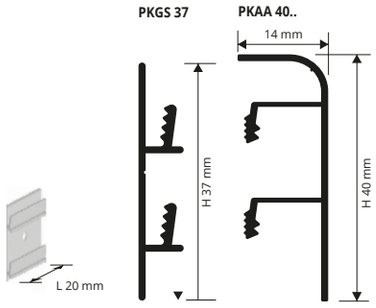

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (SILVER FINISH)

IN/EXTERNAL CORNERS - VARNISHED PLASTIC (silver finish.)
pack. **5 Pcs**


Article	H mm	€/Pack.
PKAGI 40/5	40	24,66
PKAGE 40/5	40	24,66

JOINTS - VARNISHED PLASTIC (silver finish.) - pack. **10 Pcs**

Article	H mm	€/Pack.
PKGIN 40/10	40	40,07

END CAPS R / L - VARNISHED PLASTIC (silver finish.) - pack. **10 Pcs** (5 right and 5 left)

Article	H mm	€/Pack.
PKTDSAA 40/5	40	40,07

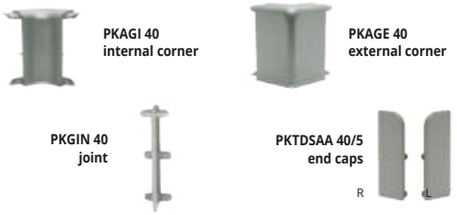

PROSKIRTING SHELL is an innovative aluminum skirting board, with 70mm height, in silver anodized finish. The skirting board can be fixed to the wall with silicone or screwed to 20mm long aluminum punched flanges, that have to be fastened to the wall at 50cm distance from each other. It allows to cover up to 25mm high perimeter edges. Moreover the version with punched flanges allows the housing of low tension electrical cables, such as internet, phone, TV and satellite cables and can be easily inspected. The optional completing pieces, such as inside/outside corners, linking elements and end caps make **PROSKIRTING SHELL** easy to install and guarantee a practical and elegant end result.

PROSKIRTING SHELL

ANODIZED SILVER ALUMINIUM





SKIRTING - ANODIZED SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
PKSHAA 70	70	14,64	29,28
PKSHAA 70A	70	19,34	38,68

"A" at the end of the product code = Item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS


AA - Anodized silver alum.


PUNCHED SUPPORT - NATURAL ALUMINIUM
support length **2 cm** - pack. **10 Pcs**


Article	H mm	€/Pack.
PKGS 55	55	3,55

ARTICLES NOT FOR SALE SINGLY

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS
1. Choose the right version of "PROSKIRTING SHELL" depending on the desired fixing solution; **2.** If you want to build low tension electrical cables (e.g. internet, phone, TV and satellite cables) into the profile, fasten the punched flanges to the wall using dowels at 50cm distance from each other; **3.** Install electrical wiring and fasten "PROSKIRTING SHELL" to the flanges; **4.** If you are installing the version with adhesive, first clean and the surface where the profile will be installed, then apply the silicone once the surface is dry. Remove the protective film and lay the profile, applying adequate pressure on it.

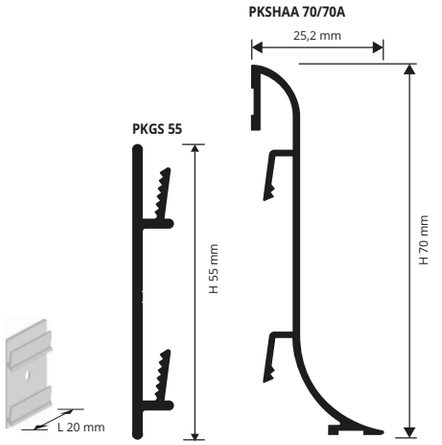





CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (SILVER FINISH)

EDGE COVER CORNERS

IN/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC (silver finish.) - pack. **5 Pcs**


Article	H x L mm	€/Pack.
RIPKSHAA 70/5	70 x 20	20,54
REPKSHAA 70/5	70 x 20	20,54

JOINT - EDGE COVER - VARNISHED PLASTIC (silver finish.)
pack. **5 Pcs**

Article	H mm	€/Pack.
GIPKSHAA 70/5	70	20,54

END CAPS R / L - EDGE COVER
VARNISHED PLASTIC (silver finish.) - pack. **6 Pcs** (3 right and 3 left)

Article	H mm	€/Pack.
TPKSHAA 70/3	70	24,65

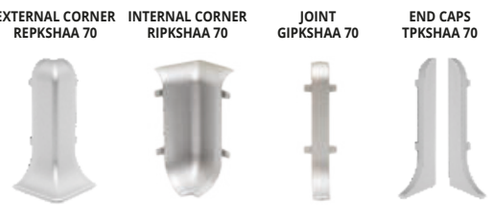

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy




SKIRTING 40

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 40 made in stainless steel AISI 304/1.4301-V2A in height 40 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

BTAC/S 40/40A
scale 1:1





POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTAC 40A	40	10,08	20,14
BTAC 40	40	9,19	18,38

"A" at the end of the product code = Item with adhesive



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTACS 40A	40	11,75	23,50
BTACS 40	40	10,73	21,46

"A" at the end of the product code = Item with adhesive

EXAMPLES OF LAYING



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS
1. Choose the "SKIRTING 40" also choose with or without adhesive. **2.** Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. **3.** For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). **4.** Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL



RIZCT... 40/...
Internal corner



REZCT... 40/...
external corner




GIZCT... 40/...
joint




TPZCT... 40/...
end caps

PRE-WELDED



RI... 40/...
internal corner



RE... 40/...
external corner

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTAC 40/...	40 x 20	29,40	66,81
REZCTAC 40/...	40 x 20	29,40	66,81

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTACS 40/...	40 x 20	29,40	66,81
REZCTACS 40/...	40 x 20	29,40	66,81

JOINT - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTAC 40/...	40	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTAC 40/2 (pack. 2 Pcs) - RIZCTAC 40/5 (pack. 5 Pcs)

JOINT - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTACS 40/...	40	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTACS 40/2 (pack. 2 Pcs) - RIZCTACS 40/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTAC 40/...	40	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTAC 40/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTAC 40/5 (pack. 10 Pcs: 5 right + 5 left)

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTACS 40/...	40	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTACS 40/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTACS 40/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER
FLUSH PRE-WELDED - POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIAC 40/...	40 x 50	46,77	106,31
REAC 40/...	40 x 50	46,77	106,31

Choose the desired packaging.
E.g.: RIAC 40/2 (pack. 2 Pcs) - RIAC 40/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER
FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIACS 40/...	40 x 50	49,56	112,65
REACS 40/...	40 x 50	49,56	112,65

Choose the desired packaging.
E.g.: RIACS 40/2 (pack. 2 Pcs) - RIACS 40/5 (pack. 5 Pcs)

© 2020 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING 40 made in anodized, polished and brushed aluminium in height 40 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.
Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 40

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc	
BTAA 40A	40	8,44	16,88	
BTAA 40	40	7,37	14,74	

"A" at the end of the product code = Item with adhesive

POLISHED TITANIUM ALUMINIUM thermo packed
bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc
BTBT 40A	40	12,34	24,68
BTBT 40	40	10,99	21,98

"A" at the end of the product code = Item with adhesive

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc	
BTA 40-01A	40	10,13	20,26	
BTA 40-01	40	8,85	17,70	
BTA 40-01OA	40	10,13	20,26	*
BTA 40-01O	40	8,85	17,70	*

"A" at the end of the product code = Item with adhesive



BRUSHED ALUMINIUM (silver-copper-titanium)
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc	
BTBS 40A	40	12,34	24,68	
BTBS 40	40	10,99	21,98	
BTRS 40A	40	13,68	27,36	*
BTRS 40	40	12,34	24,68	*
BTTS 40A	40	13,68	27,36	
BTTS 40	40	12,34	24,68	


"A" at the end of the product code = Item with adhesive

STONE LINE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**


Article	H mm	€/lm	€/Pc	
BTA 40-SL01A	40	13,19	26,38	**
BTA 40-SL01	40	11,50	23,00	**
BTA 40-SL08A	40	13,19	26,38	**
BTA 40-SL08	40	11,50	23,00	**
BTA 40-SL12A	40	13,19	26,38	**
BTA 40-SL12	40	11,50	23,00	**

"A" at the end of the product code = Item with adhesive

BT... 40/40A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

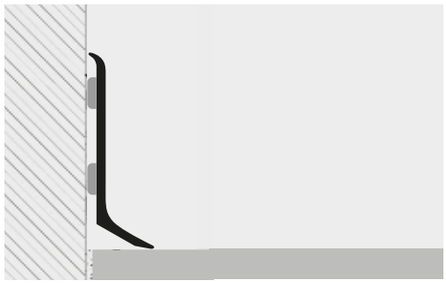

1. Choose the "SKIRTING 40" also choose with or without adhesive. **2.** Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. **3.** For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). **4.** Use the corner linking elements-joints and right and left end caps to facilitate laying.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

ANODIZED	POLISHED	BRUSHED		
			ON DEMAND	
AA - Anodized silver alum.	**BT** - Polished titanium alum.	**BS** - Brushed silver alum.	**RS** - Brushed copper alum.	**TS** - Brushed titanium alum.

SEMIGLOSSY	MATT	STONE LINE		
	ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND
01 - White varnished alum. **(9016)**	**01O** - White varnished alum. **(9016)**	**SL01** - Stone white	**SL08** - Stone antradark	**SL12** - Stone black

(There aren't combinations for the finish alu. RS)

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimum quantity, timing and price.

CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

* Corners, end caps and joints of the on demand profiles are also on demand

INTERNAL/EXTERNAL CORNER - EDGE COVER - VARNISHED METAL, ANODIZED, POLISHED STONE LINE - H 40 MM - L 20 MM

Article	€/pack. 2Pcs	€/pack. 5Pcs	
RIZCTAA 40/...	14,18	32,20	
REZCTAA 40/...	14,18	32,20	
RIZCTBT/BS/TS/RS 40/...	29,40	66,81	
REZCTBT/BS/TS/RS 40/...	29,40	66,81	
RIZCT01/01O 40/...	28,54	64,85	
REZCT01/01O 40/...	28,54	64,85	
RIZCTA 40-SL.../...	37,10	84,30	
REZCTA 40-SL.../...	37,10	84,30	

Choose the desired packaging.
E.g.: RIZCTAA 40/2 (pack. 2 Pcs) - RIZCTAA 40/5 (pack. 5Pcs)


JOINT - EDGE COVER
VARNISHED METAL ANODIZED, POLISHED, STONE LINE

Article	H mm	€/pack. 2pc	€/pack. 5pc	
GIZCTAA 40/...	40	14,18	32,20	
GIZCTBT/BS/TS/RS 40/...	40	28,54	64,85	
GIZCT01/01O 40/...	40	28,54	64,85	
GIZCTA 40-SL.../...	40	37,10	84,30	

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc	
TPZCTAA 40/...	40	28,33	64,41	
TPZCTBT/BS/TS/RS 40/...	40	57,07	129,70	
TPZCT01/01O 40/...	40	57,07	129,70	
TPZCTA 40-SL.../...	40	74,18	168,63	

METAL EDGE COVER

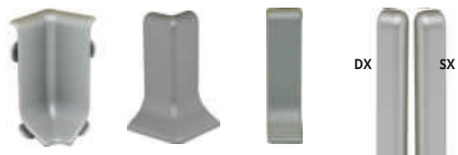

RIZCT... 40/... internal corner | **REZCT... 40/...** external corner | **GIZCT... 40/...** joint | joint

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RICTAA 40/...	40 x 20	9,25	21,04
RECTAA 40/...	40 x 20	9,25	21,04
RICTBT 40/...	40 x 20	14,18	32,20
RECTBT 40/...	40 x 20	14,18	32,20

Choose the desired packaging.
E.g.: RICTAA 40/2 (pack. 2 Pcs) - RICTAA 40/5 (pack. 5 Pcs)

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 01O - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

JOINT - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	€/pack. 2pc	€/pack. 5pc
GICTAA 40/...	40	9,25	21,04
GICTBT 40/...	40	14,18	32,20

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPCTAA 40/...	40	18,52	42,09
TPCTBT 40/...	40	28,33	64,41

Choose the desired packaging.
E.g.: TPCTAA 40/2 (pack. 4 Pcs: 2 right + 2 left)

PLASTIC EDGE COVER



RICT... 40/... internal corner | **RECT... 40/...** external corner | **GICT... 40/...** joint | **TPCT... 40/...** joint

** = Production on demand with minimum quantity of 80 Pcs. Production delay 4/5 weeks. Price to be agreed

* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy

SKIRTING 60


POLISHED and Brushed
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 60 made in stainless steel AISI 304/1.4301-V2A in height 60 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

BTAC/S 60/60A
scale 1:2

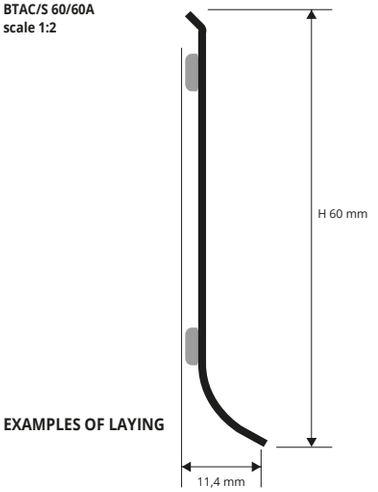

EXAMPLES OF LAYING

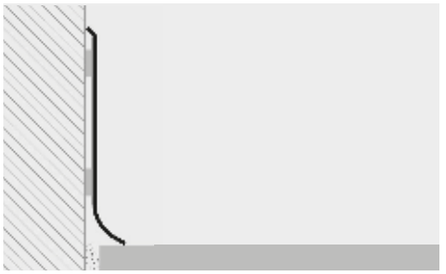



POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTAC 60A	60	14,89	29,78
BTAC 60	60	12,14	24,28

"A" at the end of the product code = Item with adhesive



Brushed STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTACS 60A	60	17,61	35,22
BTACS 60	60	15,27	30,54

"A" at the end of the product code = Item with adhesive

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS
1. Choose the "SKIRTING 60" also choose with or without adhesive. **2.** Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. **3.** For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). **4.** Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL




RIZCT... 60/...
internal corner



REZCT... 60/...
external corner



GIZCT... 60/...
joint




TPZCT... 60/...
end caps

PRE-WELDED



RI...60/...
internal corner



RE... 60/...
external corner

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTAC 60/...	60 x 20	29,40	66,81
REZCTAC 60/...	60 x 20	29,40	66,81

JOINT - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTAC 60/...	60	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTAC 60/2 (pack. 2 Pcs) - RIZCTAC 60/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTAC 60/...	60	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTAC 60/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTAC 60/5 (pack. 10 Pcs: 5 right + 5 left)

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTACS 60/...	60 x 20	29,40	66,81
REZCTACS 60/...	60 x 20	29,40	66,81

JOINT - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTACS 60/...	60	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTACS 60/2 (pack. 2 Pcs) - RIZCTACS 60/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTACS 60/...	60	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTACS 60/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTACS 60/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER
FLUSH PRE-WELDED - POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIAC 60/...	60 x 50	50,02	113,66
REAC 60/...	60 x 50	50,02	113,66

Choose the desired packaging.
E.g.: RIAC 60/2 (pack. 2 Pcs) - RIAC 60/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER
FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIACS 60/...	60 x 50	52,81	120,00
REACS 60/...	60 x 50	52,81	120,00

Choose the desired packaging.
E.g.: RIACS 60/2 (pack. 2 Pcs) - RIACS 60/5 (pack. 5 Pcs)

© 2020 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING 60 made in anodized, polished and brushed aluminium in height 60 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended. Please contact the technical department for informations concerning the skirting bending radius.

SKIRTING 60

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc
BTAA 60A	60	11,06	22,12
BTAA 60	60	9,05	18,10

"A" at the end of the product code = Item with adhesive

POLISHED TITANIUM ALUMINIUM thermo packed
bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc
BTBT 60A	60	15,03	30,06
BTBT 60	60	12,75	25,50

"A" at the end of the product code = Item with adhesive

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc	
BTA 60-01A	60	13,26	26,52	
BTA 60-01	60	10,85	21,70	
BTA 60-01OA	60	13,26	26,52	*
BTA 60-01O	60	10,85	21,70	*

"A" at the end of the product code = Item with adhesive



BRUSHED ALUMINIUM (silver-copper-titanium)
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc	
BTBS 60A	60	15,03	30,06	
BTBS 60	60	12,75	25,50	
BTRS 60A	60	17,09	34,18	*
BTRS 60	60	15,62	31,24	*
BTTS 60A	60	17,09	34,18	
BTTS 60	60	15,62	31,24	


"A" at the end of the product code = Item with adhesive

STONE LINE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc	
BTA 60-SL01A	60	17,24	34,48	**
BTA 60-SL01	60	14,11	28,22	**
BTA 60-SL08A	60	17,24	34,48	**
BTA 60-SL08	60	14,11	28,22	**
BTA 60-SL12A	60	17,24	34,48	**
BTA 60-SL12	60	14,11	28,22	**

"A" at the end of the product code = Item with adhesive

BT... 60/60A

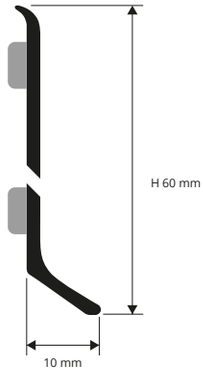

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

COLOURS

ANODIZED	POLISHED	BRUSHED			SEMIGLOSSY	MATT	STONE LINE		
						On demand	On demand	On demand	On demand
AA - Anodized silver alum.	**BT** - Polished titanium alum.	**BS** - Brushed silver alum.	**RS** - Brushed copper alum.	**TS** - Brushed titanium alum.	**01** -White varnished alum. **(9016)**	**01O** - White varnished alum. **(9016)**	**SL01** - Stone white	**SL08** - Stone antradark	**SL12** - Stone black

CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

* Corners, end caps and joints of the on demand profiles are also on demand

INTERNAL/EXTERNAL CORNER - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - H 60 X L 20

Article	€/pack. 2pc	€/pack. 5pc	
RIZCTAA 60/...	14,18	32,20	
REZCTAA 60/...	14,18	32,20	
RIZCTBT/BS/TS/RS 60/...	29,40	66,81	
REZCTBT/BS/TS/RS 60/...	29,40	66,81	
RIZCT01/01O 60/...	28,54	64,85	
REZCT01/01O 60/...	28,54	64,85	
RIZCTA 60-SL.../...	37,10	84,30	
REZCTA 60-SL.../...	37,10	84,30	

Choose the desired packaging.
E.g.: RIZCTAA 60/2 (pack. 2 Pcs) - RIZCTAA 60/5 (pack. 5 Pcs)

JOINT - EDGE COVER
VARNISHED METAL ANODIZED, POLISHED, STONE LINE


Article	H mm	€/pack. 2pc	€/pack. 5pc	
GIZCTAA 60/...	60	14,18	32,20	
GIZCTBT/BS/TS/RS 60/...	60	28,54	64,85	
GIZCT01/01O 60/...	60	28,54	64,85	
GIZCTA 60-SL.../...	60	37,10	84,30	

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPZCTAA 60/...	60	28,33	64,41
TPZCTBT/BS/TS/RS 60/...	60	57,07	129,70
TPZCT01/01O 60/...	60	57,07	129,70
TPZCTA 60-SL.../...	60	74,18	168,63

Choose the desired packaging.
E.g.: TPCCTAA 60/2 (pack. 4 Pcs: 2 right + 2 left)

METAL EDGE COVER

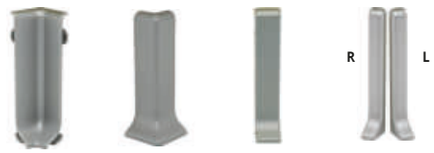

RIZCT... 60/... internal corner | **REZCT... 60/...** external corner | **GIZCT... 60/...** joint | **TPZCT... 60/...** end caps

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	€/pack. 2pc	€/pack. 5pc
RICTAA 60/...	60 x 20	9,25	21,04
RECTAA 60/...	60 x 20	9,25	21,04
RICTBT 60/...	60 x 20	14,18	32,20
RECTBT 60/...	60 x 20	14,18	32,20

JOINT - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	€/pack. 2pc	€/pack. 5pc
GICTAA 60/...	60	9,25	21,04
GICTBT 60/...	60	14,18	32,20

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPCTAA 60/...	60	18,52	42,09
TPCTBT 60/...	60	28,33	64,41

INTERNAL/EXTERNAL CORNER - FLUSH
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	€/pack. 2pc	€/pack. 5pc
RIBAA 60/...	60 x 25	9,25	21,04
REBAA 60/...	60 x 25	9,25	21,04
RIBBT 60/...	60 x 25	14,18	32,20
REBBT 60/...	60 x 25	14,18	32,20

JOINT - FLUSH
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	€/pack. 2pc	€/pack. 5pc
GIBAA 60/...	60	9,25	21,04
GIBBT 60/...	60	14,18	32,20

END CAPS R / L - FLUSH - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPBAA 60/...	60	18,52	42,09
TPBBT 60/...	60	28,33	64,41

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 01O - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

PLASTIC EDGE COVER



RICT... 60/... internal corner | **RECT... 60/...** external corner | **GICT... 60/...** joint | **TPCT... 60/...** end caps

PLASTIC FLUSH



RIB... 60/... internal corner | **REB... 60/...** external corner | **GIB... 60/...** joint | **TPB... 60/...** end caps

** = Production on demand with minimum quantity of 80 Pcs. Production delay 4/5 weeks. Price to be agreed

* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

SKIRTING 80

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 80 made in stainless steel AISI 304/1.4301-V2A in height 80 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

BTAC/S 80/80A

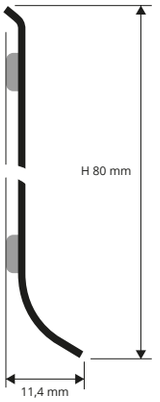



POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTAC 80A	80	19,30	38,60
BTAC 80	80	17,24	34,48

"A" at the end of the product code = Item with adhesive




Brushed STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTACS 80A	80	22,04	44,08
BTACS 80	80	20,37	40,74

"A" at the end of the product code = Item with adhesive

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

EXAMPLES OF LAYING

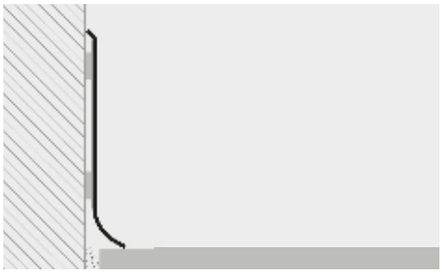

LAYING INSTRUCTIONS
1. Choose the "SKIRTING 80" also choose with or without adhesive. **2.** Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. **3.** For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). **4.** Use the corner linking elements-joints and right and left end caps to facilitate laying.

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL




RIZCT... 80
internal corner



REZCT... 80
external corner



GIZCT... 80
joint



TPZCT... 80/3
end caps

PRE-WELDED



RI... 80
internal
corner



RE... 80
external
corner

VARNISHED METAL - EDGE COVER CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTAC 80/...	80 x 20	29,40	66,81
REZCTAC 80/...	80 x 20	29,40	66,81

JOINT - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTAC 80	80	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTAC 80/2 (pack. 2 Pcs) - RIZCTAC 80/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTAC 80/...	80	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTAC 80/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTAC 80/5 (pack. 10 Pcs: 5 right + 5 left)

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTACS 80/...	80 x 20	29,40	66,81
REZCTACS 80/...	80 x 20	29,40	66,81

JOINT - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTACS 80/...	80	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTACS 80/2 (pack. 2 Pcs) - RIZCTACS 80/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTACS 80/...	80	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTACS 80/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTACS 80/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS - articles not for sale singly

INTERNAL/EXTERNAL CORNER
FLUSH PRE-WELDED - POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIAC 80/...	80 x 50	55,93	127,10
REAC 80/...	80 x 50	55,93	127,10

Choose the desired packaging.
E.g.: RIAC 80/2 (pack. 2 Pcs) - RIAC 80/5 (pack. 5 Pcs)

INTERNAL/EXTERNAL CORNER
FLUSH PRE-WELDED - BRUSHED STAINLESS STEEL

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIACS 80/...	80 x 50	58,72	133,44
REACS 80/...	80 x 50	58,72	133,44

Choose the desired packaging.
E.g.: RIACS 80/2 (pack. 2 Pcs) - RIACS 80/5 (pack. 5 Pcs)

© 2020 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING 80


ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM

SKIRTING 80 made in anodized, polished and brushed aluminium in height 80 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring. In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.
Please contact the technical department for informations concerning the skirting bending radius.





BT... 80/80A

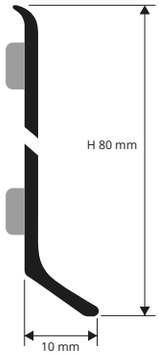

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTAA 80A	80	13,61	27,22
BTAA 80	80	11,52	23,04

POLISHED TITANIUM ALUMINIUM thermo packed
bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc
BTBT 80A	80	18,66	37,32
BTBT 80	80	16,37	32,74

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc	
BTA 80-01A	80	16,33	32,66	
BTA 80-01	80	13,85	27,70	
BTA 80-01OA	80	16,33	32,66	*
BTA 80-01O	80	13,85	27,70	*


BRUSHED ALUMINIUM (silver-copper-titanium)
thermo packed - bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	H mm	€/lm	€/Pc	
BTBS 80A	80	18,66	37,32	
BTBS 80	80	16,37	32,74	
BTRS 80A	80	22,53	45,06	*
BTRS 80	80	20,52	41,04	*
BTTS 80A	80	22,53	45,06	
BTTS 80	80	20,52	41,04	

STONE LINE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/Pc	
BTA 80-SL01A	80	21,22	42,44	**
BTA 80-SL01	80	18,01	36,02	**
BTA 80-SL08A	80	21,22	42,44	**
BTA 80-SL08	80	18,01	36,02	**
BTA 80-SL12A	80	21,22	42,44	**
BTA 80-SL12	80	18,01	36,02	**

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

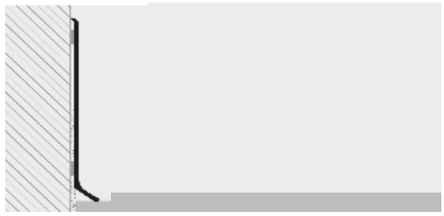

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

COLOURS

ANODIZED	POLISHED	BRUSHED			SEMIGLOSSY	MATT	STONE LINE		
									On demand
AA - Anodized silver alum.	**BT** - Polished titanium alum.	**BS** - Brushed silver alum.	**RS** - Brushed copper alum.	**TS** - Brushed titanium alum.	**01** -White varnished alum. **(9016)**	**01O** - White varnished alum. **(9016)**	**SL01** - Stone white	**SL08** - Stone antradark	**SL12** - Stone black

CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

* Corners, end caps and joints of the on demand profiles are also on demand

INTERNAL/EXTERNAL CORNER - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - H 80 X L 20

Article	€/pack. 2pc	€/pack. 5pc
RIZCTAA 80/...	14,18	32,20
REZCTAA 80/...	14,18	32,20
RIZCTBT/BS/TS/RS 80/...	29,40	66,81
REZCTBT/BS/TS/RS 80/...	29,40	66,81
RIZCT01/01O 80/...	28,54	64,85
REZCT01/01O 80/...	28,54	64,85
RIZCTA 80-SL.../...	37,10	84,30
REZCTA 80-SL.../...	37,10	84,30

Choose the desired packaging.
E.g.: RIZCTAA 80/2 (pack. 2 Pcs) - RIZCTAA 80/5 (pack. 5 Pcs)

JOINT - EDGE COVER
VARNISHED METAL ANODIZED, POLISHED, STONE LINE


Article	H mm	€/pack. 2pc	€/pack. 5pc
GIZCTAA 80/...	80	14,18	32,20
GIZCTBT/BS/TS/RS 80/...	80	28,54	64,85
GIZCT01/01O 80/...	80	28,54	64,85
GIZCTA 80-SL.../...	80	37,10	84,30

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPZCTAA 80/...	80	28,33	64,41
TPZCTBT/BS/TS/RS 80/...	80	57,07	129,70
TPZCT01/01O 80/...	80	57,07	129,70
TPZCTA 80-SL.../...	80	74,18	168,63

Choose the desired packaging.
E.g.: TPCCTAA 80/2 (pack. 4 Pcs: 2 right + 2 left)

METAL EDGE COVER

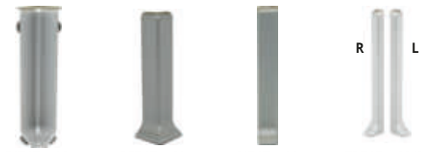

RIZCT... 80 internal corner | REZCT... 80 external corner | GIZCT... 80 joint | TPZCT... 80/3 end caps

PLASTIC EDGE COVER



RICT... 80 internal corner | RECT... 80 external corner | GICT... 80 joint | TPCT... 80/3 end caps

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	€/pack. 2pc	€/pack. 5pc
RICTAA 80/...	80 x 20	9,25	21,04
RECTAA 80/...	80 x 20	9,25	21,04
RICTBT 80/...	80 x 20	14,18	32,20
RECTBT 80/...	80 x 20	14,18	32,20

INTERNAL/EXTERNAL CORNER - FLUSH
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	€/pack. 2pc	€/pack. 5pc
RIBAA 80/...	80 x 25	9,25	21,04
REBAA 80/...	80 x 25	9,25	21,04
RIBBT 80/...	80 x 25	14,18	32,20
REBBT 80/...	80 x 25	14,18	32,20

JOINT - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	€/pack. 2pc	€/pack. 5pc
GICTAA 80/...	80	9,25	21,04
GICTBT 80/...	80	14,18	32,20

JOINT - FLUSH
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	€/pack. 2pc	€/pack. 5pc
GIBAA 80/...	80	9,25	21,04
GIBBT 80/...	80	14,18	32,20

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPCTAA 80/...	80	18,52	42,09
TPCTBT 80/...	80	28,33	64,41

END CAPS R / L - FLUSH - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPBAA 80/...	80	18,52	42,09
TPBBT 80/...	80	28,33	64,41

PLASTIC FLUSH



RIB... 80 internal corner | REB... 80 external corner | GIB... 80 joint | TPB... 80/3 end caps

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 01O - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

** = Production on demand with minimum quantity of 80 Pcs. Production delay 4/5 weeks. Price to be agreed

* = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy

SKIRTING 100
SKIRTING 150

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

SKIRTING 100 and **SKIRTING 150** made in stainless steel AISI 304/1.4301-V2A in height 100 and 150 mm. Available with or without adhesive. Superior aesthetic quality, extremely strong and easy to lay, it is ideal for all public and private environments that require high standards of hygiene and image. Used increasingly more often in contrast combinations with wood, carpeted floors, etc. for an unmistakeable hi-tech effect.
In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.

BTAC/S 100/100A



BTAC/S 150/150A



EXAMPLES OF LAYING





POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
BTAC 100A	100	21,46	42,92
BTAC 100	100	19,30	38,60

Brushed STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
BTACS 100A	100	23,12	46,24
BTACS 100	100	21,33	42,65

"A" at the end of the product code = Item with adhesive

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

LAYING INSTRUCTIONS
1. Choose the "SKIRTING 100 -150" also choose with or without adhesive. **2.** Cut the profile to the required length, taking care to calculate the width of the inside-outside corner joints. **3.** For the self-adhesive version, the surface must be smooth, grease-free and not porous. It is not recommended for plaster and mortar surfaces (version without adhesive is better, using fast-setting acrylic silicone which is suitable for fixing aluminium to mortar - plaster, etc.). **4.** Use the corner linking elements-joints and right and left end caps to facilitate laying.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2
with protective film - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
BTAC 150A	150	30,48	60,96
BTAC 150	150	28,60	57,20

Brushed STAINLESS STEEL AISI 304/1.4301-V2A
with protective film - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
BTACS 150A	150	32,34	64,68
BTACS 150	150	30,10	60,21

"A" at the end of the product code = Item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A

CORNERS, END CAPS AND JOINTS

STEEL and VARNISHED METAL

EDGE COVER VARNISHED METAL




RIZCT... 100
internal corner



REZCT... 100
external corner



GIZCT... 100
joint



TPZCT... 100/3
end caps

STEEL PRE-WELDED

RI... 100 / 150
internal corner



RE... 100 / 150
external corner



VARNISHED METAL - EDGE COVER CORNERS H100 - articles not for sale singly

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTAC 100/...	100 x 20	29,40	66,81
REZCTAC 100/...	100 x 20	29,40	66,81

JOINT - EDGE COVER
VARNISHED METAL POLISHED STEEL EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTAC 100/...	100	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTAC 100/2 (pack. 2 Pcs) - RIZCTAC 100/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL POLISHED STEEL EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTAC 100/...	100	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTAC 100/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTAC 100/5 (pack. 10 Pcs: 5 right + 5 left)

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTACS 100/...	100 x 20	29,40	66,81
REZCTACS 100/...	100 x 20	29,40	66,81

JOINT - EDGE COVER
VARNISHED METAL BRUSHED STAINLESS ST. EFFECT

Article	H mm	€/pack. 2Pcs	€/pack. 5Pcs
GIZCTACS 100/...	100	28,54	64,85

Choose the desired packaging.
E.g.: RIZCTACS 100/2 (pack. 2 Pcs) - RIZCTACS 100/5 (pack. 5 Pcs)

END CAPS R / L - EDGE COVER - VARNISHED METAL BRUSHED STAINLESS ST. EFFECT - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4Pcs	€/pack. 10Pcs
TPZCTACS 100/...	100	57,07	129,70

Choose the desired packaging.
E.g.: TPCCTACS 100/2 (pack. 4 Pcs: 2 right + 2 left)
TPCCTACS 100/5 (pack. 10 Pcs: 5 right + 5 left)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS H100
articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH PRE-WELDED
POLISHED-BRUSHED STAINLESS STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIAC 100/...	100 x 50	61,80	140,48
REAC 100/..	100 x 50	61,80	140,48
RIACS 100/...	100 x 50	64,60	146,82
REACS 100/...	100 x 50	64,60	146,82

Choose the desired packaging.
E.g.: RIAC 100/2 (pack. 2 Pcs) - RIAC 100/5 (pack. 5 Pcs)

STEEL AISI 304/1.4301-V2A - FLUSH CORNERS H150 articles not for sale singly

INTERNAL/EXTERNAL CORNER - FLUSH PRE-WELDED
POLISHED-BRUSHED STAINLESS STEEL EFFECT

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RIAC 150/...	150 x 50	93,19	211,81
REAC 150/...	150 x 50	93,19	211,81
RIACS 150/...	150 x 50	96,26	218,77
REACS 150/...	150 x 50	96,26	218,77

Choose the desired packaging.
E.g.: RIACS 150/2 (pack. 2 Pcs) - RIACS 150/5 (pack. 5 Pcs)

© 2020 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING 100 made in anodized, polished and brushed aluminium in height 100 mm. Available with or without adhesive. Superior aesthetic quality and easy to lay, it is ideal for all public and private environments. Can be used with all types of flooring.
In order to facilitate and to perfect the laying process, internal and external angles, plugs and junctions are recommended.
Please contact the technical department for informations concerning the skirting bending radius.


SKIRTING 100

ANODIZED, POLISHED, VARNISHED and BRUSHED ALUMINIUM





BT... 100/100A

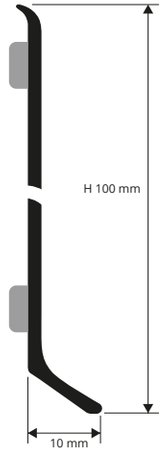

ANODIZED SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc
BTAA 100A	100	17,57	35,14
BTAA 100	100	15,23	30,46

POLISHED TITANIUM ALUMINIUM thermo packed
bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc	
BTBT 100A	100	22,26	44,52	*
BTBT 100	100	19,98	39,96	*

VARNISHED SEMIGLOSSY AND MATT WHITE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc	
BTA 100-01A	100	21,07	42,14	
BTA 100-01	100	18,27	36,54	
BTA 100-01OA	100	21,07	42,14	*
BTA 100-01O	100	18,27	36,54	*


BRUSHED ALUMINIUM (silver-copper-titanium)
thermo packed - bar length **2 lm** - pack. **20 Pcs - 40 lm**

Article	H mm	€/lm	€/Pc	
BTBS 100A	100	22,26	44,52	
BTBS 100	100	19,98	39,96	
BTRS 100A	100	26,37	52,74	*
BTRS 100	100	25,28	50,56	*
BTTS 100A	100	26,37	52,74	
BTTS 100	100	25,28	50,56	

STONE LINE ALUMINIUM
thermo packed - bar length **2 lm** - pack. **40 Pcs - 80 lm**

Article	H mm	€/lm	€/pc	
BTA 100-SL01A	100	27,38	54,76	*
BTA 100-SL01	100	23,75	47,50	*
BTA 100-SL08A	100	27,38	54,76	*
BTA 100-SL08	100	23,75	47,50	**
BTA 100-SL12A	100	27,38	54,76	**
BTA 100-SL12	100	23,75	47,50	**

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

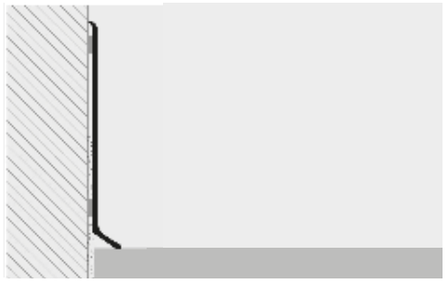

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

COLOURS

ANODIZED	POLISHED	BRUSHED			SEMIGLOSSY	MATT	STONE LINE		
						On demand	On demand	On demand	On demand
AA - Anodized silver alum.	**BT** - Polished titanium alum.	**BS** - Brushed silver alum.	**RS** - Brushed copper alum.	**TS** - Brushed titanium alum.	**01** -White varnished alum. **(9016)**	**01O** - White varnished alum. **(9016)**	**SL01** - Stone white	**SL08** - Stone antradark	**SL12** - Stone black

CORNERS, END CAPS AND JOINTS

VARNISHED METAL and VARNISHED PLASTIC

* **Corners, end caps and joints of the on demand profiles are also on demand**

INTERNAL/EXTERNAL CORNER - EDGE COVER - VARNISHED METAL, ANODIZED, POLISHED STONE LINE - H 100 MM - L 20 MM

Article	€/pack. 2Pcs	€/pack. 5Pcs
RIZCTAA 100/...	14,18	32,20
REZCTAA 100/...	14,18	32,20
RIZCTBT/BS/TS/RS 100/...	29,40	66,81
REZCTBT/BS/TS/RS 100/...	29,40	66,81
RIZCT01/01O 100/...	28,54	64,85
REZCT01/01O 100/...	28,54	64,85
RIZCTA 100-SL.../...	37,10	84,30
REZCTA 100-SL.../...	37,10	84,30

Choose the desired packaging.
E.g.: RIZCTAA 100/2 (pack. 2 Pcs) - RIZCTAA 100/5 (pack. 5Pcs)


JOINT - EDGE COVER
VARNISHED METAL ANODIZED, POLISHED, STONE LINE

Article	H mm	€/pack. 2pc	€/pack. 5pc
GIZCTAA 100/...	100	14,18	32,20
GIZCTBT/BS/TS/RS 100/...	100	28,54	64,85
GIZCT01/01O 100/...	100	28,54	64,85
GIZCTA 100-SL.../...	100	37,10	84,30

END CAPS R / L - EDGE COVER - VARNISHED METAL ANODIZED, POLISHED, STONE LINE - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPZCTAA 100/...	100	28,33	64,41
TPZCTBT/BS/TS/RS 100/...	100	57,07	129,70
TPZCT01/01O 100/...	100	57,07	129,70
TPZCTA 100-SL.../...	100	74,18	168,63

METAL EDGE COVER

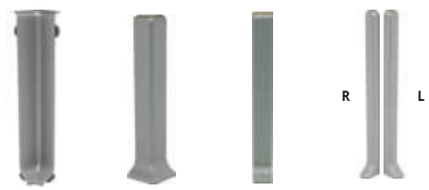

RIZCT... 100 internal corner | REZCT... 100 external corner | GIZCT... 100 joint | TPZCT... 100/3 end caps

INTERNAL/EXTERNAL CORNER - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	HxL mm	€/pack. 2Pcs	€/pack. 5Pcs
RICTAA 100/...	100 x 20	9,25	21,04
RECTAA 100/...	100 x 20	9,25	21,04
RICTBT 100/...	100 x 20	14,18	32,20
RECTBT 100/...	100 x 20	14,18	32,20

Choose the desired packaging.
E.g.: RICTAA 100/2 (pack. 2 Pcs) - RICTAA 100/5 (pack. 5 Pcs)

Available on demand aluminium prewelded internal and external flush corners. Finishing: 01 - 01O - AA - BT - BS - RS - TS. Price to be agreed. Production delay 4/5 weeks.

JOINT - EDGE COVER
VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM

Article	H mm	€/pack. 2pc	€/pack. 5pc
GICTAA 100/...	100	9,25	21,04
GICTBT 100/...	100	14,18	32,20

END CAPS R / L - EDGE COVER - VARNISHED PLASTIC ANODIZED SILVER, POLISHED AND TITANIUM - pack. **4Pcs** (2 R + 2 L) **/ 10Pcs** (5 R + 5 L)

Article	H mm	€/pack. 4pc	€/pack. 10pc
TPCTAA 100/...	100	18,52	42,09
TPCTBT 100/...	100	28,33	64,41

Choose the desired packaging.
E.g.: TPCTAA 100/2 (pack. 4 Pcs: 2 right + 2 left)

PLASTIC EDGE COVER



RICT... 100 internal corner | RECT... 100 external corner | GICT... 100 joint | TPCT... 100/3 end caps

**** = Production on demand with minimum quantity of 80 Pcs. Production delay 4/5 weeks. Price to be agreed**

*** = Production on demand with minimum quantity of 100 Pcs. Production delay 4/5 weeks. Price to be agreed**

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROMULTISKIRT SQUARE


FOAMED VINYL RESIN

PROMULTISKIRT SQUARE is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes.The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone.The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT SQUARE in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

BTEPR... 108614/S
Scale 1:1

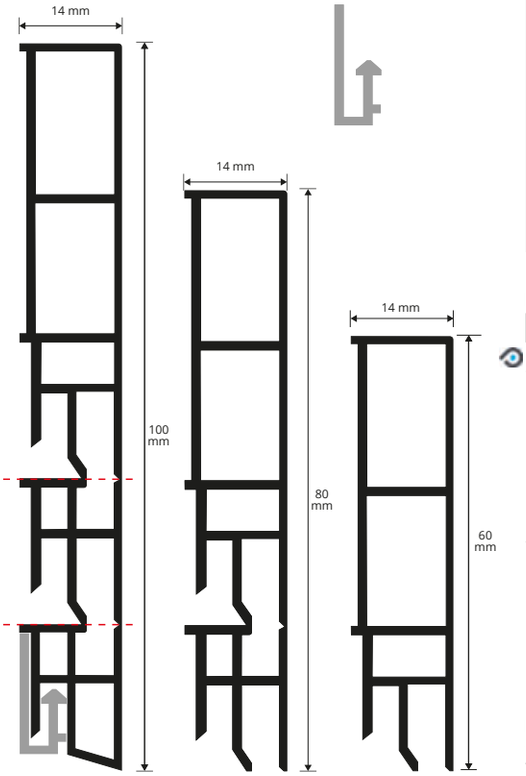

BTEPRS 18/100
Scale 1:1

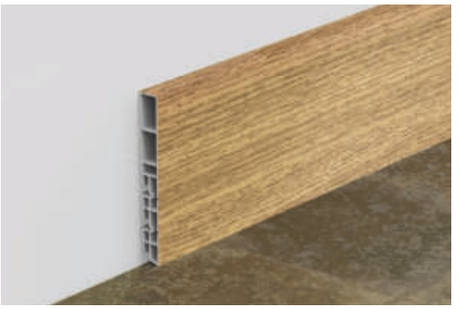

FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length **2,4 lm** - pack. **20 Pcs - 48 lm**

Article	H mm	€/lm	€/pc
BTEPR... 108614/S	**100/80/60**	**8,81**	**21,14**

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 108614/S (chosen finish Havana oak) BTEPR34W 108614/S

PATENTED



SUPPORT / FIXING CLIP - PLASTIC
pack. **100 Pcs**

Article	H mm	€/pack.
BTEPRS 18	**16,5**	**12,68**

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

(For a precise assessment of colours request the wood finishes sample range)




29W - White oak | **30W** - Grey oak | **34W** - Havana oak | **B** - White | **N** - Black | **AA** - Silver

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

LAYING INSTRUCTIONS

1. Choose "PROMULTISKIRT SQUARE" according to the chosen colour. **2**. Cut "PROMULTISKIRT SQUARE" to the required length. **3**. if necessary cut "PROMULTISKIRT SQUARE" to the required height. * **4**. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general.
Laying with adhesive only:
5a. . With dry surface apply the Proband Fix. **6a.** Press the profile against the wall with the correct pressure.
Laying with adhesive and support:
5b. Fix the plastic supports to the wall every 50mm with screws. **6b.** Apply Proband Fix only to the back upper part of the skirting board.
7b. Fix the profile to the supports and press it against the wall with correct pressure.

EXAMPLE OF LAYING

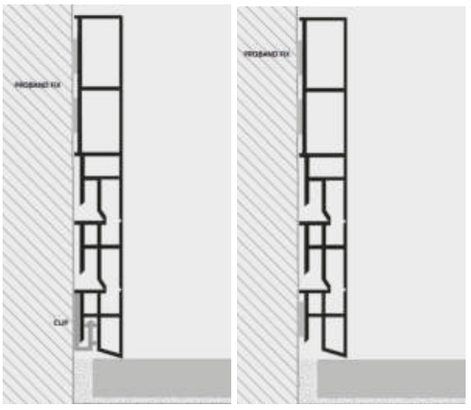

***CUT INSTRUCTIONS**



Option 1A: Cut to have the height 80 mm.
Cut along the first pre-incision on the back of the skirting;



Option 1B: Cut to have the height 60 mm.
Cut along the second pre-incision on the back of the skirting;



2. Cut the skirting on the front side at the cut previously made on the back;




3. Remove the excess part.

CORNERS, END CAPS AND JOINTS


FOAMED VINYL RESIN

INTERNAL CORNER KIT



KIT BTEPR ... 108614/SI

EXTERNAL CORNER KIT



KIT BTEPR ...108614/SE

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KBTEPR...108614/SI	**100/80/60**	**16,41**
KBTEPR...108614/SE	**100/80/60**	**16,41**

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/S

© 2023 All rights reserved by Progress Profiles. Printed in Italy

= News 2023

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


PROMULTISKIRT ROUND is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes.The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone.The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT ROUND in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

PROMULTISKIRT ROUND

FOAMED VINYL RESIN

PATENTED



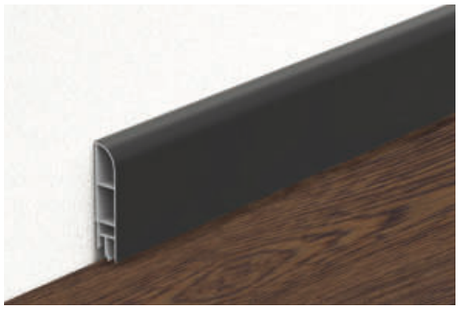

FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length **2,4 lm** - pack. **20 Pcs - 48 lm**

Article	H mm	€/lm	€/pc
BTEPR... 108614/R	**100/80/60**	**8,81**	**21,14**

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 108614/R (chosen finish Havana oak)BTEPR34W 108614/R

SUPPORT / FIXING CLIP - PLASTIC
pack. **100 Pcs**

Article	H mm	€/pack.
BTEPRS 18	**16,5**	**12,68**

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




COLOURS (For a precise assessment of colours request the wood finishes sample range)




29W - White oak | **30W** - Grey oak | **34W** - Havana oak | **B** - White | **N** - Black | **AA** - Silver

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

BTEPR... 108614/R
scale 1:1

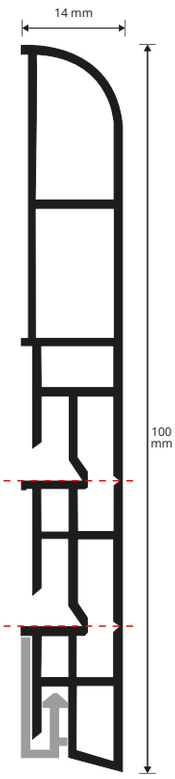


BTEPRS 18/100
scale 1:1

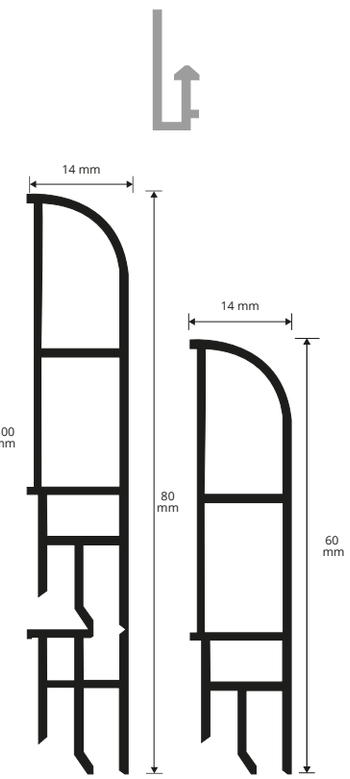

LAYING INSTRUCTIONS:T ROUND" according to the chosen colour. **2**. Cut "PROMULTISKIRT ROUND" to the required length. **3**. if necessary cut "PROMULTISKIRT ROUND" to the required height. * **4**. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general.
Laying with adhesive only:
5a. . With dry surface apply the Proband Fix. **6a.** Press the profile against the wall with the correct pressure.
Laying with adhesive and support:
5b. Fix the plastic supports to the wall every 50mm with screws. **6b.** Apply Proband Fix only to the back upper part of the skirting board.
7b. Fix the profile to the supports and press it against the wall with correct pressure.

EXAPLE OF LAYING

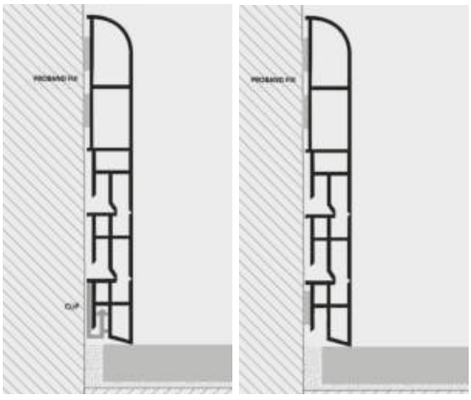



Option 1A: Cut to have the height 80 mm.
Cut along the first pre-incision on the back of the skirting;



Option 1B: Cut to have the height 60 mm.
Cut along the second pre-incision on the back of the skirting;



2. Cut the skirting on the front side at the cut previously made on the back;



3. Remove the excess part.

CORNERS, END CAPS AND JOINTS


FOAMED VINYL RESIN

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/S

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)


Article	H mm	€/KIT
KBTEPR...108614/RI	**100/80/60**	**16,41**
KBTEPR...108614/RE	**100/80/60**	**16,41**

INTERNAL CORNER KIT



KIT BTEPR ...108614/RI

EXTERNAL CORNER KIT



KIT BTEPR ...108614/RE

© 2023 All rights reserved by Progress Profiles. Printed in Italy


= News 2023
Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

SKIRTING 7016


FOAMED VINYL RESIN

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm. available wooden finishes and finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 57 cm. Its special section, that allows to cover a 16 mm sperimetral joint, and wide range of finishes make it a very requested, elegant and econimic skirting profile.

BTEPR... 7016
scale 1:1

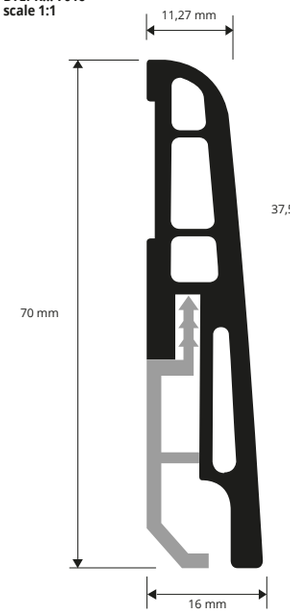

BTEPRS 385/100
scale 1:1





FOAMED VINYL RESIN (wood finIshes - black - white and silver)
Length **= 2,5 m -** Pack **20 pcs - 50 lm**

Article	H mm	€/lm	€/pc
BTEPR... 7016	70	4,64	11,60



SUPPORT / FIXING CLIP - PLASTIC
support Length **5 cm**

Article	H mm	€/pack.
BTEPRS 385	37,5	12,68

Order the SUPPORT and choose the SKIRTING in the desired finish.


USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)


Article	H mm	€/KIT
KIT BTEPR ...7016I	70	11,69
KIT BTEPR ...7016E	70	11,69

KIT BTEPR...7016I
INTERNAL CORNER KIT



KIT BTEPR...7016E
EXTERNAL CORNER KIT



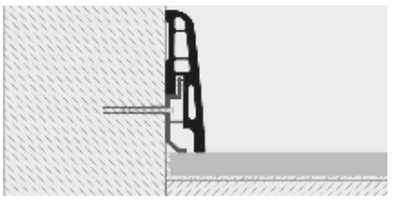


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS
1. Choose "Skirting 7016" in the desired finish. **2.** Fix the pre-punched support to the wall with screws every 50 cm. **3.** Attach the profile to the support applying low pressure. **4.** Alternatively fix the profile using a suitable fast adhesive, nails or screws

COLOURS (For a precise assessment of colours request the wood finishes sample range)



On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

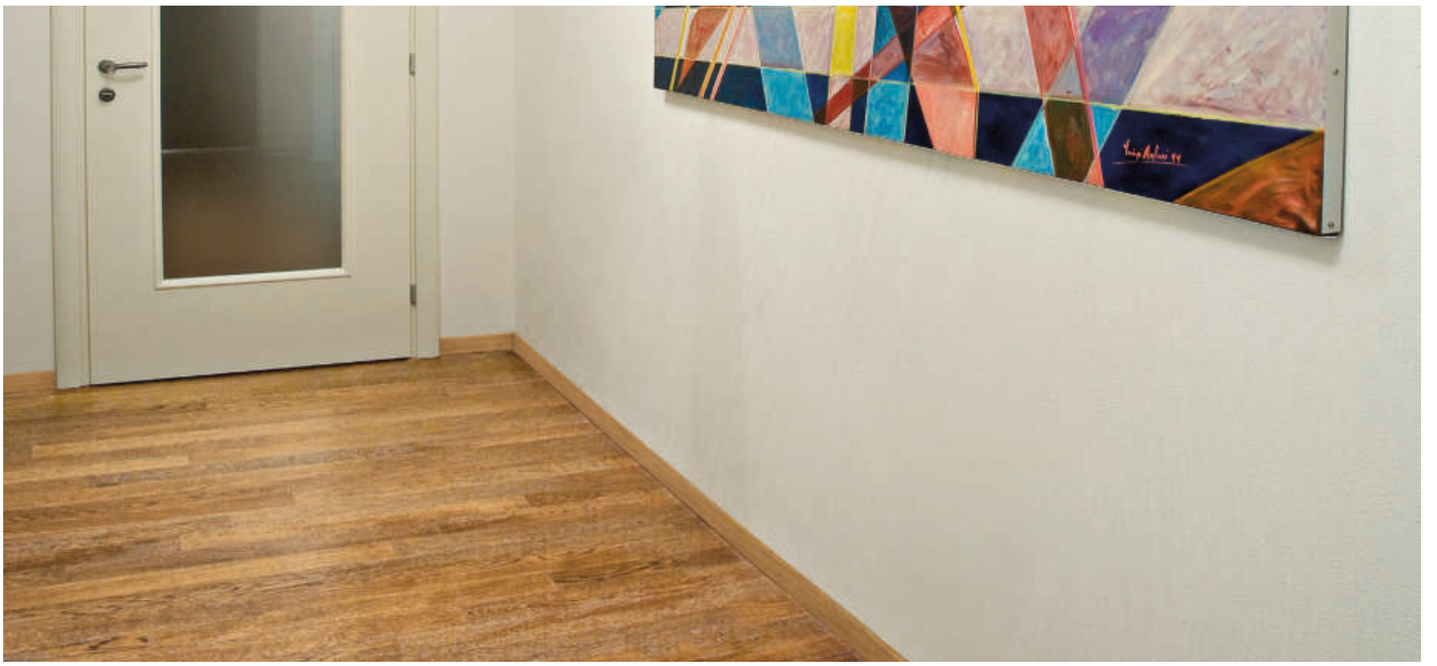

© 2020 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING 7011 is a vinyl resin foam profile with a height of 70 mm x 10,5 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails .

SKIRTING 7011

FOAMED VINYL RESIN






FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length **= 2,5 m -** Pack **20 pcs - 50 lm**

Article	H mm	€/lm	€/pc
BTEPR... 7011	70	4,43	11,07

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...7011I	70	10,38
KIT BTEPR ...7011E	70	10,38

INTERNAL CORNER KIT



KIT BTEPR...7011I

EXTERNAL CORNER KIT




KIT BTEPR...7011E

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



BTEPR... 7011
scale 1:1

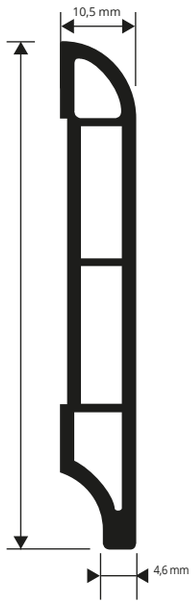


COLOURS (For a precise assessment of colours request the wood finishes sample range)



On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "Skirting 7011" in the required the colour. **2.** Lay the "Skirting 7011" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

SKIRTING 40 is a vinyl resin foam profile with a height of 40 mm x 10 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails .

SKIRTING 40

FOAMED VINYL RESIN



FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length **= 2,4 m** - Pack. **20 PC - 48 ml**

Article	H mm	€/lm	€/pc
BTEPR... 4010	40	4,43	10,63

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 4010 (chosen finish Havana oak) BTEPR34W 4010

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...4010I	40	6,66
KIT BTEPR ...4010E	40	6,66

INTERNAL CORNER KIT




KIT BTEPR...4010I

EXTERNAL CORNER KIT




KIT BTEPR...4010E

BTEPR... 4010
scale1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

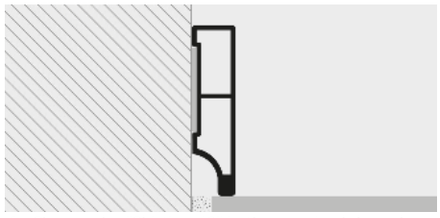

1. Choose the "Skirting 40" in the required the colour. **2.** Lay the "Skirting 40" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

COLOURS (For a precise assessment of colours request the wood finishes sample range)



On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


= News 2023
Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

SKIRTING 60
SKIRTING 120


NON-TOXIC FLEXIBLE VINYL RESIN
IN 6 COLOURS

PVC FLEXIBLE SKIRTING 60/120 height 60 mm and 120 mm, is a very strong profile ideal for easily achieving special, attractive, superior finishes. Installation recommended with glue or silicone. Easy to install, the shaped edges ensure perfect adhesion to the surface. The projecting rounded flange covers the terminal expansion joint.

BTPV... 60
scale 1:1

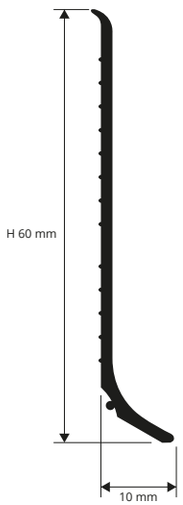

BTPV... 120

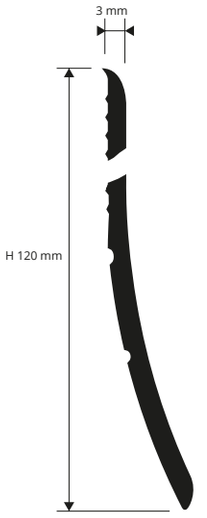





NON-TOXIC FLEXIBLE VINYL RESIN
rolls length **50 lm**

Article	H mm	€/lm	€/roll
BTPV... 60	60	2,14	107,00
BTPV... 120	120	5,09	254,50


Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPV... 60 (chosen finish light gray) BTPVGC 60.

NON-TOXIC FLEXIBLE VINYL RESIN - ADHESIVE
rolls length **50 lm**

Article	H mm	€/lm	€/roll
BTPV... 60A	60	3,58	179,00
BTPV... 120A	120	8,11	405,50

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPV... 60 (chosen finish light gray) BTPVGC 60.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

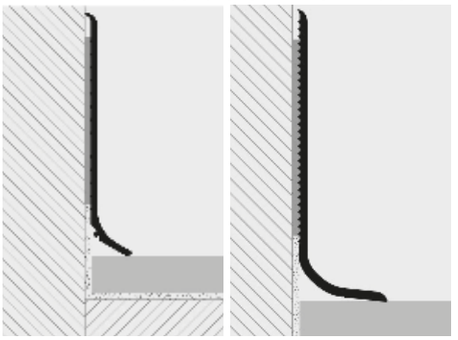

1. Choose the "SKIRTING 60 - 120" of the required height 60/120mm and choose the colour. **2.** Lay the "SKIRTING 60 - 120" using an adhesive suitable for gluing flexible PVC onto mortar, plaster, accessorised walls, etc. or fix with screws/nails.

As regards the items with adhesive, the adhesive roll is sold separately (50 lm for H:60), (50 lm for H:120)

ATTENTION: IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION.

COLOURS




B - White | **GC** - Light gray | **GS** - Dark gray | **T** - Dark brown | **M** - Brown | **N** - Black

SKIRTING 62F


FLEXIBLE VINYL RESIN
IN 6 COLOURS

SKIRTING 62F is a new 62 mm skirting board made of non-toxic, flexible vinyl resin. This profile is very resistant and particularly suited for providing highly aesthetic perimeter skirting of excellent quality at reasonable prices. It differs from the BTPV.. 60 skirting board in that it is provided with a bottom flange that allows it to be placed perpendicularly (90°) to the wall/lining and welded to PVC floors. In addition, the horizontal flange covers the floor's perimeter expansion joint. We recommend applying the skirting using glue/adhesive/Bostik/mastic. Alternatively, you can choose the self-adhesive version for quick, effortless installation.

BTPF... 62 / BTPF... 62A
scale 1:1

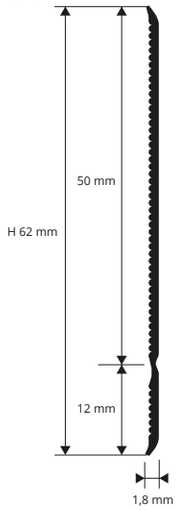

EXAMPLES OF LAYING





LAYING INSTRUCTIONS
1. Choose the colour of the "SKIRTING 62F" board, indicating whether you want it with or without a self-adhesive backing. **2.** Cut the "SKIRTING 62F" to length, taking into account the width of the internal and external connections. **3.** Self-adhesive skirting is recommended only for surfaces that are perfectly smooth, non-oily and non-porous. On plaster and mortar surfaces, use a non-adhesive version and apply the skirting using quick-setting acrylic silicone suitable for gluing aluminium to mortar, plaster, etc.

ATTENTION: IN ORDER TO USE, LAY AND FIX PROPERLY THIS PRODUCT PLEASE LOOK AT OUR WEBSITE OR APP LAYING / FIXING VIDEO FOR CORRECT INSTALLATION

FLEXIBLE VINYL RESIN
rolls length **50 lm** with or without adhesive

Article	H mm	€/lm	€/roll
BTPF... 62	62	2,02	101,00

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPF...62 (chosen finish light gray) BTPFGC 62.

FLEXIBLE VINYL RESIN
rolls length **50 lm** with or without adhesive

Article	H mm	€/lm	€/roll
BTPF... 62A	62	3,42	171,00

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTPF...62 (chosen finish light gray) BTPFGC 62.

As regards the items with adhesive, the adhesive roll is sold separately (50 lm)

COLOURS



B - White | **GC** - Light gray | **GS** - Dark gray | **T** - Dark brown | **M** - Brown | **N** - Black

© 2026 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING in PVC foam height 70 mm in 4 semi-matt colours and 8 wood finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone -acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.

SKIRTING

EXPANDED VINYL RESIN





EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length **2 lm** - pack. **60 Pcs - 120 lm**


Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	**70**	**1,27**	**2,54**	**152,40**

EXPANDED RIGID VINYL RESIN (8 wood finishes)
bar length **2 lm** - pack. **60 Pcs - 120 lm**

Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	**70**	**1,33**	**2,66**	**159,60**

Available in the wood finishes: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour black) BTPRN 70.


BTPR...70

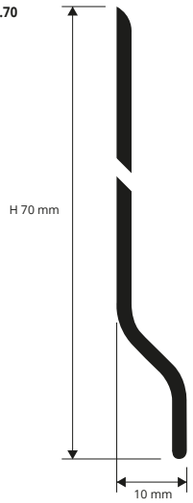

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

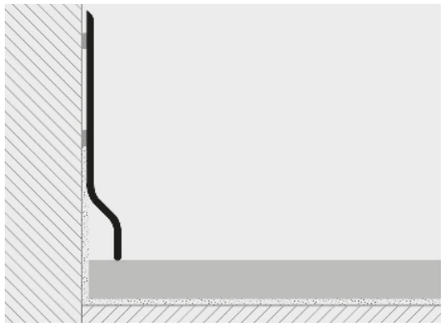

1. Choose the "SKIRTING" in the required the colour. **2.** Lay the "SKIRTING" using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

COLOURS



B - White | **GC** - Light grey | **GS** - Dark grey | **N** - Black | **04W** - Dark beech | **05W** - Light oak (strip)

06W - Dark oak (walnut) | **07W** - Light cherry (strip) | **08W** - Dark cherry (board) | **09W** - Red walnut (merbau-apple-walnut) | **10W** - Wengé (panga panga-wengè) | **M** - Mogano

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

ANGLE BAR produced in expanded PVC in 4 semi-matt colours and 8 wood finishes used to protect angles. Laying is done by gluing (acetic silicone - acrylic-mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments.

ANGLE BAR

EXPANDED VINYL RESIN





EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	L x H mm	€/lm	€/Pc
AGE... 25	**25 x 25**	**1,13**	**3,05**

EXPANDED RIGID VINYL RESIN (8 wood finishes)
bar length **2,7 lm** - pack. **40 Pcs - 108 lm**


Article	L x H mm	€/lm	€/Pc
AGE... 25	**25 x 25**	**1,17**	**3,16**

Available in the wood finishes: B - GC - GS - 11- 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen finish black) AGE11 25.

AGE...25
scale 1:1



EXAMPLES OF LAYING

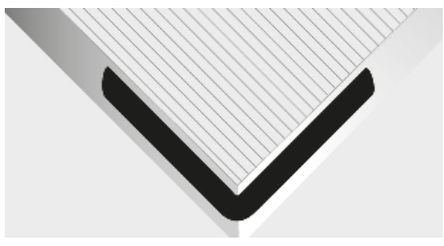

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



The shade of the wooden finish in rigid expanded vinyl resin/ PVC results slightly different from the film usually applied on the profiles in aluminium.

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROSEAL WOOD

EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS


PROSEAL WOOD is a new inner connector square suitable for creating a concave skirting for wood / rolled-melamime floating wood / ceramic / marble tiles to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents ant to small breakages. **PROSEAL WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colours to combine with various wood finishes. Easy to lay with fixing silicone.

transition profiles

PSAW... 20
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

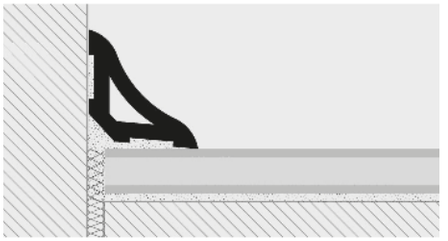

1. Choose "PROSEAL WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik suitable for gluing PVC with mortar - plaster - wall units etc., or fix using screws/nails.





EXPANDED PVC - 2 WOOD FINISHING
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
PSAW... 20	**21 x 21**	**0,98**	**2,45**

EXPANDED PVC - 4 COLOURS
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
PSAW... 20	**21 x 21**	**0,91**	**2,27**

Available in the wood finishes: 05W - 10W , and colours: B - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen finish black) PSAWN 20.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

COLOURS



B - White | **GC** - Light gray | **GS** - Dark gray | **N** - Black | **05W** - Light oak (strip) | **10W** - Wengé (panga panga-wengè)

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.


PROANGLE WOOD

EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS


PROANGLE WOOD is a new inner connector square suitable for creating a convex skirting for wood / rolled-melamime floating wood / ceramic / marble floor to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents and to small breakages. **PROANGLE WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colors to combine with various wood finishes. Easy to lay with fixing silicone.

transition profiles

PGAW... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

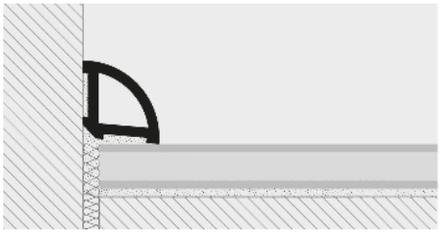

1. Choose "PROANGLE WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik, suitable for glueing PVC with mortar-plaster-wall units etc., or fix using screws/nails.





EXPANDED PVC - 2 WOOD FINISHING
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
PGAW... 15	**15 x 15**	**0,74**	**1,85**

EXPANDED PVC - 4 COLOURS
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
PGAW... 15	**15 x 15**	**0,67**	**1,68**

Available in the wood finishes: 05W - 10W, and colours: - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PGAW...15 (chosen finish black) PGAWN 15.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

COLOURS



B - White | **GC** - Light gray | **GS** - Dark gray | **N** - Black | **05W** - Light oak (strip) | **10W** - Wengé (panga panga-wengè)

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

© 2020 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING COVECAP is a series of flexible co-extruded non-toxix vinyl profiles. **SKIRTING COVECAP** is a **SKIRTING/ SKIRTING** with capping seal used to provide an elegant and functional solution to finish the top of resilient floor covering were it has been coved up to the wall ,support floor covering at a weal point and protects the exposed edges. The visible portion of the profiles is rounded and available in white - light grey - dark grey - dark brown - brown and black.


SKIRTING COVECAP

NON-TOXIC FLEXIBLE
CO-EXTRUDED VINYL RESIN





BTVCC... 80

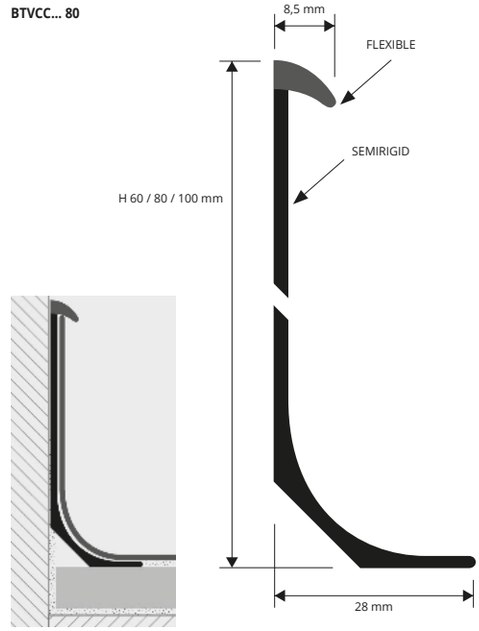

NON-TOXIC FLEXIBLE CO-EXTRUDED VINYL RESIN - bar length **2,50 lm**
Pack **H 60 mm / 40 Pcs - H 80 mm /30 Pcs - H 100 mm / 20 Pcs**

Article	H mm	Pcs/Pack.	€/lm	€/Pc	€/Pack.
BTVCC... 60	60	40	4,83	12,08	483,20
BTVCC... 80	80	30	5,09	12,73	381,90
BTVCC... 100	100	20	5,34	13,35	267,00

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: BTVCC... 60 (chosen colour white) BTVCCB 60.

Adhesive version: add the letter A after the article. As regards the items with adhesive, the adhesive roll is sold separately.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS
1. Select the "SKIRTING COVECAP" of the desired color and height. **2.** Using a utility knife cut the "SKIRTING COVECAP" to the desired length. **3.** Apply the proper adhesive or glue/mastic and install the profile

ATTENTION: THE INSTALLATION OF THIS PROFILES IS RECOMMENDED FOR AN EXPERT INSTALLER OF VINYL FLOORINGS

COLOURS - FLEXIBLE PART



B - White | **GC** - Light gray | **GS** - Dark gray | **T** - Dark brown | **M** - Brown | **N** - Black

SEMIRIGID





Black

PROCAP is a non-toxic co-extruded flexible vinyl resin profile that in combination with PROSEAL FLEX allows a correct application and finishing of vinyl flooring and carpet along the wall-floor joint. The visible surface of the profile is available in white, light gray, dark gray, dark brown, brown and black. Its ease of application makes it a very practical profile for the finishing of vinyl and carpet flooring


PROCAP S

NON-TOXIC CO-EXTRUDED
FLEXIBLE VINYL RESIN

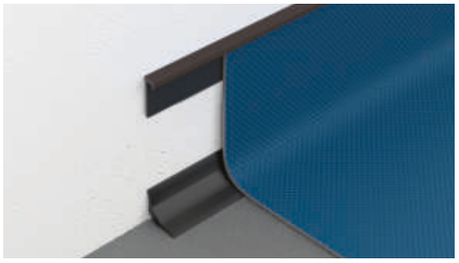

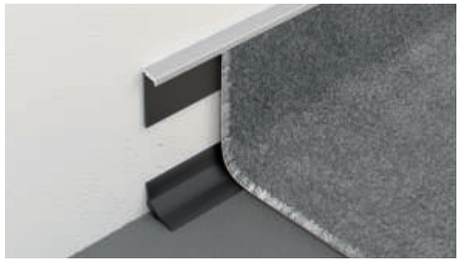

PRCPS



PROCAP S - NON-TOXIC FLEXIBLE CO-EXTRUDED VINYL RESIN
bar length **2,50** - pack. **20 Pcs** - **50 lm**


Article	H x L mm	€/lm	€/Pc
PRCPS...	31 x 5,3	1,96	4,90

Available in the colours: B - GC - GS - T - M - N.
The code of the selected colour must be added to the article code.
E.g.: PRCPL... (chosen colour white) PRCPLB


PROSEAL FLEX - FLEXIBLE BLACK NON-TOXIC VYNIL RESIN
bar length **2,5 lm** - pack. **40 Pcs** - **100 lm**

Article	L X H mm	€/lm	€/Pc
PSF 15-11	15x15	1,30	3,25
PSF 20-11	20x20	1,58	3,95
PSF 25-11	25x25	1,96	4,90

PSF



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

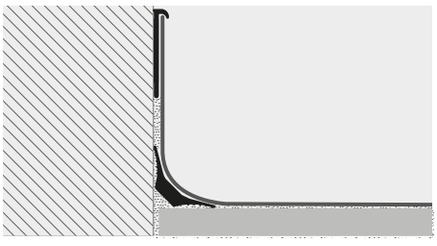

1. Choose "PROCAP S" according to height and desired colour. **2.** Cut "PROCAP S" to the right lengt. **3.** Apply a suitable adhesive and lay the profile. **4.** Lay the desired resilient flooring.

COLOURS

PLAIN PRCPS & EMBOSSED PRCPL




B - White | **GC** - Light gray | **GS** - Dark gray
T - Dark brown | **M** - Brown | **N** - Black

© 2026 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROGRESS® PROFILES

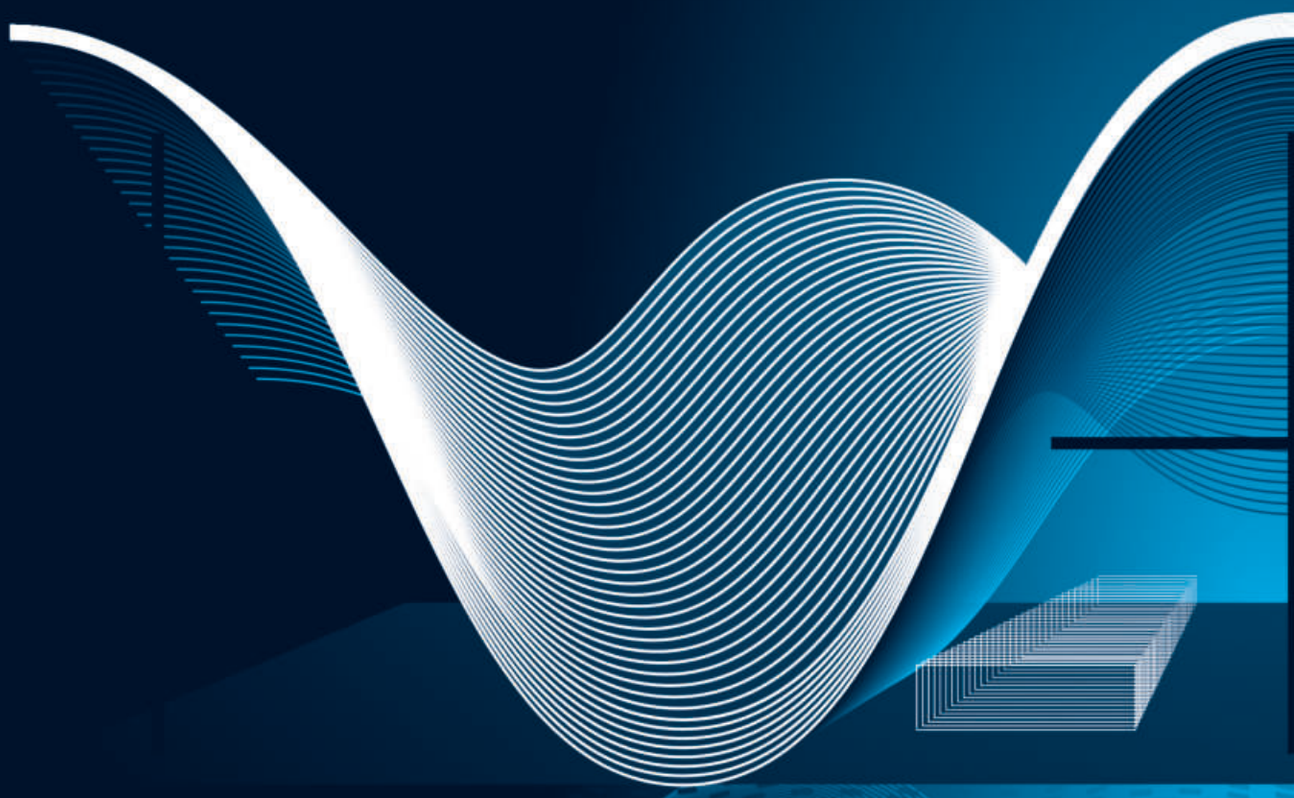

An interpretation of:

Bosjes Chapel, Steyn Studio, CAPE TOWN (South Africa), 2016

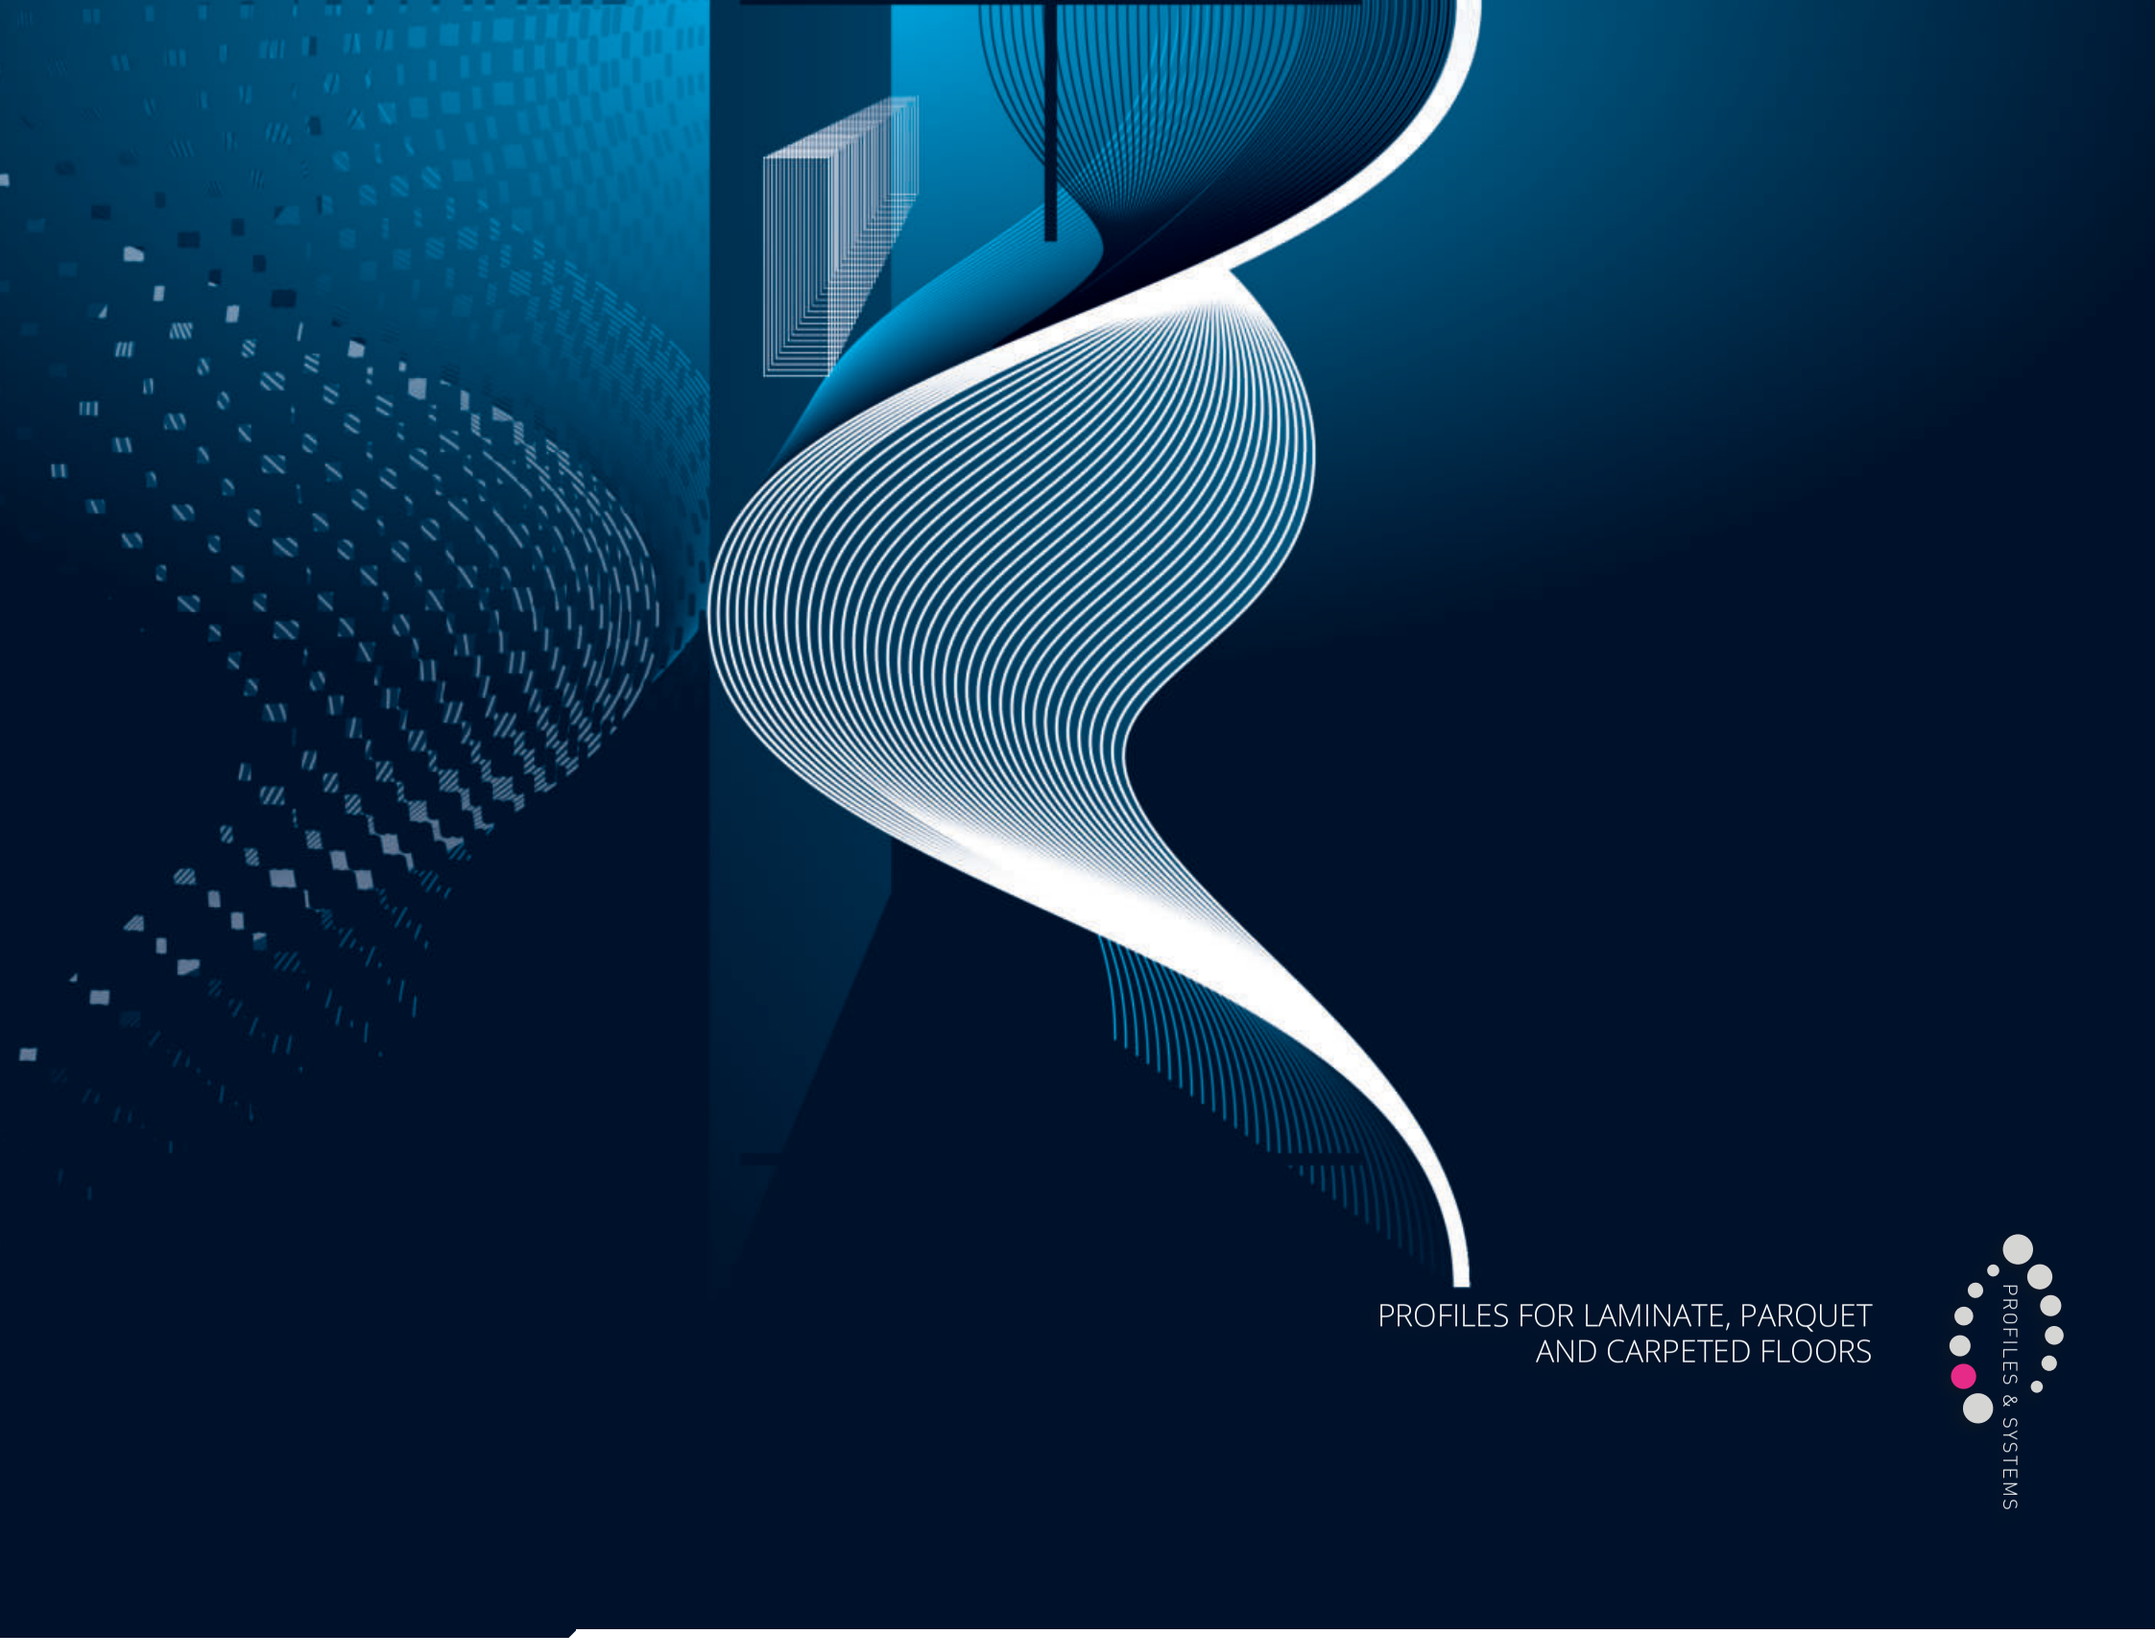

PROFILES FOR LAMINATE, PARQUET
AND CARPETED FLOORS

PROFILES & SYSTEMS

WOODEN/LVT

COLOURS
STANDARD AND ON DEMAND

For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS

wooden finishes	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	SOL 30	Procover wood	Profixer line	7016	7011	Multiskirting round/square	Skirting 40
04W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
05W	●	●	●	●	●	●	*	●	●	●	●	●	*	*
06W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
08W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09W	●	●	●	●	*	●	*	●	*	●	*	●	*	*
10W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11W	*	*	*	*	*	*	*	*	●	*	*	*	*	*
13W	*	●	*	*	●	●	*	●	*	●	●	*	*	*
18W	●	●	●	●	●	●	*	●	*	●	●	●	*	*
21W	●	●	●	●	●	●	*	●	*	●	●	●	*	*
25W	*	●	*	*	●	●	*	●	*	●	●	*	●	●
28W	*	*	*	*	*	*	*	*	●	*	*	*	*	*
29W	●	●	●	●	●	●	*	●	●	●	●	●	●	●
30W	●	●	●	●	●	●	*	*	●	●	●	●	●	●
31W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
32W	●	●	*	●	●	*	*	*	*	●	●	●	*	*
33W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
34W	●	●	●	●	●	●	*	*	*	●	●	●	●	●
35W	●	●	*	●	●	*	*	*	*	●	●	●	*	*
36W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
37W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
38W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
39W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
40W	*	*	*	*	*	*	*	*	*	*	*	●	*	*
41W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
42W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
43W	*	*	*	*	*	●	*	*	*	*	*	●	*	*
44W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
45W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
46W	●	●	●	●	*	●	*	*	*	●	*	●	*	*
47W	*	*	*	*	*	●	*	*	*	*	*	●	*	*
48W	●	●	*	●	*	●	*	*	*	●	*	●	*	*
49W	●	●	*	●	*	●	*	*	*	●	*	●	*	*
50W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
51W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
52W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
53W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
54W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
55W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
56W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
57W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
58W	*	*	*	*	*	*	*	*	*	*	*	*	*	*

wooden finishes	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	SOL 30	Procover wood	Profixer line	7016	7011	Multiskirting round/square	Skirting 40
59W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
60W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
61W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
62W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
63W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
64W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
65W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
66W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
67W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
68W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
69W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
70W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
71W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
72W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
73W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
74W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
75W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
76W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
77W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
78W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
79W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
80W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
81W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
82W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
83W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
84W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
85W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
86W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
87W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
88W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
89W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
90W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
91W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
93W	●	*	*	*	*	●	*	*	*	*	*	*	*	*
94W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
95W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
97W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
AA	X	X	X	X	X	X	X	X	*	*	●	●	●	●
B	X	X	X	X	X	X	X	X	X	X	●	●	●	●
N	X	X	X	X	X	X	X	X	X	X	●	*	●	●

● = Available finishes | X = Not available finishes

* = minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS



04W - Dark beech | **05W** - Light oak (strip) | **06W** - Dark oak (Walnut) | **07W** - Light cherry (strip) | **08W** - Dark cherry (board) | **09W** - Red walnut | **10W** - Wengè | **11W** - Decapè bleached | **13W** - Indonesian teak

18W - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **28W** - Aspen oak | **29W** - White oak | **30W** - Grey oak | **31W** - Victoria oak | **32W** - Pink oak | **33W** - Sawed oak

34W - Havana oak | **35W** - Edinburgh oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak | **39W** - Grey elm | **40W** - Brown oak | **41W** - Ice oak | **42W** - Grace oak

43W - Manhattan oak | **44W** - Honey oak | **45W** - Marocco oak | **46W** - Black decape' | **47W** - Black oak | **48W** - Cork oak | **49W** - Sand oak | **50W** | **51W**

52W | **53W** | **54W** | **55W** | **56W** | **57W** | **58W** | **59W** | **60W**

61W | **62W** | **63W** | **64W** | **65W** - Tripoli | **66W** | **67W** | **68W** | **69W**

70W | **71W** | **72W** | **73W** - Bangkok | **74W** | **75W** - Liotard | **76W** | **77W** | **78W**

79W | **80W** | **80W** | **82W** | **83W** | **84W** | **85W** | **86W** | **87W**

88W | **89W** | **90W** | **93W** - New white | **94W** | **95W** | **97W**

EXTRUDED EXPANDED PVC COLOURS



B - White | **GC** - Light grey | **GS** - Dark grey | **N** - Black

04W - Dark beech | **05W** - Light Oak | **06W** - Dark Oak | **07W** - Light cherry

08W - Dark cherry | **09W** - Red Walnut | **10W** - Wengè | **M** - Mahogany

ANODIZED COLOURS



AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium | **AT** - Anod. titanium aluminium

CH - Anod. champagne alum. | **SB** - Anod. sand aluminium

Extruded Expanded PVC	Proseal wood	Proangle wood	Skirting	Angle bar
B (White)	●	●	●	●
GC (Light Grey)	●	●	●	●
GS (Dark Grey)	●	●	●	●
N (Black)	●	●	●	●
04W (Dark Beech)	X	X	●	●
05W (Light Oak)	●	●	●	●
06W (Dark Oak)	X	X	●	●
07W (Light cherry)	X	X	●	●
08W (Dark cherry)	X	X	●	●
09W (Red Walnut)	X	X	●	●
10W (Wengè)	●	●	●	●
M (Mahogany)	X	X	●	●

Anodized Aluminium Colours	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	Prostep ins	SOL 30	Profixer line	Proscrew
AO (anod. gold)	●	●	●	●	●	●	●	●	●	●	●
AA (anod. silver)	●	●	●	●	●	●	●	X	*	●	*
AB (anod. bronze)	●	●	●	●	●	●	●	X	*	●	*
AT (anod. titanium)	*	*	*	*	*	*	*	X	*	*	*
CH (anod. champagne)	*	*	*	*	*	*	*	X	*	*	*
SB (anod. sand)	*	*	*	*	*	*	*	X	*	*	*

● = Available finishes | X = Not available finishes

* = minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROMULTIFIX SYSTEM®

INSTRUCTIONS FOR LAYING

PATENTED

PROGRESS PROFILES® has filed an innovative patent PROMULTIFIX SYSTEM® in respect of a wide range of aluminum profiles covered with very strong films in wooden finishes, plus anodized finishes.
The PROMULTIFIX SYSTEM® system is a multipurpose profile for finishing laminate, melamine-coated, parquet and wood floating floors.
FIXING: it can be fixed with adhesive, nylon anchors, glue, flatten down base and screws.
STANDARD Wooden FINISHES: Light oak (strip), Light cherry (strip), Red walnut (merbau-apple-walnut), Light zerbano, Oak powder, White oak, Grey oak, Victoria oak, Pink oak, Havana oak, Edinburgh oak, Carvi oak, Ice oak, Grace oak, Honey oak, Black decape', Cork oak, Sand oak, Tripoli, Bangkok, Liotard, New white.
STANDARD ALUMINUM FINISHES: anodized Silver, Gold and Bronze.

ANODIZED COLOURS



AO - Anodized gold aluminium | **AA** - Anodized silver aluminium | **AB** - Anodized bronze aluminium

* ANODIZED COLOURS ON DEMAND




AT - Anodized titanium aluminium | **CH** - Anodized champagne aluminium | **SB** - Anodized sand aluminium

WOODEN COLOURS

(For a precise assessment of colours request the wooden finishes sample range)



05W - Light oak (strip) | **07W** - Light cherry (strip) | **09W** - Red walnut (merbau-apple-walnut) | **18W** - Light zerbano | **21W** - Oak powder | **29W** - White oak | **30W** - Grey oak | **31W** - Victoria oak | **32W** - Pink oak | **34W** - Havana oak




35W - Edinburgh oak | **37W** - Carvi oak | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak | **46W** - Black decape' | **48W** - Cork oak | **49W** - Sand oak | **65W** - Tripoli | **73W** - Bangkok



75W - Liotard | **93W** - New white

* WOODEN COLOURS ON DEMAND

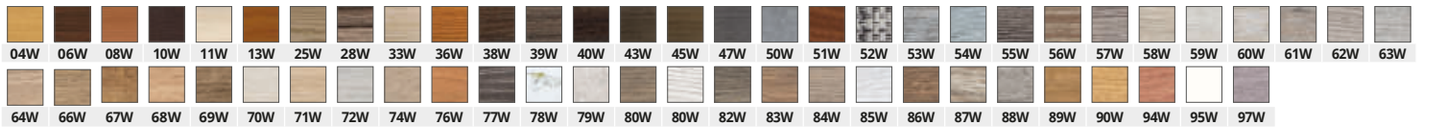

04W | **06W** | **08W** | **10W** | **11W** | **13W** | **25W** | **28W** | **33W** | **36W** | **38W** | **39W** | **40W** | **43W** | **45W** | **47W** | **50W** | **51W** | **52W** | **53W** | **54W** | **55W** | **56W** | **57W** | **58W** | **59W** | **60W** | **61W** | **62W** | **63W**

64W | **66W** | **67W** | **68W** | **69W** | **70W** | **71W** | **72W** | **74W** | **76W** | **77W** | **78W** | **79W** | **80W** | **80W** | **82W** | **83W** | **84W** | **85W** | **86W** | **87W** | **88W** | **89W** | **90W** | **94W** | **95W** | **97W**

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROMULTIFIX SYSTEM

PROMULTIFIX SYSTEM is composed of an aluminium profile with adhesive, with a lengthwise groove in form of dovetail, where nylon anchors can be inserted, or a punched aluminium flatten down base for an easy and invisible fixing.

NYLON SCREW ANCHORS







PERIMETRIC SUPPORTS








FLATTEN DOWN BASE



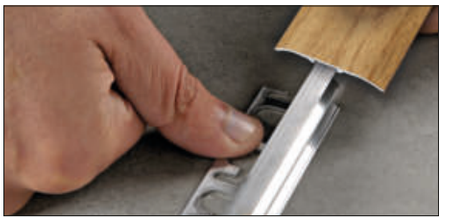



* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

It is a system composed of a special TOP with adhesive, with a visible surface of 44.7 mm, anodized aluminium or covered with wooden film. The aluminium TOP can be fixed to the floor in different ways: with adhesive, with nylon anchors, support with removable spacers, flatten down base.

PROMULTIFIX SYSTEM

ALUMINIUM PROFILES
FIXING KIT












PMPFX... 42090AS / 42A
scale 1:1

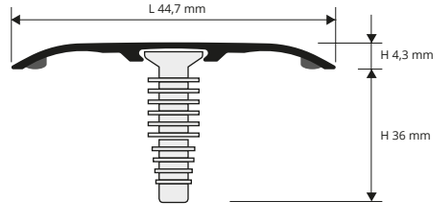

PMPFX... 42090AS / 42A
scale 1:1



PMPFX... 42090AS / 42A + PMFIXBSAN 23
scale 1:1

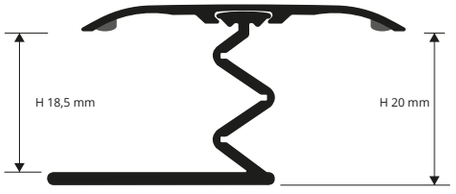

MAXIMUM HEIGHT 18,5 MM



MINIMUM HEIGHT 4,5 MM

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	8,81	23,79

TOP IN ALUM. COVERED with adhesive (80 wooden finishes of which 59 on demand) + n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	12,61	34,05

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length **0,90 lm** - **15 Pcs**

Article	L mm	€/Pc
PMPFX... 42090AS	44,7	9,25


TOP IN ALUM. COVERED with adhesive (80 wooden finishes of which 59 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length **0,90 lm** - **15 Pcs**

Article	L mm	€/Pc
PMPFX... 42090AS	44,7	13,25

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 07W - 09W -18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W - 93W. The code of the selected colour must be added to the article code. E.g.: PMPFX... 42A (chosen finish anod. gold) PMPFXAO 42A.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the profile of the required finish, if necessary cut the TOP in the required length.
2. Clean, remove the grease and dry the substrate: the temperature should be at least of 15° C.
Fixing with biadhesive tape:
3. Remove the paper protection from the adhesive and lay the TOP with a vertical pressure without moving the profile.
Fixing with screw anchors:
3. Drill the substrate with a 6 mm bit, 5 holes per linear meter. **4.** Remove the paper protection from the adhesive. **5.** Insert the screw anchors in the profile dovetail groove. **6.** Beat with a rubber/pvc hammer to insert the screw anchors into the holes.
Fixing of the aluminium flatten down base:
3. Cut the flatten down base to the requested length. **4.** Remove the paper protection from the adhesive. **5.** insert the base into the profile groove dovetail, then fix or glue the base to the floor. **6.** Make a uniform pressure on the profile with the hands or a rubber hammer.
Perimetric laying:
3. Remove the paper protection from the adhesive. **4.** Cut the perimetric pins according to the thckness of the floor. **5.** Insert the perimetric pins into the profile groove dovetail using 4 supports per linear meter. **6.** Fix the profil making a uniform pressure on the profile with the hands, but do not move the profile.

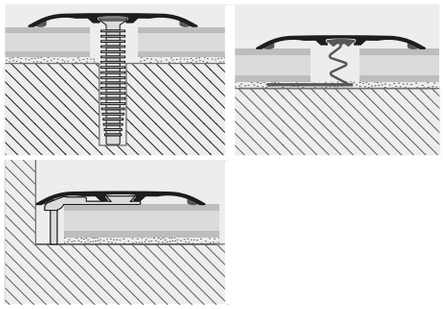


One fixing kit is composed of: 5 screws, 4 perimetric pins, 2 joints



SCREWS AND SCREW ANCHORS, TAP-DOWN BASE


NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. **1.000 Pcs**

Article	Ø mm	L mm	€/Pack.
VINIPT 325	3	25	77,66



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,74	18,20

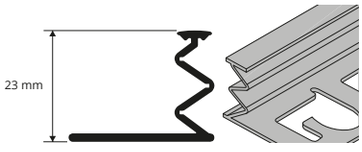

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROINSERT SYSTEM®

INSTRUCTIONS FOR LAYING

PROGRESS® PROFILES has filed an innovative patent PROINSERT SYSTEM in respect of a wide range of aluminum profiles covered with very strong films in 77 wooden finishes are available, plus 6 anodized finishes.
The **PROINSERT SYSTEM** system comprises a complete set of profiles for finishing laminate, melamine-coated, parquet and wood floating floors.
INTERCHANGEABLE INSERTS in 7 heights: (H 07, 09, 11, 13, 15, 17 and 19 mm). PROFILES COVERED with film: resistant to wear and UV rays (classe AC1). TWO VERSATILE VERSIONS OF BASES: available for fixing with glue or screws.

INSTRUCTIONS FOR LAYING:

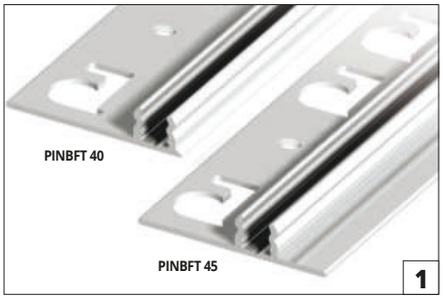

1) Choose between the two types of aluminum base.




2) Fix and/or glue the base to the floor.





3) Lay the floor correctly leaving between 3 and 10 mm gap for the natural expansion of the wood.

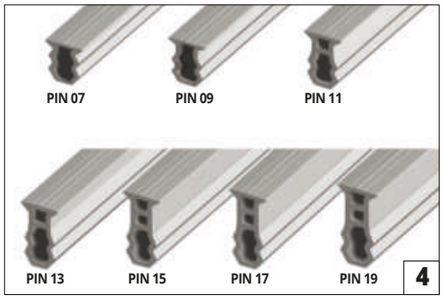

4) Choose the vinyl resin insert according to the clear height and thickness of the floor.



5) Keep the profile with the groove for insertion facing upwards and slot in the insert from the top downwards (if it does not slide easily, lubricate with water, silicone spray or vegetable oil).



6) Place the profile over the "U" shaped channel.



7) With the help of a wooden tapping block, apply pressure evenly over the whole Length of the profile using a hammer. If tapping is done correctly, a "click" will be heard when the profile slots into place.

© 2026 All rights reserved by Progress Profiles. Printed in Italy

THESE PROFILES ARE APPLIED TO CREATE:

- Threshold covers and expansion joints (SOL 30, SOL 40P and SOL 50)
- Transition joints for differences in level and floors in differing materials and thickness (ZERO CURVE)
- Perimeter joints or terminal expansion pieces (TERMINAL PIN)
- Corner joints and step nosings (serie STYLE STAIR)

SOL 30, SOL 40P AND SOL 50





ZERO CURVE





TERMINAL PIN





STYLE STAIR / STYLE STAIR L






PROFIXER LINE SYSTEM

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminum with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminum profile may be inserted for easy and invisible fixing.

NYLON SCREW ANCHORS



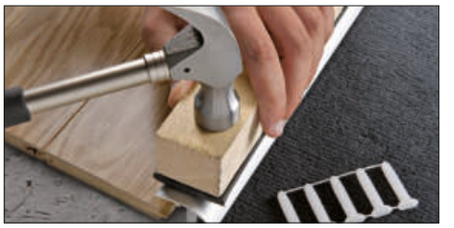

TAP-DOWN BASE





© 2023 All rights reserved by Progress Profiles. Printed in Italy

SOL 40P

TOP IN WOODEN OR ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

SOL 40P range comprises a large assortment of universal jointing profiles in aluminium covered with film that is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Thanks to the insert in rigid PVC (non-conducting) between the base and the top, the new **SOL 40P** stops and eliminates electrostatic charges and magnetic fields and whatever else may be transmitted between two floors (e.g.: heated floors). available in wooden finishes, plus anodized finishes. Any insert of height H 7, 9, 11, 13, 15, 17 and 19 mm may be used with either the punched/perforated base for screwing or for gluing. Covering width 40 mm.



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** (**PIN 17, 19** - **40,5 lm**)

Article	H mm	€/lm	€/Pc
PISPC... 407 (PIN 07)	7 / 10	15,14	40,88
PISPC... 409 (PIN 09)	9 / 12	15,28	41,26
PISPC... 4011 (PIN 11)	11 / 14	15,41	41,61
PISPC... 4013 (PIN 13)	13 / 16	15,56	42,01
PISPC... 4015 (PIN 15)	15 / 18	15,71	42,42
PISPC... 4017 (PIN 17)	17 / 20	15,96	43,09
PISPC... 4019 (PIN 19)	19 / 22	16,16	43,63

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
length **0,90 lm** - **15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)** SELF PACK

Article	H mm	€/Pc
PISPC... 4079S (PIN 07)	7 / 10	15,48
PISPC... 4099S (PIN 09)	9 / 12	15,70
PISPC... 40119S (PIN 11)	11 / 14	15,95
PISPC... 40139S (PIN 13)	13 / 16	16,23
PISPC... 40159S (PIN 15)	15 / 18	16,51
PISPC... 40179S (PIN 17)	17 / 20	16,94
PISPC... 40199S (PIN 19)	19 / 22	17,37



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm** (**PIN 17, 19** - **40,5 lm**)


Article	H mm	€/lm	€/Pc
PISPC... 407 (PIN 07)	7 / 10	21,04	56,81
PISPC... 409 (PIN 09)	9 / 12	21,20	57,24
PISPC... 4011 (PIN 11)	11 / 14	21,34	57,62
PISPC... 4013 (PIN 13)	13 / 16	21,46	57,94
PISPC... 4015 (PIN 15)	15 / 18	21,63	58,40
PISPC... 4017 (PIN 17)	17 / 20	21,92	59,18
PISPC... 4019 (PIN 19)	19 / 22	22,26	60,10

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
length **0,90 lm** - **15 Pcs (PIN 13, 15, 17, 19 - 10 PCS)** SELF PACK

Article	H mm	€/Pc
PISPC... 4079S (PIN 07)	7 / 10	20,87
PISPC... 4099S (PIN 09)	9 / 12	21,16
PISPC... 40119S (PIN 11)	11 / 14	21,42
PISPC... 40139S (PIN 13)	13 / 16	21,71
PISPC... 40159S (PIN 15)	15 / 18	22,00
PISPC... 40179S (PIN 17)	17 / 20	22,44
PISPC... 40199S (PIN 19)	19 / 22	22,88


PISPC...407
scale 1:1

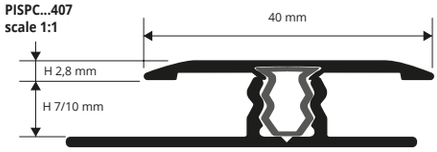


PISPC...409
scale 1:1




PISPC...4011
scale 1:1



PISPC...4013
scale 1:1

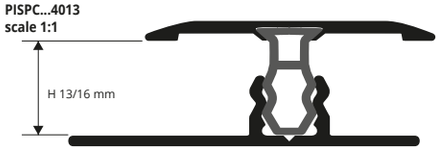


PISPC...4015
scale 1:1

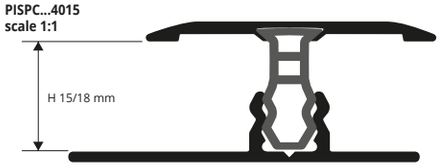

PISPC...4017 AVAILABLE in H17/20

PISPC...4019
scale 1:1

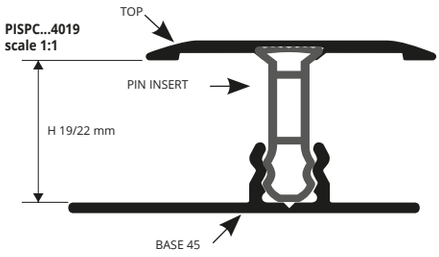

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PISPC... 4079S (chosen finish anod. gold) PISPCAO 4079S.

ANODIZED COLOURS

AO - Anodized gold aluminium
AA - Anodized silver aluminium
AB - Anodized bronze aluminium


* ANODIZED COLOURS ON DEMAND

AT - Anodized titanium aluminium
CH - Anodized champagne aluminium
SB - Anodized sand aluminium

WOODEN COLOURS



* WOODEN COLOURS ON DEMAND

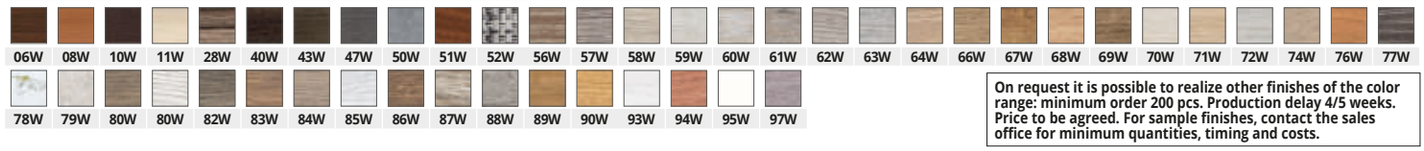

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. **2.** Lay the floor leaving from 3 to10 mm between the floor and the insert. **3.** Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. **4.** With the aid of a board, hammer the TOP to the desired fitting level.

*** = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


© 2026 All rights reserved by Progress Profiles. Printed in Italy

ZERO CURVE

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

transition profiles

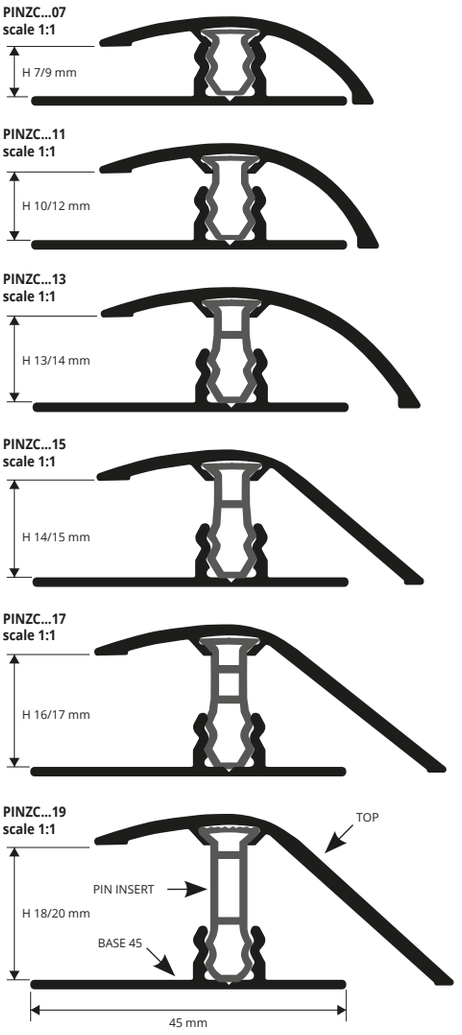



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length **2,7 lm -** pack. **20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)**

Article	H mm	€/lm	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	14,63	39,50
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	15,33	41,39
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	15,54	41,96
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	15,75	42,53
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	16,17	43,66
PINZC... 19 (top PINZ... 15+ PIN 19)	18 / 20	16,71	45,12

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs) SELF PACK

Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	14,32
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	15,30
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	15,53
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	15,75
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	16,15
PINZC... 19S (top PINZ... 15+ PIN 19)	18 / 20	16,56



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
bar length **2,7 lm -** pack. **20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)**

Article	H mm	€/lm	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	21,15	57,10
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	21,73	58,67
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	22,00	59,40
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	22,29	60,18
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	22,56	60,91
PINZC... 19 (top PINZ... 15+ PIN 19)	18 / 20	23,07	62,29

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs) SELF PACK

Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	20,82
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	21,70
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	22,00
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	22,26
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	22,55
PINZC... 19S (top PINZ... 15+ PIN 19)	18 / 20	22,93

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZC... 07S (chosen finish anod. gold) PINZCAO 07S.

ANODIZED COLOURS



AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium

*** ANODIZED COLOURS ON DEMAND**



AT - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium

WOODEN COLOURS



04W - Dark beech | **05W** - Light oak (strip) | **07W** - Light cherry (strip) | **09W** - Red walnut | **13W** - Indonesian teak | **18W** - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **29W** - White oak | **30W** - Grey oak | **31W** - Victoria oak
32W - Pink oak | **33W** - Sawed oak | **34W** - Havana oak | **35W** - Edinburgh oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak | **39W** - Grey elm | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak
45W - Marocco oak | **46W** - Black decape' | **48W** - Cork oak | **49W** - Sand oak | **53W** | **54W** | **55W** | **65W** - Tripoli | **73W** - Bangkok | **75W** - Liotard

*** WOODEN COLOURS ON DEMAND**



06W | **08W** | **10W** | **11W** | **28W** | **40W** | **43W** | **47W** | **50W** | **51W** | **52W** | **56W** | **57W** | **58W** | **59W** | **60W** | **61W** | **62W** | **63W** | **64W** | **66W** | **67W** | **68W** | **69W** | **70W** | **71W** | **72W** | **74W** | **76W** | **77W**
78W | **79W** | **80W** | **80W** | **82W** | **83W** | **84W** | **85W** | **86W** | **87W** | **88W** | **89W** | **90W** | **93W** | **94W** | **95W** | **97W**

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. **2.** Lay the floor leaving from 3 to10 mm between the floor and the insert. **3.** Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. **4.** With the aid of a board, hammer the TOP to the desired fitting level.

*** = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


© 2026 All rights reserved by Progress Profiles. Printed in Italy

TERMINAL PIN

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting –board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 22 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc.

terminal - outer profiles

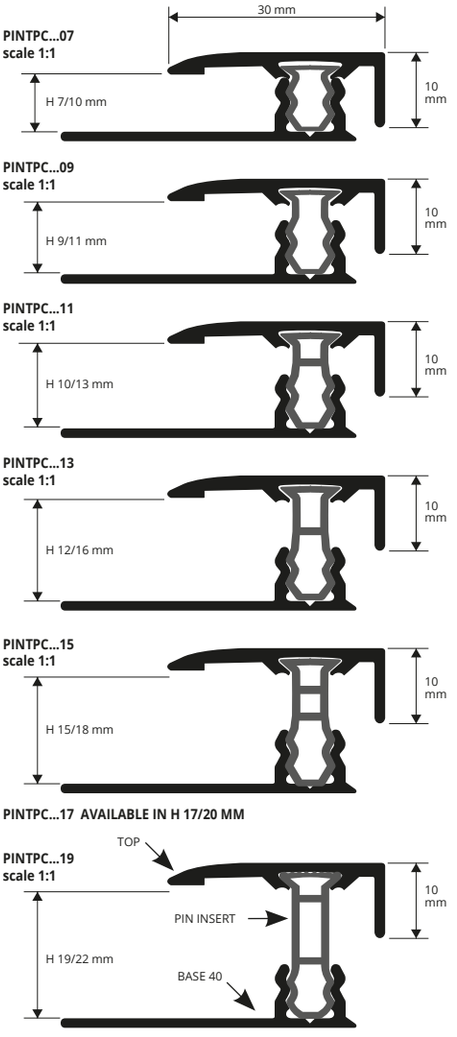



ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)**

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10	13,46	36,34
PINTPC... 09 (PIN 09)	9 / 11	13,87	37,45
PINTPC... 11 (PIN 11)	10 / 13	14,30	38,61
PINTPC... 13 (PIN 13)	12 / 16	14,82	40,01
PINTPC... 15 (PIN 15)	15 / 18	15,53	41,93
PINTPC... 17 (PIN 17)	17 / 20	16,39	44,25
PINTPC... 19 (PIN 19)	19 / 22	17,24	46,55

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs) SELF PACK

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	14,54
PINTPC... 09S (PIN 09)	9 / 11	15,05
PINTPC... 11S (PIN 11)	10 / 13	15,57
PINTPC... 13S (PIN 13)	12 / 16	16,07
PINTPC... 15S (PIN 15)	15 / 18	16,56
PINTPC... 17S (PIN 17)	17 / 20	18,53
PINTPC... 19S (PIN 19)	19 / 22	18,08



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)**

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10	18,92	51,08
PINTPC... 09 (PIN 09)	9 / 11	19,50	52,65
PINTPC... 11 (PIN 11)	10 / 13	20,10	54,27
PINTPC... 13 (PIN 13)	12 / 16	20,91	56,46
PINTPC... 15 (PIN 15)	15 / 18	21,73	58,67
PINTPC... 17 (PIN 17)	17 / 20	22,88	61,78
PINTPC... 19 (PIN 19)	19 / 22	23,94	64,64


COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs) SELF PACK

Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	20,01
PINTPC... 09S (PIN 09)	9 / 11	20,63
PINTPC... 11S (PIN 11)	10 / 13	20,95
PINTPC... 13S (PIN 13)	12 / 16	21,63
PINTPC... 15S (PIN 15)	15 / 18	22,17
PINTPC... 17S (PIN 17)	17 / 20	22,73
PINTPC... 19S (PIN 19)	19 / 22	23,36


Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINTPC... 07S (chosen finish anod. gold) PINTPCAO 07S.

ANODIZED COLOURS



AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium

***ANODIZED COLOURS ON DEMAND**




AT - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium

WOODEN COLOURS



04W - Dark beech | **05W** - Light oak (strip) | **07W** - Light cherry (strip) | **09W** - Red walnut | **13W** - Indonesian teak | **18W** - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **29W** - White oak | **30W** - Grey oak | **31W** - Victoria oak
32W - Pink oak | **33W** - Sawed oak | **34W** - Havana oak | **35W** - Edinburgh oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak | **39W** - Grey elm | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak
45W - Marocco oak | **46W** - Black decape' | **48W** - Cork oak | **49W** - Sand oak | **53W** | **54W** | **55W** | **65W** - Tripoli | **73W** - Bangkok | **75W** - Liotard

***WOODEN COLOURS ON DEMAND**

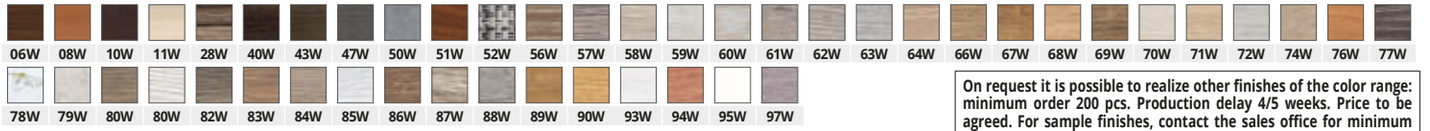

06W | **08W** | **10W** | **11W** | **28W** | **40W** | **43W** | **47W** | **50W** | **51W** | **52W** | **56W** | **57W** | **58W** | **59W** | **60W** | **61W** | **62W** | **63W** | **64W** | **66W** | **67W** | **68W** | **69W** | **70W** | **71W** | **72W** | **74W** | **76W** | **77W**
78W | **79W** | **80W** | **80W** | **82W** | **83W** | **84W** | **85W** | **86W** | **87W** | **88W** | **89W** | **90W** | **93W** | **94W** | **95W** | **97W**

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix PINBFTL 40 base at the outer edge/wall. **2.** Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

*** = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

TERMINAL

ALUMINIUM COVERED WOODEN FINISHES AND ANODIZED FINISHES

The **TERMINAL** range comprises a large assortment of perimeter joint or edging profiles in aluminium covered in wooden finishes are available, plus anodized finishes. They are used in various laying situations. Ideal as an edging profile for wood parquet, laminate and melamine-coated floors. They finish the floor where it joins to abutting surfaces, windows, glazed areas, doors, terraces and may also be used for joining two floors: wood/tiles, wood/carpeting.





ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs - 108 lm**
(H 11 - H 13 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT... 07	7	6,58	17,77
PINT... 09	9	6,74	18,20
PINT... 11	11	6,88	18,58
PINT... 13	13	7,13	19,25
PINT... 15	15	7,42	20,03

ALUMINIUM COVERED (80 wooden finishes of which 70 on demand)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**
(H 11 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT... 09	9	10,57	28,54
PINT... 11	11	10,87	29,35
PINT... 15	15	12,59	33,99

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-08W-10W-29W-30W-31W-34W-37W-41W-42W.
The code of the selected colour must be added to the article code. E.g.: PINT... 07 (chosen finish anod. gold) PINTAO 07.

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed
bar length **0,90 lm - 20 Pcs - BLISTER PACKS** SELF PACK


Article	H mm	€/Pc
PINT... 07S	7 / 8	7,39
PINT... 09S	9 / 10	7,53
PINT... 11S	11 / 12	7,68
PINT... 15S	15 / 16	8,27

ALUMINIUM COVERED (80 wooden finishes of which 70 on demand)
thermo packed
bar length **0,90 lm - 20 Pcs - BLISTER PACKS** SELF PACK


Article	H mm	€/Pc
PINT... 09S	9 / 10	13,53
PINT... 11S	11 / 12	13,61
PINT... 15S	15 / 16	14,18

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-08W-10W-29W-30W-31W-34W-37W-41W-42W.
The code of the selected colour must be added to the article code. E.g.: PINT... 07S (chosen finish anod. gold) PINTAO 07S.

PINT... 07
scale 1:1




PINT... 09
scale 1:1




PINT... 11
scale 1:1




PINT... 13
scale 1:1

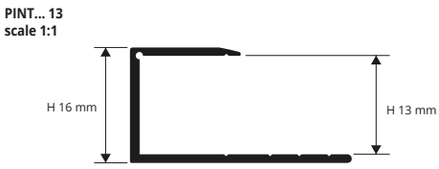

PINT... 15
scale 1:1

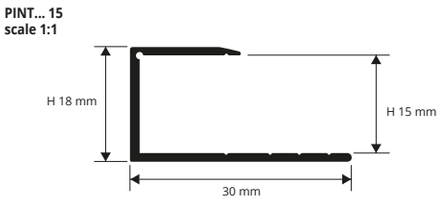

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

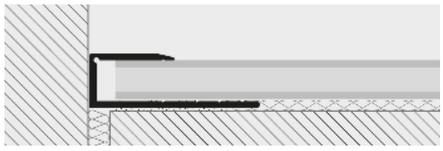

1. Choose the TERMINAL according to the required height and finish and fix with screws and screw anchors or with glue/silicone; the profile must be placed next to the abutting surface e.g. wall, glazing, etc. **2.** Align the laminate/melamine/wood floor, ensuring that a large enough gap is left to accommodate the natural expansion between the floor and the profile (approx. 3/10mm on one side).

ANODIZED COLOURS




AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium

*** ANODIZED COLOURS ON DEMAND**



AT - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium

WOODEN COLOURS



05W - Light oak (strip) | **08W** - Dark cherry | **10W** - Wengè | **29W** - white oak | **30W** - Rovere grigio | **30W** - Grey oak | **34W** - Havana oak | **37W** - Carvi oak | **41W** - Ice oak | **42W** - Grace oak

*** WOODEN COLOURS ON DEMAND**



04W | **06W** | **07W** | **09W** | **10W** | **11W** | **13W** | **28W** | **21W** | **25W** | **28W** | **32W** | **33W** | **35W** | **36W** | **38W** | **39W** | **40W** | **43W** | **44W** | **45W** | **46W** | **47W** | **48W** | **49W** | **50W** | **51W** | **52W** | **53W** | **54W**
55W | **56W** | **57W** | **58W** | **59W** | **60W** | **61W** | **62W** | **63W** | **64W** | **65W** | **66W** | **67W** | **68W** | **69W** | **70W** | **71W** | **72W** | **73W** | **74W** | **75W** | **76W** | **77W** | **78W** | **79W** | **80W** | **80W** | **82W** | **83W** | **84W**
85W | **86W** | **87W** | **88W** | **89W** | **90W** | **93W** | **94W** | **95W** | **97W**

On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


STYLE STAIR

TOP IN WOODEN FINISHES
and ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE


The **STYLE STAIR** range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. wooden finishes are available , plus anodized finishes. Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

stair nosing profiles


PINYC...07
scale 1:1

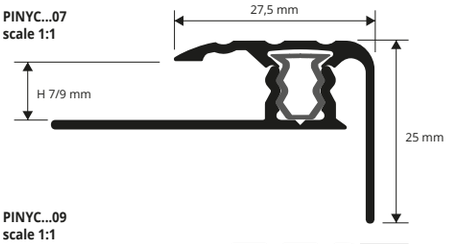


PINYC...09
scale 1:1

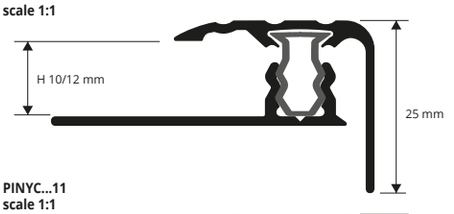


PINYC...11
scale 1:1

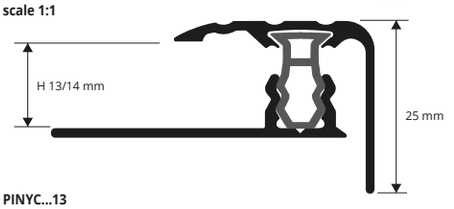


PINYC...13
scale 1:1

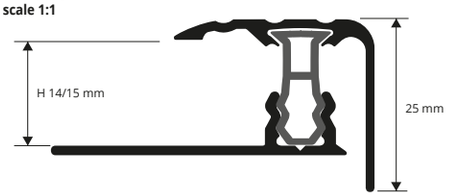

PINYC...15
scale 1:1

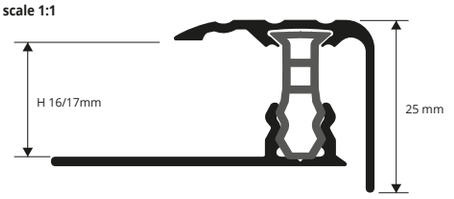

PINYC...17
scale 1:1

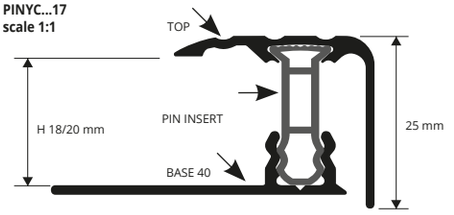



ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)**

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	13,85	37,40
PINYC... 09 (PIN 09)	10 / 12	14,24	38,45
PINYC... 11 (PIN 11)	13 / 14	14,63	39,50
PINYC... 13 (PIN 13)	14 / 15	15,03	40,58
PINYC... 15 (PIN 15)	16 / 17	15,40	41,58
PINYC... 17 (PIN 17)	18 / 20	15,80	42,66

COMPLETE



ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED (80 wooden finishes of which 60 on demand) thermo packed
bar length **2,7 lm -** pack. **20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)**

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	20,02	54,05
PINYC... 09 (PIN 09)	10 / 12	20,37	55,00
PINYC... 11 (PIN 11)	13 / 14	20,77	56,08
PINYC... 13 (PIN 13)	14 / 15	21,16	57,13
PINYC... 15 (PIN 15)	16 / 17	21,56	58,21
PINYC... 17 (PIN 17)	18 / 20	21,92	59,18

COMPLETE


Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS











TOP IN ANODIZED FINISHES



TOP IN WOODEN FINISHES


1. Fix the base exactly over the stair riser. **2.** Align the laminate/ melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. **3.** Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. **4.** With the aid of a board, hammer the TOP to the desired fitting level.

ANODIZED COLOURS



AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium

*** ANODIZED COLOURS ON DEMAND**



AT - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium

WOODEN COLOURS




05W - Light oak (strip) | **07W** - Light cherry (strip) | **09W** - Red walnut | **18W** - Light zerbano | **21W** - Oak powder | **29W** - White oak | **30W** - Grey oak | **31W** - Victoria oak | **32W** - Pink oak | **34W** - Havana oak | **35W** - Edinburgh oak



37W - Carvi oak | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak | **46W** - Black decape' | **48W** - Cork oak | **49W** - Sand oak | **65W** - Tripoli | **73W** - Bangkok | **75W** - Liotard

*** WOODEN COLOURS ON DEMAND**



04W | **06W** | **08W** | **10W** | **11W** | **13W** | **25W** | **28W** | **33W** | **36W** | **38W** | **39W** | **40W** | **43W** | **45W** | **47W** | **50W** | **51W** | **52W** | **53W** | **54W** | **55W** | **56W** | **57W** | **58W** | **59W** | **60W** | **61W** | **62W** | **63W**



64W | **66W** | **67W** | **68W** | **69W** | **70W** | **71W** | **72W** | **74W** | **76W** | **77W** | **78W** | **79W** | **80W** | **80W** | **82W** | **83W** | **84W** | **85W** | **86W** | **87W** | **88W** | **89W** | **90W** | **93W** | **94W** | **95W** | **97W**

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

*** = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STYLE STAIR L comprises a large range of aluminium stair nosing protecting profiles for step in timber, parquet, laminate or melamine material with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. The profiles is made with 3 pcs. A natural aluminium base to scew or glue to the pavement, a PIN in non-toxic rigid to insert in the TOP, then a TOP should be selected most suitable for the floor.

STYLE STAIR L

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE





ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)**

Article	H mm	€/lm	€/Pc
PINYLC... 07 (PIN 07)	7 / 9	14,24	38,45
PINYLC... 09 (PIN 09)	10 / 12	14,63	39,50
PINYLC... 11 (PIN 11)	13 / 14	15,03	40,58
PINYLC... 13 (PIN 13)	14 / 15	15,40	41,58
PINYLC... 15 (PIN 15)	16 / 17	15,80	42,66
PINYLC... 17 (PIN 17)	18 / 20	16,19	43,71

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORED (80 wooden finishes of which 57 on demand) thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)**

Article	H mm	€/lm	€/Pc
PINYLC... 07 (PIN 07)	7 / 9	20,37	55,00
PINYLC... 09 (PIN 09)	10 / 12	20,77	56,08
PINYLC... 11 (PIN 11)	13 / 14	21,16	57,13
PINYLC... 13 (PIN 13)	14 / 15	21,56	58,21
PINYLC... 15 (PIN 15)	16 / 17	21,92	59,18
PINYLC... 17 (PIN 17)	18 / 20	22,32	60,26

COMPLETE


Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 58W - 54W - 55W.
The code of the selected colour must be added to the article code. E.g.: PINYLC... 07 (chosen finish anod. gold) PINYLCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS











TOP IN ANODIZED FINISHES



TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser. **2.** Align the laminate/ melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. **3.** Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. **4.** With the aid of a board, hammer the TOP to the desired fitting level.

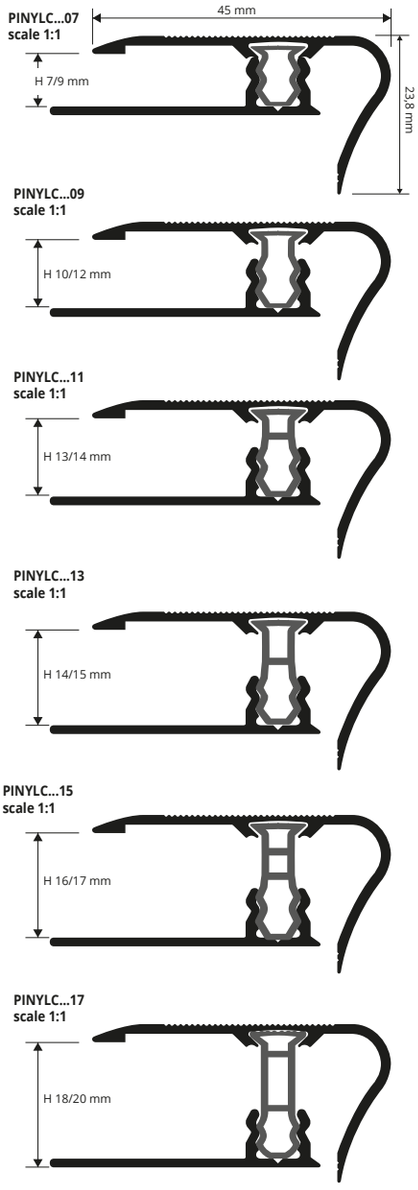

ANODIZED COLOURS

AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium

*** ANODIZED COLOURS ON DEMAND**

AT - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium

WOODEN COLOURS

04W - Dark beech | **05W** - Light oak (strip) | **13W** - Indonesian teak | **18W** - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **29W** - White oak | **30W** - Grey oak | **31W** - Victoria oak | **32W** - Pink oak | **33W** - Sawed oak

34W - Havana oak | **35W** - Edinburgh oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak | **39W** - Grey elm | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak | **45W** - Marocco oak | **53W**

54W | **55W**

*** WOODEN COLOURS ON DEMAND**

06W | **07W** | **08W** | **09W** | **10W** | **11W** | **28W** | **40W** | **43W** | **46W** | **47W** | **48W** | **49W** | **50W** | **51W** | **52W** | **56W** | **57W** | **58W** | **59W** | **60W** | **61W** | **62W** | **63W** | **64W** | **65W** | **66W** | **67W** | **68W** | **69W**

70W | **71W** | **72W** | **73W** | **74W** | **75W** | **76W** | **77W** | **78W** | **79W** | **80W** | **80W** | **82W** | **83W** | **84W** | **85W** | **86W** | **87W** | **88W** | **89W** | **90W** | **93W** | **94W** | **95W** | **97W**

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

*** = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

© 2020. All rights reserved by Progress Profiles. Printed in Italy

© 2023 All rights reserved by Progress Profiles. Printed in Italy



UNIVERSAL, CONNECTION AND PERIMETER JOINTS



SOL 30P (Page 244)



ZERO CURVE (Page 244)



TERMINAL PIN (Page 244)

CONNECTION JOINTS



PROINTER KL ACC / ALL (Page 30-32)



PROSHELL D ALL (Page 159)



PROSHELL R ALL (Page 159)



PROLEVALL 305 (Page 80)



PROLINOLEUM (Page 85)



PROFLOOR 24 (Page 85)



PROSLIDER KL ALL (Page 86)



PROCOVER 1045 ALL (Page 86)

STAIR NOSINGS PROFILES



PROSTYLE KL 10 (Page 161)



PROSTAIR KL 20 (Page 161)

© 2026 All rights reserved by Progress Profiles. Printed in Italy


LVT PROFILES - SOL 30P

AWOODEN FINISHES and
ANODIZED FINISHES


SOL 30P, ZERO CURVE AND TERMINAL PIN are profile which serve as expansion joints, junction and as perimetrical expansion joint between different floors in vinyl. The profiles are composed of a BASE in PVC to fix to the support and of three TOP. The choice of the TOP depend on the desired application. Their particular section, together with the wide range of finishes available and the ease of installation, make them a much-sought profiles, that could be easily matched with every type of floor in vinyl.

universal joints

PISPC... 3046
PISPCAA 4046
scale 1:1



EXAMPLES OF LAYING





INSTRUCTIONS FOR LAYING METHODS
1. Choose SOL P / ZERO CURVE / TERMINAL PIN according to the desired finish. **2.** Cut the BASE in vinyl resin/PVC to the desired length and fix it with adhesive or dowels to the support. **3.** Lay the floor in vinyl, leaving a 5 mm joint between the vertical walls of the base in vinyl resin/PVC and the floor. **4.** Cut the desired TOP in aluminium to the desired length. **5.** Place a small wooden board on the TOP in aluminium and hammer equally in order to facilitate the insertion of the TOP into the pvc base.

ALUMINIUM TOP 6 anod. finishes (3 on demand) **+ BASE** (vinyl resin/PVC) -**thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PISPC... 3046	**30**	**7,77**	**20,98**

The code of the selected colour must be added to the article code. E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP 80 wooden finishes (56 on demand) **+ BASE** (vinyl resin/PVC) - **thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PISPC... 3046	**30**	**11,34**	**30,62**

The code of the selected colour must be added to the article code. E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP (anod. silver) **+ BASE** (vinyl resin/PVC)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**


Article	L mm	€/lm	€/Pc
PISPCAA 4046	**40**	**8,12**	**21,92**

LVT PROFILES - ZERO CURVE

WOODEN FINISHES and
ANODIZED FINISHES

transition profiles

PINZC... 2646
PINZCAA 3246
scale 1:1



EXAMPLES OF LAYING





ALUMINIUM TOP (anod. silver) **+ BASE** (vinyl resin/PVC)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINZCAA 3246	**32**	**8,12**	**21,92**

ALUMINIUM TOP 6 anod. finishes (3 on demand) **+ BASE** (vinyl resin/PVC) -**thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINZC... 2646	**26**	**7,77**	**20,98**

The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

ALUMINIUM TOP 80 wooden finishes (56 on demand) **+ BASE** (vinyl resin/PVC) - **thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINZC... 2646	**26**	**11,34**	**30,62**


The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

LVT PROFILES - TERMINAL PIN


WOODEN FINISHES and
ANODIZED FINISHES

terminal

PINTPC... 1946
PINTPCAA 2546
scale 1:1



EXAMPLES OF LAYING





ALUMINIUM TOP (anod. silver) **+ BASE** (vinyl resin/PVC)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINTPCAA 2546	**25**	**8,12**	**21,92**

ALUMINIUM TOP 6 anod. finishes (3 on demand) **+ BASE** (vinyl resin/PVC) -**thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINTPC... 1946	**19**	**7,77**	**20,98**

The code of the selected colour must be added to the article code. E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

ALUMINIUM TOP 80 wooden finishes (56 on demand) **+ BASE** (vinyl resin/PVC) - **thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINTPC... 1946	**19**	**11,34**	**30,62**

The code of the selected colour must be added to the article code. E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED

ON DEMAND - MINIMUM QUANTITY 200 PCS

AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium | **AT** - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium

05W - Light oak (strip) | **09W** - Red walnut (merbau-apple-walnut) | **13W** - Indonesian teak | **18W** - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **29W** - White oak | **30W** - Grey oak | **31W** - Victoria oak

33W - Sawed oak | **34W** - Havana oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak | **39W** - Grey elm | **41W** - Ice oak | **42W** - Grace oak | **43W** - Manhattan oak

44W - Honey oak | **45W** - Marocco oak | **46W** - Black decape | **47W** - Black oak | **48W** - Cork oak | **49W** - Sand oak | **93W** - New white

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROWALK 2510 & 2520 are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium and wooden finishes. Available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.


PROWALK 2510 & 2520

ANODIZED ALUMINIUM AND WOODEN FINISHES
PUNCHED OR SELF ADHESIVE







PWK... 2510A
scale 1:1




PWK... 2510F
scale 1:1



PWK... 2520A
scale 1:1



PWK... 2520F
scale 1:1



ANODIZED ALUMINIUM with adhesive thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PWK... 2510A	24 x 10	6,24	16,85
PWK... 2520A	24 x 20	6,85	18,50

ANODIZED ALUMINIUM with adhesive thermo packed - bar length **0,90 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PWK... 25109AS	24 x 10	6,71
PWK... 25209AS	24 x 20	7,73

ANODIZED ALUMINIUM punched thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PWK... 2510F	24 x 10	4,68	12,64
PWK... 2520F	24 x 20	5,38	14,53

ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length **0,90 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PWK... 25109FS	24 x 10	5,64
PWK... 25209FS	24 x 20	6,49

ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length **1,35 lm** - pack. **20 Pcs** SELF PACK

Article	L x H mm	€/Pc
PWK... 251013FS	24 x 10	8,18


Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs).
The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish anod. silver) PWKAA 2510A.


ALUMINIUM WOOD FINISH with adhesive thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc	
PWK... 2510A	24 x 10	10,38	28,03	*
PWK... 2520A	24 x 20	12,48	33,70	*

Available on demand in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W with a minimum quantity order of x pcs.
The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A.

EXAMPLES OF LAYING

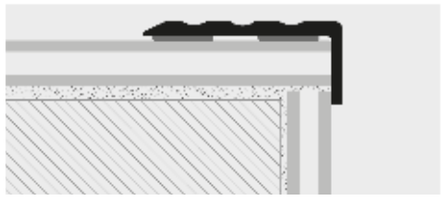

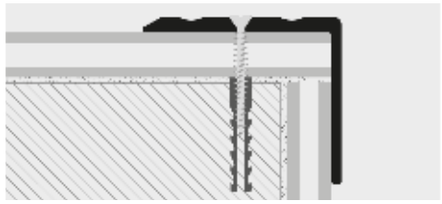


© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROSTEP INS is a step cover profile in silver anodized aluminium ideal for protecting and laying laminated wood / floating melaminic and parquets. Available in two heights 10.5 and 16.


PROSTEP INS

ANODIZED SILVER ALUMINUM




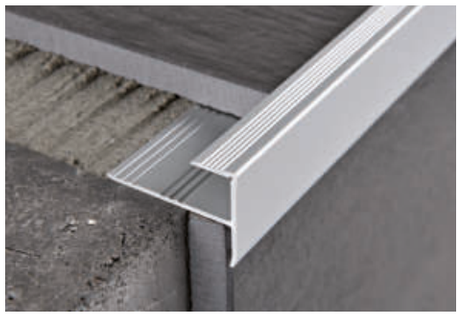

PTSAA 105
scale 1:1

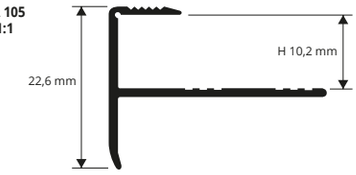

PTSAA 16
scale 1:1



ANODIZED SILVER ALUMINUM thermo packed
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**


Article	H mm	€/lm	€/Pc
PTSAA 105	10,2	6,85	18,50
PTSAA 16	15,9	7,37	19,90

COLOURS



AA - Anod. silver aluminium

EXAMPLES OF LAYING

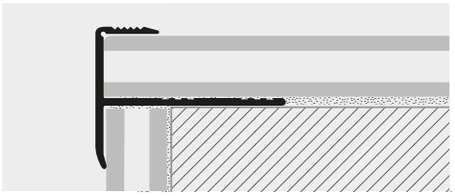

*** = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


SOL 30 SELF-ADHESIVE

ALUMINIUM COVERED WITH PROTECTIVE FILM IN WOODEN FINISHES


SOL 30 self-adhesive is a joint/threshold cover profile in aluminum covered with film wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

threshold - joint-cover profiles

PINS...30A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

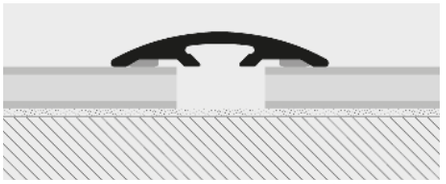

1. Choose the adhesive "SOL 30" in the required finish. **2.** Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. **3.** Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.





ALUMINUM COVERED 80 wooden finishes (71 on demand) with ADHESIVE thermo packed - length **30 mm** - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINS...30A	**30**	**11,81**	**31,89**

ALUMINUM COVERED 80 wooden finishes (71 on demand) with ADHESIVE - thermo packed - bar length **0,90 lm** - **20 Pcs** SELF PACK

Article	L mm	€/Pc
PINS...309AS	**30**	**12,09**

Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code. E.g.: PINS... 30A (chosen finish dark beech) PINS04W 30A.


ZERO CURVE SELF-ADHESIVE

ALUMINIUM COVERED WITH WOODEN FINISHES AND ANODIZED ALUMINIUM


ZERO CURVE self-adhesive is a transition profile in anodised aluminum and aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

transition profiles

PINZ...07A
scale 1:1

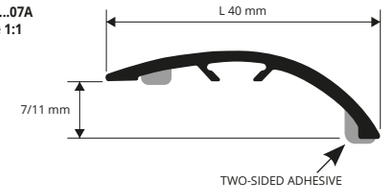

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

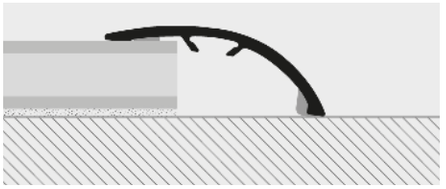

1. Choose the "ZERO CURVE" with adhesive with the required finish. **2.** Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. **3.** Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using an iron/steel hammer.





ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE thermo packed - length **40 mm** - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINZ...07A	**40**	**18,33**	**49,49**
PINZAA 07A	**40**	**10,27**	**27,73**

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE thermo packed - bar length **0,90 lm** - **20 Pcs** SELF PACK

Article	L mm	€/Pc
PINZ...079AS	**40**	**18,26**

Available in the finish: AA - 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07A (chosen finish dark beech) PINZ04W 07A.


COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED



AA - Anod. silver aluminium




04W - Dark beech | **05W** - Light oak (strip) | **07W** - Light cherry (strip) | **09W** - Red walnut (merbau-apple-walnut) | **13W** - Indonesian teak | **18W** - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **29W** - White oak



30W - Grey oak | **31W** - Victoria oak | **32W** - Pink oak | **33W** - Sawed oak | **34W** - Havana oak | **35W** - Edinburgh oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak



39W - Grey elm | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak | **45W** - Marocco oak | **46W** - Black decape' | **48W** - Cork oak | **49W** - Sand oak | **53W**



54W | **55W** | **65W** - Tripoli | **73W** - Bangkok | **75W** - Liotard

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

SOL 40P self-adhesive is a joint/threshold cover profile in aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WOODEN FINISHES



SILVER ANODIZED ALUMINUM with ADHESIVE thermo packed - length **40 mm** - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PNSPAA 40 PA	40	9,07	24,49

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE thermo packed - length **40 mm** - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PNSP.. 40 PA	40	16,65	44,95

SILVER ANODIZED ALUMINUM with ADHESIVE thermo packed - bar length **90 cm** - pack. **20 Pcs** SELF PACK

Article	L mm	€/Pc
PNSPAA 409 PAS	40	9,00

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length **0,90 lm** - **20 Pcs** SELF PACK

Article	L mm	€/Pc
PNSP.. 409 PAS	40	16,99

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length **1 lm** - **20 Pcs** SELF PACK


Article	L mm	€/Pc
PNSPAA 4010 PAS	40	9,95

SILVER ANODIZED ALUMINUM with ADHESIVE - thermo packed - bar length **1 lm** - **20 Pcs** SELF PACK


Article	L mm	€/Pc
PNSP.. 4010 PAS	40	18,62

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PNSP... 40 PA (chosen finish dark beech) PNSP04W 40 PA.

PNSP... 40 PA
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the adhesive "SOL 40" in the required finish. **2.** Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. **3.** Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

threshold - joint-cover profiles

PROCOVER WOOD is a joint-cover profile in aluminum covered with a very strong film available in wooden finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN WOODEN FINISHES





ALUMINUM COVERED 80 wooden finishes (76 on demand) thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 x 9	6,60	17,82
PCRA... 269	26 x 9	11,61	31,35


Available in the wooden finishes: 05W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.

COLOURS




On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.


PCRA... 149
scale 1:1



PCRA... 269
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

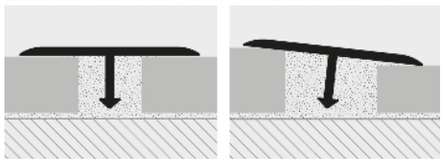

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm - 2/32" - 1/8" side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

WOODEN/LVT

PROCOVER INSERT

VINYL RESIN / BLACK RUBBER


Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN / RUBBER
length **2,7 lm** and/or in rolls


Article	€/lm	€/Roll
PCPCR	4,00	10,80

PROINSERT BASE 45 and BASE 40 - ALUM. PUNCHED/PERFORED
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PINBFT 45	45	6,37	17,20
PINBFT 40	40	6,29	16,98



PCRA... 149/1499/209/269
+ INS
+ BASE 45/40
scale 1:1

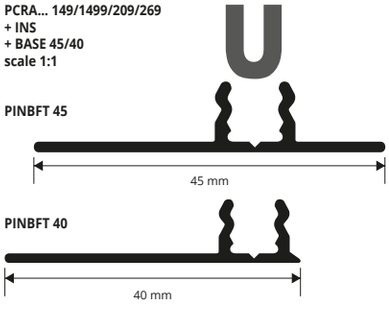

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROFIXER LINE SYSTEM

ZERO CURVE INSERTS + NYLON ANCHORS + BASE
WOODEN FINISHES AND ANODIZED FINISHES

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.
The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus anodized finishes. The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.


transition profiles

PINZ... 07 + PMFIXBSAN 23
scale 1:1

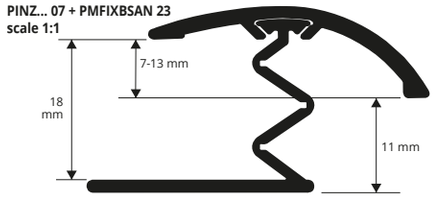


Minimum height 7mm

PINZ... 13 + TAS 36
scale 1:1

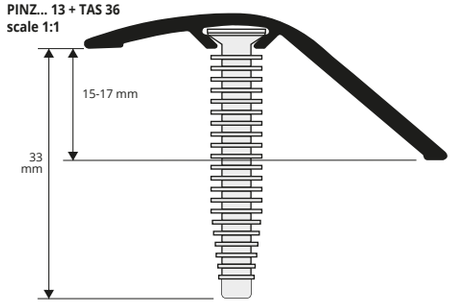

PINZ... 13 + PMFIXBSAN 23
scale 1:1

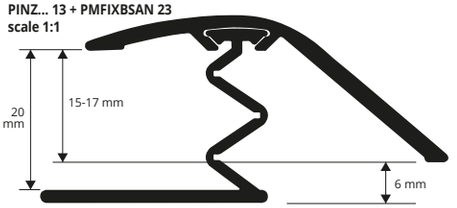

Minimum height 7mm





ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	H mm	€/lm	€/Pc
PINZ... 07	40	7 - 13	8,32	22,46
PINZ... 13	47	15 - 17	11,94	32,24

ALUMINIUM COVERED (80 wooden finishes of which 49 on demand) thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	H mm	€/lm	€/Pc
PINZ... 07	40	7 - 13	15,25	41,18
PINZ... 13	47	15 - 17	18,10	48,87

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand) thermo packed - bar length **0,90 lm** - **20 Pcs**
with **5** anchors — SELF PACK


Article	L mm	H mm	€/Pc
PINZ... 07S	40	7 - 13	10,31
PINZ... 13S	47	15 - 17	12,60

ALUMINIUM COVERED (80 wooden finishes of which 49 on demand) thermo packed - bar length **0,90 lm** - **20 Pcs**
with **5** anchors — SELF PACK

Article	L mm	H mm	€/Pc
PINZ... 07S	40	7 - 13	17,02
PINZ... 13S	47	15 - 17	19,26

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. **2.** Cut the profile to the required length. **3a. For the version with screw anchors:** make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole. **3b. For the version with tap-down aluminium base:** first insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile. **4.** Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.

COLOURS


(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED

ON DEMAND - MINIMUM QUANTITY 200 PCS



AO - Anod. gold aluminium | **AA** - Anod. silver aluminium | **AB** - Anod.bronze aluminium | **AT** - Anod. titanium aluminium | **CH** - Anod. champagne alum. | **SB** - Anod. sand aluminium



04W - Dark beech | **05W** - Light oak (strip) | **07W** - Light cherry (strip) | **09W** - Red walnut (merbau-apple-walnut) | **13W** - Indonesian teak | **18W** - Light zerbano | **21W** - Oak powder | **25W** - Bleached fir | **29W** - White oak



30W - Grey oak | **31W** - Victoria oak | **32W** - Pink oak | **33W** - Sawed oak | **34W** - Havana oak | **35W** - Edinburgh oak | **36W** - American oak | **37W** - Carvi oak | **38W** - Queens oak



39W - Grey elm | **41W** - Ice oak | **42W** - Grace oak | **44W** - Honey oak | **45W** - Marocco oak | **46W** - Black decape' | **48W** - Cork oak | **49W** - Sand oak | **53W**



54W | **55W** | **65W** - Tripoli | **73W** - Bangkok | **75W** - Liotard


On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - **H 36 mm** - pack. **20 Pcs**
for **SOL 30-40-50** and **ZERO CURVE 07-15**


Article	H mm	€/Pc	€/Pack.
TAS 36	36	0,27	5,40

minimum order 5 pcs.



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED
for **SOL 30-40-50** and **ZERO CURVE 07-15**
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,74	18,20



Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

WOODEN/LVT


© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS® PROFILES

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.
The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus six anodized finishes (3 available on demand). The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.

PROFIXER LINE SYSTEM

INSERTS SOL 30 - SOL 40P - SOL 50
+ NYLON ANCHORS + BASE

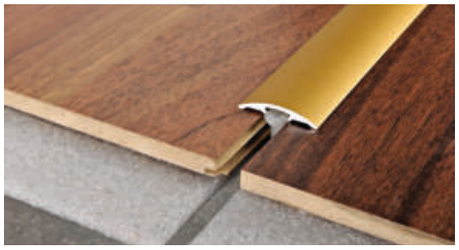

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINS... 30	30	6,08	16,42
PNSP... 40P	40	7,84	21,17

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **0,90 lm** - **20 Pcs** with **5** anchors SELF PACK

Article	L mm	€/Pc
PINS... 309S	30	7,12

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs)

ALUMINIUM COVERED (80 wooden finishes of which 71 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINS... 30	30	11,40	30,78

ALUM. COVERED (80 wooden finishes of which 71 on demand)
thermo packed - bar length **0,90 lm** - **20 Pcs** with **5** anchors SELF PACK

Article	L mm	€/Pc
PINS... 309S	30	11,34

Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
E.g.: PINS...30 (chosen finish dark beech) PINS04W 30.



ALUMINIUM COVERED (80 wooden finishes of which 49 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**


Article	L mm	€/lm	€/Pc
PNSP... 40 P	40	14,34	38,72

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code.
E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.


ANODIZED SILVER ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PINSAA 50	50	8,62	23,27


PINS... 30
scale 1:1




PNSP... 40 P
scale 1:1



PINSAA 50 + TAS 36
scale 1:1

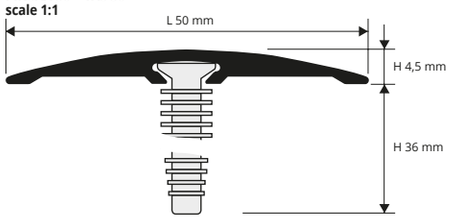

PINSAA 50 + PMFIXBSAN 23
scale 1:1

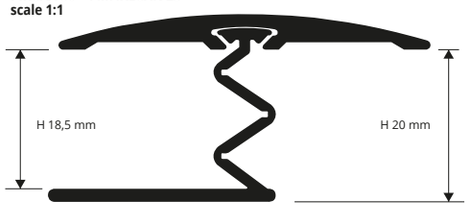

MAXIMUM HEIGHT 18,5 MM




MINIMUM HEIGHT 6MM

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - **H 36 mm** - pack. **20 Pcs**
for **SOL 30-40-50** and **ZERO CURVE 07-15**


Article	H mm	€/Pc	€/Pack.
TAS 36	36	0,27	5,40

minimum order 5 pcs.




PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORATED
for **SOL 30-40-50** and **ZERO CURVE 07-15**
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,74	18,20



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

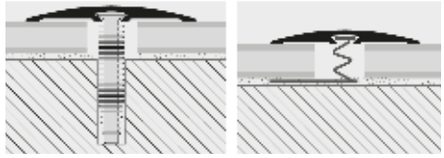

1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. **2.** Cut the profile to the required length.
For the version with screw anchors:
3. Make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole.
For the version with tap-down aluminium base:
3. First insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile. **4.** Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROSCREW 34

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

universal joints with screw

PSWC... 34
scale 1:1

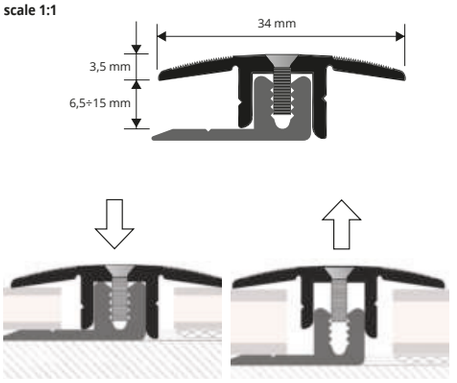



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSWCAA 34	34	16,43	44,36	
PSWCAO 34	34	16,43	44,36	*
PSWCSB 34	34	16,43	44,36	*
PSWCAB 34	34	17,24	46,55	*
PSWCCH 34	34	17,24	46,55	*

To order the following items (top and base), see page **259**
Add + 5% of the price €/lm for the self pack version 0,90 lm


TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSWAA 34	34	9,02	24,35	
PSWAO 34	34	9,02	24,35	*
PSWSB 34	34	9,02	24,35	*
PSWAB 34	34	9,91	26,76	*
PSWCH 34	34	9,91	26,76	*

BASE IN NATURAL ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,89	15,90


PSWBAN 07F



PROSCREW 44

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 44
scale 1:1

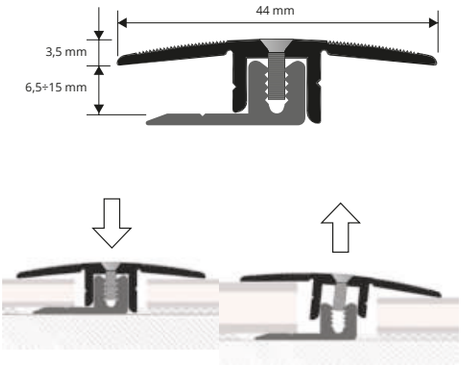



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSWCAA 44	44	17,24	46,55	
PSWCAO 44	44	17,24	46,55	*
PSWCSB 44	44	17,24	46,55	*
PSWCAB 44	44	18,10	48,87	*
PSWCCH 44	44	18,10	48,87	*

To order the following items (top and base), see page **259**
Add + 5% of the price €/lm for the self pack version 0,90 lm


TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSWAA 44	44	10,17	27,46	
PSWAO 44	44	10,17	27,46	*
PSWSB 44	44	10,17	27,46	*
PSWAB 44	44	11,19	30,21	*
PSWCH 44	44	11,19	30,21	*

BASE IN NATURAL ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,89	15,90


PSWBAN 07F



PROSCREW 33

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 33
scale 1:1

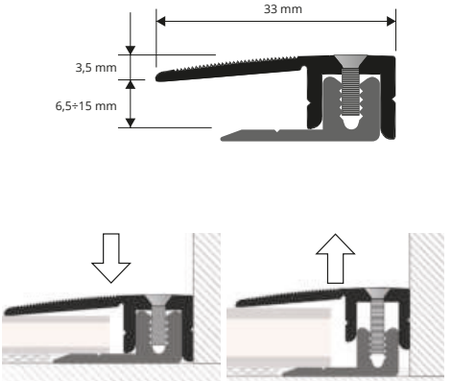



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSWCAA 33	33	16,43	44,36	
PSWCAO 33	33	16,43	44,36	*
PSWCSB 33	33	16,43	44,36	*
PSWCAB 33	33	17,24	46,55	*
PSWCCH 33	33	16,46	44,44	*

To order the following items (top and base), see page **259**
Add + 5% of the price €/lm for the self pack version 0,90 lm


TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSWAA 33	33	9,02	24,35	
PSWAO 33	33	9,02	24,35	*
PSWSB 33	33	9,02	24,35	*
PSWAB 33	33	9,91	26,76	*
PSWCH 33	33	9,91	26,76	*

BASE IN NATURAL ALUMINIUM
thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,89	15,90

PSWBAN 07F



COLOURS

ON DEMAND (minimum quantity 100 pcs)

ANODIZED



AA - Anod. silver alum.

ANODIZED



AO - Anod. gold alum. **AB** - Anod. bronze alum. **CH** - Anod. champagne alum. **SB** - Anod. sand alum.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc	
PSWAA 50	50	11,36	30,67	
PSWAO 50	50	11,36	30,67	*
PSWSB 50	50	11,36	30,67	*
PSWAB 50	50	12,51	33,78	*
PSWCH 50	50	12,51	33,78	*

BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**


Article	L mm	€/lm	€/Pc	
PSWCAA 50	50	17,98	48,55	
PSWCAO 50	50	17,98	48,55	*
PSWCSB 50	50	17,98	48,55	*
PSWCAB 50	50	18,71	50,52	*
PSWCCH 50	50	18,71	50,52	*

To order the following items (top and base), see page **259**
Add + 5% of the price €/lm for the self pack version 0,90 lm

BASE IN NATURAL ALUMINIUM thermo packed - bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,89	15,90


PSWBAN 07F



PROSCREW 50

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 50
scale 1:1

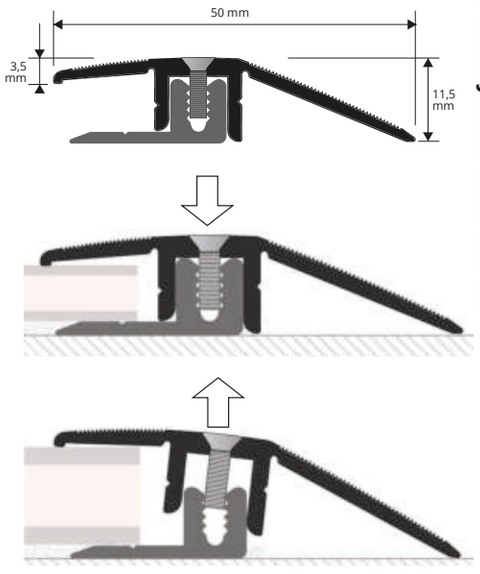

universal joints with screw

COLOURS

ON DEMAND (minimum quantity 100 pcs)



SCREWS to fix all perforated versions

NICKEL PLATED


WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X10
pack. **14 Pcs**

Article	Ø mm	H mm	€/Pack.
VIZBP 310	05	10	3,92


WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X16
pack. **14 Pcs**

Article	Ø mm	H mm	€/Pack.
VIZBP 316	05	16	3,92

VIZBP 310



VIZBP 316




KIT PROSCREW

KIT PROSCREW

Article		€/KIT
KIT PROSCREW	KIT consists of 14 screws VIZBP 310, 14 screws VIZBP 316, 15 screws + screw anchors VINPT 325	6,53

KIT PROSCREW

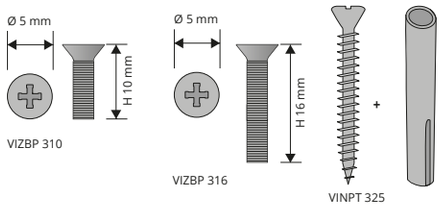

EXAMPLES OF LAYING







*** = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


© 2026 All rights reserved by Progress Profiles. Printed in Italy

PROMULTISKIRT SQUARE


FOAMED VINYL RESIN

PROMULTISKIRT SQUARE is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes.The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone.The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT SQUARE in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

BTEPR... 108614/S
Scale 1:1

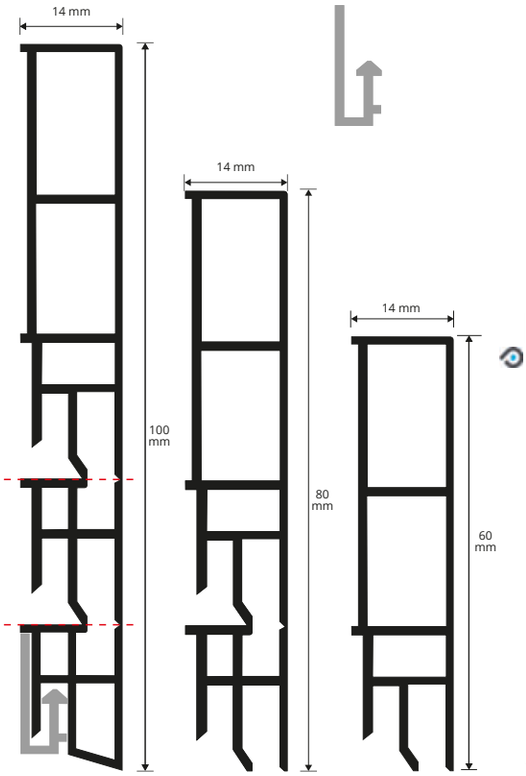

BTEPRS 18/100
Scale 1:1

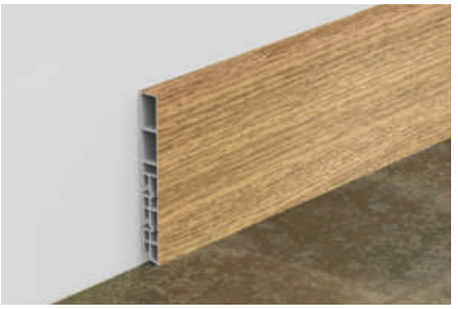

PATENTED



FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length **2,4 lm** - pack. **20 Pcs - 48 lm**

Article	L mm	€/lm	€/Pc
BTEPR... 108614/S	**100/80/60**	**8,81**	**21,14**

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 108614/S (chosen finish Havana oak) BTEPR34W 108614/S

SUPPORT / FIXING CLIP - PLASTIC
pack. **100 Pcs**

Article	H mm	€/pack.
BTEPRS 18	**16,5**	**12,68**

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS




29W - White oak | **30W** - Grey oak | **34W** - Havana oak | **B** - White | **N** - Black | **AA** - Silver

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

LAYING INSTRUCTIONS

1. Choose "PROMULTISKIRT SQUARE" according to the chosen colour. **2**. Cut "PROMULTISKIRT SQUARE" to the required length. **3**. if necessary cut "PROMULTISKIRT SQUARE" to the required height. * **4**. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general.
Laying with adhesive only:
5a. . With dry surface apply the Proband Fix. **6a.** Press the profile against the wall with the correct pressure.
Laying with adhesive and support:
5b. Fix the plastic supports to the wall every 50mm with screws. **6b.** Apply Proband Fix only to the back upper part of the skirting board.
7b. Fix the profile to the supports and press it against the wall with correct pressure.

EXAMPLE OF LAYING

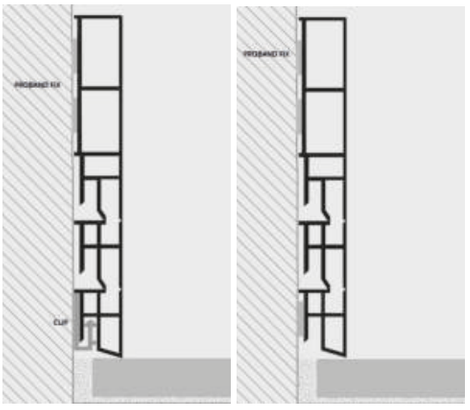

***CUT INSTRUCTIONS**



Option 1A: Cut to have the height 80 mm.
Cut along the first pre-incision on the back of the skirting;



Option 1B: Cut to have the height 60 mm.
Cut along the second pre-incision on the back of the skirting;



2. Cut the skirting on the front side at the cut previously made on the back;




3. Remove the excess part.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CORNERS, END CAPS AND JOINTS

FOAMED VINYL RESIN

INTERNAL CORNER KIT



KIT BTEPR ... 108614/SI

EXTERNAL CORNER KIT



KIT BTEPR ...108614/SE

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KBTEPR...108614/SI	**100/80/60**	**16,41**
KBTEPR...108614/SE	**100/80/60**	**16,41**

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/S

PROGRESS® PROFILES

= News 2023

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROMULTISKIRT ROUND is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes.The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone.The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT ROUND in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

PROMULTISKIRT ROUND

FOAMED VINYL RESIN

PATENTED



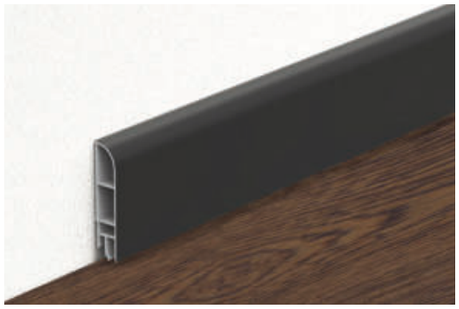

FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length **2,4 lm** - pack. **20 Pcs - 48 lm**

Article	L mm	€/lm	€/Pc
BTEPR... 108614/R	100/80/60	8,81	21,14

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 108614/R (chosen finish Havana oak)BTEPR34W 108614/R

SUPPORT / FIXING CLIP - PLASTIC
pack. **100 Pcs**


Article	H mm	€/pack.
BTEPRS 18	16,5	12,68

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



BTEPR... 108614/R
scale 1:1

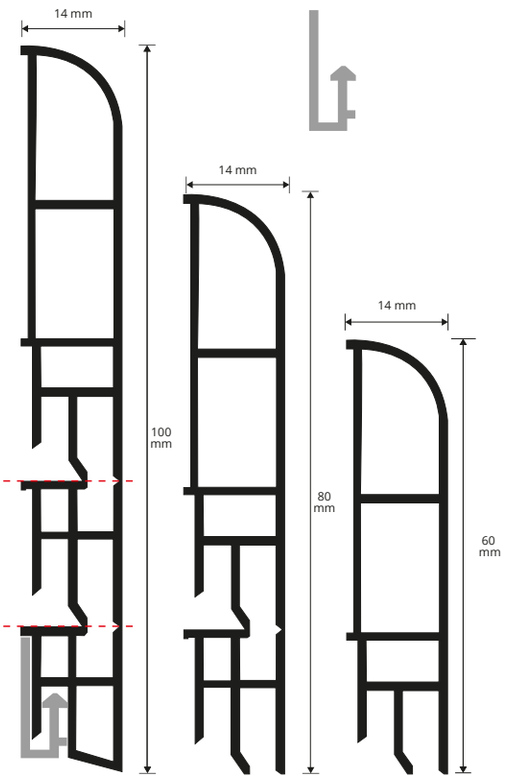

BTEPRS 18/100
scale 1:1

COLOURS

(For a precise assessment of colours request the wood finishes sample range)



29W - White oak	30W - Grey oak	34W - Havana oak	B - White	N - Black	AA - Silver

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

LAYING INSTRUCTIONS

1. Choose "PROMULTISKIRT ROUND" according to the chosen colour. **2**. Cut "PROMULTISKIRT ROUND" to the required length. **3**. if necessary cut "PROMULTISKIRT ROUND" to the required height. * **4**. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general.
Laying with adhesive only:
5a. . With dry surface apply the Proband Fix. **6a.** Press the profile against the wall with the correct pressure.
Laying with adhesive and support:
5b. Fix the plastic supports to the wall every 50mm with screws. **6b.** Apply Proband Fix only to the back upper part of the skirting board.
7b. Fix the profile to the supports and press it against the wall with correct pressure.



Option 1A: Cut to have the height 80 mm.
Cut along the first pre-incision on the back of the skirting;



Option 1B: Cut to have the height 60 mm.
Cut along the second pre-incision on the back of the skirting;




2. Cut the skirting on the front side at the cut previously made on the back;



3. Remove the excess part.

EXAPLE OF LAYING

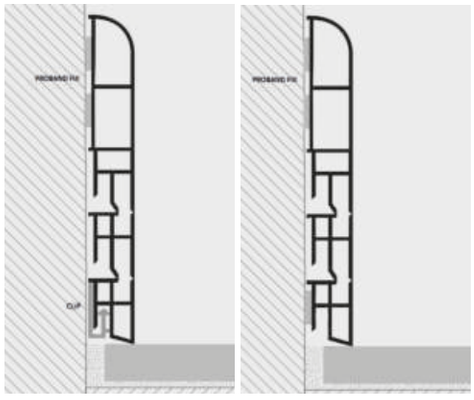

CORNERS, END CAPS AND JOINTS

FOAMED VINYL RESIN

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/S

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)


Article	H mm	€/KIT
KBTEPR...108614/RI	100/80/60	16,41
KBTEPR...108614/RE	100/80/60	16,41

INTERNAL CORNER KIT



KIT BTEPR ...108614/RI

EXTERNAL CORNER KIT



KIT BTEPR ...108614/RE

© 2023 All rights reserved by Progress Profiles. Printed in Italy

= News 2023


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

SKIRTING 7016


FOAMED VINYL RESIN

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm. available wooden finishes and finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 57 cm. Its special section, that allows to cover a 16 mm sperimetral joint, and wide range of finishes make it a very requested, elegant and econimic skirting profile.

BTEPR... 7016
scale 1:1

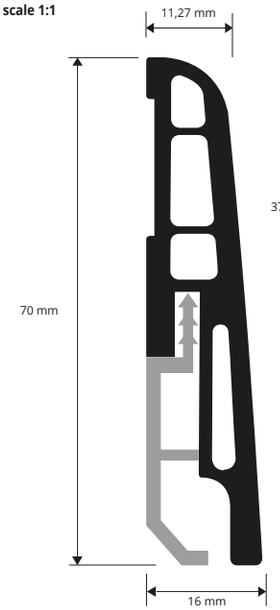

BTEPRS 385/100
scale 1:1





FOAMED VINYL RESIN (wood finIshes - black - white and silver)
Length **= 2,5 m -** Pack **20 pcs - 50 lm**

Article	L mm	€/lm	€/Pc
BTEPR... 7016	70	4,64	11,60

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL





SUPPORT / FIXING CLIP - PLASTIC
support Length **5 cm**


Article	H mm	€/pack.
BTEPRS 385	37,5	12,68

Order the SUPPORT and choose the SKIRTING in the desired finish.


IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)


Article	H mm	€/KIT
KIT BTEPR ...7016I	70	11,69
KIT BTEPR ...7016E	70	11,69

INTERNAL CORNER KIT



EXTERNAL CORNER KIT



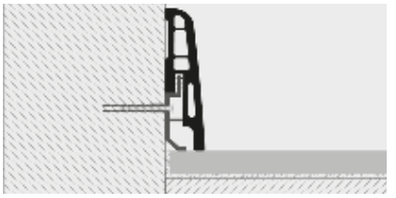

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


1. Choose "Skirting 7016" in the desired finish. **2.** Fix the pre-punched support to the wall with screws every 50 cm. **3.** Attach the profile to the support applying low pressure. **4.** Alternatively fix the profile using a suitable fast adhesive, nails or screws

COLOURS

(For a precise assessment of colours request the wood finishes sample range)



On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

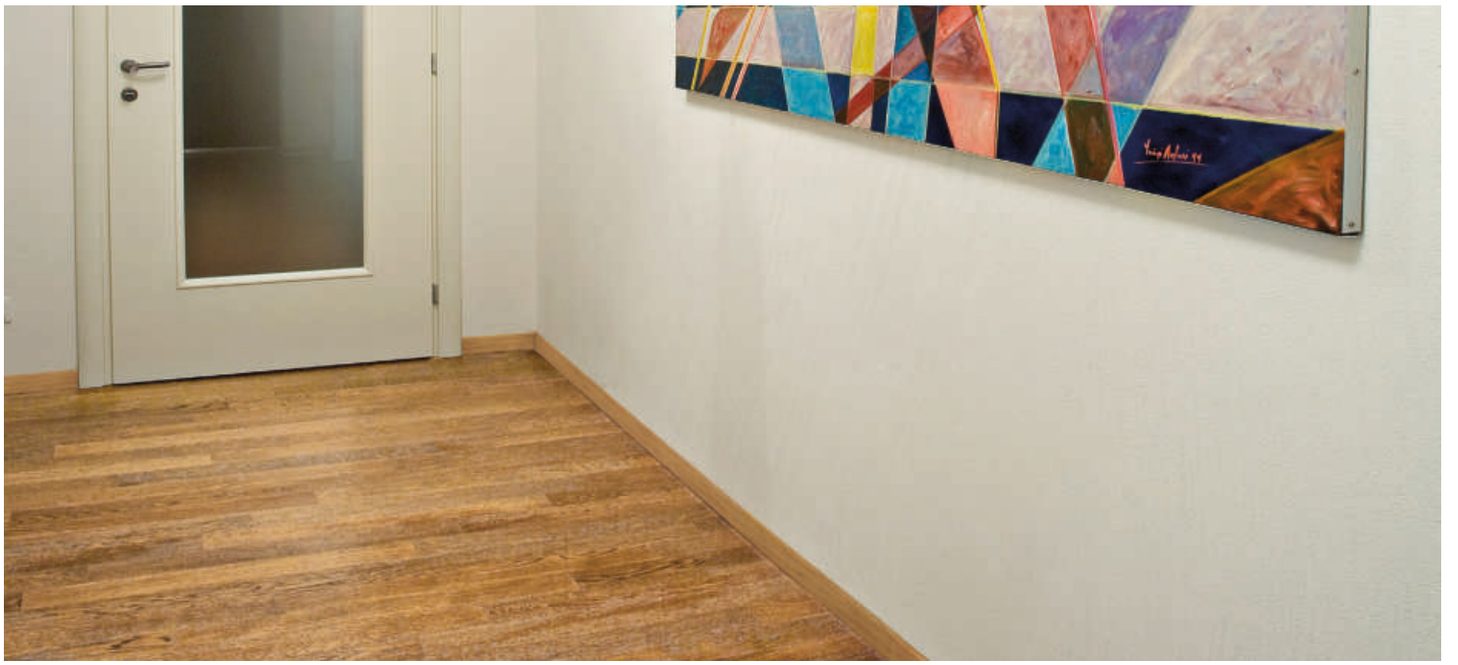

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

SKIRTING 7011 is a vinyl resin foam profile with a height of 70 mm x 10,5 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails .

SKIRTING 7011

FOAMED VINYL RESIN






FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length **= 2,5 m -** Pack **20 pcs - 50 lm**

Article	H mm	€/lm	€/pc
BTEPR... 7011	70	4,43	11,07

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...7011I	70	10,38
KIT BTEPR ...7011E	70	10,38

INTERNAL CORNER KIT




KIT BTEPR...7011I

EXTERNAL CORNER KIT



KIT BTEPR...7011E

BTEPR... 7011
scale 1:1

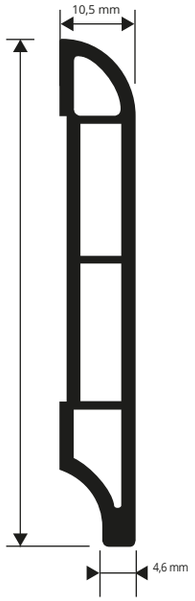

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




COLOURS

(For a precise assessment of colours request the wood finishes sample range)



On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "Skirting 7011" in the required the colour. **2.** Lay the "Skirting 7011" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

SKIRTING 40 is a vinyl resin foam profile with a height of 40 mm x 10 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails .

SKIRTING 40

FOAMED VINYL RESIN



FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length **= 2,4 m** - Pack. **20 PCS - 48 Lm**

Article	H mm	€/lm	€/pc
BTEPR... 4010	40	4,43	10,63

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 4010 (chosen finish Havana oak) BTEPR34W 4010

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...4010I	40	6,66
KIT BTEPR ...4010E	40	6,66


KIT BTEPR...4010I
INTERNAL CORNER KIT



KIT BTEPR...4010E
EXTERNAL CORNER KIT



BTEPR... 4010
scale1:1




COLOURS

(For a precise assessment of colours request the wood finishes sample range)



On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

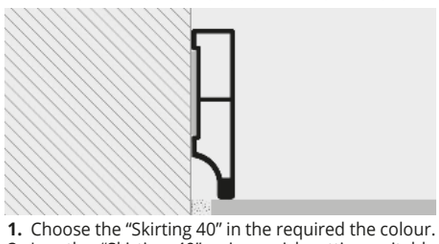

1. Choose the "Skirting 40" in the required the colour. **2.** Lay the "Skirting 40" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

= News 2023


Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROSEAL WOOD


EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS

PROSEAL WOOD is a new inner connector square suitable for creating a concave skirting for wood / rolled-melamime floating wood / ceramic / marble tiles to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents ant to small breakages. **PROSEAL WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colours to combine with various wood finishes. Easy to lay with fixing silicone.

PSAW... 20
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

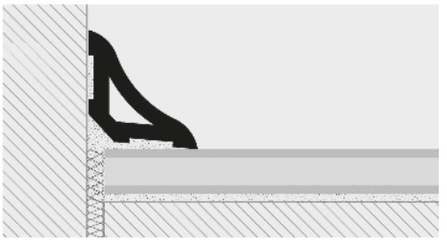

1. Choose "PROSEAL WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik suitable for gluing PVC with mortar - plaster - wall units etc., or fix using screws/nails.



EXPANDED PVC - 2 WOOD FINISHING
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L mm	€/lm	€/Pc
PSAW... 20	**21 x 21**	**0,98**	**2,45**

Available in the wood finishes: 05W - 10W , and colours: B - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen finish black) PSAWN 20.



EXPANDED PVC - 4 COLOURS
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L mm	€/lm	€/Pc
PSAW... 20	**21 x 21**	**0,91**	**2,27**

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS



B - White	**GC** - Light gray	**GS** - Dark gray	**N** - Black	**05W** - Light oak (strip)	**10W** - Wengé (panga panga-wengè)


The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

PROANGLE WOOD


EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS

PROANGLE WOOD is a new inner connector square suitable for creating a convex skirting for wood / rolled-melamime floating wood / ceramic / marble floor to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents and to small breakages. **PROANGLE WOOD**'s dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colors to combine with various wood finishes. Easy to lay with fixing silicone.

PGAW... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

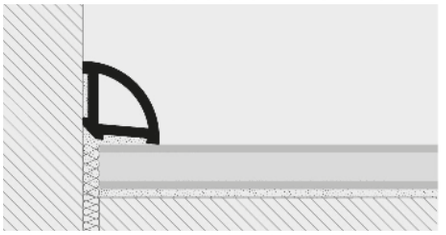

1. Choose "PROANGLE WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik, suitable for glueing PVC with mortar-plaster-wall units etc., or fix using screws/nails.



EXPANDED PVC - 2 WOOD FINISHING
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L mm	€/lm	€/Pc
PGAW... 15	**15 x 15**	**0,74**	**1,85**

Available in the wood finishes: 05W - 10W, and colours: - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PGAW...15 (chosen finish black) PGAWN 15.



EXPANDED PVC - 4 COLOURS
bar length **2,5 lm** - pack. **40 Pcs - 100 lm**

Article	L mm	€/lm	€/Pc
PGAW... 15	**15 x 15**	**0,67**	**1,68**



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

COLOURS



B - White	**GC** - Light gray	**GS** - Dark gray	**N** - Black	**05W** - Light oak (strip)	**10W** - Wengé (panga panga-wengè)

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

SKIRTING

EXPANDED VINYL RESIN

SKIRTING in PVC foam height 70 mm in 12 finishes: 4 in semi-matt black-grey-white and 8 wooden finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone - acrylic - mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species.



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length **2 lm** - pack. **60 Pcs** - **120 lm**

Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	70	1,27	2,54	152,40

EXPANDED RIGID VINYL RESIN (8 wooden finishes)
bar length **2 lm** - pack. **60 Pcs** - **120 lm**

Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	70	1,33	2,66	159,60

Available in the colours: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour black) BTPRN 70.

COLOURS



The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.

BTPR...70



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS
1. Choose the "SKIRTING" in the required the colour. **2.** Lay the skirting using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

ANGLE BAR

EXPANDED VINYL RESIN

ANGLE BAR produced in expanded PVC in 12 finishes: 4 colours in semi-matt, black-grey-white and 8 wooden finishes used to protect angles. Laying is done by gluing (acetic silicone - acrylic - mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species.



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
AGE... 25	25 x 25	1,13	3,05




EXPANDED RIGID VINYL RESIN (8 wooden finishes)
bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
AGE... 25	25 x 25	1,17	3,16


Available in the colours: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen colour black) AGEN 25.

The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.

AGE...25
scale 1:1



EXAMPLE OF LAYING



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

LVT PROFILES - SOL 30P

ALUMINIUM ANODIZED FINISHES
AND WOODEN FINISHES

ALUMINIUM TOP 80 wooden fin. "...W" (56 on demand), 6 anodized fin. (3 on demand) **thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PNSP... 3046	30	4,58	12,37
PNSP...W 3046	30	7,84	21,17

ALUMINIUM TOP (anod. silver)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PNSPAA 4046	40	4,89	13,20

PNSP... 3046
PNSPAA 4046



BASE (vinyl resin/PVC) **-** bar length **2,7 lm**

Article	L mm	€/lm	€/Pc
PINBFT 3646	36	2,48	6,70

PINBFT 3646



LVT PROFILES - ZERO CURVE

ALUMINIUM ANODIZED FINISHES
AND WOODEN FINISHES


ALUMINIUM TOP 80 wooden fin. "...W" (56 on demand), 6 anodized fin. (3 on demand) **thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINZ... 2646	26	4,58	12,37
PINZ...W 2646	26	7,84	21,17

ALUMINIUM TOP (anod. silver)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINZAA 3246	32	4,89	13,20


PINZ... 2646
PINZAA 3246



BASE (vinyl resin/PVC) **-** bar length **2,7 lm**

Article	L mm	€/lm	€/Pc
PINBFT 2346	23	2,48	6,70

PINBFT 2346



LVT PROFILES - TERMINAL PIN

ALUMINIUM ANODIZED FINISHES
AND WOODEN FINISHES


ALUMINIUM TOP 80 wooden fin."...W" (56 on demand), 6 anodized fin. (3 on demand) **thermo packed -** bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINTP... 1946	19	4,58	12,37
PINTP...W 194	19	7,84	21,17

ALUMINIUM TOP (anod. silver)
thermo packed - bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L mm	€/lm	€/Pc
PINTPAA 2546	25	4,89	13,20


PINTP... 1946
PINTPAA 2546



BASE (vinyl resin/PVC) **-** bar length **2,7 lm**

Article	L mm	€/lm	€/Pc
PINBFT 2346	23	2,48	6,70

PINBFT 2346



Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 33W - 34W - 36W - 37W - 38W - 39W - 41W - 42W - 43W - 44W - 45W - 46W - 47W - 48W - 49W. The code of the selected colour must be added to the article code. E.g.: PNSP... 3046 (chosen finish anod. gold) PNSPAO 3046.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

SOL 30 (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

joints

PINS... 30
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINS... 30	**30**	**6,08**	**16,42**

ALUMINIUM COVERED (80 wooden finishes f which 71 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINS... 30	**30**	**11,40**	**30,78**


Available in the anodized finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs), 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W.
The code of the selected colour must be added to the article code. E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

TERMINAL PIN (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

terminal outerprofiles

PINTP... 10
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINTP... 10	**10**	**8,85**	**23,89**

ALIMINIUM COVERED (80 wooden finishes f which 49 on demand)
thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PINTP...	**10**	**14,95**	**40,37**


Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINTP... 10 (chosen finish anod. gold) PINTPAO 10.

ZERO CURVE 07-09-13-15 (only top)


WOODEN-FINISHES AND ANODIZED FINISHES

transition profiles


PINZ... 07
scale 1:2




PINZ... 09
scale 1:2



PINZ... 13
scale 1:2



PINZ... 15
scale 1:2



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length **2,7 lm**
pack. **20 Pcs** - **54 lm** (**H 7** - **H 9 mm** - **108 lm**)

Article	H mm	€/lm	€/Pc
PINZ... 07	**7 / 11**	**8,32**	**22,46**
PINZ... 09	**11 / 14**	**9,04**	**24,41**
PINZ... 13	**15 / 17**	**11,94**	**32,24**
PINZ... 15	**19 / 22**	**12,52**	**33,80**

ALUMINIUM COVERED (80 wooden finishes f which 49 on demand)
thermo packed - bar length **2,7 lm**
pack. **20 Pcs** - **54 lm** (**H 7** - **H 9 mm** - **108 lm**)

Article	H mm	€/lm	€/Pc
PINZ... 07	**7 / 11**	**15,25**	**41,18**
PINZ... 09	**11 / 14**	**15,82**	**42,71**
PINZ... 13	**15 / 19**	**18,10**	**48,87**
PINZ... 15	**19 / 22**	**19,77**	**53,38**


Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

STYLE STAIR (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

stair nosing profiles

PINY...



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed- bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L x H mm	€/lm	€/Pc
PINY...	**27,5 x 25**	**9,49**	**25,62**

ALUMINIUM COVERED (80 wooden finishes f which 60 on demand)
thermo packed - bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	L x H mm	€/lm	€/Pc
PINY...	**27,5 x 25**	**16,01**	**43,23**


Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINY... (chosen finish anod. gold) PINYAO.

STYLE STAIR L (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

stair nosing profiles

PINYL...



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	L x H mm	€/lm	€/Pc
PINYL...	**45 x 23,8**	**10,45**	**28,21**

ALUMINIUM COVERED (80 wooden finishes f which 57 on demand)
thermo packed - bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	L x H mm	€/lm	€/Pc
PINYL...	**45 x 23,8**	**17,62**	**47,57**


Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs), 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 53W - 54W - 55W
The code of the selected colour must be added to the article code. E.g.: PINY... (chosen finish anod. gold) PINYAO.

SOL 40 P (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

joints

PNSP... 40P
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed- bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PNSP... 40P	**40**	**7,84**	**21,17**

ALUMINIUM COVERED (80 wooden finishes f which 49 on demand)
thermo packed- bar length **2,7 lm** - pack. **10 Pcs** - **27 lm**

Article	L x H mm	€/lm	€/Pc
PNSP... 40P	**40**	**14,34**	**38,72**

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PNSP... 40P (chosen finish anod. gold) PNSPAO 40P.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


INTERCHANGEABLE INSERT

RIGID IMPACT-RESISTANT
NO-TOXIC VINYL RESIN

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length **2,7 LM** - pack. **20 Pcs** - **54 LM**

Article	H mm	€/lm	€/Pc
PIN 07	7	1,34	3,62
PIN 09	9	1,47	3,97
PIN 11	11	1,62	4,37
PIN 13	13	1,76	4,75
PIN 15	15	1,90	5,13
PIN 17	17	2,08	5,62
PIN 19	19	2,21	5,97

FOR SOL 40 P AND TERMINAL PIN

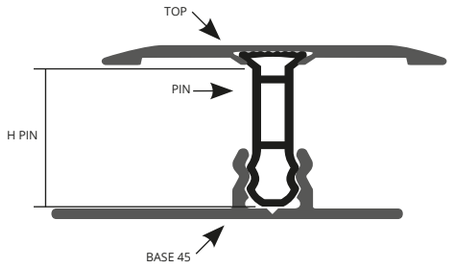


RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PIN 09	9	1,47	3,97
PIN 11	11	1,62	4,37
PIN 13	13	1,76	4,75
PIN 15	15	1,90	5,13
PIN 17	17	2,08	5,62
PIN 19	19	2,21	5,97


FOR ZERO CURVE, STYLE STAIR

For a correct assembly, see the drawings of the complete products in the previous pages


PIN 07
scale 1:1




PIN 09
scale 1:1




PIN 11
scale 1:1




PIN 13
scale 1:1




PIN 15
scale 1:1



PIN 17
scale 1:1



PIN 19
scale 1:1




PROINSERT BASE 45 AND BASE 40

NATURAL ALUMINIUM






PINBFT 45
scale 1:1



PINBFT 40
scale 1:1



ALUM. PUNCHED/PERFORED FOR SOL 30-40-50 AND ZERO CURVE
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	width mm	€/lm	€/Pc
PINBFT 45	45	6,37	17,20
PINBFT 40	40	6,29	16,98

SCREWS and SCREW ANCHORS to fix all perforated version


NICKEL-PLATED


NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. **1.000 Pcs**

Article	Ø mm	length mm	€/Pack.
VINIPT 325	03	25	91,53

BRASS - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. **1.000 Pcs**

Article	Ø mm	length mm	€/Pack.
VIOTPT 325	03	25	91,53





© 2026 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROGRESS®
PROFILES




An interpretation of:
The Gherkin, Norman Foster, LONDON (England), 2004

PROFILES & SYSTEMS

DO IT YOUR SELF PROFILES

CORNER EQUAL SIDES

POLISHED STAINLESS STEEL 1.4016

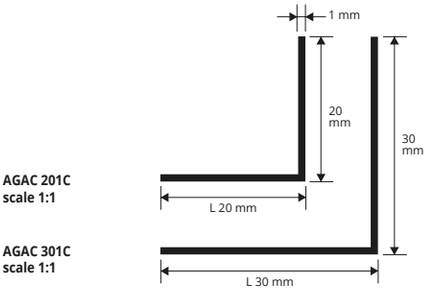

POLISHED STAINLESS STEEL 1.4016 with protective film
thick **1 mm -** bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
AGAC 201C	20 x 20	7,15	14,30
AGAC 301C	30 x 30	8,68	17,36

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.


COLOURS

AC - Polished stainless steel 1.4016



CORNER EQUAL SIDES

POLISHED BRASS

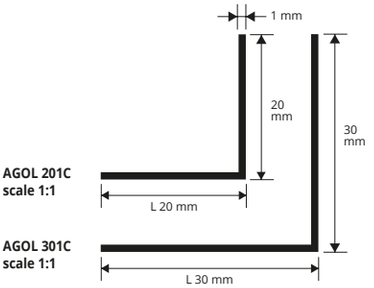

POLISHED BRASS with protective film
thick **1 mm -** bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc	
AGOL 201C	20 x 20	18,40	36,80	*
AGOL 301C	30 x 30	27,36	52,12	*

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.


COLOURS

OL - Polished brass



CORNER EQUAL SIDES


ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

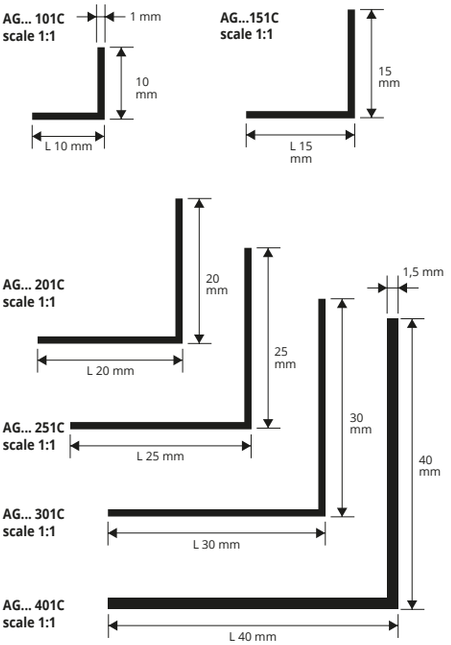

ANODIZED GOLD and SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
AG... 101C	10 x 10	2,38	4,76
AG... 151C	15 x 15	2,63	5,26
AG... 201C	20 x 20	3,21	6,42
AG... 251C	25 x 25	3,58	7,16
AG... 301C	30 x 30	3,92	7,84
AG... 401C	40 x 40	7,26	14,52

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: AG... 101C (chosen finish anodized gold) AGAO 101C.

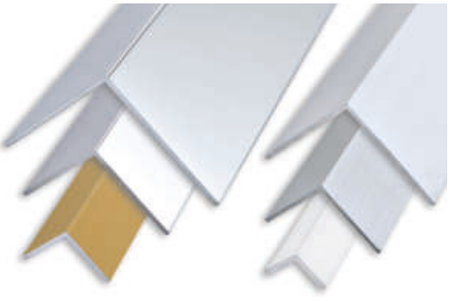

POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
AGBC 101C	10 x 10	3,74	7,48
AGBC 151C	15 x 15	4,04	8,08
AGBC 201C	20 x 20	4,81	9,62
AGBC 251C	25 x 25	5,31	10,62
AGBC 301C	30 x 30	5,91	11,82
AGBC 401C	40 x 40	9,32	18,64

WHITE VARNISHED ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
AGB 101C	10 x 10	2,45	4,90
AGB 151C	15 x 15	2,71	5,42
AGB 201C	20 x 20	3,27	6,54
AGB 251C	25 x 25	3,62	7,24
AGB 301C	30 x 30	3,98	7,96
AGB 401C	40 x 40	7,25	14,50

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.

COLOURS

AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum. **B** - White varnished alum.


*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

CORNER EQUAL SIDES

NON - TOXIC VINYL RESIN

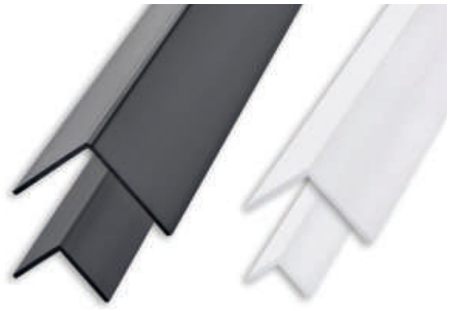

NON - TOXIC VINYL RESIN
bar length **2 lm** - pack. **10 Pcs - 20 lm**


Article	L x H mm	€/lm	€/Pc
AGP10...C	10 x 10	0,60	1,20
AGP15...C	15 x 15	0,96	1,92
AGP20...C	20 x 20	1,42	2,84
AGP25...C	25 x 25	1,78	3,56

Available in the colours: B-N.
The code of the selected colour must be added to the article code.
E.g.: AGP10...C (colour white) AGP10BC.

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.


COLOURS

B - White | **N** - Black

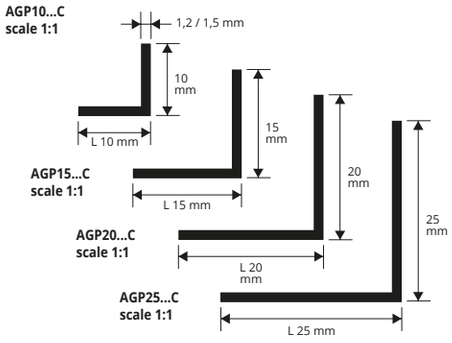

CORNER "L-FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

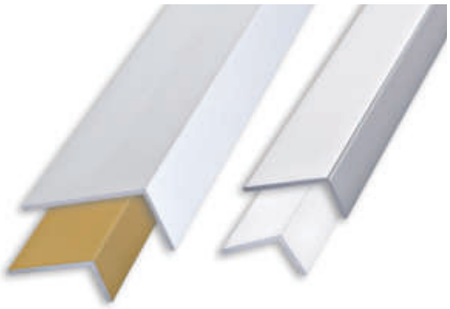

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
AL... 1510C	15 x 10	2,38	4,76
AL... 1020C	20 x 10	2,57	5,14
AL... 3015C	30 x 15	3,30	6,60

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: AL... 1510C (chosen finish anodized gold) ALAO1510C.

POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
ALBC 1510C	15 x 10	3,86	7,72
ALBC 1020C	20 x 10	4,04	8,08
ALBC 3015C	30 x 15	5,00	10,00

WHITE VARNISHED ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**


Article	L x H mm	€/lm	€/Pc
ALB 1510C	15 x 10	2,45	4,90
ALB 3015C	30 x 15	3,35	6,70

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.

COLOURS


AO - Anodized gold alum. | **AA** - Anodized silver alum. | **BC** - Polished chrome alum.

B - White varnished alum.

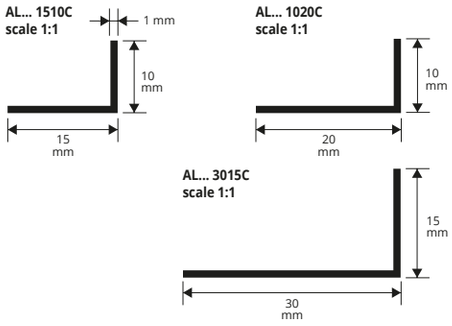

CORNER "L-FORM"

NON - TOXIC VINYL RESIN

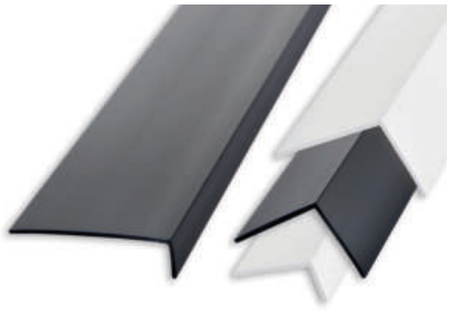

NON TOXIC VINYL RESIN
bar length **2 lm** - pack. **10 Pcs - 20 lm**


Article	L x H mm	€/lm	€/Pc
ALP20...C	20 x 10	0,92	1,84
ALP25...C	25 x 20	1,39	2,78
ALP30...C	30 x 20	1,45	2,90
ALP40...C	40 x 10	1,71	3,42

Available in the colours: B-N.
The code of the selected colour must be added to the article code.
E.g.: ALP20...C (colour white) ALP20BC.

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.

COLOURS

B - White | **N** - Black

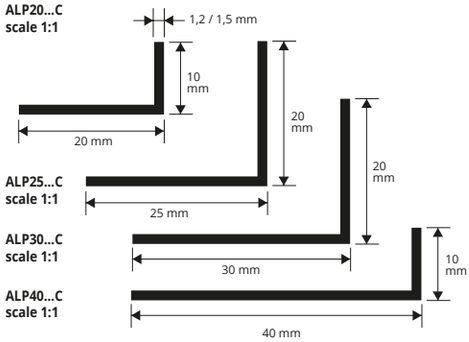


© 2020. All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.


CANAL "U FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME
AND WHITE VARNISHED ALUMINIUM


CU... 081C
scale 1:1




CU... 101C
scale 1:1



CU... 151C
scale 1:1



CU... 201C
scale 1:1



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
CU... 081C	8 x 8	2,17	4,34
CU... 101C	10 x 10	2,57	5,14
CU... 151C	10 x 15	3,11	6,22
CU... 201C	10 x 20	3,17	6,34

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: CU... 101C (chosen finish anodized gold) CUAO 101C.

POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
CUBC 081C	8 x 8	3,82	7,64
CUBC 101C	10 x 10	3,91	7,82
CUBC 151C	10 x 15	4,77	9,54

WHITE VARNISHED ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
CUB 081C	8 x 8	3,36	6,72
CUB 101C	10 x 10	3,55	7,10
CUB 151C	10 x 15	4,16	8,32
CUB 201C	10 x 20	4,77	9,54 *

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.



COLOURS




AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum.

B - White varnished alum.


CANAL DOUBLE "U FORM"

ANODIZED GOLD AND SILVER, POLISHED CHROME
AND WHITE VARNISHED ALUMINIUM


CW... 167C
scale 1:1




CW... 161C
scale 1:1



CW... 201C
scale 1:1



CW... 208C
scale 1:1



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
CW... 167C	16 x 7	2,94	5,88
CW... 161C	16 x 12	3,62	7,24
CW... 201C	20 x 10	3,72	7,44
CW... 208C	20 x 18	4,81	9,62

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: CW... 167C (chosen finish anodized gold) CWAO 167C.

POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
CWBC 167C	16 x 7	4,68	9,36
CWBC 161C	16 x 12	6,03	12,06
CWBC 201C	20 x 10	6,36	12,72
CWBC 208C	20 x 18	6,99	13,98

WHITE VARNISHED ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
CWB 161C	16 x 12	3,72	7,44 *
CWB 208C	20 x 18	4,70	9,40 *

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.



COLOURS



AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum.

B - White varnished alum.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

DO IT YOUR SELF


PROGRESS® PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

FLAT

ANODIZED GOLD AND SILVER, POLISHED CHROME AND WHITE VARNISHED ALUMINIUM

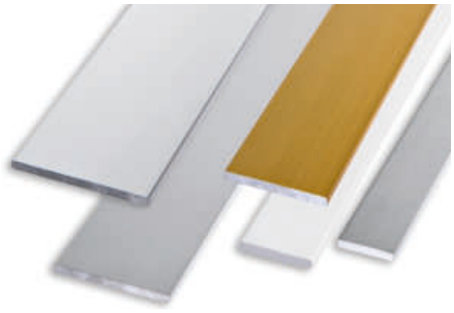


ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**


Article	L mm	€/lm	€/Pc
PI... 102C	10	2,22	4,44
PI... 122C	12	2,35	4,70
PI... 152C	15	2,81	5,62
PI... 202C	20	3,14	6,28
PI... 252C	25	3,55	7,10
PI... 302C	30	4,16	8,32
PI... 402C	40	5,49	10,98


Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: PI... 122C (chosen finish anodized gold) PIAO 122C.


POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**


Article	L mm	€/lm	€/Pc
PIBC 102C	10	3,72	7,44
PIBC 122C	12	3,83	7,66
PIBC 152C	15	4,28	8,56
PIBC 202C	20	4,68	9,36
PIBC 252C	25	5,30	10,60
PIBC 302C	30	6,95	13,90
PIBC 402C	40	9,21	18,42

PI... 102C scale 1:1



PI... 122C scale 1:1


PI... 152C scale 1:1


PI... 202C scale 1:1


PI... 252C scale 1:1


PI... 302C scale 1:1


PI... 402C scale 1:1


WHITE VARNISHED ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc
PIB 102C	10	2,80	5,60
PIB 152C	15	2,90	5,80
PIB 202C	20	3,17	6,34
PIB 252C	25	3,62	7,24
PIB 302C	30	4,17	8,34
PIB 402C	40	5,55	11,10

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.

COLOURS



AO - Anodized gold alum. | **AA** - Anodized silver alum. | **BC** - Polished chrome alum. | **B** - White varnished alum.


FLAT


NATURAL, POLISHED AND BRUSHED BRASS



NATURAL BRASS thermo packed
bar length **2,7 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc	
PION 102C	10	7,46	20,14	*
PION 202C	20	15,04	40,61	*

PI... 102C scale 1:1


PI... 202C scale 1:1



POLISHED BRASS thermo packed
bar length **2,7 lm** - pack. **10 Pcs 20 lm**

Article	L mm	€/lm	€/Pc	
PIOL 102C	10	12,01	32,43	*
PIOL 202C	20	23,17	62,56	*

BRUSHED BRASS thermo packed
bar length **2,7 lm** - pack. **20 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc	
PIOS 102C	10	12,01	32,43	*
PIOS 202C	20	23,17	62,56	*

COLOURS



ON - Natural brass | **OL** - Polished brass | **OS** - Brushed brass

© 2023 All rights reserved by Progress Profiles. Printed in Italy


= News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

EMPTY ROUND TUBE

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM

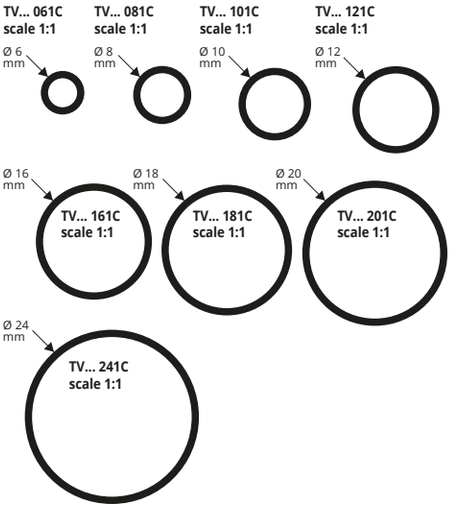

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
thick **1 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	Ø mm ext.	€/lm	€/Pc
TV... 061C	6	2,32	4,64
TV... 081C	8	2,48	4,96
TV... 101C	10	2,70	5,40
TV... 121C	12	3,02	6,04
TV... 161C	16	3,36	6,72
TV... 181C	18	3,77	7,54
TV... 201C	20	4,16	8,32
TV... 241C	24	6,78	13,56

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TV... 122C (chosen finish anodized gold) TVAO 122C.

POLISHED CHROME ALUMINIUM thermo packed
thick **1 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	Ø mm ext.	€/lm	€/Pc	
TVBC 081C	8	3,97	7,94	*
TVBC 101C	10	4,43	8,86	*
TVBC 121C	12	4,92	9,84	*
TVBC 161C	16	5,51	11,02	*
TVBC 181C	18	6,15	12,30	*
TVBC 201C	20	6,85	13,70	*
TVBC 241C	24	11,55	23,10	*



COLOURS




AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum.

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.

FULL ROUND TUBE

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM

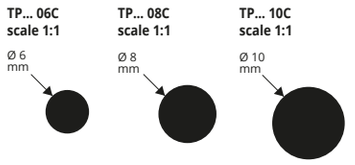

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	Ø mm ext.	€/lm	€/Pc	
TP... 06C	6	2,89	5,78	*
TP... 08C	8	3,82	7,64	
TP... 10C	10	5,43	10,86	

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TP... 122C (chosen finish anodized gold) TPAO 122C.

POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	Ø mm ext.	€/lm	€/Pc	
TPBC 06C	6	4,68	9,36	*
TPBC 08C	8	6,46	12,92	*
TPBC 10C	10	9,05	18,10	*

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.



COLOURS



AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum.

FULL SQUARE TUBE

ANODIZED GOLD AND SILVER ALUMINIUM

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
TQP... 08C	8 x 8	4,63	9,26
TQP... 10C	10 x 10	6,70	13,40

Available in the finishes: AO - AA. The code of the selected colour must be added to the article code. E.g.: TQP... 08C (chosen finish anodized gold) TQPAO 08C.

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.



COLOURS



AO - Anodized gold alum. **AA** - Anodized silver alum.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROGRESS PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

EMPTY SQUARE TUBE

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM

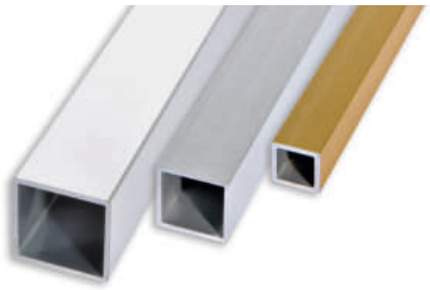

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
TQV... 10C	10 x 10	3,21	6,42
TQV... 15C	15 x 15	4,23	8,46
TQV... 20C	20 x 20	5,30	10,60

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TQV... 10C (chosen finish anodized gold) TQVAO 10C.

POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
TQVBC 10C	10 x 10	5,29	10,58
TQVBC 15C	15 x 15	7,04	14,08
TQVBC 20C	20 x 20	8,84	17,68


COLOURS




AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum.

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.


TQV... 10C
scale 1:1



TQV... 15C
scale 1:1




TQV... 20C
scale 1:1



EMPTY RECTANGULAR TUBE

ANODIZED GOLD AND SILVER, POLISHED CHROME
AND WHITE VARNISHED ALUMINIUM

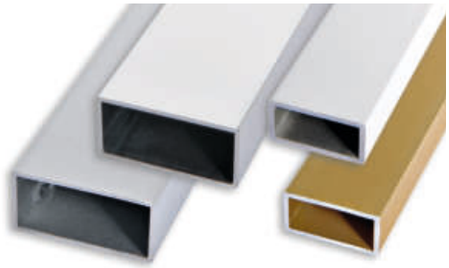

ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
TR... 2010C	20 x 10	4,23	8,46
TR... 3015C	30 x 15	5,43	10,86

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: TR... 2010C (chosen finish anodized gold) TRAO 2010C.

POLISHED CHROME ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**


Article	L x H mm	€/lm	€/Pc
TRBC 2010C	20 x 10	7,01	14,02
TRBC 3015C	30 x 15	9,05	18,10

WHITE VARNISHED ALUMINIUM thermo packed
bar length **2 lm** - pack. **10 Pcs - 20 lm**


Article	L x H mm	€/lm	€/Pc
TRB 2010C	20 x 10	4,35	8,70 *

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.

TR... 2010C
scale 1:1



TR... 3015C
scale 1:1



CURVE PROFILE

ANODIZED GOLD AND SILVER, POLISHED CHROME
AND WHITE VARNISHED ALUMINIUM



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
thick **1 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc
UG... 181C	18	2,61	5,22
UG... 221C	22	2,81	5,62
UG... 251C	25	2,89	5,78

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: UG... 181C (chosen finish anodized gold) UGAO 181C.


POLISHED CHROME ALUMINIUM thermo packed
thick **1 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc
UGBC 181C	18	4,12	8,24
UGBC 221C	22	4,63	9,26
UGBC 251C	25	4,68	9,36

WHITE VARNISHED ALUMINIUM thermo packed
thick **1 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc
UGB 181C	18	2,71	5,42

COLOURS

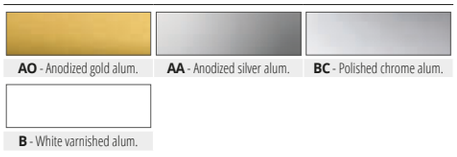


AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum.


B - White varnished alum.

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.


UG... 181C
scale 1:1



UG... 221C
scale 1:1



UG... 251C
scale 1:1




Prices are referred to whole packs.

© 2026 All rights reserved by Progress Profiles. Printed in Italy


PROFILE "T FORM"

ANODIZED GOLD AND SILVER ALUMINIUM
POLISHED CHROME ALUMINIUM

T... 1515C
scale 1:1



T... 2525C
scale 1:1



ANODIZED GOLD AND SILVER ALUMINIUM thermo packed
thick **1 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
T... 1515C	15 x 15	3,36	6,72
T... 2525C	25 x 25	4,77	9,54

Available in the finishes: AO - AA.
The code of the selected colour must be added to the article code.
E.g.: T... 1515C (chosen finish anodized gold) TAO 1515C.

POLISHED CHROME ALUMINIUM thermo packed
thick **1 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
TBC 1515C	15 x 15	5,07	10,14
TBC 2525C	25 x 25	6,51	13,02

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.



COLOURS




AO - Anodized gold alum. **AA** - Anodized silver alum. **BC** - Polished chrome alum.


CURTAINBALANCE

ANODIZED SILVER AND WHITE VARNISHED ALUMINIUM

CTAA 304C
CTB 304C
scale 1:1



CTAA 404C
CTB 404C
scale 1:1



ANODIZED SILVER ALUMINIUM thermo packed
thick **4 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc	
CTAA 304C	30	7,00	14,00	
CTAA 404C	40	9,47	18,94	*

WHITE VARNISHED ALUMINIUM thermo packed
thick **4 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc	
CTB 304C	30	7,19	14,38	*
CTB 404C	40	9,82	19,64	*

The indicated prices are with bar code EAN 13.
On demand are available 1 lm bars.



COLOURS



AA - Anodized silver alum. **B** - White varnished alum.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


DO IT YOUR SELF

PROGRESS® PROFILES

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**

Prices are referred to whole packs.

PIF 153
PIF 203
PIF 253
PIF 403




FLAT IRON
thick **3 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L mm	€/lm	€/Pc	
PIF 153	15	2,17	4,34	
PIF 203	20	2,50	5,00	
PIF 253	25	3,13	6,26	
PIF 403	40	5,07	10,14	

items not for sell individually.

AGF 203
AGF 303
AGF 403




CORNER EQUAL SIDES IRON
thick **3 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
AGF 203	20 x 20	5,24	10,48
AGF 303	30 x 30	6,52	13,04
AGF 403	40 x 40	8,21	16,42

items not for sell individually.

ALF 3020
ALF 4020




CORNER "L-FORM" IRON
thick **2 mm** - bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc	
ALF 3020	30 x 20	6,31	12,62	*
ALF 4020	40 x 20	7,04	14,08	*

items not for sell individually.

TVF 12
TVF 16
TVF 20
TVF 25



EMPTY ROUND TUBE IRON
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	Ø mm ext.	€/lm	€/Pc	
TVF 12	12	3,77	7,54	*
TVF 16	16	4,83	9,66	*
TVF 20	20	5,91	11,82	*
TVF 25	25	7,08	14,16	*

items not for sell individually.

TPF 10
TPF 12




FULL ROUND TUBE IRON
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	Ø mm ext.	€/lm	€/Pc	
TPF 10	10	3,70	7,40	*
TPF 12	12	4,27	8,54	*

items not for sell individually.

TQPF 08
TQPF 10
TQPF 12
TQPF 14




FULL SQUARE TUBE IRON
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc	
TQPF 08	8 x 8	2,90	5,80	*
TQPF 10	10 x 10	4,35	8,70	*
TQPF 12	12 x 12	5,64	11,28	*
TQPF 14	14 x 14	7,64	15,28	*

items not for sell individually.

TQVF 20
TQVF 25
TQVF 30
TQVF 40




EMPTY SQUARE TUBE IRON
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc	
TQVF 20	20 x 20	7,15	14,30	*
TQVF 25	25 x 25	9,02	18,04	*
TQVF 30	30 x 30	10,06	20,12	
TQVF 40	40 x 40	12,93	25,86	*

items not for sell individually.

TRF 3020
TRF 4020




EMPTY RECTANGULAR TUBE IRON
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc
TRF 3020	30 x 20	7,80	15,60
TRF 4020	40 x 20	9,09	18,18

items not for sell individually.

TF 20




PROFILE "T-FORM" IRON
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc	
TF 20	20 x 20	5,24	10,48	*

items not for sell individually.

CUF 1515
CUF 3020



CANAL "U FORM" IRON
bar length **2 lm** - pack. **10 Pcs - 20 lm**

Article	L x H mm	€/lm	€/Pc	
CUF 1515	15 x 15	4,56	9,12	*
CUF 3020	30 x 20	5,50	11,00	*

items not for sell individually.


The indicated prices are without bar code

*** = Production on demand with minimum quantity of 250 pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

PROGRESS®
PROFILES

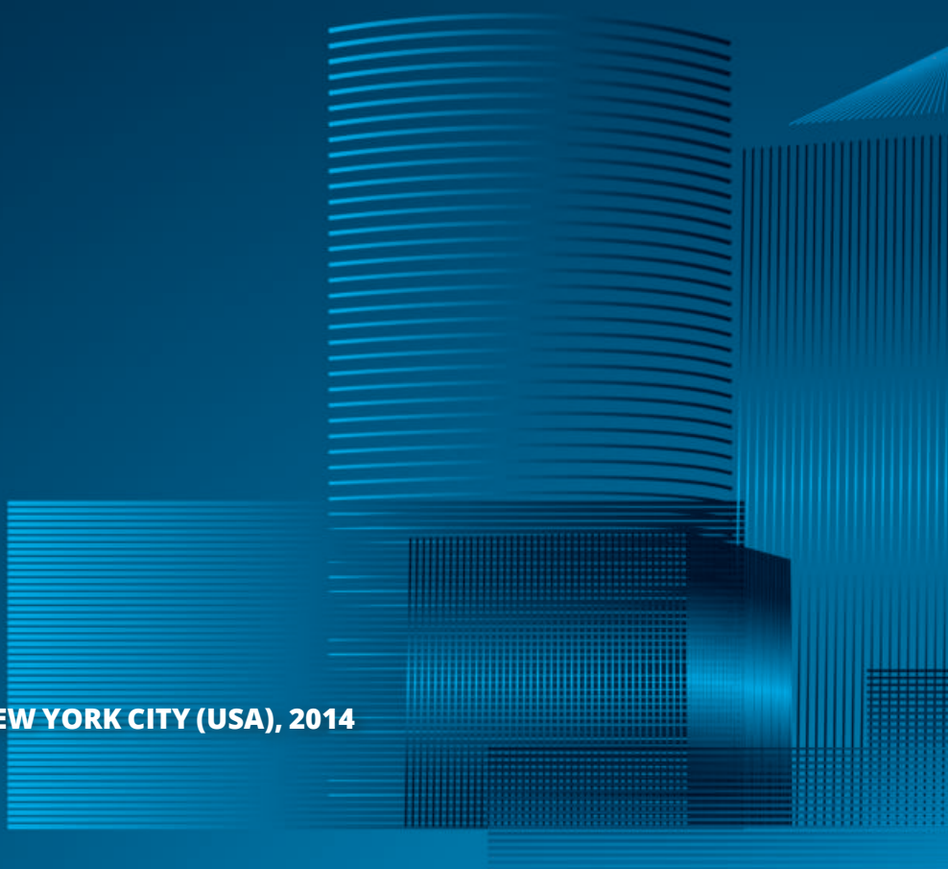

An interpretation of:
One World Trade Center, David Childs , NEW YORK CITY (USA), 2014

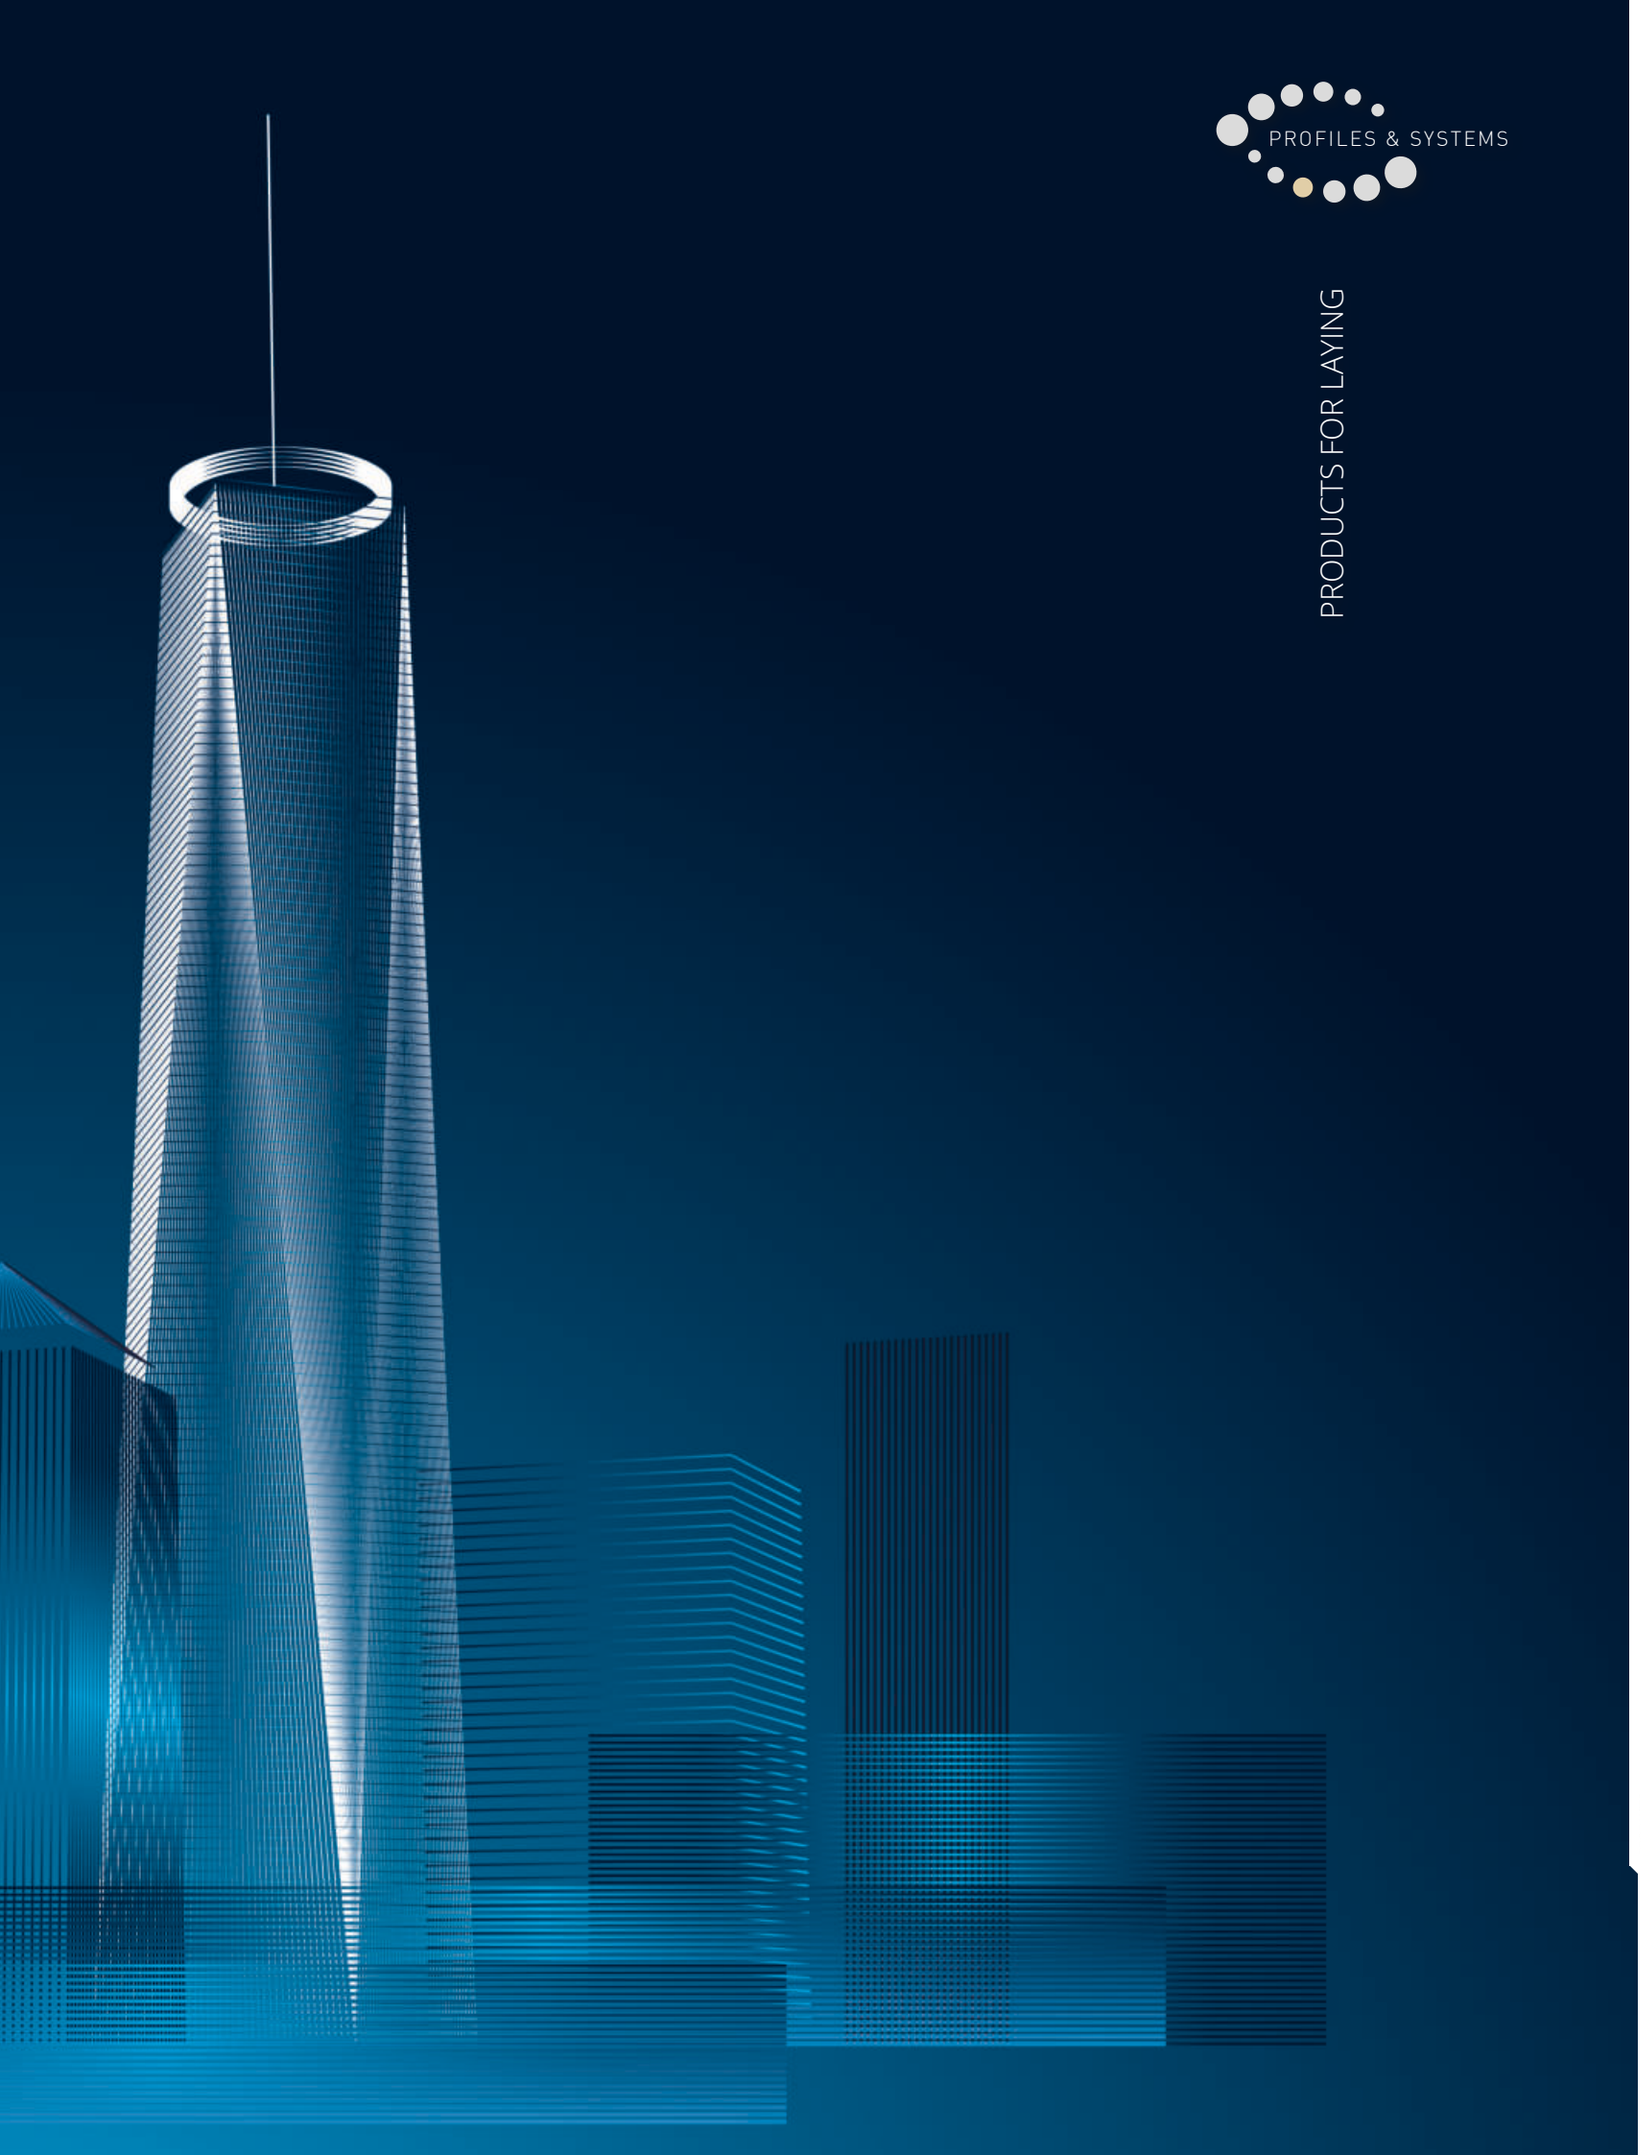


PROFILES & SYSTEMS

PRODUCTS FOR LAYING

TRANSPARENCY
FOR A PERFECT LAYING.

LAYING INSTRUCTIONS

PATENTED

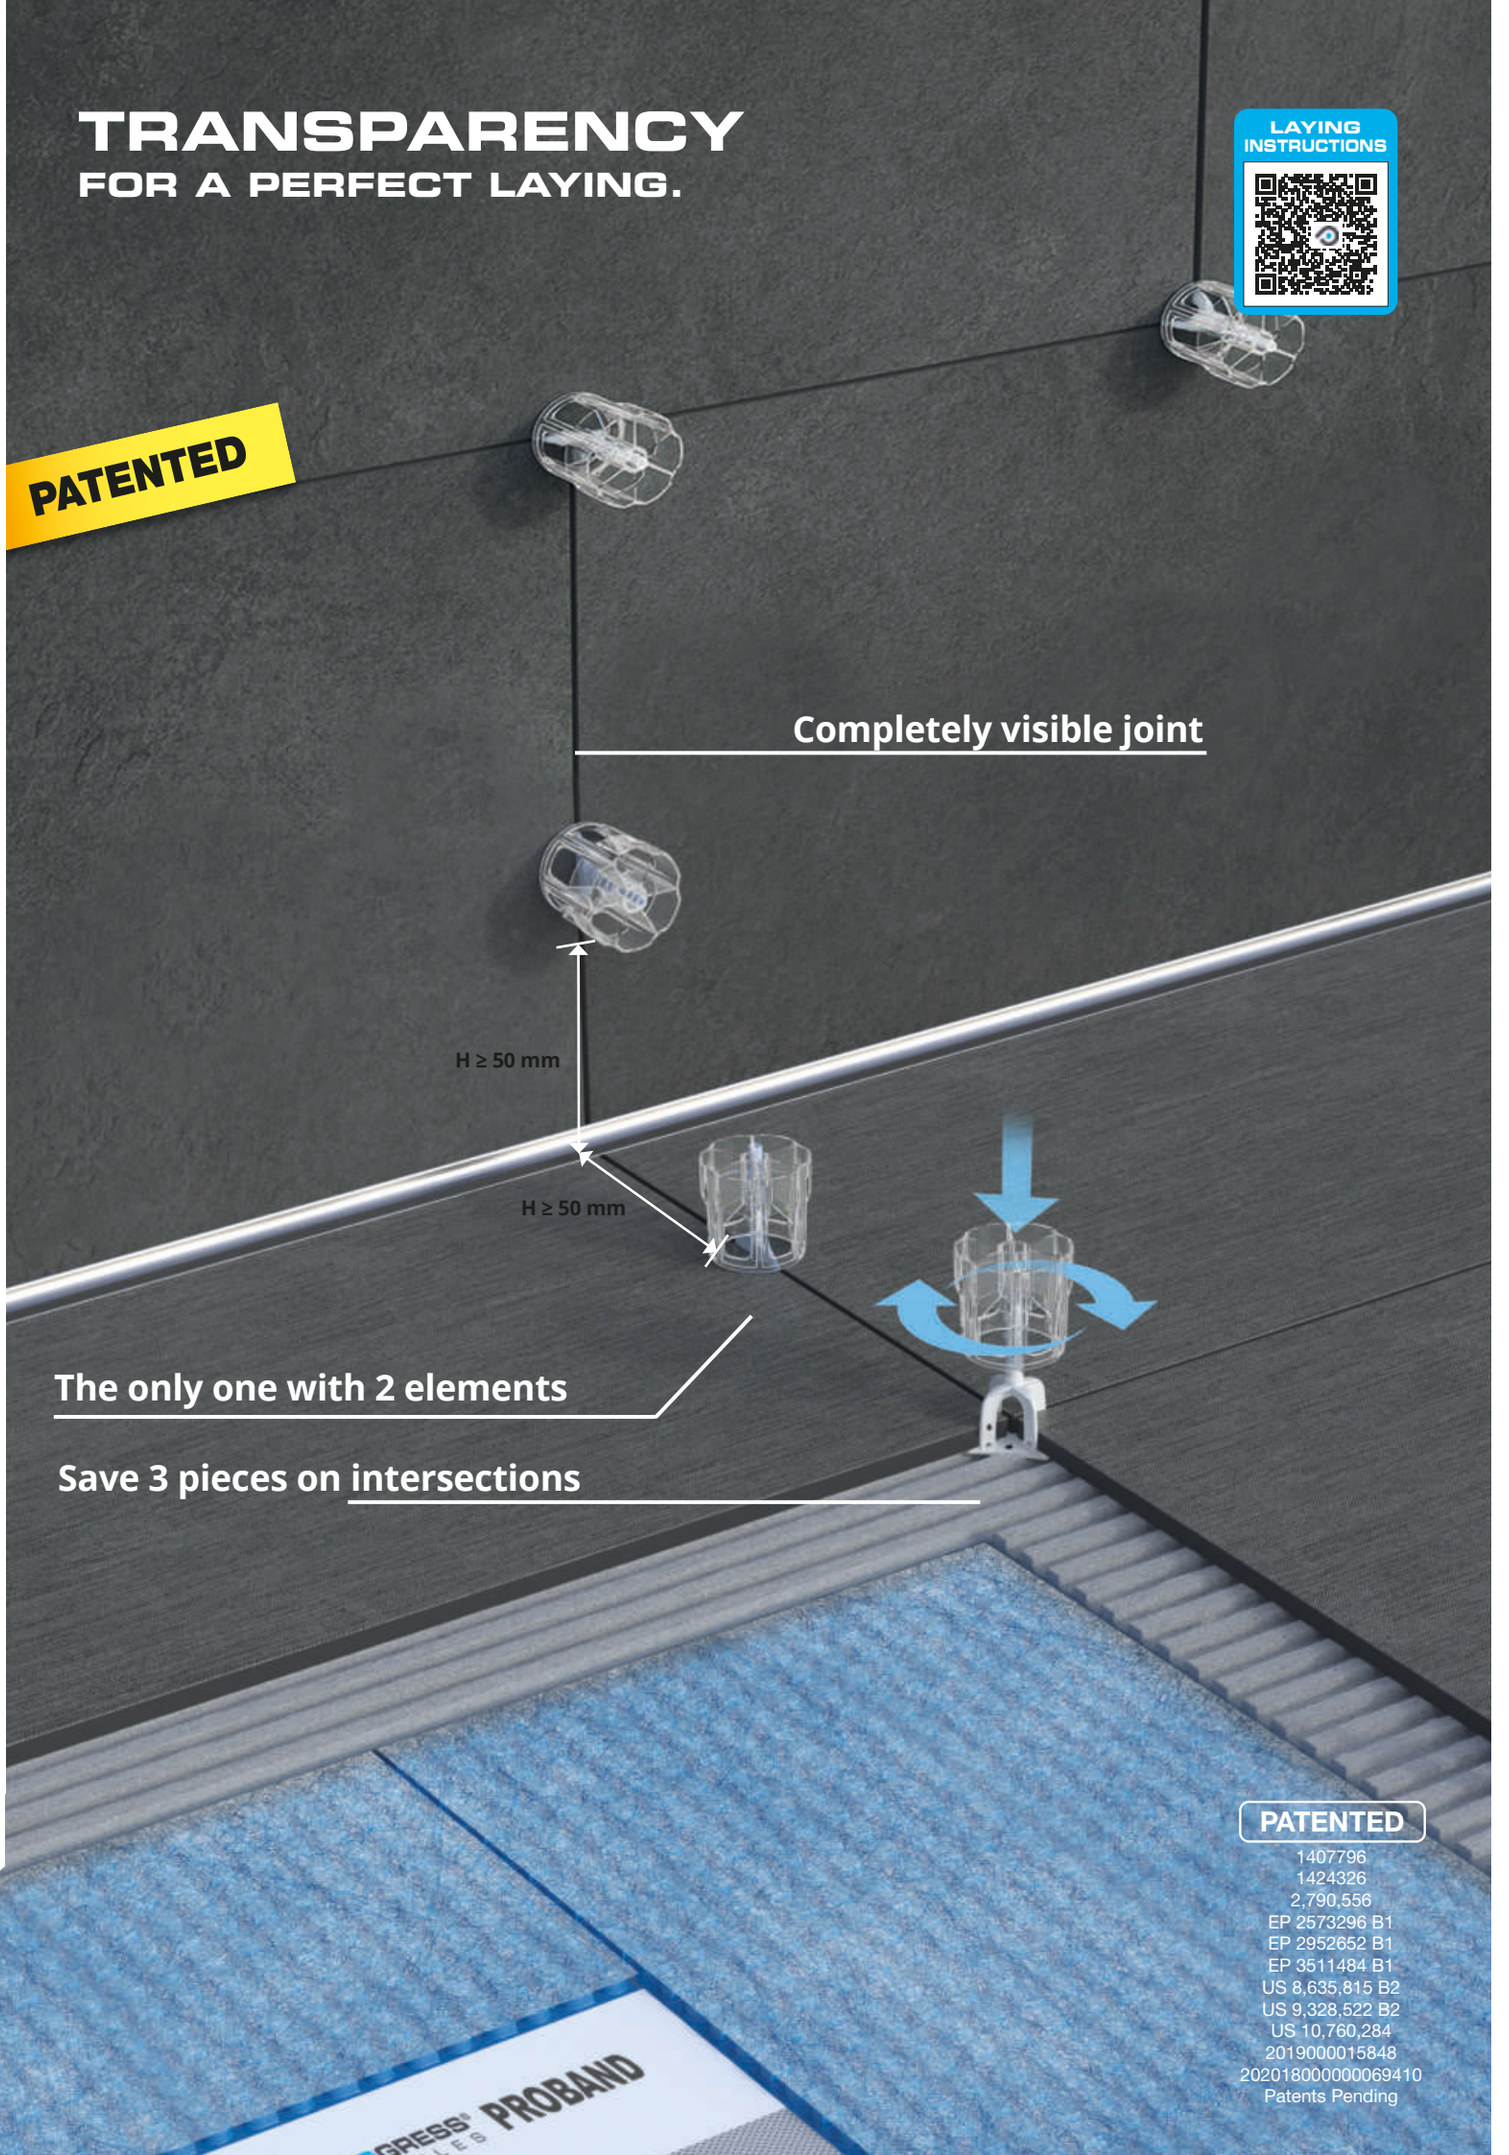


PATENTED

1407796
1424326
2,790,556
EP 2573296 B1
EP 2952652 B1
EP 3511484 B1
US 8,635,815 B2
US 9,328,522 B2
US 10,760,284
2019000015848
202018000000069410
Patents Pending

© 2023 All rights reserved by Progress Profiles. Printed in Italy



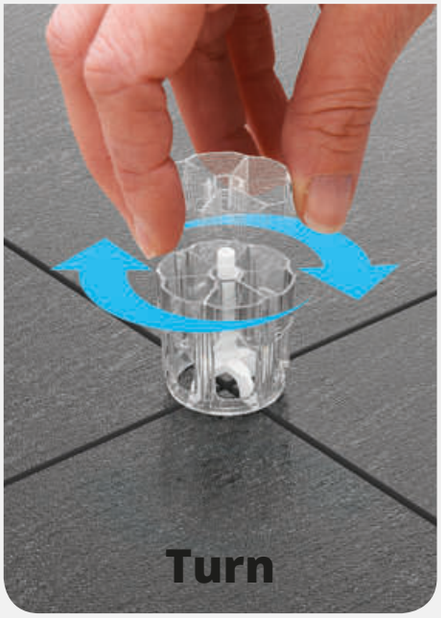



Kicking the clip in the direction of the joint.

ADVANTAGES

1. Simple and quick to lay with **only 2 elements**: **leveler & cap**. No need for expensive hand tools.
2. The only worldwide leveling system with multiple size levelers (2,3 and 5 mm). Built in spacers are available to accommodate "+" intersections as well as "T" joints **with a single leveler saving up to 3 pieces per joint.**
3. The only System with only two elements (**leveler & cap**) capable of leveling 3 to 20 mm floors and wall coverings with 1/2/3/5 mm available joints, and from 20 to 40 mm with 8 mm joint. Simply flip the cap over to work with various thicknesses.
4. It guarantees a minimum joint of 1 mm, maximum 5 mm.
5. Vertical compression reduces movement and widening of joints.
6. The thin base of the leveler allows for easy placement without mortar accumulation.
7. The shaped hole in the middle of the cross and T-shaped levelers allow a perfect control of the tiles lining up. Moreover the holes on their base enable a perfect anchoring between adhesive and tile.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Proleveling System

DESCRIPTION

Proleveling System is a revolutionary and innovative leveling system when laying medium and large materials with a thickness between 3 and 40 mm.
The patented system is made of 2 elements:

- A leveling base (1-2-3-5 mm size) with spaced notches that allow spacing/separating/ joining floors of any type and material in a way that is: linear, cross and half cross with joints to be chosen between 1mm, 2 mm, 3 mm and 5 mm.
- The threaded stem is attached perpendicularly to the base in a way that allows for easy adjustment with turns of the cap during installation. Removal of the cap and Stem after the materials are set is made easy with strategically placed breakage points that release with either increased pressure by turning the cap or by kicking the cap in the direction of the joint.

One cap fits all threaded stems and can be reused an infinite amount of times for big cost savings.

The new PPLS (patented) system assists in the reduction or elimination of ledging and lippage in the installation of various types of materials that are applied to floors or walls with mortar including: Large Format Tile, Natural Stone, Thin Profile Tile and many others.

LAYING SYSTEM

a) Choose the desired type of Leveler (spacers) based on the requested joints and joining:
- 1 mm Linear, Cross and Half Cross Version
- 2 mm Linear, Cross and Half Cross Version
- 3 mm Linear, Cross and Half Cross Version
- 5 mm Linear, Cross and Half Cross Version

b) Apply the thinset or mortar on a level base with the proper notched trowel as called out in the setting materials manufacturer's installation instructions.

c) During the application of the tile or other materials, position the base of the chosen Leveler under the edge of the tile at the appropriate joint location and continue laying in sequence.

d) Attach the cap to the threaded stem by rotating it clockwise. Level the joint by rotating the cap using the minimum amount of pressure needed.

e) Once the setting materials have become solid and the floor o r wall is ready for grout: kick the cap in the direction of the joint to detach connection points between base and stem.

Remover: Fixed on a drill allows to remove levelers from caps.









By turning the cap it is possible to level a thickness of up to 40 mm with an 8 mm joint.





T-shaped leveler installation.




Linear leveler installation.



© 2023 All rights reserved by Progress Profiles. Printed in Italy

Proleveling System





PRSL 1
PRSL 2
PRSL 3
PRSL 5



PRST 1
PRST 2
PRST 3
PRST 5



PRSC 1
PRSC 2
PRSC 3
PRSC 5



PRSTT



PRST

LINEAR LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRSL 1	1	100	0,174	17,40	4000
PRSL 2	2	100	0,174	17,40	4000
PRSL 3	3	100	0,174	17,40	4000
PRSL 5	5	100	0,183	18,30	4000

"T" LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRST 1	1	100	0,206	20,60	3000
PRST 2	2	100	0,206	20,60	3000
PRST 3	3	100	0,206	20,60	3000
PRST 5	5	100	0,216	21,60	3000

CROSS LEVELER PROLEVELING SYSTEM

Article	thick mm	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRSC 1	1	100	0,206	20,60	3000
PRSC 2	2	100	0,206	20,60	3000
PRSC 3	3	100	0,206	20,60	3000
PRSC 5	5	100	0,216	21,60	3000

PROLEVELING SYSTEM REMOVER FOR LEVELER

Article	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRSSV	50	0,99	49,50	1300



PRSSV

ROTATING POMMEL CAP FOR LEVELER PROLEVELING SYSTEM

Article	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRSTT	50	1,14	57,00	1000
PRST	50	0,97	48,50	1000

PROTECTION CAP FOR PROLEVELING SYSTEM


Article	Pcs/ Pack.	€/Pc	€/Pack.	Pcs/box
PRSPC	50	0,99	49,50	3000




It protects the marble and natural stones surface from scratches that could be provoked by the cap during the floor levelling.

Tiles cm x cm	30 X 30	40 X 40	45 X 45	50 X 50	60 X 60	80 X 80	90 X 90	120 X 120
U. / MQ (Type of leveler)*	11 (only +)	6 (only +)	5 (only +)	4 (only +)	3 (only +)	5 (2+, 3L)	5 (2+, 3L)	3 (1+, 2L)

* + = cross leveler, L = linear leveler , T = "T" shape leveler




(30x30)
(40x40)
(45x45)
(50x50)
(60x60)




(80x80)
(90x90)
(120x120)

Tiles cm x cm	30 X 60	40 X 80	45 X 90	120 X 30	100 X 50	120 X 60
U. / MQ (Type of leveler)*	6 (only +)	6 (3+, 3L)	6 (3+, 3L)	6 (3+, 3L)	4 (2+, 2L)	4 (2+, 2L)

* + = cross leveler, L = linear leveler , T = "T" shape leveler




(30x60)



(40x80)
(45x90)
(120x30)
(120x50)
(120x60)

Tilest cm x cm	10 X 100	12 X 100	15 X 100	20 X 100	10 X 120	12 X 120	15 X 120	20 X 120	10 X 80	12 X 80	15 X 80	20 X 80	40 x 80	45 x 90	100 x 50	120 x 60
U. / MQ (Type of leveler)*	20 (only T)	17 (only T)	14 (only T)	10 (only T)	17 (only T)	14 (only T)	11 (only T)	9 (only T)	25 (only T)	21 (only T)	17 (only T)	13 (only T)	6 (only T)	5 (only T)	4 (only T)	4 (only T)

* + = cross leveler, L = linear leveler , T = "T" shape leveler




(10x100)
(12x100)
(15x100)
(20x100)
(10x120)
(12x120)
(15x120)
(20x120)


(10x80)
(12x80)
(15x80)
(20x80)
(40x80)
(45x90)
(100x50)
(120x60)


© 2025 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs.

Proleveling Wedge System





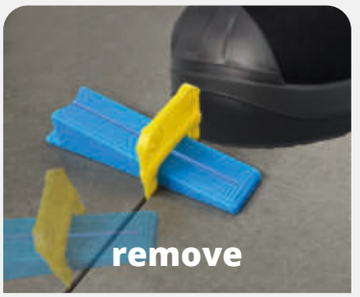

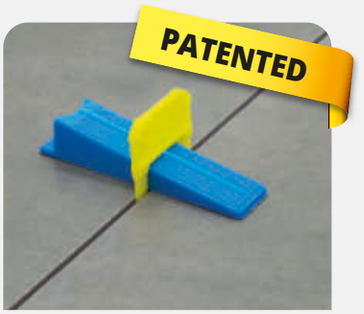

ADVANTAGES

1. **Complies with the legislation:** Thanks to the join of the stems directly on the base, after the removal there are no components between the joints;
2. **Ergonomic wedge:** The concave part of the wedge allows greater ease in insertion;
3. **Easier to insert:** Improved base with the new eye shape that ensures better and more effective insertion under the tile;

PROLEVELING WEDGE SYSTEM

Leveling system for tiles composed of 3 elements: wedge, leveler and plier.
The levelers are available for grout lines of 1/1.5/2 and 3 mm and are suitable for tiles with thickness from 3 to 12 mm and from 12 to 20 mm. The wedge, with a length of 90 mm and a width of 22 mm, is inserted during the laying inside the leveler and thanks to the plier we get a complete flatness between adjacent tiles. When the adhesive is hardened, kick the wedges and the protruding part of the levelers along the grout line.

Levellers H 3-12 mm



PRLW 1 PRLW 15 PRLW 2

Levellers H 12-20 mm



PRLW 3 PRLW 120 PRLW 220

Wedge - PRLW





LEVELING WEDGE

Article	Pcs/pack	Pcs/box	€/Pc	€/Pack.
PRLW	100	2400	0,169	16,90

TRACTION PLIER for PROLEVELING WEDGE SYSTEM

Article	Pcs/pack	€/Pc
PRLWP	1	27,65


PROLEVELING WEDGE SYSTEM - LINEAR LEVELERS

Article	h. mm	Thick. mm	Pcs/pack	Pcs/Box	€/Pc	€/Pack.
PRLW 1	3-12	1	200	3000	0,145	29,00
PRLW 15	3-12	1,5	200	3000	0,151	30,20
PRLW 2	3-12	2	200	3000	0,158	31,60
PRLW 3	3-12	3	200	3000	0,163	32,60
PRLW 120	12-20	1,5	100	2500	0,193	19,30
PRLW 220	12-20	2	100	2500	0,206	20,60

INDICATIVE CONSUMPTIONS FOR A SURFACE OF 10 M²

X cm	10	15	20	25	30	40	45	50	55	60	75	80	90	100	120	150	180	200	Y cm
10	1980																		
15	1317	876																	
20	495	328	490																
25	396	263	391	312															
30	660	438	488	389	431														
35	495	328	365	291	322	240													
40	440	292	324	258	285	213	189												
45	396	263	291	232	256	191	169	152											
50	360	239	264	211	232	173	154	138	125										
55	330	219	242	193	212	158	141	126	114	105									
75	396	263	258	206	212	158	140	126	114	104	99								
80	371	246	241	192	198	148	131	117	107	97	93	87							
90	330	219	214	171	176	131	116	104	94	86	82	77	68						
100	297	197	192	153	157	117	104	93	84	77	73	68	61	54					
120	330	219	200	160	157	117	104	93	84	77	71	66	59	52	49				
150	330	219	192	153	146	109	96	86	78	71	64	60	53	47	44	38			
180	330	219	186	149	139	103	91	82	74	68	60	56	49	44	40	34	31		
200	347	230	192	153	140	104	92	83	75	68	59	55	49	44	39	33	30	28	

Ex: 120 X 50 cm = 93 Pz X 10 m²

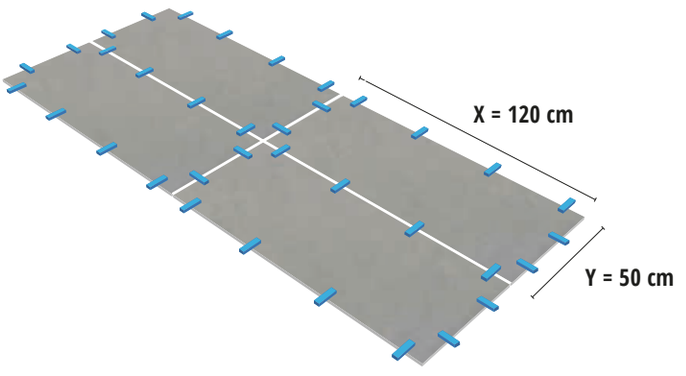

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.



MULTISPACER Removable and reusable spacer for joints of tiled floors and walls. Its little tabs and open shape allows various uses with a perfect joint and view of the junctions among tiles during the laying.

MULTISPACER

PATENTED






MULTISPACER

Article	Thick. mm	Pcs/pack	Pcs/Box	€/Pc	€/Pack.
MSP 1	1	100	2500	0,343	34,30
MSP 2	2	100	2500	0,349	34,90
MSP 3	3	100	2500	0,355	35,50
MSP 5	5	100	2500	0,37	37,40



The **CROSS-SHAPED** and **T-SHAPED SPACERS** are perforated, weatherproof and made in top quality material with choice of colour. They are used to provide regular gaps in floors and coverings and thanks to the anti-floating perforations remain in the correct laying position. Available in every required thickness 1 - 2 - 3 - 4 - 5 - 7 - 10 mm. Levelling wedges are also available for compensating differences in level that emerge during laying. The **Y-SHAPED SPACERS** have to be used to separate hexagonal tiles in floors and walls. Available in thickness 2 and 3 mm.

SPACERS LEVELLING WEDGES

PERFORATED SPACERS CROSS-SHAPED boxes with bags of **250 Pcs** each

Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
RC 1	1	20.000	2,75	0,011
RC 2	2	15.000	2,75	0,011
RC 3	3	15.000	2,75	0,011
RC 4	4	15.000	2,75	0,011
RC 5	5	15.000	2,75	0,011
RC 7	7	10.000	3,00	0,012
RC 10	10	5.000	5,75	0,023



PERFORATED SPACERS T-SHAPED boxes with bags of **250 Pcs** each

Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
RT 1	1	20.000	2,75	0,011
RT 2	2	15.000	2,75	0,011
RT 3	3	15.000	2,75	0,011
RT 4	4	15.000	2,75	0,011
RT 5	5	15.000	2,75	0,011
RT 7	7	10.000	3,00	0,012
RT 10	10	5.000	5,75	0,023




Y-SHAPED SPACERS FOR HEXAGONAL TILES boxes with bags of **250 Pcs** each

Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
RY 2	2	10.000	4,50	0,018
RY 3	3	10.000	4,50	0,018



RY 2


RY 3



LEVELLING WEDGES boxes with bags of **500 Pcs**

Article	Thick. mm	Pcs/Box	€/Bag	€/Pc
PCU 5	0 - 5	10.000	5,50	0,011





SPACERS / SQ.M

TILE FORMAT cm x cm	60 x 60	60 x 30	40 x 40	40 x 30	40 x 20	33 x 33	30 x 30	30 x 20	25 x 25	20 x 20	15 x 15	13 x 26	13 x 13	10 x 20	10 x 10
CROSS-SHAPED SPACERS No. / Sq.m	3	6	7	9	12	9	11	17	16	25	44	30	60	50	100
T-SHAPED SPACERS No. / Sq.m	6	12	14	18	24	18	22	34	32	50	88	60	120	100	200
Y-SHAPED SPACERS	2 spacers for each tile multiplied by the amount of tiles per square meter														

© 2025 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROSUPPORT TUBE SYSTEM

ADJUSTABLE AND MODULAR SUPPORTS SYSTEM
FOR OUTDOOR FLOATING FLOORS

PROSUPPORT TUBE SYSTEM is an adjustable and modular supports system for outdoor floating floors from the height of 29 mm to 1000 mm. The system is composed of 1 base, 2 screws, 1 flange, 2 heads and several pvc pipes to obtain the requested height. Both heads, according to the screw, can be fix or self-levelling.


PATENTED

PROSUPPORT TUBE SYSTEM KIT HEIGHTS

FULL KIT - Pack. **40 Pcs. - Items not for sale individually. Minimum order one pack.**



A: SUPPORT'S HEIGHT WITH SELF-LEVELING INSTALLATION
B: SUPPORT'S HEIGHT WITH FIX SIDE INSTALLATION
T: THICKNESS OF THE SPACER FLAP



FULL KIT CODE	
PST3454/4 T = 4 mm	PST3454/2 T = 2 mm
€/Pc. 4,43	
€/Pack. 177,20	



FULL KIT CODE	
PST5474/4 T = 4 mm	PST5474/2 T = 2 mm
€/Pc. 4,76	
€/Pack. 190,40	



FULL KIT CODE	
PST7494/4 T = 4 mm	PST7494/2 T = 2 mm
€/Pc. 6,71	
€/Pack. 268,40	



FULL KIT CODE	
PST94114/4 T = 4 mm	PST94114/2 T = 2 mm
€/Pc. 7,22	
€/Pack. 288,80	



FULL KIT CODE	
PST114134/4 T = 4 mm	PST114134/2 T = 2 mm
€/Pc. 7,61	
€/Pack. 304,40	



FULL KIT CODE	
PST134154/4 T = 4 mm	PST134154/2 T = 2 mm
€/Pc. 7,98	
€/Pack. 319,20	



FULL KIT CODE	
PST154174/4 T = 4 mm	PST154174/2 T = 2 mm
€/Pc. 9,51	
€/Pack. 380,40	



FULL KIT CODE	
PST174194/4 T = 4 mm	PST174194/2 T = 2 mm
€/Pc. 9,75	
€/Pack. 390,00	



FULL KIT CODE	
PST194214/4 T = 4 mm	PST194214/2 T = 2 mm
€/Pc. 9,95	
€/Pack. 398,00	

HEIGHTS GREATER THAN 209 mm

H (mm) SELF-LEVELING HEAD (A)	H (mm) FIX HEAD (B)	Choose the kit according to the desired tile joint (T)			PIPE		FLANGE		€/PC.
		PST3454/4 T = 4 mm	PST3454/2 T = 2 mm				PSTGH 02		
214/234	209/229			+	PSTT 175	+			11,18
234/254	229/249			+	PSTT 195	+			11,85
254/274	249/269			+	PSTT 215	+			12,26
274/294	269/289			+	PSTT 235	+			12,76
294/314	289/309			+	PSTT 255	+			13,36
314/334	309/329			+	PSTT 275	+			14,07
334/354	329/349			+	PSTT 295	+			14,07
354/374	349/369			+	PSTT 315	+			14,97
374/394	369/389			+	PSTT 335	+			14,97
394/414	389/409			+	PSTT 355	+			16,14
414/434	409/429			+	PSTT 375	+			16,14
434/454	429/449			+	PSTT 395	+			17,68
454/474	449/469			+	PSTT 415	+			17,68
474/494	469/489			+	PSTT 435	+			17,68
494/514	489/509			+	PSTT 455	+			19,86



PST3454/...



PSTGH 02

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES


Prices are referred to whole packs.

SELF-LEVELING HEAD MODE

Self-levelling head mode
Max height 1000 mm with max slope of 5%.

FIXED HEAD MODE

Fixed head mode
Max height 1000 mm

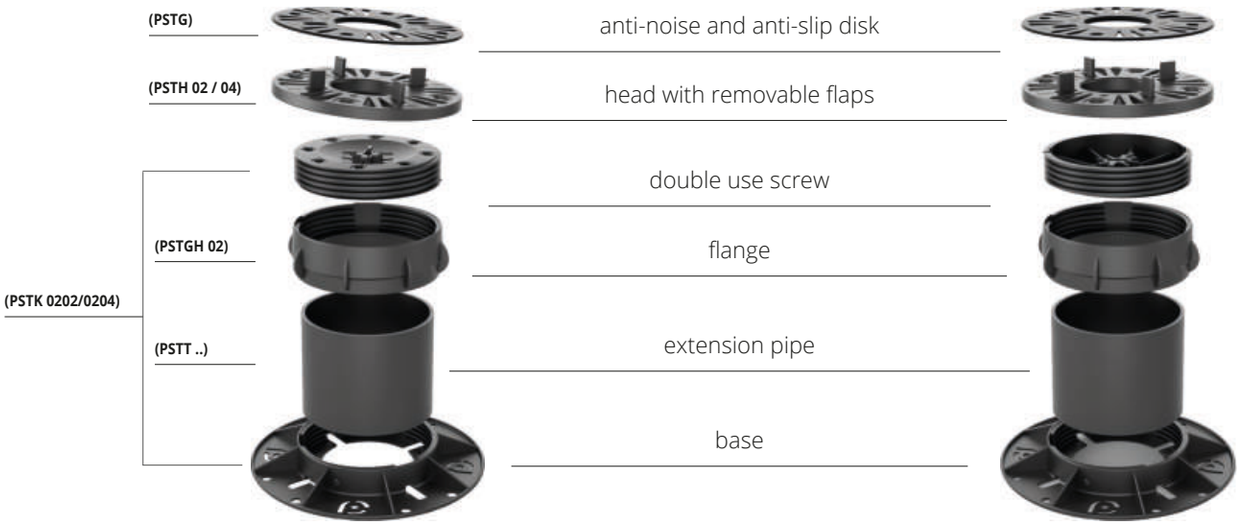

LAYING INSTRUCTIONS

PROSUPPORT TUBE SYSTEM COMPONENTS

BASE +SCREW 20/40 mm
polypropylene - pack. **40 Pc. (PSTK 0202)** - pack. **20 Pc. (PSTK 0204)**


Article	Thickness (mm)	kit / pack.	€/Pc	€/pack.
PSTK 0202	20	40	3,30	132,00
PSTK 0204	40	20	3,61	72,20

Items not for sale individually. Minimum order one pack.



BASE + SCREW 20 mm

PSTK 0202



BASE + SCREW 40 mm

PSTK 0204


HEAD with removable flaps 2/4 mm
polypropylene - pack. **40 Pc.**

Article	flap Thk (mm)	kit/pack.	€/Pc	€/pack.
PSTH 02	2	40	1,13	45,20
PSTH 04	4	40	1,13	45,20


Items not for sale individually. Minimum order one pack.



PSTH 02 / PSTH 04



FLAP THICKNESS 2 mm - PSTH 02



FLAP THICKNESS 4 mm - PSTH 04

FLANGE 40 mm
polypropylene - pack. **40 pcs**

Article	H (mm)	Pc/pack.	€/Pc	€/Pack.
PSTGH 02	40	40	1,77	70,80

Connection nut with a lower side of 110 mm inner diameter, where the pipe of different heights should be inserted, and one side with thread where the regulation screws should be inserted.

Items not for sale individually. Minimum order one pack.



PSTGH 02

ANTI-NOISE AND ANTI-SLIP DISK
rubber - H 1,5 mm - **Ø 150** - pack. **120 pcs**

Article	H / Ø mm	Pc/pack.	€/Pc	€/Pack.
PSTG	H 1,5 - Ø150	120	1,08	129,60

The non-slip rubber disk to be used with the heads of PROSUPPORT TUBE SYSTEM reduces noises till 25 dB.

Items not for sale individually. Minimum order one pack.



PSTG

PRE-CUT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene polypropylene - pack. **40 Pc.**

Article	H (mm)	Pc/pack.	€/Pc	€/pack.
PSTT 35	35	40	0,50	20,00
PSTT 55	55	40	1,02	40,80
PSTT 75	75	40	1,39	55,60
PSTT 95	95	40	1,77	70,80
PSTT 115	115	40	3,30	132,00
PSTT 135	135	40	3,55	142,00
PSTT 155	155	40	3,74	149,60

Items not for sale individually. Minimum order one pack.



PSTT...

FULL LENGHT EXTENSION PIPE - outer diameter Ø110 mm Thickness 4 mm - polyethylene or polypropylene - pallet **43 Pc.**

Article	H (ml)	ml/pallet.	€/ml	€/Pc	€/pallet
PSTT 2700	2,7	116	24,09	65,04	2796,72

Items not for sale individually. Minimum order one pallet.

UPON REQUEST IT IS POSSIBLE TO HAVE HEIGHTS TILL 1000 MM USING PIPES FROM 155 TILL 955. For information and installation instructions ask for the technical data sheet. Price to be agreed. Production delay 4/5 weeks.

PSTT 2700



270 cm


© 2025 All rights reserved by Progress Profiles. Printed in Italy


Prices are referred to whole packs.

PERIMETER SPACER

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded flin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.

DPP

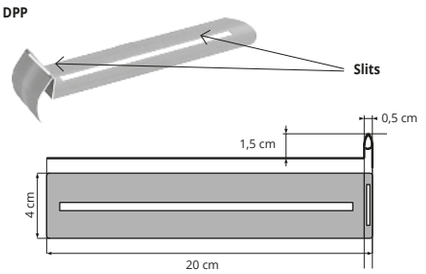

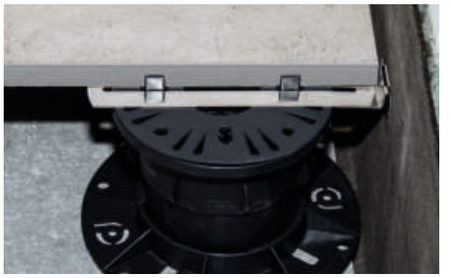

PERIMETER SPACER PROSUPPORT SYSTEM
Stainless steel AISI 316L / 1.4404 - V4A - pack. **40 Pcs**

Article	€/Pc	€/Pack.
DPP	3,55	142,00

PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)

Article	€/Pc
PSTAK	31,50



ADJUSTABLE SPACER TABS 4 mm
polypropylene - Pack **80 pcs**

Article	L x H mm	Pcs/pack	€/Pc	€/Pack.
PSTJ	80 x 20	80	0,83	66,40

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

FIXING CLIP FOR TILES - WIND-PROOF
Pack **40 pairs**

Article	L x H mm	pairs/pack	€/Pair	€/Pack.
PSTWP	20 x 60	40	6,09	243,60

Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.

RUBBER DISK for laying on bituminous roof membrane
H 2 mm - Pack. **100 Pcs** (box 100 pcs)

Article	H (mm)	€/Pc	€/Pack.
LVGG 02	2	1,96	196,00 *

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.



SPACER FOR APPLICATION ON GRAVEL
Pack. **100 Pcs** (box 100 pcs)

Article	€/Pc	€/Pack.
DILV	0,91	91,00

Transparent plastic 4 mm cross spacer for laying on gravel or irregular surfaces.





PRODUCTS FOR LAYING

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs.

PROSUPPORT PROFILE T & N is a profile for the protection and finishing of the external edge of raised floors in ceramic, wood and composite materials. The vertical section of the profiles features a specially designed fins that create a dovetail cladding system. This dovetail cladding system allows for the adhesive used to fix the covering to also mechanically bond to the profiles. The profile is also available with a decorative edge of 2 cm height (PROSUPPORT PROFILE T).


PROSUPPORT PROFILE T & N


VARNISHED ALUMINIUM
NATURAL ALUMINIUM


PATENTED





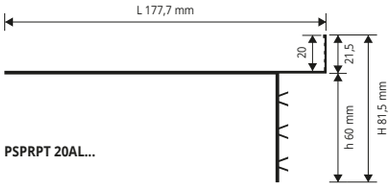

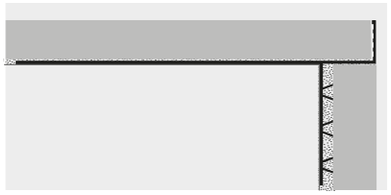

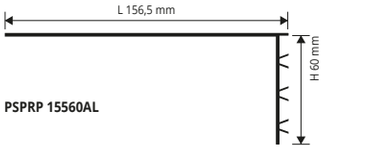



PROSUPPORT PROFILE T - VARNISHED ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	L x H mm	h mm	€/lm	€/Pc
PSPRPT 20AL...	177,7x81,5	60	31,34	84,62

COLOURS (EMBOSSED)

GF - Grey **(7038)** | **A** - Anthracite grey - **(no RAL)**

*** ON DEMAND (EMBOSSED)**

BF - White **(9010)** | **TF** - Dark brown **(8019)** | **C -** Corten | **EF** - Beige

PROSUPPORT PROFILE N - NATURAL ALUMINIUM
bar length **2,7 lm** - pack. **20 Pcs - 54 lm**

Article	H mm	L	€/lm	€/Pc
PSPRP 15560AL	60	156,5	20,89	56,40

COLOURS

AN - Natural aluminium


LAYING INSTRUCTIONS
1. Choose "PROSUPPORT PROFILE" desired model. **2.** Cut "PROSUPPORT PROFILE" to the desired lenght and put on the supports and aligning. **3.** Lay the floor by adjusting the height of the supports until completely leveling. **4.** Cut the tiles of the correct size to close the perimeters of the floating floor. **5.** Fix on the vertical surface of the profile the tiles using a suitable adhesive.

PROSUPPORT SYSTEM A&B Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, stone etc. The **PROSUPPORT PROFILE A** consists in an "L"-shaped horizontal flat base to insert and anchor above the **PROSUPPORT** Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing).
Use: Perimeter profile to protect and finish the outer edge of raised floors of different types, ceramic, wood, marble etc. The **PROSUPPORT PROFILE** consists in an "L"-shaped horizontal flat base to insert and anchor above the **PROSUPPORT** Self-levelling head and a vertical visible part to insert in the vertical "L"-shaped element (as indicated in the drawing)

PROSUPPORT PROFILE A & B

VARNISHED ALUMINIUM,
NATURAL ALUMINIUM






PROSUPPORT A



PROSUPPORT B

PFPSAL... 1060 | **PFPSAL... 1080** | **PFPSAL... 10100**

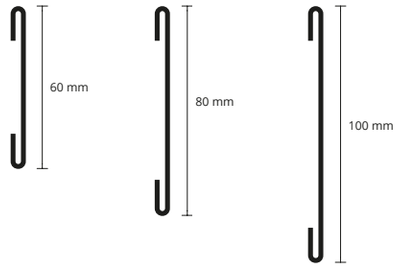

PUNCHED AND PERFORATED PROSUPPORT A
NATURAL ALUMINIUM - length **2,7 lm** - pack. **20 Pcs**

Article	L x H	€/lm	€/Pc
BPPSAN 15015	150 X 15	27,36	73,87
BPPSAN 15020	150 X 20	28,67	77,41
BPPSAN 15025	150 X 25	29,98	80,95

COLOURS

AN - Natural aluminium

TOP PROFILE PROSUPPORT B - VARNISHED ALUMINIUM
length **2,7 lm** Pack **10 Pcs (PFPSAL...1060** Pack **20 Pcs)**

Article	H1	€/lm	€/Pc
PFPSAL... 1060	60	20,25	54,68
PFPSAL... 1080	80	23,51	63,48
PFPSAL... 10100	100	26,45	71,42

COLOURS (EMBOSSED)

GF - Grey **(7038)** | **A** - Anthracite grey - **(no RAL)**

*** ON DEMAND (EMBOSSED)**

BF - White **(9010)** | **TF** - Dark brown **(8019)** | **C -** Corten | **EF** - Beige

*** = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed**


Prices are referred to whole packs.

© 2025 All rights reserved by Progress Profiles. Printed in Italy

PRORAIL SYSTEM

PRORAIL SYSTEM SYSTEM is a modular system composed of aluminium joists to lay floating floors of any size, to create steady and modular substructures together with PROSUPPORT TUBE and PROSUPPORT SLIM. The system consists of two aluminium joists, PRORAIL and PRORAIL RET, one fastening ring PRORAIL RING, two cross spacers with removable flaps PRORAIL SPACER and one anti-noise and anti-slip rubber PRORAIL RUBBER

PRORAIL
PSTRAN 53

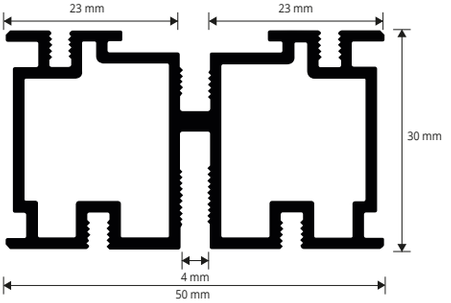



PRORAIL - SHAPED JOIST
aluminium - Pack **10 Pcs -** Bar lenght **2,7 Lm**


Article	L x H (mm)	Pc/Pack	€/lm	€/Pc
PSTRAN 53	50 X 30	10	16,48	44,50



PRORAIL RUBBER
Roll lenght **110 Lm**

Article	L roll ml	€/lm	€/roll
PSTRI	110	1,90	209,00

PRORAIL RET
PSTRAN 5030

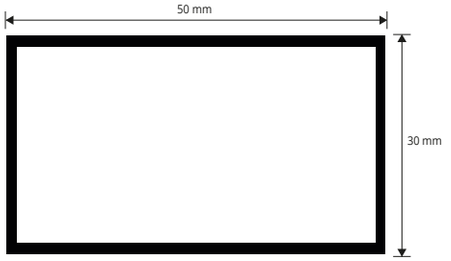



PRORAIL RET - SMOOTH JOIST
aluminium - Pack **10 Pcs -** Bar lenght **2,7 ML**

Article	L x H (mm)	Pc/Pack	€/lm	€/Pc
PSTRAN 5030	50 X 30	10	11,41	30,81




PRORAIL RING - JOIST FASTENING RING
polypropylene - Pack **40 Pcs**

Article	Ø mm	Pc/Pack	€/Pc	€/Pack
PSTRR	135	40	0,88	35,20


PRORAIL SYSTEM LAYING PATTERN

Material required for 1 qm of the below pattern:
-3 pcs **PROSUPPORT TUBE/PROSUPPORT TUBE SLIM**
-3 pcs fastening rings **PRORAIL RING**
-2.7 lm **PRORAIL** joist
-4 lm **PRORAIL RUBBER**

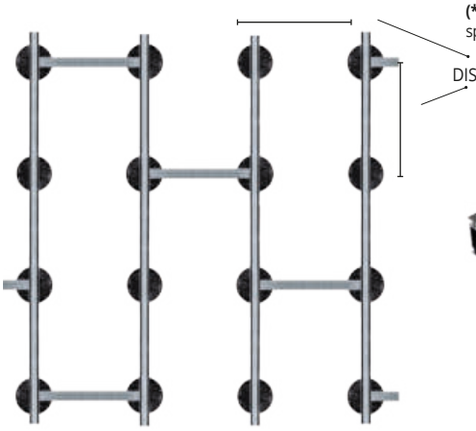

TECHINCAL LAYING INSTRUCTIONS

1. Choose the support **PROSUPPORT TUBE** or **PROSUPPORT SLIM** of the required height;
2. Set the fastening ring **PRORAIL RING** on the supports;
3. Set the **joist PRORAIL (*)** or the **joist PRORAIL RET** on the ring;
4. Insert the rubber **PRORAIL RUBBER** inside the grooves of the joist **PRORAIL;**
5. Set the cross spacers **PRORAIL SPACER** following the laying pattern;
(*) It is possible to fix the joist PRORAIL on the supports fixing it into the spacer flaps, see picture hereunder.

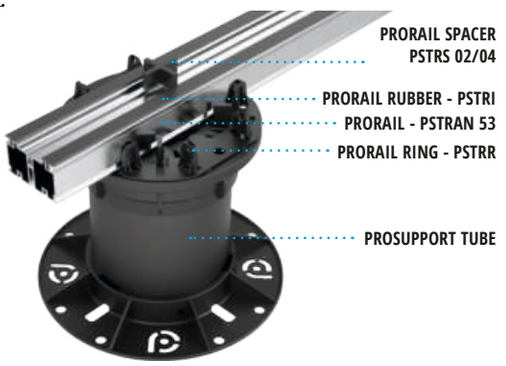



PRORAIL SPACER
PSTRS 02



PRORAIL SPACER
PSTRS 04

PRORAIL SPACER - CROSS SPACER with removable flaps
polypropylene - Pack **100 Pcs**


Article	thickness (mm)	Pc/Pack	€/Pc	€/Pack
PSTRS 02	2	100	0,76	76,00
PSTRS 04	4	100	0,88	88,00



ANTI-ROTATION CLIP - Pack **40 Pcs**

Article	Pc/Pack	€/Pc	€/Pack
PSTCAR	40	1,05	42,00

FIXING WITH PRORAIL JOIST:
Prosupport tube/slim + Prorail + Prorail spacer + Prorail rubber

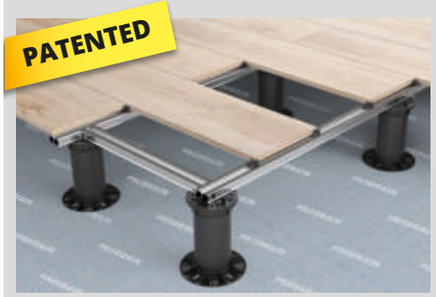

FIXING WITH RING AND PRORAIL JOIST:
Prosupport tube/slim + Prorail ring + Prorail + Prorail spacer + Prorail rubber



FIXING WITH RING AND PRORAIL RET SMOOTH JOIST :
Prosupport tube/slim + Prorail ring + Prorail ret



© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

© 2025 All rights reserved by Progress Profiles. Printed in Italy



PROSUPPORT SLIM SYSTEM

PROSUPPORT SLIMis a modular system to make outdoor floating floors from 10 to 40 mm height, it is composed of two bases of 10 mm height, levellers of 10 mm thickness and anti-noise and anti-slip disks. Thanks its modularity the system allows to make, from a height of 10 mm, all heights with 2 mm interval using the levellers.



BASE WITH FLAPS
PSTSB 02 - 2 mm



BASE WITH FLAPS
PSTSB 04 - 4 mm



LEVELER
PSTSL 02 - 2 mm



ANTI-NOISE AND ANTI-SLIP DISK
PSTSG

BASE with flaps 2/4 mm
polypropylene - Pack 120 Pc.

Article	Thickness (mm)	Pcs/pack	€/Pc	€/Pack
PSTSB 02	2	120	1,13	135,60
PSTSB 04	4	120	1,13	135,60


LEVELLER
Polystyrene - Pack 120 Pc.

Article	Thickness (mm)	Pcs/pack	€/Pc	€/Pack
PSTSL 02	2	120	0,95	114,00


ANTI-NOISE AND ANTI-SLIP DISK
rubber - pack. **120 pcs**

Article	H/Ø mm	Pcs/pack	€/Pc	€/Pack
PSTSG	H 1,5 - Ø 150	120	0,95	114,00


PSTSB 02/04

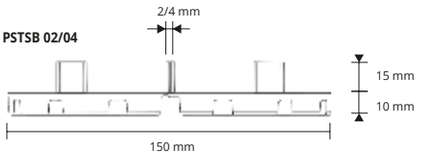

PSTSL 02



ACHIEVABLE HEIGHTS WITH PROSUPPORT SLIM SYSTEM



Requested items:
PSTSB 02/04




Requested items:
PSTSB 02/04
PSTSL 02



Requested items:
PSTSB 02/04
2 x PSTSL 02



Requested items:
PSTSB 02/04
3 x PSTSL 02



Requested items:
PSTSB 02/04
4 x PSTSL 02




Requested items:
2 x PSTSB 02/04



Requested items:
2 x PSTSB 02/04
PSTSL 02




Requested items:
2 x PSTSB 02/04
2 x PSTSL 02



Requested items:
2 x PSTSB 02/04
3 x PSTSL 02



Requested items:
2 x PSTSB 02/04
4 x PSTSL 02



Requested items:
3 x PSTSB 02/04

TO OBTAIN MORE THAN 30 mm HEIGHTS USE THE PROSUPPORT TUBE SYSTEM WITH WHICH IT'S POSSIBLE TO OBTANI HEIGHTS FROM 29 mm UP TO A MAXIMUM OF 1000 mm.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

© 2025 All rights reserved by Progress Profiles. Printed in Italy



SUPPORT and **LEVELLER** are suitable for the realization of outdoor floating floors. The support, in polyethylene, has a height of 15 mm. The rubber leveller, with a thickness of 3 mm, can be applied on the supports up to a maximum of 2. **SUPPORT** and **LEVELLER** are suitable for outdoor areas, terraces, pool edges and pedestrian crossings.

SUPPORT AND LEVELLER

POLYETHYLENE

SQUARES SUPPORT
boxes of **350 Pcs**

Article	Thick. mm	€/Pc	€/Pack.
SQG 15	15	0,36	126,00

ITEMS NOT FOR SALE INDIVIDUALLY.

SQUARES LEVELLER
boxes of **100 Pcs**

Article	Thick. mm	€/Pc	€/Pack.
LQG 03	3	0,27	27,00

ITEMS NOT FOR SALE INDIVIDUALLY.




SUPPORT




LEVELER



SQG 15




LQG 03



LAYING INSTRUCTIONS
1. Lay the supports on the waterproofing membrane. **2.** To reach the desired height or compensate different heights, if necessary, place 1 or 2 rubber levelers on the support. **3.** Lay the floating flooring.

Prices are referred to whole packs.

MAGNET KIT



MAGNET KIT - 4 magnets and 4 plates
for ceramic inspection panel - packs of **10 kits** - price for **1 Kit**

Article	€/KIT
KMD	13,28

SCISSORS
FOR PVC PROFILES



SCISSORS
for cutting PVC profiles

Article	€/Pc
FTPP	92,28

PROECOFON

EXPANDED POLYETHYLENE CLOSED - CELL
WITH ADHESIVE

PROECOFON is a roll of closed-cell polyethylene used as edging between the wall and screed or where there are expansion joints. It should be used in all floor-laying work to ensure long life of the floor.




CLOSED-CELL EXPANDED POLYETHYLENE

Article	Thick. x H mm	lm/roll	€/lm	€/Roll
PEF 550A	5 X 50	25	2,06	51,50
PEFPU 510A	5 X 10	2,7	2,81	7,59
PEF 5100A	5 X 100	100	0,83	83,00

For perimeter areas and joints.
PEFPU 510A for Proterrace Drain Drip
PEF 550A - sold exclusively in packs of **2 pcs**

EXEMPLE OF LAYING



PROBAND FIX

MONOCOMPONENT WATERPROFF
SEALANT







SEALANT MONOCOMPONENT WATERPROOF
Pack of **12** cartridges

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXB	290	17,64	211,68
PRBFXG	290	17,64	211,68

DISPENSING GUN FOR SEALANT CARTRIDGES

Article	Pc/Pack	€/Pc
PRBFXGUN	1	352,60

SEALANT MONOCOMPONENT WATERPROOF CARTRIDGE
Pack of **12** cartridges

Article	Cartridge lm	€/Pc	€/Pack.
PRBFXUB	600	34,61	415,32
PRBFXUG	600	34,61	415,32

COLOURS

B - White | **G** - Grey

Technical data:	
Appearance:	white or gray thixotropic paste
Temperature range for application:	+ 5 °C / + 40 °C
Temperature range:	- 40 °C / + 90 °C
Curing:	≈ 2 mm / 24 h
Commissioning:	≈ 7 days

Suggestions for the installation:
In general cementitious support must be free from dust, oil and grease, dry and free from any visible moisture, free of loose or imperfectly anchored parts such as residual traces of cement, lime and paint, which must be totally removed. In case of contact with eyes, rinse immediately with water and seek medical advice. Avoid contact with skin and keep out of reach of children.

- **Use**
  Balconies, terraces, bathrooms, kitchens, saunas, swimming pools and exterior surfaces of any size.

- **Don't use**
  On bitumen membranes.
  To seal proband with PRODESO® .

PROPOLISH

WHITE CREAM - BASED SURFACTANTS
SUITABLE FOR CLEANING

White cream - based surfactants , amines and inert powder, suitable for cleaning, degreasing and polishing of stainless steel surfaces and opaque/matt brass. The product, ready to use , does not contain acids and alkalis and do not leave marks after use. It does not emit harmful substances



Article	Pack. g.	Pcs/Pack	€/Pc	€/Pack.
PRLISH	250	6	20,25	121,50

PROCARE CLEAN

CLEANING SPRAY

Cleaning spray ready to use suitable for cleaning of stainless steel, brass and aluminum profiles, from residual surface oxide and limestone. The product deposit a protective film that prevents the deposit of limestone and soap residues. Its periodic use allows to obtain bright and cleaner surfaces for long period. Suitable also for glasses, mirrors and bathroom fittings.



Article	Pack. lm	Pcs/Pack.	€/Pc	€/Pack.
PRCLEAN	750	6	19,59	117,54

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.


TROWEL in steel foil 3x3, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of the waterproofing system PROFOIL.

TROWEL

STEEL

TROWEL STEINLESS STEEL
Box **6 Pcs**

Article	Tooth	Dimensions mm	Pcs/Box	€/Pack.	€/Pc
PFTT33	3X3	280X120	6	101,88	16,98

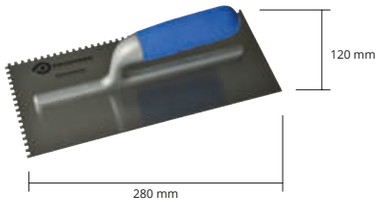


TROWEL in steel foil 5x7, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of the waterproofing and uncoupling systems PRODESO® and PRODESO® HEAT & PRODESO® HEAT GRIP.

TROWEL

STEEL

TROWEL STEINLESS STEEL
Box **6 Pcs**

Article	Tooth	Dimensions mm	Pcs/Box	€/Pack.	€/Pc
PFTT57	5X7	280X121	6	101,88	16,98

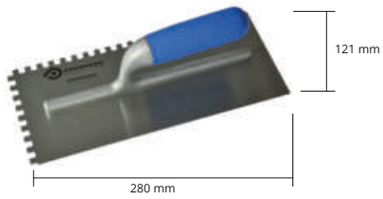


TROWEL in steel foil 10x10, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of tiles above the waterproofing and uncoupling systems PRODESO® and PRODESO® HEAT & PRODESO® HEAT GRIP.

TROWEL

STEEL

TROWEL STEINLESS STEEL
Box **6 Pcs**

Article	Tooth	Dimensions mm	Pcs/Box	€/Pack.	€/Pc
PFTT1010	10X10	280X122	6	101,88	16,98

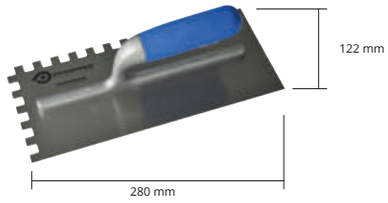


TROWEL in PVC size 10x10 cm, resistants to solvents, with a triangular teeth of interaxle spacing of 5 mm, 4 mm and 3 mm. To be used for the application of adhesives PROBAND FIX.

TROWEL

PVC

TROWEL

Article	Dimensions mm	€/Pc
PRSPD 10	100x100	3,79



ROLLER in nylon, 40 cm long, fixed to a varnished metal or stainless steel 304 frame, suitable for pressing the PRODESO®, PRODESO® HEAT & PRODESO® HEAT GRIP and PROFOIL. The roller is equipped with an extendable grip, length-adjustable and with an L base that allows to load 1 bag of adhesive to obtain the correct and homogenous pressing of the membranes. A tripod allows to keep the roll in the right position while loading the bag.

ROLLER

VARNISHED STEEL OR STAINLESS STEEL

ROLLER IN STAINLESS STEELL
L 40 cm

Article	L mm	Finish	€/Pc
PSM	400	varnished	515,83
PSMAC	400	steel	652,95



© 2025 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROGRESS® PROFILES

An interpretation of:

Premier Tower, Elenberg Fraser, MELBOURNE (Australia)



BUILDING SYSTEMS

PROFILES & SYSTEMS

SNAP-ON STRAND SHEATH

GREY RIGID PVC

The **SNAP-ON PVC STRAND SHEATH** serves to cover/neutralise the reinforcement strands inside the prestressed beams; the sheath cancels out the stress that the strands transmit to the beam, thereby permitting the positive to be changed to left-handed moments. Available in various diameters and lengths.

R 110
scale 1:1




R 111
scale 1:1



R 112
scale 1:1



R 113
scale 1:1




GREY RIGID PVC
bar length **3 lm** - pack. **50 Pcs - 150 lm**


Article	Ø inches	Ø mm	€/lm	€/Pc
R 110	3 x 3"	8	0,50	1,50
R 111	3 / 8"	12	0,55	1,65
R 112	1 / 2"	15	0,59	1,77
R 113	0' 6"	19	0,63	1,89

R 110/ 111: 15.000 lm / pallets
R 112/113: 10.800 lm / pallets

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




Laying is extremely simple by just positioning the sheath so that the "V" shaped flanges are facing the prestressed reinforcement strands that are already in situ and gently pressing until the sheath snaps on.

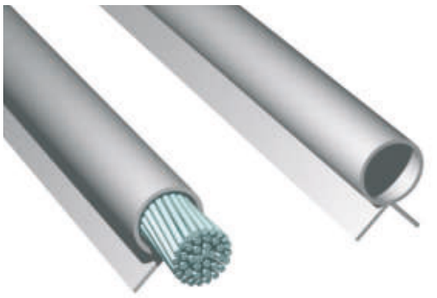


SNAP-ON STRAND TUBE

GREY RIGID PVC


R 114
scale 1:1



R 115
scale 1:1



R 116
scale 1:1




GREY RIGID PVC
bar length **3 lm** - pack. **50 Pcs - 150 lm**

Article	Ø inches	Ø mm	€/lm	€/Pc
R 114	3/8"	12	0,50	1,50
R 115	1/2"	15	0,55	1,65
R 116	0/6"	19	0,60	1,80

R 114/ 115: 15.000 lm / pallets
R 116: 12.000 lm / pallets

COLOURS

G - Grey

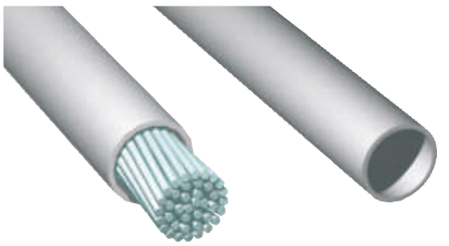

LAYING INSTRUCTIONS
Laying is very simple; just insert the casing over the strands before they are tensioned.

FINNED DISTANCE TUBE

GREY RIGID PVC

TDA 09
scale 1:1



TDA 12
scale 1:1



GREY RIGID PVC
bar length **2 lm** - pack. **50 Pcs - 100 lm**

Article	Ø mm	€/lm	€/Pc
TDA 09	9	0,40	0,80
TDA 12	12	0,45	0,90

TDA 09: 15.000 lm / pallets
TDA 12: 10.000 lm / pallets

COLOURS

G - Grey



LAYING INSTRUCTIONS
Laying is very simple:
1. Just insert the iron rod into the finned tube before closing the reinforcement panel. **2.** Upon removing the reinforcement panels, if necessary insert the end plugs.

END CAPS FOR DISTANCE TUBE

GREY HD POLYPROPYLENE

PPT 09 / 12



SMOOTH END CAPS - GREY HD POLYPROPYLENE
pack. **1000 Pcs**

Article	Ø mm	€/Pc	€/Pack.
PPT 09	9	0,026	26,00
PPT 12	12	0,029	29,00


Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

RIBBED DISTANCE TUBE

GREY RIGID PVC




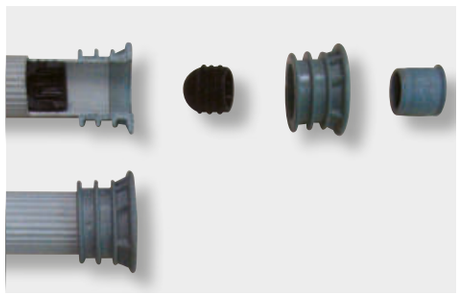


PPD 20
scale 1:1



PPD 22
scale 1:1



PPD 26
scale 1:1



GREY RIGID PVC
bar length **2 lm** - pack. **25 Pcs - 50 lm**

Article	Ø mm inside	€/lm	€/Pc
PPD 20	20	0,60	1,20
PPD 22	22	0,65	1,30
PPD 26	26	0,85	1,70

PPD 20/ PPD 22: 5.000 lm / pallets
PPD 26: 3.000 lm / pallets

COLOURS

G - Grey

WASHERS AND END CAPS FOR DISTANCE TUBE

GREY HD POLYPROPYLENE - PVC / RUBBER

WASHERS - GREY HD POLYPROPYLENE
pack. **1000 Pcs**

Article	Ø mm outside	€/Pc	€/Pack.
PPR 20	20	0,044	44,00
PPR 22	22	0,045	45,00
PPR 26	26	0,135	135,00

OUTSIDE WASHERS - GREY HD POLYPROPYLENE
pack. **1000 Pcs**

Article	Ø mm	€/Pc	€/Pack.
RETDB 22	26	0,252	252,00

INSIDE END CAPS - PVC / RUBBER
pack. **2000 PCS** divided into two **1000 Pcs** bags

Article	Ø mm	€/Pc	€/Pack.
TIGPC 22	22	0,212	424,00

SMOOTH PLUGS - GREY HD POLYPROPYLENE
(**PPT 20/ 22/ 26** pack. **2000 Pcs** divided into two **1000 Pcs** bags)

Article	Ø mm	Pcs/Pack.	€/Pc	€/Pack.	
PPT 09	9	1000	0,026	26,00	
PPT 12	12	1000	0,030	30,00	
PPT 16	16	1000	0,031	31,00	*
PPT 20	20	2000	0,032	64,00	
PPT 22	22	2000	0,033	66,00	
PPT 26	26	2000	0,102	204,00	

HOLLOW PLUGS - GREY HD POLYPROPYLENE
pack. **2000 Pcs** divided into two **1000 Pcs** bags

Article	Ø mm	Pcs/Pack.	€/Pc	€/Pack.	
PPTC 22	22	2000	0,035	70,00	*

SMOOTH PLUG
for walls without plaster



HOLLOW PLUG
for plaster



PPR 20 / 22 / 26



PPT 09 / 12 / 16 / 20 / 22 / 26



RETDB 22




TIGPC 22







DRIP

GREY RIGID PVC

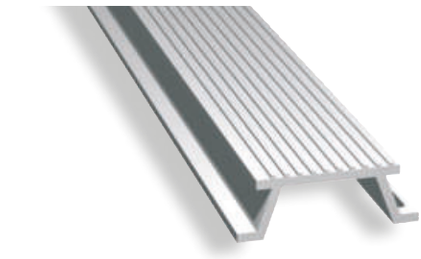


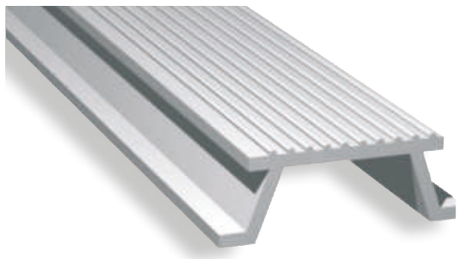

GCT 20
scale 1:1



GCT 30
scale 1:1



GREY RIGID PVC
bar length **2 lm** - pack. **50 Pcs - 100 lm**

Article	L x H mm	€/lm	€/Pc
GCT 20	20 x 12	0,36	0,72
GCT 30	30 x 15	0,54	1,08

GCT 20: 15.000 lm / pallets
GCT 30: 10.000 lm / pallets

COLOURS

G - Grey

LAYING INSTRUCTIONS
Must be fixed below the sheathing/armature to create the drip course.

*** = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PROFILE
WITH TRIANGULAR CHAMFER


GREY RIGID PVC

The **TRIANGULAR CHAMFER** is made in grey rigid PVC in various widths 10-15-20-30 mm and standard length of 2 lm. It is mainly used to chamfer the corners of the concrete pours when making, for example, walls-columns etc. It is strong and easy to lay.


PST 10
scale 1:1




PST 15
scale 1:1



PST 20
scale 1:1



PST 30
scale 1:1



LAYING INSTRUCTIONS
Put the nails into the central part along the profile before pouring the concrete.

GREY RIGID PVC
bar length **2 lm** - pack. **50 Pcs** - **100 lm**


Article	Width mm	€/lm	€/Pc
PST 10	**10**	**0,20**	**0,40**
PST 15	**15**	**0,22**	**0,44**

20.000 lm pallets

GREY RIGID PVC
bar length **2 lm** - pack. **50 Pcs** - **100 lm**

Article	Width mm	€/lm	€/Pc
PST 20	**20/22**	**0,25**	**0,50**
PST 30	**30/32**	**0,37**	**0,74**


PST 20: 15.000 lm / pallets
PST 30: 10.000 lm / pallets

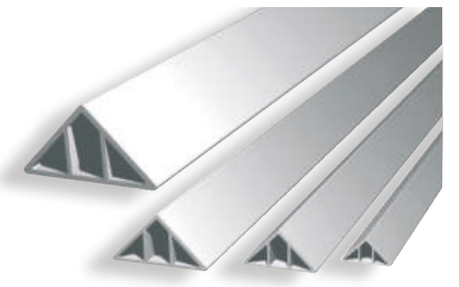


ROUNDED TRIANGULAR
CHAMFER FILLET

GREY RIGID PVC

PSD 32
scale 1:1



PSD 22
scale 1:1



LAYING INSTRUCTIONS
Put the nails into the central part along the profile before pouring the concrete.


GREY RIGID PVC
bar length **2 lm** - pack. **50 Pcs** - **100 lm**

Article	L mm	€/lm	€/Pc
PSD 22	**20/22**	**0,40**	**0,80**
PSD 32	**30/32**	**0,50**	**1,00**

PST 22: 15.000 lm / pallets
PST 32: 10.000 lm / pallets

COLOURS

G - Grey

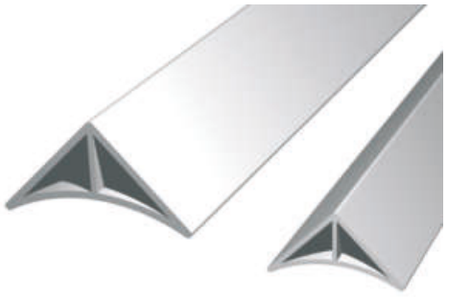

FISHBONE RIBBED JOINT

GREY RIGID PVC

COLOURS


G - Grey

LAYING INSTRUCTIONS
Laying is very simple: just insert the ribbed joint into the gap deliberately left in the concrete or the screed.

GREY RIGID PVC
bar length **2 lm** - pack. **50 Pcs** - **100 lm**

Article	H x L mm	€/lm	€/Pc
GRP 25	**25 X 5**	**0,50**	**1,00**
GRP 45	**45 X 5**	**0,90**	**1,80**

GRP 25: 10.000 lm / pallets
GRP 45: 5.000 lm / pallets

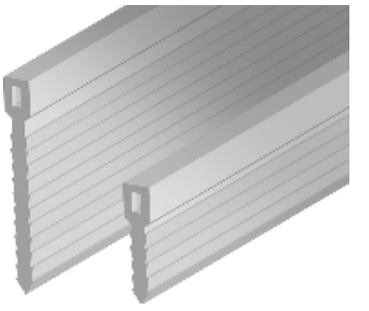

PROFILE
WITH DOUBLE CHAMFER - FOR BALCONIES

GREY RIGID PVC

COLOURS


G - Grey

LAYING INSTRUCTIONS
Laying is very simple: just fix it with nails or clamps in the relative formwork prior to pouring the concrete.

GREY RIGID PVC
on demand bar length

Article	H mm	€/lm	
R 117	**80**	**12,95**	*

PROFILE SPECIFICATIONS:
- Chamfer angle 45°
- Chamfer length 20 mm
- Bar length on demand
- Weight x metre ≈ 2,3 Kg

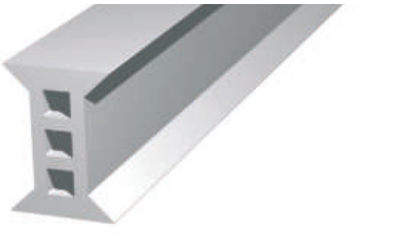

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

WATERSTOP


PLASTICIZED PVC BLUE

The **WATERSTOPS** profiles are made in high-quality polyvinyl chloride (plasticized PVC) and have excellent physical-mechanical properties, strength, flexibility, resistance to ageing and fluid-tightness even under pressure. The "Flat Waterstop" model art. WP is used for adjacent pours of concrete, while the "Waterstop with Bulb" model art. WB is used in concrete casting but as an expansion joint, thanks to the central bulb. They find many applications: floors, underground rooms, trench ducts/ underground passages, face walls, cisterns, silos, swimming pools, tanks, canals, dams, aqueducts, etc.
The quality of the materials allows the waterstops to be used on concrete structures exposed to temperatures between –30°C and +70°C, also ensuring good resistance to chemicals in alkaline environments, to brackish waters and to acid solutions.

FLAT WATERSTOPS WP 100

FLAT WATERSTOPS WP 150 / 200 / 220 / 250 / 300

WATERSTOPS WITH BULB WB 200 / 220 / 250 / 300

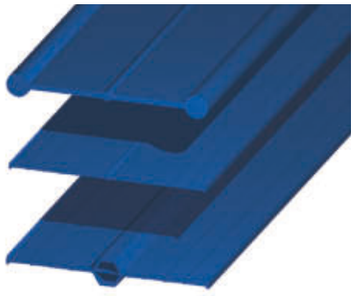



FLAT WATERSTOPS - PLASTICIZED PVC BLUE
pack. rolls **25 lm (WP 150** - pack. rolls **50 lm)**


Article	L mm	€/lm	€/Pack.	
WP 100	100	4,40	220,00	
WP 150 (50 ml)	150	4,10	205,00	
WP 200	200	4,95	247,50	
WP 220	220	6,20	310,00	*
WP 250	250	7,45	372,50	
WP 300	300	9,10	455,00	*


ANCHORING CLIPS for WATERSTOPS on demand.

WATERSTOPS WITH BULB - PLASTICIZED PVC BLUE
pack. rolls **25 lm**

Article	L mm	€/lm	€/Pack.
WB 200	200	7,10	177,50
WB 220	220	8,60	215,00
WB 250	250	10,35	258,75
WB 300	300	11,50	287,50

ANCHORING CLIPS for WATERSTOPS on demand.

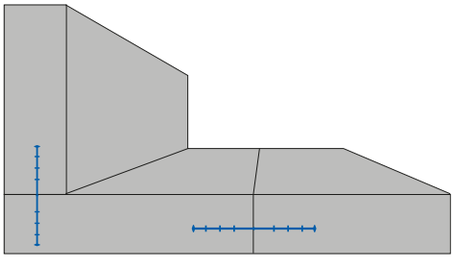

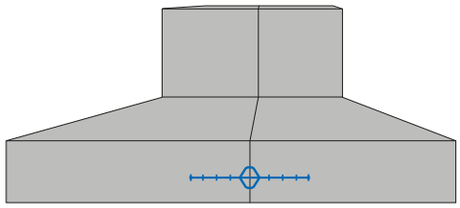


SEALING OF WATERSTOPS

The Waterstops may be welded together to obtain a single piece of the required length. The two parts must be properly cleaned for perfect fluid-tightness of the joints.
The waterstops are usually field welded using a normal hot-air heater on the ends of the sections.
The bond is accomplished by melting the material and pressing one end over the other.

COLOURS



B - Blue

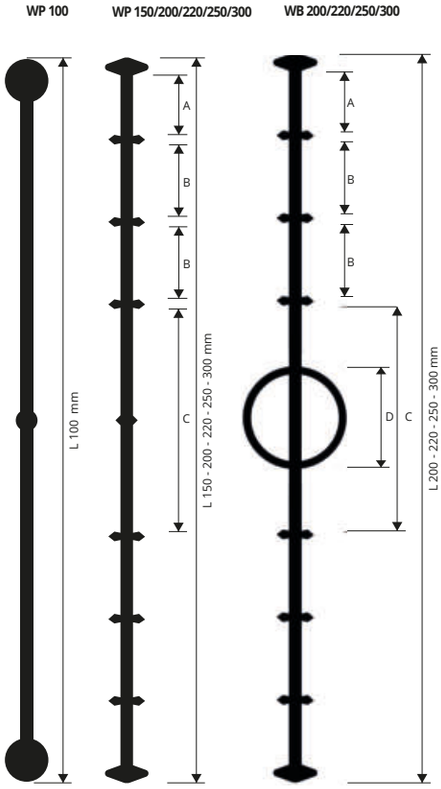

profiles for adjacent pours of concrete

SIZE

ART.	A	B	C	D
WP 100	*40 mm*			
WP 150	*13,3 mm*	*15,5 mm*	*45,5 mm*	
WP 200	*22 mm*	*22 mm*	*50 mm*	
WP 220	*23 mm*	*25 mm*	*50 mm*	
WP 250	*19 mm*	*21 mm*	*71,5 mm*	
WP 300	*20,5 mm*	*22,5 mm*	*78 mm*	
WB 200	*16 mm*	*18 mm*	*85 mm*	*32 mm*
WB 220	*16 mm*	*18,5 mm*	*86 mm*	*33 mm*
WB 250	*26 mm*	*20 mm*	*84 mm*	*30 mm*
WB 300	*26 mm*	*22 mm*	*88 mm*	*34 mm*

ANCHORING CLIPS FOR WATERSTOPS

GREY UH POLYPROPYLENE

GREY HD POLYPROPYLENE
pack. **1000 Pcs**

Article	€/Pc	€/Pack.
CLPS	0,35	350,00





*** = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed.**


Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PRODISTANZ

GREY HD PLYPROPYLENE

PRODISTANZ is a patented new product that simplifies, improves and speeds up the work of securing and preparing shuttering panels used in the casting of concrete; it avoids the cutting and assembling in situ of the tubular waler-washer (traditional system). **PRODISTANZ** is recommended for its special, very strong structure, which is resistant to compressive stress and prevents water infiltration thanks to the lateral ribs along the cylindrical part and the horizontal supports and circles. It consists of a single plastic element and is available in a wide range of lengths 15-20-25-30-35-40 cm (in packs of 100 Pcs.). They come with watertight plugs in a choice of two types. Watertight caps at 18 Atm. / Bar.

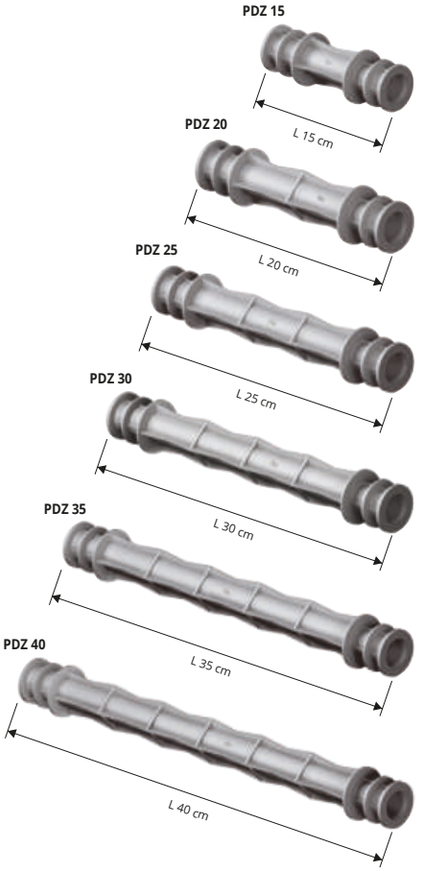



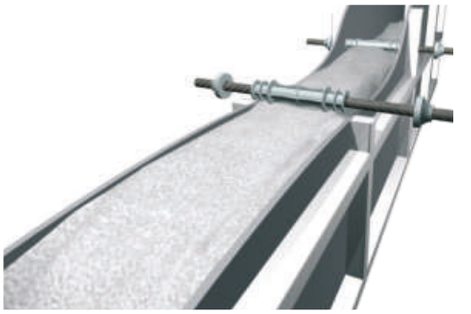

GREY HD POLYPROPYLENE
pack. **100 Pcs + 200** end caps

Article	L cm	€/Pc	€/Pack.
PDZ 15	15	0,43	43,00
PDZ 20	20	0,46	46,00
PDZ 25	25	0,50	50,00
PDZ 30	30	0,53	53,00
PDZ 35	35	0,60	60,00
PDZ 40	40	0,65	65,00

SIMPLE FAST ECONOMIC
- Exclusive patented product
- High resistance to compressive stress and to water infiltration
- Fast, assured work, without waste, cutting costs or pipe scraps
- Extremely easy to use
- Vast range available: 15-20-25-30-35-40 cm
- Innovative design – guaranteed
- Quality - Constant colour and quality





END CAPS AND JOINTS FOR PRODISTANZ

GREY HD POLYPROPYLENE - PVC/RUBBER

TIGPC 22



GPDZ 22



PPTC 22



PPTC 22 hollow plung for plaster



Hollow plug: for better anchorage of the plaster. (new) standard.

HOLLOW END CAPS - GREY HD POLYPROPYLENE
pack. **2000 Pcs** divided into two **1000 Pcs** bags

Article	Ø mm	Pcs/Pack.	€/Pc	€/Pack.	
PPTC 22	22	2000	0,035	70,00	*

SMOOTH PLUGS - GREY HD POLYPROPYLENE
pack. **2000 Pcs** divided into two **1000 Pcs** bags

Article	Ø mm	Pcs/Pack.	€/Pc	€/Pack.
PPT 22	22	2000	0,033	66,00


INSIDE END CAPS - PVC/RUBBER
pack. **2000 Pcs** divided into two **1000 Pcs** bags

Article	Ø mm	€/Pc	€/Pack.
TIGPC 22	22	0,212	424,00

JOINT - GREY HD POLYPROPYLENE
pack. **1000 Pcs** divided into two **500 Pcs** bags

Article	Ø mm	€/Pc	€/Pack.
GPDZ 22	22	0,199	199,00



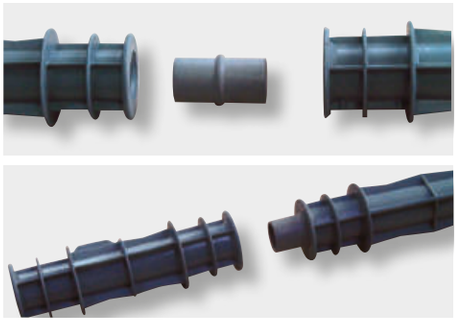

© 2023 All rights reserved by Progress Profiles. Printed in Italy


PROGRESS® PROFILES


* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.


Prices are referred to whole packs.


The linear spacer **RAPY 100** is strong and resistant, capable of bearing heavy loads thanks to its shape and size. The lateral and horizontal holes allow perfect penetration of the concrete. Upside down it can be used on insulating panels for floors. Spacers may be joined together longitudinally with a simple slot-in system. Ideal for precasting and civil industry, it ensures stability and invisible finish. On demand available in 50 cm cut.

RAPY 100
FOR HEAVY MESH
GREY HD POLYPROPYLENE

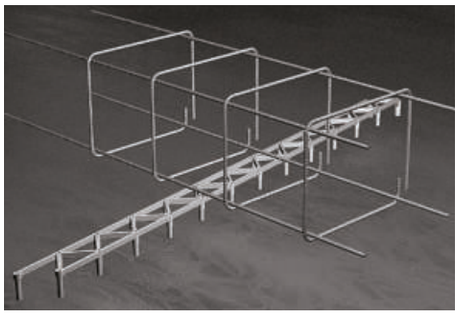

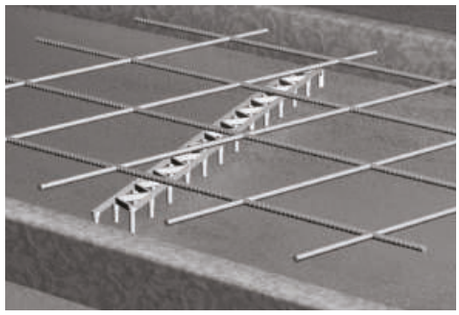



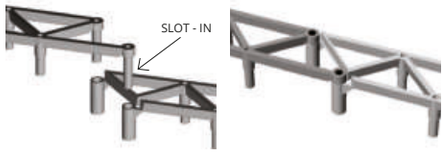

GREY HD POLYPROPYLENE
length **1 lm** - pack. **80 lm**

Article	H mm	€/lm	€/Pack.
PLF 20	20	0,62	49,60
PLF 25	25	0,68	54,40
PLF 30	30	0,70	56,00

Maximum weight:
3000 kg a piece (bar lenght: 1lm) equally distributed.

GREY HD POLYPROPYLENE
length **1 lm** - pack. **60 lm**

Article	H mm	€/lm	€/Pack.
PLF 35	35	0,77	46,20
PLF 40	40	0,97	58,20
PLF 45	45	1,27	76,20
PLF 50	50	1,46	87,60
PLF 55	55	1,67	100,20
PLF 60	60	2,01	120,60



Strong and very resistant linear spacer, to be joined lengthwise and have several lengths. The new shape allows to combine high technical performances to a costs optimization.

RAPY 100 ECO
GREY HD POLYPROPYLENE

RAPY 100 ECO
length **1 lm** - pack. **64 lm**

Article	H mm	€/lm	€/Pack.
PLFE 20	20	0,48	30,72
PLFE 25	25	0,53	33,92
PLFE 30	30	0,57	36,48
PLFE 35	35	0,62	39,68
PLFE 40	40	0,69	44,16

ARTICLES NOT FOR SALE SINGLY

RAPY 100 ECO
length **1 lm** - pack. **64 lm**

Article	H mm	€/lm	€/Pack.	
PLFE 45	45	1,00	64,00	*
PLFE 50	50	1,18	75,52	*
PLFE 55	55	1,32	84,48	*
PLFE 60	60	1,57	100,48	*

ARTICLES NOT FOR SALE SINGLY




The **RAPY 200** spacer is sturdy, resistant and easy to place. Ideal for reinforced horizontal, vertical and sloped structures. The side and horizontal holes allow it to perfectly penetrate into the concrete.
When flipped over, it can be used for insulation panels, floors and precast structures.
On demand available at 1 metre.

RAPY 200
GREY HD POLYPROPYLENE

GREY HD POLYPROPYLENE
length **2 lm** - pack. **96 lm**

Article	H mm	€/lm	€/Pack.
PLF 20R	20	0,67	64,32
PLF 25R	25	0,74	71,04
PLF 30R	30	0,80	76,80
PLF 40R	40	1,00	96,00

Maximum weight: 3000 kg a piece (bar lenght: 2 lm) equally distributed.
The spacer is made up of two 1 lm pieces joined together.

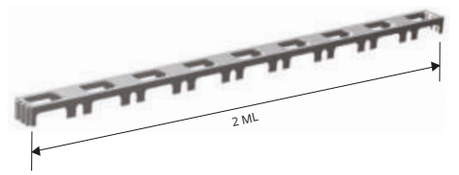




Spacer for horizontal use for heavy reinforcement and meshes; it withstands heavy incidental weights and loads with great stability.

MULTIPIEDE
GREY HD POLYETHYLENE

GREY HD POLYPROPYLENE
bar length **50 cm** - Pack. **100 Pcs** (**DMP 30** - Pack **75 Pcs**)

Article	H mm	€/Pc	€/Pack.	
DMP 20	20	0,44	44,00	*
DMP 25	25	0,46	46,00	*
DMP 30	30	0,50	50,00	*

Maximum weight:
2.500 kg a piece (bar lenght: 50 cm) equally distributed.

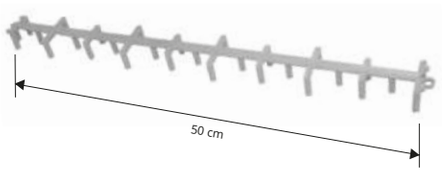

*** = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs.

© 2023. All rights reserved by Progress Profiles. Printed in Italy


TYPE "PAV" WHEEL

GREY HD POLYPROPYLENE

The circular spacer **PAV** is a patented and innovative product to resolve problems connected with the laying of spacers for electrically welded mesh, using rods of different diameter Ø 4-6-8-10-12 mm and thereby avoiding the purchase of other types of spacers for iron with larger diameter.


spacers for electrically welded mesh



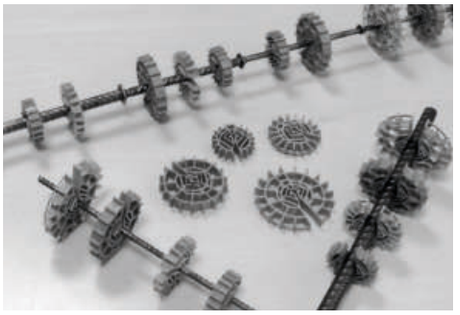

GREY HD POLYPROPYLENE
pack. **2000 Pcs**

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPV 10	10	4/8	0,030	60,00
PPV 15	15	4/8	0,035	70,00





GREY HD POLYPROPYLENE
pack. **1000 Pcs**

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPV 20	20	4/8	0,040	40,00
PPV 25	25	4/12	0,045	45,00
PPV 30	30	4/12	0,050	50,00

GREY HD POLYPROPYLENE
pack. **500 Pcs**

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPV 40	40	8/16	0,115	57,50
PPV 50	50	8/16	0,193	96,50


NEW PATENTED UNIVERSAL MODEL FOR RODS Ø 4/12 MM.
THE ADVANTAGES OF THE NEW PAV RANGE ARE AS FOLLOWS:
1st The only universal spacer for 4 to 12 mm rods.
2nd Easy to insert.
3rd Innovative and technical design.


TYPE "PAU" TOWER

GREY HD POLYPROPYLENE

The universal spacer **PAU** can be used either horizontally or vertically. Strong and resistant, it can bear heavy loads and is easy to fit. Recommended for cross application of wires in electro-welded or welded meshes.

spacers for electrically welded mesh

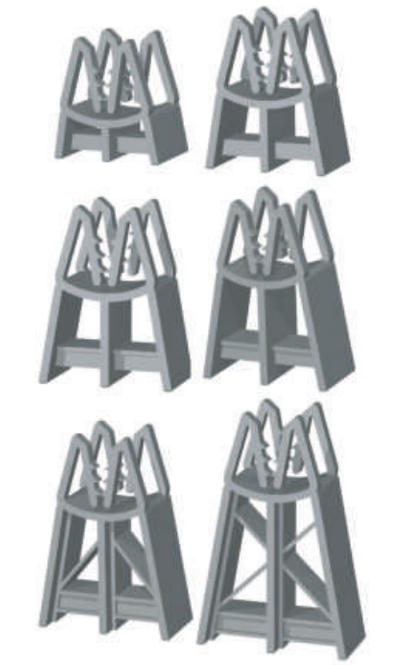

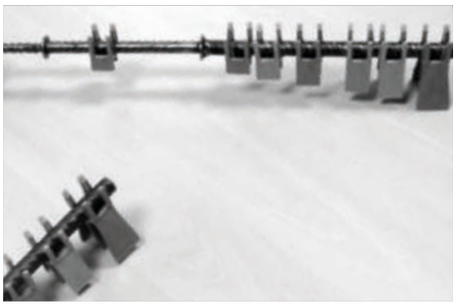


GREY HD POLYPROPYLENE
pack. **4000 Pcs (PPU 10) -** pack. **3000 Pcs (PPU 15)**

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPU 10	10	4/12	0,030	120,00
PPU 15	15	4/12	0,035	105,00

GREY HD POLYPROPYLENE
pack. **1000 Pcs**

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPU 30	30	4/12	0,050	50,00
PPU 40	40	4/12	0,055	55,00

NEW PATENTED UNIVERSAL MODEL FOR RODS Ø 4/12 MM.
THE ADVANTAGES OF THE NEW PAV RANGE ARE AS FOLLOWS:
1st The only universal spacer for 4 to 12 mm rods.
2nd Easy to insert.
3rd innovative and technical design.

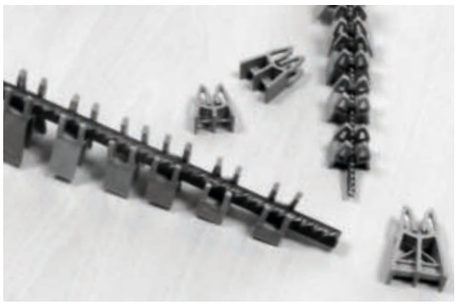

GREY HD POLYPROPYLENE
pack. **2000 Pcs**

Article	Formwork spacer mm	Ø rod mm	€/Pc	€/Pack.
PPU 20	20	4/12	0,040	80,00
PPU 25	25	4/12	0,045	90,00

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

SPACER for vertical and horizontal meshes. complete with hooks fixing to mesh.
dimensions 192 x 90 mm.


SPACER
FOR VERTICAL/HORIZONTAL MESH

GREY HD POLYETHYLENE

spacers

GREY HD POLYETHYLENE
length **192 mm** - width **90 mm**

Article	Pc/pack.	H mm	€/Pc	€/Pack.	
DVO 10	400	10	0,28	112,00	*
DVO 15	400	15	0,32	128,00	*
DVO 20	300	20	0,36	108,00	*
DVO 25	120	25	0,42	50,40	*
DVO 30	250	30	0,50	125,00	
DVO 35	200	35	0,54	108,00	*

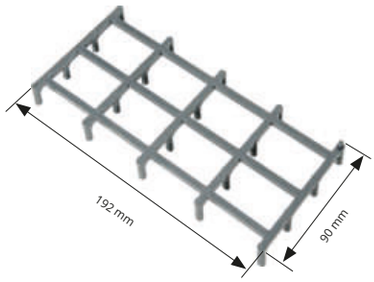


SPACER
FOR GLASS BRICK

HD STYROFOAM

spacers

WHITE HD STYROFOAM
pack. **600 Pcs**

Article	Thick mm	€/Pc	€/Pack.	
DSVT	10	0,32	192,00	*

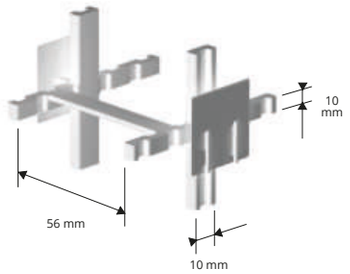


With the **DOPPY** type spacer with double slot, two Ø 4 to 8 mm mesh reinforcements may be kept simultaneously at the same distance from the formwork.

TYPE "DOPPY"
WITH DOUBLE SLOT

GREY HD POLYPROPYLENE

spacers

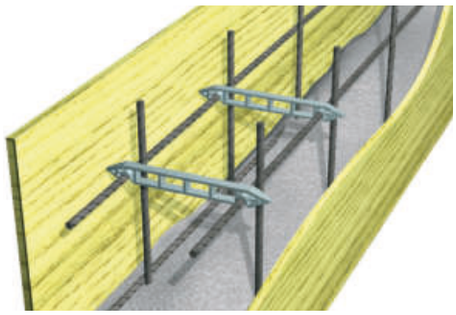


GREY HD POLYPROPYLENE - for mesh up to **Ø 8 mm**
pack. **500 Pcs**

Article	mesh dist. L mm	€/Pc	€/Pack.	
PPY 15	100	0,30	150,00	*

GREY HD POLYPROPYLENE - for mesh up to **Ø 8 mm**
pack. **250 Pcs**

Article	mesh dist. L mm	€/Pc	€/Pack.	
PPY 20	150	0,37	92,50	*
PPY 25	200	0,44	110,00	*
PPY 30	250	0,50	125,00	*

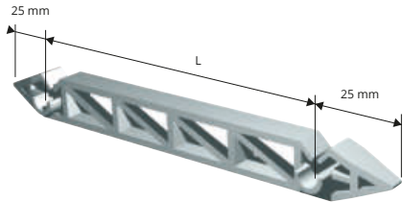

© 2020. All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.


Prices are referred to whole packs.

PROTECTIVE CAPS
FOR RODS FOR ADJACENT POURS

HD POLYPROPYLENE

The **PROTECTIVE CAPS** have been created to comply with the safety regulations as per Italian law 81/2008. They protect the end of the protruding rods, thereby preventing injury to operators. Two types for different diameters are available.

laying products

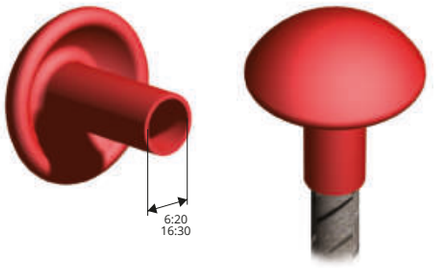


HD POLYPROPYLENE - colour red
pack. **200 Pcs** (divided into two **100 Pcs** bags)

Article	Ø mm	€/Pc	€/Pack.
PCPF 620	6/20	0,19	38,00
PCPF 1630	16/30	0,44	88,00

FLAT SPACER
FOR MOUNTING PREFABRICATED PANELS

HD POLYPROPYLENE

laying products

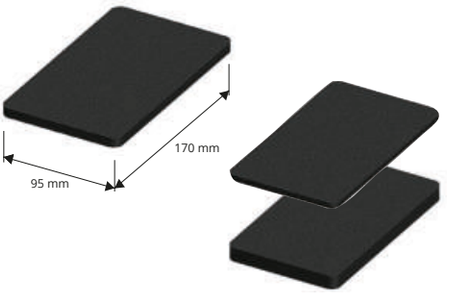

HD POLYPROPYLENE
size **170 X 95 mm** - pack. **400 Pcs**

Article	Thick mm.	€/Pc	€/Pack.
PPN 02	2	0,50	200,00

HD POLYPROPYLENE
size **170 X 95 mm** - pack. **100 Pcs**

Article	Thick mm.	€/Pc	€/Pack.
PPN 10	10	1,32	132,00

HD POLYPROPYLENE
size **170 X 95 mm** - pack. **200 Pcs**

Article	Thick mm.	€/Pc	€/Pack.
PPN 05	5	0,83	166,00

© 2026 All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.

The **PAX** spacer is a sturdy spacer used for horizontal mesh; its shape allows the use of Ø 10 / 16 mm mesh.

TYPE "PAX" STURDY

GREY HD POLYETHYLENE

GREY HD POLYETHYLENE - Ø rod **10/16 mm**
pack. **2000 Pcs**

Article	Formwork spacer mm	€/Pc	€/Pack.	
PPX 15	15	0,044	88,00	**

GREY HD POLYETHYLENE - Ø rod **10/16 mm**
pack. **1000 Pcs**

Article	Formwork spacer mm	€/Pc	€/Pack.	
PPX 20	20	0,055	55,00	**
PPX 25	25	0,067	67,00	**
PPX 30	30	0,079	79,00	**
PPX 40	40	0,096	96,00	**





spacers for

The **PAL** spacer is a lightweight spacer used to join the iron mesh framework of floor slabs, maintaining the distance from the formwork.

TYPE "PAL" FOR FLOOR SLABS

GREY HD POLYPROPYLENE

GREY HD POLYPROPYLENE - Ø rod **6+5 mm**
pack. **2000 Pcs**

Article	Formwork spacer mm	€/Pc	€/Pack.	
PPO 15	15	0,058	116,00	*
PPO 20	20	0,067	134,00	*

GREY HD POLYPROPYLENE - Ø rod **6+5 mm**
pack. **1000 Pcs**

Article	Formwork spacer mm	€/Pc	€/Pack.	
PPO 25	25	0,076	76,00	*





welded mesh

The **PAS** spacer is a sturdy spacer used for heavy reinforcement and large diameter rods.

TYPE "PAS" CHAIR

GREY HD POLYETHYLENE

GREY HD POLYETHYLENE - Ø rod **0/28 mm**
pack. **2000 Pcs** - divided into two **1000 Pcs** bags

Article	Formwork spacer mm	€/Pc	€/Pack.	
PPS 15	15	0,037	74,00	**
PPS 20	20	0,050	100,00	**
PPS 25	25	0,065	130,00	**

GREY HD POLYETHYLENE - Ø rod **0/28 mm**
pack. **1000 Pcs** - divided into two **500 Pcs** bags

Article	Formwork spacer mm	€/Pc	€/Pack.	
PPS 30	30	0,083	83,00	**
PPS 40	40	0,099	99,00	**
PPS 50	50	0,165	165,00	**





© 2023. All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

** = Production on demand with minimum quantity of 50000 pcs. Production delay 4/5 weeks. Price to be agreed.


Prices are referred to whole packs.

GASKETS FOR PRECAST FORMS

PVC / RUBBER

gaskets for industrial precast forms

M 232




PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 232	to be agreed *



M 233




PVC / RUBBER
length rolls **50 lm**


Article	€/lm
M 233	to be agreed *




M 234



M 234 A



M 234 B




PVC / RUBBER - weight 650 g / lm
length rolls **50 lm**

Article	€/lm
M 234	to be agreed *
M 234 A	to be agreed *
M 234 B	to be agreed *



M 235

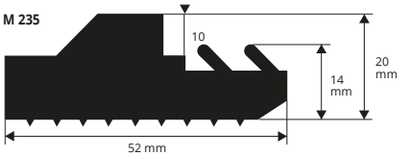


PVC / RUBBER - weight 980 g / lm
length rolls **50 lm**


Article	€/lm
M 235	to be agreed *




M 236



M 236 A



M 236 B




PVC / RUBBER - weight 270 g / lm
length rolls **50 lm**

Article	€/lm
M 236	to be agreed *
M 236 A	to be agreed *
M 236 B	to be agreed *




M 237



PVC / RUBBER - weight 510 g / lm
length rolls **50 lm**

Article	€/lm
M 237	to be agreed *

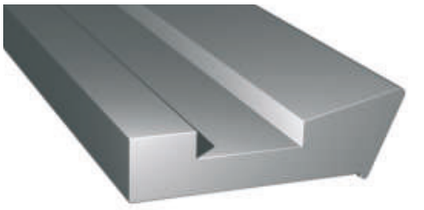


*** = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

GASKETS FOR PRECAST FORMS


PVC / RUBBER

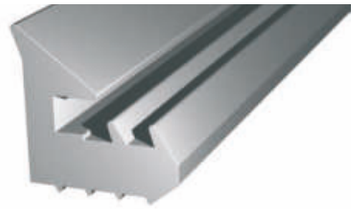


PVC / RUBBER - weight 695 g / lm
length rolls **50 lm**

Article	€/lm	
M 238	to be agreed	*

M 238




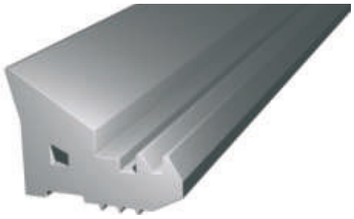

PVC / RUBBER - weight 880 g / lm
length rolls **50 lm**

Article	€/lm	
M 239	to be agreed	*

M 239







PVC / RUBBER
length rolls **50 lm**

Article	€/lm	
M 240	to be agreed	*
M 240 A	to be agreed	*
M 240 B	to be agreed	*


M 240




M 240 A



M 240 B




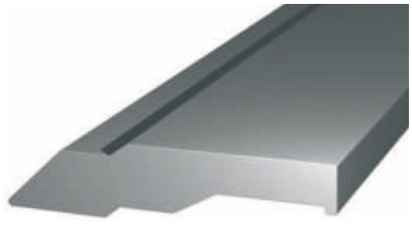

PVC / RUBBER
length rolls **50 lm**

Article	€/lm	
M 241	to be agreed	*

M 241






PVC / RUBBER - weight 695 g / lm
length rolls **50 lm**

Article	€/lm	
M 242	to be agreed	*

M 242






PVC / RUBBER - weight 630 g / lm
length rolls **50 lm**

Article	€/lm	
M 243	to be agreed	*

M 243



* = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.


© 2026 All rights reserved by Progress Profiles. Printed in Italy

GASKETS FOR PRECAST FORMS

PVC / RUBBER

gaskets for industrial precast forms

M 244



M 244 A



PVC / RUBBER - weight 180-330 g / lm
length rolls **50 lm**

Article	€/lm	
M 244	to be agreed	*
M 244 A	to be agreed	*



M 245




PVC / RUBBER
length rolls **50 lm**

Article	€/lm	
M 245	to be agreed	*



M 246




PVC / RUBBER - weight 330 g / lm
length rolls **50 lm**

Article	€/lm	
M 246	to be agreed	*



M 247




PVC / RUBBER - weight 335 g / lm
length rolls **50 lm**


Article	€/lm	
M 247	to be agreed	*



M 248




M 248 A




PVC / RUBBER - weight 270 g / lm
length rolls **50 lm**

Article	€/lm	
M 248	to be agreed	*
M 248 A	to be agreed	*

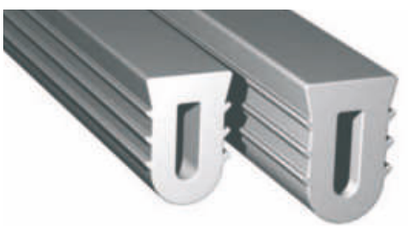

M 249



PVC / RUBBER - weight 220 g / lm
length rolls **50 lm**

Article	€/lm	
M 249	to be agreed	*



*** = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.**

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

GASKETS FOR PRECAST FORMS


PVC / RUBBER




PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 250	to be agreed *

M 250




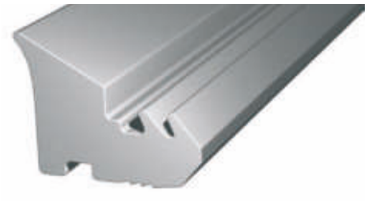

PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 251	to be agreed *

M 251






PVC / RUBBER
length rolls **50 Lm**

Article	€/lm
M 252	to be agreed *

M 252






PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 253	to be agreed *

M 253







PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 254	to be agreed *

M 254




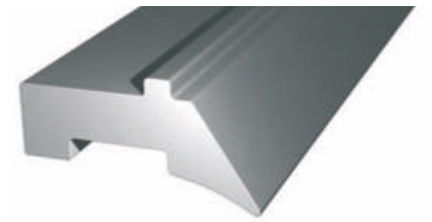

PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 255	to be agreed *

M 255

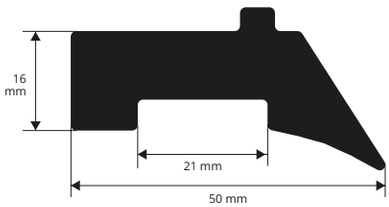

* = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.


© 2023. All rights reserved by Progress Profiles. Printed in Italy

GASKETS FOR PRECAST FORMS

PVC / RUBBER


gaskets for industrial precast forms

M 256




PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 256	to be agreed *

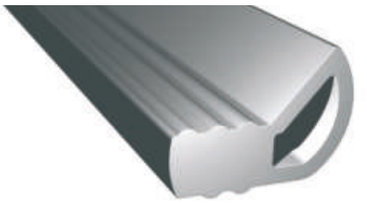


M 257




PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 257	to be agreed *

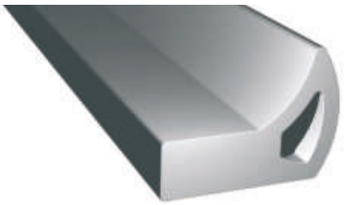


M 258




PVC / RUBBER
length rolls **50 lm**

Article	€/lm
M 258	to be agreed *

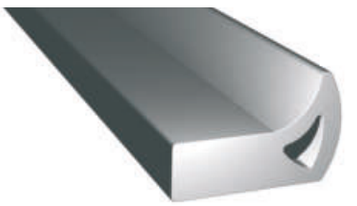

M 259




PVC / RUBBER - weight 750 g / lm
length rolls **50 lm**

Article	€/lm
M 259	to be agreed *




M 260



PVC / RUBBER - weight 350 g / lm
length rolls **50 lm**

Article	€/lm
M 260	to be agreed *

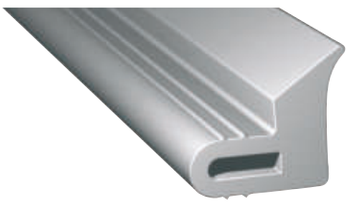


© 2023 All rights reserved by Progress Profiles. Printed in Italy


* = Production on demand with minimum quantity of 50 lm. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.

GAP-COVERING BALLOON SHEATH

COEXTRUDED FLEXIBILE VINYL RESIN

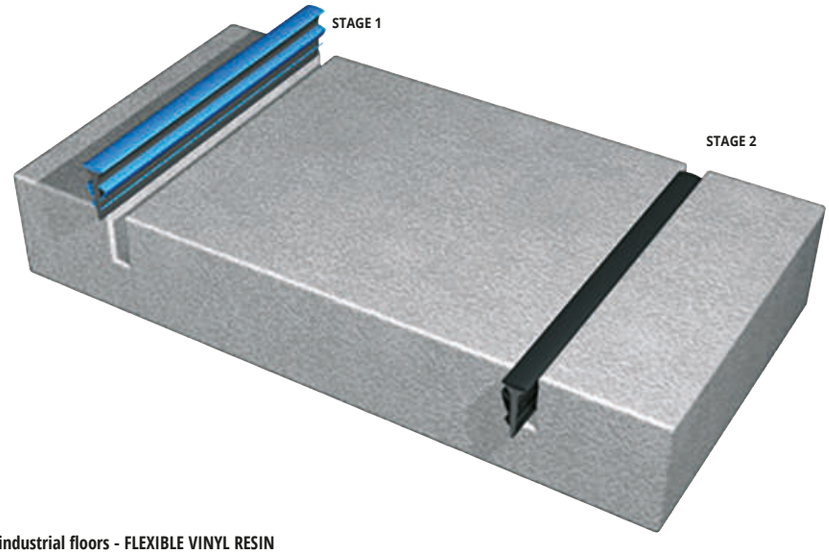

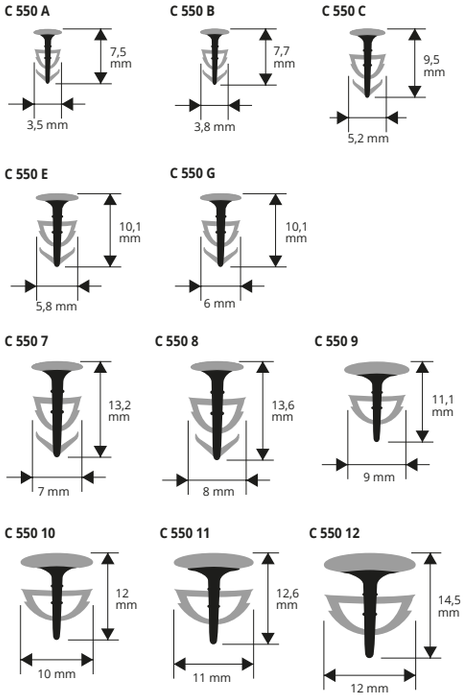

For industrial floors - FLEXIBLE VINYL RESIN
pack. roll **250 lm**

Article	sheath L mm	disk thick mm	€/roll	€/lm	
C 550 A..	3,5	2,4	60,00	0,24	*
C 550 B..	3,8	2,8	65,00	0,26	*
C 550 C..	5,2	3,2	70,00	0,28	*
C 550 E..	5,8	3,6/3,8	75,00	0,30	*
C 550 G..	6	4,2	87,50	0,35	*

MINIMUM QUANTITY 20 ROLLS = 5000 lm per colour and dimension.
Available for every type of diamond and abrasive disk.

For larger gaps - FLEXIBLE VINYL RESIN
pack. roll **200 lm**

Article	sheath L mm	disk thick mm	€/roll	€/lm	
C 550 7..	7	5/6	172,00	0,86	*
C 550 8..	8	6/7	212,00	1,06	*

For larger gaps - FLEXIBLE VINYL RESIN
pack. roll **150 lm**


Article	sheath L mm	disk thick mm	€/roll	€/lm	
C 550 9..	9	7/8	181,50	1,21	*
C 550 10..	10	8/9	210,00	1,40	*

For larger gaps - FLEXIBLE VINYL RESIN
pack. roll **100 lm**

Article	sheath L mm	disk thick mm	€/roll	€/lm	
C 550 11..	11	9/10	162,00	1,62	*
C 550 12..	12	10/11	176,00	1,76	*

The inserted joints have a wider upper flat part to cover the splintering of the floor created by the disk during cutting.

Available in the colours: G - Y - R - N - B. The code of the selected colour must be added to the article code. E.g.: C 550 A... (chosen colour Grey) C 550 AG.

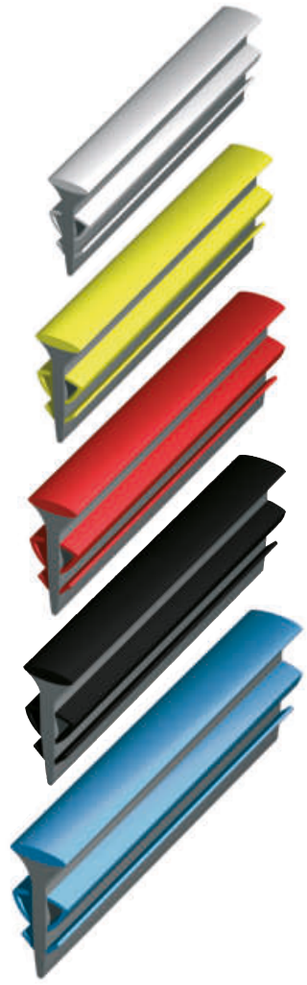

COLOURS

G - Grey | **Y** - Yellow | **R** - Red | **N** - Black | **B** - Blue

RESOLVES THE FOLLOWING PROBLEMS:

- Perfectly covers the gap made with any type of disk and remains for a long time at floor level without sinking.
- Thanks to the central semi-rigid shank, the sheath cannot contract in the joint areas.
- When the disk is worn, the sheath need not be changed because it adapts to even the narrowest gaps.
- Also available for larger gaps from 6 mm to 12 mm.
- Very easy to lay.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

* = Production on demand with minimum quantity of 5000 lm. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.


PAVIJOINT

GREY RIGID PVC


PAVIJOINT is a rigid PVC profile with the upper part in elastic PVC/rubber, which absorbs the stress of the floor movements. Two T-irons are inserted inside the profile to strengthen it and to unite two short rods; through holes are also made for the rods 80 cm apart.
The **PAVIJOINT** totally replaces the conventional aluminium beams used for shuttering the concrete cast, thereby avoiding demoulding of the cast and cutting of the joint with diamond-slitting disks in a delicate point such as construction joints.

construction joints for industrial floors


PVJ 10

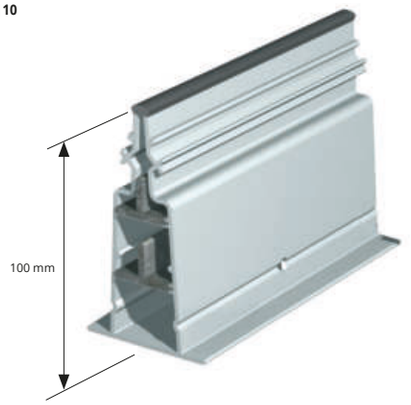

FLOOR TYPE OF LAYING:
example of laying for heights between 15 and 20 mm

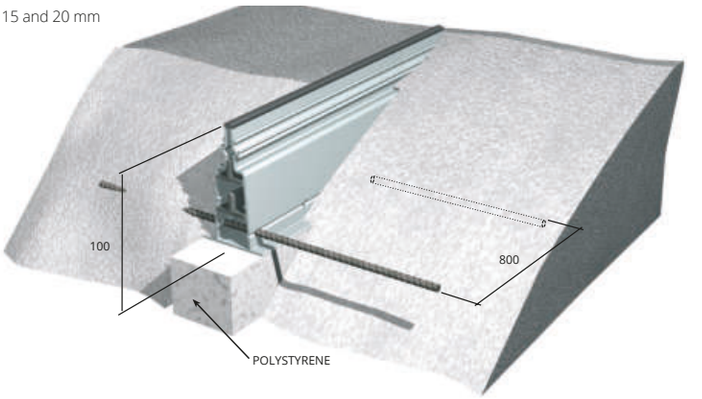

FLOOR SLAB TYPE OF LAYING:
example of laying for height of 10 mm

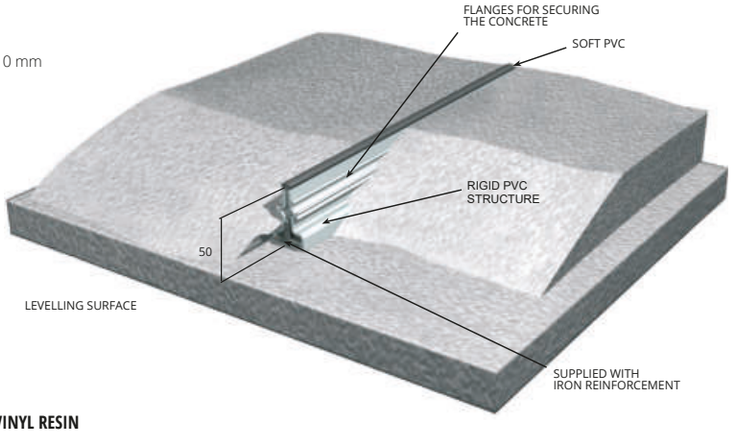

COMPLETE PAVIJOINT - RIGID VINYL RESIN
bar length **3,10 lm**

Article	H mm	€/lm	€/Pc	
PVJ 10	100	19,95	61,85	*

PHYSICAL-MECHANICAL CHARACTERISTICS OF RIGID PVC

PROPERTIES	U.M.	RESULTS	METHOD
Specific weight	*gr/cm³*	*1.45 +/- 0.020*	*ASTM=D 792*
Tensile yield strength	*N/mm²*	*49*	*ASTM=D 638*
Ultimate tensile stress	*N/mm²*	*44*	*ASTM=D 638*
Ultimate tensile stress	*%*	*4%*	*ASTM=D 638*
Flexural yield strength	*N/mm²*	*94*	*ASTM=D 790*
Flexing resistance	*N/mm²*	*3240*	*ASTM=D 790*
Impact strength	*J/m a 23°C*	*44*	*ASTM=D 256*
Softening temperature	*Vicat°C*	*83 50N*	*ASTM=D 1525*


MECHANICAL CHARACTERISTICS OF SOFT PVC/RUBBER

PROPERTIES	U.M.	RESULTS	METHOD
Specific weight	*gr/cm³*	*1.25 +/- 0.02*	*ISO 1183*
Hardness	*Sh A 15"*	*67 +/- 2*	*ISO 868*
Ultimate tensile strength	*N/mm²*	*> 16*	*ISO 527*
Ultimate elongation	*%*	*> 350*	*ISO 27*

* = Production on demand with minimum quantity of 100 lm. Production delay 4/5 weeks. Price to be agreed.

LAYING ACCESSORIES

GREY RIGID PVC





RIBBED DISTANCE TUBE (to neutralise the short rods)
RIGID PVC - bar length **2 lm** - pack. **20 Pcs - 50 lm**

Article	Ø mm outside	€/lm	€/Pc
PPD 20	20	0,53	1,06
PPD 22	22	0,56	1,12

CORNER JOINTS FOR SECURING PAVIJOINT - pack. **20 Pcs**

Article	€/Pc	€/Pack.	
SQBD	5,50	110,00	*

PLUGS FOR FINNED TUBE - GREY HD POLYETHYLENE
pack. **2000 Pcs** divided in two **1000 Pcs** bags

Article	Ø mm	€/Pc	€/Pack.
PPT 20	20	0,032	64,00
PPT 22	22	0,035	70,00

* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

The **SHEATH LAYING TROLLEY** was designed to lay different sizes of bubble sheathing easily and correctly. It is supplied with the accessories indicated in the photo (except for the pliers).

SHEATH LAYING TROLLEY

FOR INDUSTRIAL FLOORS


SHEATH LAYING TROLLEY FOR INDUSTRIAL FLOORS
with accessories (extra weight - slurry dragger)
pallet

Article	€/Pc
CPGC	1975,00




START OF LAYING


EASY TO USE


GROUT DRAGGER FOR MORE CONTROLLED LAYING


ROLL-LIFTING FEET



EXTRA WEIGHT


LIGHTWEIGHT FOR MOBILITY

© 2020. All rights reserved by Progress Profiles. Printed in Italy

Prices are referred to whole packs.

PROGRESS®
PROFILES

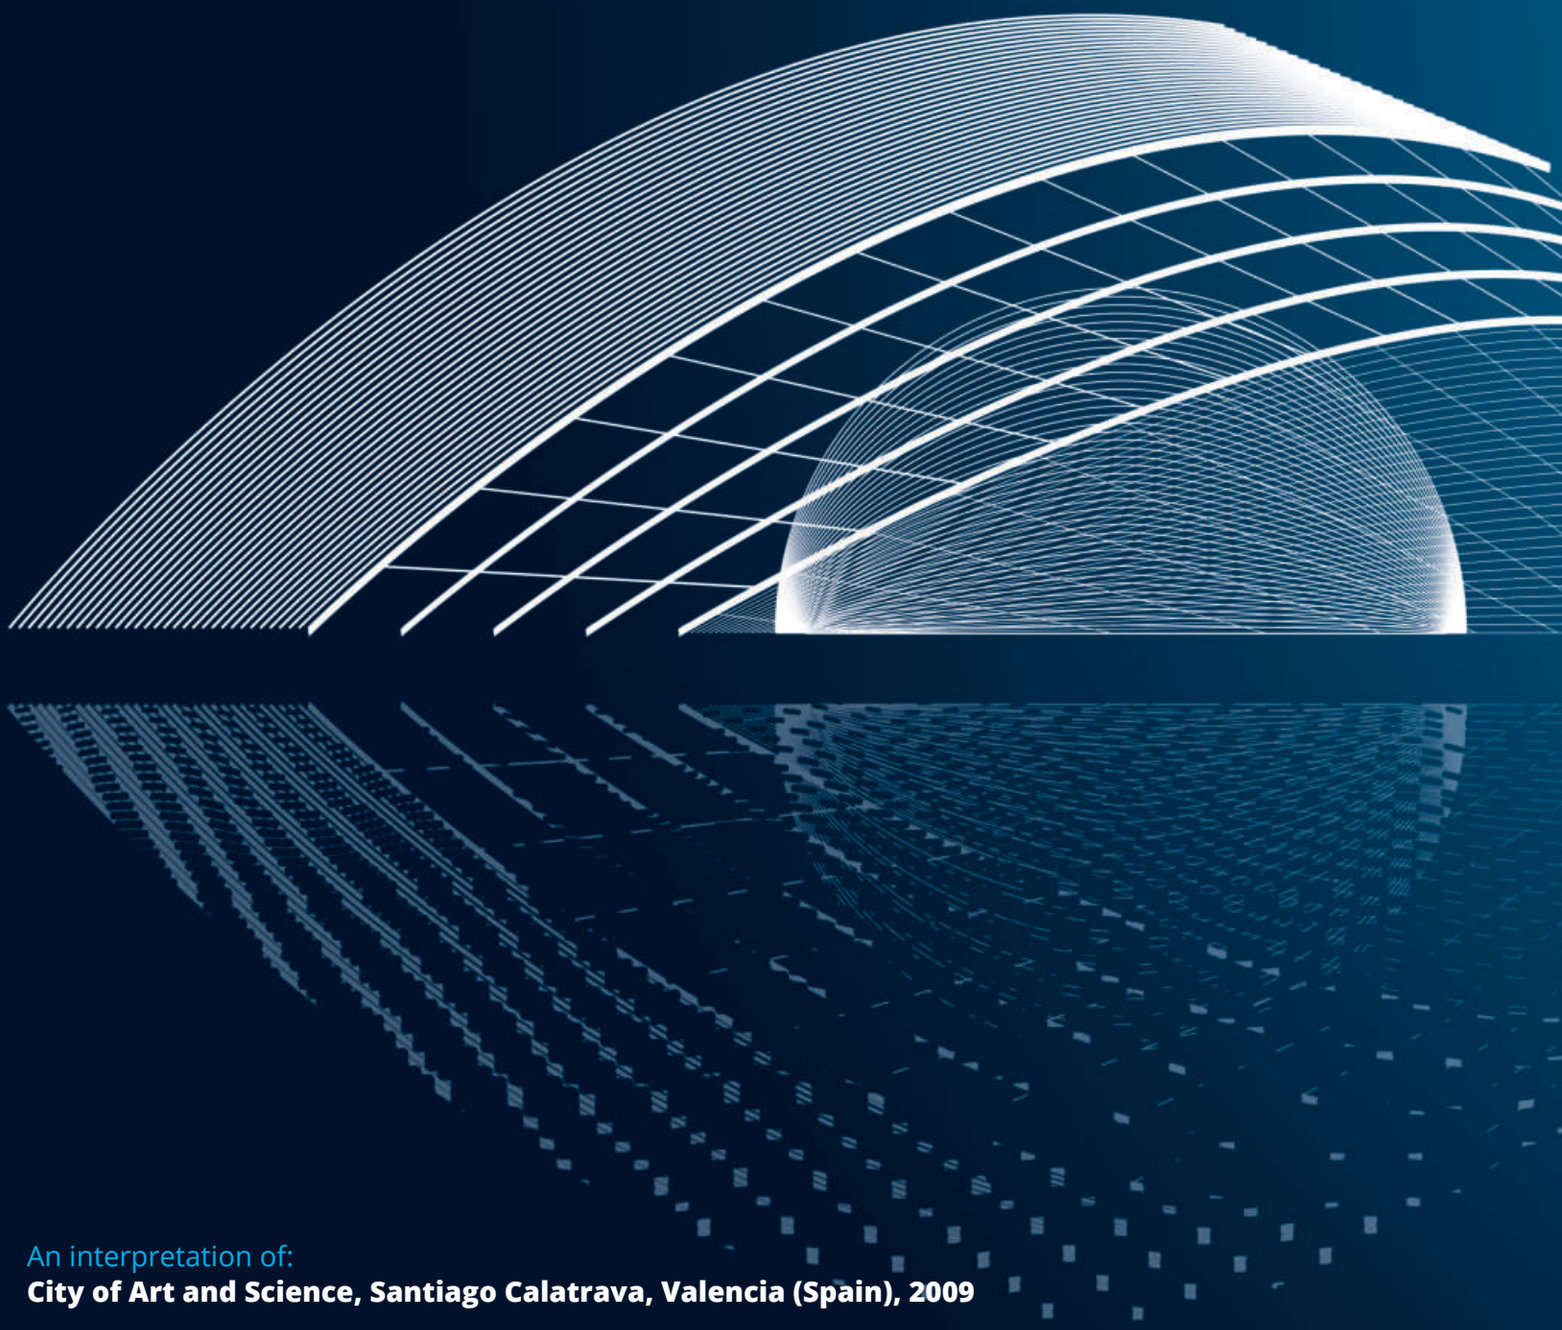

An interpretation of:
City of Art and Science, Santiago Calatrava, Valencia (Spain), 2009

PROFILES & SYSTEMS

MARKETING AND SALES STAND SYSTEMS



SQUARE SHOW CASE
WITH DRAWERS FOR PROFILES FOR SHOW ROOM

SQUARE SHOW CASE WITH 10 DRAWERS
length **39,5 cm -** width **39,5 cm** - height **109 cm**
(*Brochure and flyers not included)

Article	€/Pc
ESPQCI	2611,82






1 - Profiles for walls


2 - Profiles for walls


3 - Profiles for floors


4 - Profiles for floors


5 - Profiles for floors


6 - Profiles for floors + joints

SET OF SAMPLES AVAILABLE FOR 10 DRAWERS

Set	Samples Description
1	**PROFILES FOR WALLS** - *Projolly Triangle - Prointer - Proterminal Int - Prolistel Channel - Prolistel ACC, P ALL, Led - Profinlist 20 - Proedge AC, OT - Proround - Probord*
2	**PROFILES FOR WALLS** - *Proseal 50, 25 - Proshell - Proshell All - Prointer KL - Prokerlam SQ - Prokerlam Line - Prokerlam Jolly - Protop - Protop T - Proshell R, D*
3	**PROFILES FOR FLOORS** - *Proterminal Curve - Projolly Curve - Proslider Curve - Prolevigal - Proelegant - Profinal - Prosquare - Proangle - Projoint - Procanal - Proflat*
4	**PROFILES FOR FLOORS** - *Proslider - Procarpet - Proslider LR - Proskid - Proskid ALL - Prolevall 29, 33, 305 - Pronivo - Protrans*
5	**PROFILES FOR FLOORS** - *Profloor - Propress - Proslider - Prolinoleoum - Procover - Promoquette Gin - Promoquette Clip - Promoquette - Promoquette Fix*
6	**PROFILES FOR FLOORS + JOINTS** - *Proplate - Prolevall 38 - Proflex - Proflex ALN - Prodilat – Mortar-laid Joints*
7	**STAIR NOSING PROFILES** - *Prostair - Prostyle - Prostyle Grip - Prostair - Prostair 50 - Probrastep - Probrastep - Protermstep ACC, ALL - Prostyle*
8	**STAIR NOSING PROFILES** - *Prostair Led - Prostep Ins - Prostyle KL - Prostair KL 20 - Prowalk - Proend Ins, Grip - Proend 50 - Proend - Tube 12 – Tube plugs 12 - Eyelet – Hinge support*
9	**TERRACES** - *Proterrace Drain - Proterrace PCG, ALT, pc, PCJ, ECO*
10	**SKIRTING** - *Proskirting INS, ISP – Punched support - Proskirting - Proskirting Shell, Led – Cable glands support – Polycarbonate flat - Proskirting Giled - Top Giled*
11	**SKIRTING** - *Skirting 40, 60, 100, 7016, 7011 - Support clip - Skirting 60 Flex - Covecap - Skirting*
12	**PROFILES FOR PARQUET** - *Proscrew Base - Proscrew 44, 33, 50 - Proinsert Base 45, 40 – Pin Insert - Top Sol 40 P, 30 P - Terminal Pin - Zero Curve - Style Stair - Style Stair L - Terminal - Base LVT 30, 23 - LVT Top, Terminal, Zero Curve*



7 - Stair nosing profiles


8 - Stair nosing profiles


9 -Terraces


10 - Skirting


11 - Skirting


12 - Profiles for parquet

NOTES:
Labels will delivering with the profiles samples, but in a separeted pack.
(*) Write the brochures and flyers codes of the systems to be displayed

© 2023 All rights reserved by Progress Profiles. Printed in Italy

EXPOSURE DISPLAY / WALL UNIT
FOR SHOWROOM



EXPOSURE DISPLAY / WALL UNIT FOR SHOWROOM
W 208 cm x H 240 cm

Description	Article	€/Pc
Exposure display / wall unit	**ESHPAN 250**	**8488,42**
The exposure display / wall unit is complete with		
19 Sample board PESP	**PESP 1 ÷ 19**	
1 Display PROLEVELING SYSTEM	**PNPLSI**	
1 Bruchure display PROLEVELING SYSTEM	**PBPLS**	
50 Flyer PROLEVELING SYSTEM	**FLYPLSI 18**	
3 Finishes case:		
- PROJOLLY finishes case	**COFPJ**	
- PROJOLLY SQUARE finishes case	**COFPJQ**	
- PROTERMINAL finishes case	**COFPT**	
2 Photo book	**BOAM**	
1 Exposure display PROSHOWER with Design grid	**PSHWDL 70 + PSHWD 70**	
1 Bruchures exposure	**ESPB**	
3 Sample board PROLISTEL	**PESPPLT - PESPPLT15 - PESPPLTP**	
3 Sample board SKIRTING	**PESPBT - PESPPK - PESPPKCH**	

Description	Article	€/Pc
Please order separately 10 brochures	**MCAT21/22I**	**6,70**

© 2026 All rights reserved by Progress Profiles. Printed in Italy

ROTATING DISPLAY EXPOSURE STAND FOR SHOW ROOM

ROTATING DISPLAY EXPOSURE STAND FOR SHOW ROOM
(with 18 sample boards) - diameter **81 cm** - height **224 cm**

Article	€/Pc
ESPGSM18	**1044,73**

The rotating display allows to exposed 18 removable boards with images of different settings. (On the order write the number of the 18 chosen boards PESP) The sample boards are 19. When the display is ordered, specify the desired 18 sample boards according to sales requirements.



SMALL EXPOSURE STAND



SMALL EXPOSURE STAND (with 4 sample boards)
width **33 cm** - depth **50 cm** - height **60 cm**

Article	€/Pc
CURAS	**295,13**

It allows to expose 4 easily removable boards at your choice. (On the order write the number of the 4 chosen boards PESP) The sample boards are 19. When the stand is ordered, specify the desired 4 sample boards according to sales requirements.

TROLLEY



TROLLEY (with 18 sample boards)
width **50 cm** - depth **35 cm** - height **63 cm**

Article	€/Pc
TRAG18	**1110,02**

(On the order write the number of the 18 chosen boards PESP ...)

SAMPLE BOARD


SAMPLE BOARD
width **30 cm** - height **56 cm**

Article	€/Pc
PESP 1/ 2/ 3/ 4/ 5/ 6/ 7/ 8/ 9/ 10/ 11/ 12/ 13/ 14/ 15/ 16/ 17/ 18/ 19	**40,23**

For the composition of the display ESPGSM and CURAS, choose the boards you wish with the reference number.



Sample board n° 1
Projolly Square, Profinlist, Prolistel, Procanal


Sample board n° 2
Projolly Square, Prolistel, Profinlist


Sample board n° 3
Projolly, Projolly Quart, Pointer, Proterminal


Sample board n° 4
Probord, Proedge, Proshell, Prosguscio, Proround, Probath, Proseal, Protop, Prokerlam



Sample board n° 5
Proterminal, Profinal , Proelegant, Prolevigal, Procanal, Projoint, Proangle, Proflat


Sample board n° 6
Proslider, Procarpet, Proskid, Proslider, Procover, Propress, Proplate


Sample board n° 7
Prosol, Prolevall, Protrans, Pronivo, Promoquette, Proflor, Prolinoleum, Pronivo


Sample board n° 8
Prostair, Prostyle, Prostep, Proterrmstep, Probrastep


Sample board n° 9
Prostyle, Prowalk, Proend, Prostair, Tube and Accessories


Sample board n° 10
Proflex, Prodilat, Adhesiv-laid Joint, Mortar-laid Joint


Sample board n°11
Proexpan, GNS, GDA, Proplate


Sample board n° 12
Profoil, Prodeso, Prodrain 10, Proband, Proband BU, Proband Koll, Proband Fix, Prodrip, Proterrace


Sample board n° 13
Proterrace


Sample board n° 14
Skirting 40/ 60/ 80/ 100


Sample board n° 15
Proskirting, Gaied, Shell, Led, Flat, INS, TSP, Channel, Line


Sample board n° 16
SOL 40P, Terminal Pin, Zero Curve, Style Stair, Terminal, SOL 30, Profixer Line, SOL 50, Proscrew


Sample board n° 17
Curve Profiles - Proterminal, Projolly, Profinal, Proslider, Procover, Proelegant, Terminal, Do it yourself profiles - Tube, Corner, Canal, Flat, Curve Profile


Sample board n° 18
Triangular Chamfer, Rapy 100/200, Ribbed Distance, Rouded Triangular Chamfer, Prodistanz, Waterstop, Snape-on Strand, PAU/PAV spacers


Sample board n° 19
Projolly Triangle, Proterminal Int, Prolistel channel, Proskirting 40, Skirting 7011/16, Proseal flex, Protop T, Style stair L, Proside walk

© 2023 All rights reserved by Progress Profiles. Printed in Italy

ROTATING DISPLAY FOR SKIRTING



ROTATING DISPLAY FOR SKIRTING
diameter **81,5 cm** - height **170 cm**

Article	€/Pce
ESPGSMBT	1100,00

Note: The revolving tower has a predefined range of samples from PROGRESS PROFILES, that you see on this page, and it is not possible to request customizations or further changes.


















PROLISTEL AND SKIRTING DISPLAY

PROLISTEL AND SKIRTING COUNTER DISPLAY

Article	€/Pc
ESPBLSH	391,78



PROLISTEL
width **30 cm** - height **38 cm**

Article	€/Pc
PESPPLT	65,29
PESPPLT15	65,29
PESPPLTP	65,29

PESPPLT



PESPPLT15



PESPPLTP



SKIRTING
width **30 cm** - height **38 cm**

Article	€/Pc
PESPBT	65,29
PESPPK	65,29
PESPPKCH	65,29

PESPBT



PESPPK



PESPPKCH



© 2023 All rights reserved by Progress Profiles. Printed in Italy

= News 2023

SAMPLE CASES

FINISHES CASES

Article	Description	€/Pc
COFPJ	Projolly / Projolly Quart	67,05
COFPJQ	Projolly Square	67,05
COFPT	Proterminal	67,05
COFSTL	Stone Line	67,05
COFBT	Skirtings	67,05





COLOUR RANGE KEYRINGS

PROFILES COLOUR RANGE

Article	Description	€/Pc
COLBS	Skirtings	26,82
COLPJ	Projolly	21,45
COLPJM	Projolly marble	21,45
COLPJQ	Projolly square	21,45
COLPJQT	Projolly quart	21,45



COLBS



COLPJ



COLPJM

SAMPLES AND WOODEN

PROFILES FOR LAMINATE, PARQUET AND CARPETED FLOORS

Article	€/Pc
TUBLAM (PROINSERT SYSTEM profiles samples)	26,11
CCOLL (standard wood samples)	63,40
CCOLLR (on demand wood samples)	82,48 *



TUBLAM



CCOLLR



CCOLL


PROSKIRTING GILED DISPLAY

PROSKIRTING GILED PANEL
width **70 cm** - height **92 cm**

Article	€/Pc
ESPGLED	601,41



FRONT



BACK

PROSKIRTING LED DISPLAY

PROSKIRTING LED PANEL
width **70 cm** - height **92 cm**

Article	€/Pc
ESPLED	536,47



SWITCHED OFF



SWITCHED ON



BACK OF PROSKIRTING LED BOARD

= News 2023

* = Article on demand, Production delay and prices to be agreed.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

PRODESO HEAT SYSTEM
PRODESO SYSTEM

EXPOSURE PRODESO® HEAT SYSTEM
width **60 cm** - depth **60 cm** - height **206 cm**

Article	€/Pc
ESPPDHI595	1110,02



EXPOSURE PRODESO® HEAT SYSTEM

Article	€/Pc
SPCPDESH...	65,29





EXPOSURE PRODESO®

Article	€/Pc
SPCPDES...	65,29





MEMBRANES CASE

Article	€/Pc
COFMIE	65,29





EXPOSURE PRODESO® HEAT / PRODESO® / PROTERRACE
width **60 cm** - depth **60 cm** - height **206 cm**

Article	€/Pc
ESPPDHT...	522,36



PROSHOWER SYSTEM DISPLAY

EXPOSURE DISPLAY PROSHOWER SYSTEM FOR SHOWROOM
(with PROSHOWER BASE L + SET OF AVAILABLE GRIDS)
width **100 cm x 36 cm** - height **73 cm**

Article	€/Pc
ESPSHW 70 + (COLGPSHW 70)	1044,73



FRONT



BACK



SET OF AVAILABLE GRIDS

© 2023. All rights reserved by Progress Profiles. Printed in Italy

= News 2023

PRODUCT BOARD PROLEVELING SYSTEM DISPLAY SPACERS

PROLEVELING SYSTEM DISPLAY

Article	€/Pc
ESPPLS 50/70	620,31

PROLEVELING SYSTEM BOARD - 2 PCS

Article	€/Pc
PNPLS...	117,53





PROLEVELING SYSTEM BOARD

Article	€/Pc
PNPLSA3 (29,7 x 42 cm)	14,36



PROLEVELING SYSTEM DISPLAY

7 COMPARTMENTS



5 COMPARTMENTS



PROLEVELING WEDGE SYSTEM BOARD

Article	€/Pc
PNPLWS	117,53





SPACERS DISPLAY

SPACERS DISPLAY (ACCESSORI EXCLUDED)



EXPOSURE DISPLAY DISTANZIATORI PROGRESS PROFILES

Article	€/Pc
ESPD	8,03

EXIBITION BOARD

EXHIBITION BOARD - 80 x 57 cm

Article	€/Pc
PNPSR (80 x 57 cm)	58,76



EXPOSURE DISPLAY PROSUPPORT TUBE

EXPOSURE DISPLAY PROSUPPORT TUBE WITH 50 FLYER

Article	€/Pc
ESPPST	112,84
FLYPSUP...	15,67



EXPOSURE DISPLAY PROTERRACE

EXPOSURE DISPLAY PROTERRACE WITH 50 FLYER

Article	€/Pc
ESPFDPP	130,59
FLYPTER...	15,67



© 2023 All rights reserved by Progress Profiles. Printed in Italy

GENERAL CATALOGUE / PRICE LIST

Article	€/Pc
CAT22...	40,23



BROCHURE SYSTEMS

Article	€/Pc
BRSYS 22/23	6,97



BROCHURE A4 PRODESO DRAIN SYSTEM

Article	€/Pc
BRPDDR...	3,28



BROCHURE A4 PRODESO HEAT GRIP SYSTEM

Article	€/Pc
BRDESHG...	3,28



MINI CATALOGUE A5 (NO PRICES)

Article	€/Pc
MCAT21/22...	6,70



BROCHURE A4 PRODESO SYSTEM

Article	€/Pc
BRDES...	3,28



BROCHURE A4 PROSHOWER SYSTEM

Article	€/Pc
BRPSW...	2,60



BROCHURE A4 PROSUPPORT TUBE SYSTEM

Article	€/Pc
BRPSUPT...	3,28



COUNTER DISPLAY FOR BROCHURES

Article	€/Pc
ESPB...	40,23



COUNTER DISPLAY FOR FLYER

Article	€/Pc
PBPLS	32,64

Order the customization sticker separately in line with the exposed flyer



PHOTO BOOK

Article	€/Pc
BOAM	9,80



DEPLIANT FLYER 10 X 21 cm - Pack 50 Pcs

Article	Description	€/Pc
FLYPDDR...	Flyer Prodeso Drain system	15,67
FLYPDESHG...	Flyer Prodeso Heat Grip system	15,67
FLYPDES...	Flyer Prodeso Membrane system	15,67
FLYPSHW...	Flyer Proshower system	15,67
FLYPFPS...	Flyer Profoil panel system	15,67
FLYPTER...	Flyer Proterrace system	15,67
FLYPLS...	Flyer Proleveling system	15,67
FLYPSUP...	Flyer Prosupport tube system	15,67
FLYPLED...	Flyer Proledlight system	15,67
FLYPDSD...	Flyer Prodeso sound system	15,67
FLYPMLTFX...	Flyer Promultifix system	15,67

Available in the following languages: Italian (I), English (E), German (T), French (F), Russian (R), Spanish (ES), American $ (USA), English £ (UK). The initials of the chosen language must be added to the initials of the article.
Example: CAT22 ... (Desired language Italian) CAT22I;

FLYPDDR...



FLYPDESHG...



FLYPDES...



FLYPSHW...



FLYPFPS...



FLYPTER...



FLYPLS...



FLYPSUP...



FLYPLED...




FLYPDSD...



FLYPMLTFX...





= News 2023

© 2022 All rights reserved by Progress Profiles. Printed in Italy

MODULAR DISPLAY SYSTEM
FOR SHOWROOM

The **MODULAR DISPLAY SYSTEM WITH INTECHANGEABLE BOARDS** is composed by an metal base, 225 cm height, 93 width and 44 cm deep. It is possible to fix to this framework boards with pictures, samples and fixing patterns of profiles. A shelf with a fixing example of the most common profiles showed on the boards above is in the middle of the framework. Thanks to the pictures of fixing patterns, profiles samples and fixinf examples, the modular display allows the customer to have an overall view of the use of the Progress Profiles products and systems. The modularity and the small size of the display allows its positioning in all showroom and sales point. Thanks to the modularity of the boards, the customer can choose the boards according to the products he wants to show. The system is easy to update with new finishes and products.




MODULAR DISPLAY WITH VIDEO

MODULAR DISPLAY WITH STEPS

MODULAR DISPLAY SYSTEM

Article	Description	€/Pc	
RIV 1	Modular display Profiles for walls 1	2950,00	*
RIV 2	Modular display Profiles for walls 2	2950,00	*
RIV 3	Modular display Profiles for walls 3	2950,00	*
PAV1	Modular display Profiles for floors 1	2950,00	*
PAV2	Modular display Profiles for floors 2	2950,00	*
CRV	Modular display Curved profiles	2950,00	*
GR1	Modular display Stair nosing profiles 1	2950,00	*
GR2	Modular display Stair nosing profiles 2	2950,00	*
GIU1	Modular display Joints 1	2950,00	*
PTR	Modular display Proterrace	2950,00	*
PSH1	Modular display Proshower 1	2950,00	*
PSH2	Modular display Proshower 2	2950,00	*
PFPG	Modular display Profoil panel	2950,00	*
B1	Modular display Baseboards 1	2950,00	*
B2	Modular display Baseboards 2	2950,00	*
LED	Modular display Proledlight	2950,00	*
LGN	Modular display Profiles for parquet	2950,00	*
PLV	Modular display Proleveling	2950,00	*
PSPT	Modular display Prosupport tube	2950,00	*
PSTS	Modular display Prosupport slim/prorail	2950,00	*

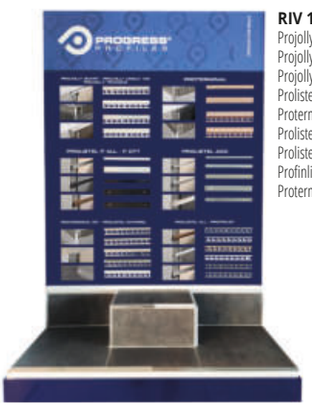

RIV 1: Projolly quart, Projolly angle, Projolly angle 135, Prolistel p, Proterminal, Prolistel, Prolistel channel, Profinlist, Proterminal int;



RIV 2: Projolly square;



RIV 3: Projolly, Prointer, Prointer kl, Proshell, Proedge, Prokerlam square, Prokerlam jolly, Prokerlam line, Prostair kl;



PAV 1: Proslider, Procarpet, Proskid, Profinal, Procanal, Projoint, Proterminal, Prolevigal, Proelegant;



PAV 2: Procover, Propress, Profloor, Prosol, Proplate, Prolevall, Promoquette;



CRV: Proterminal curve, Proelegant curve, Profinal curve, Projolly curve, Proslider curve, Terminal curve, Procover;



GR1: Prostair acc Prostair kl, Prostair grip, Prostair wood, Protermstep, Prostyle, Prostyle kl, Probrastep, Prostep;



GR2: Prostyle grip, Prostyle 2610, Proend ins, Proend grip, Prowalk, Prostair led, Proside walk;

© 2023 All rights reserved by Progress Profiles. Printed in Italy

* = Article on demand, Production delay and prices to be agreed.



GIU:
Proflex acn
Proflex acc
Proflex aln,
Proflex al,
Proflex ot,
Proflex acc pr,
Proflex 25/5 pr,
Prodilat;



PTR:
Proterrace drain drip,
Proterrace drain fdp,
Proterrace pcg,
Proterrace pc,
Proterrace pcj,
Proterrace eco drip;



PSH 1:
Proshower linear system,
Proshower profile glass,
Proshower profile,
Proshower profile wall,
Proshower profile front;



PSH2:
Proshower central system;



PFPG:
PROFOIL PANEL SYSTEM,
PRO GOBORD SYSTEM,
PROFOIL PANEL NICHE,



B1:
Proskirting led,
Proskirting giled,
Proskirting list,
Proskirting isp,
Proskirting,
Proskirting shell,
Proskirting channel,
Proskirting flat,
Proskirting ins,
Proskirting line;



B2:
Skirtings



LED:
Proledlight system,
Proskirting led,
Proskirting giled,
Prostair led,
Prolistel led;



LGN:
Lvt Profiles,
Skirting 7016
Skirting 7011,
Promultifix,
Zero Curve,
Sol 40p,
Terminal Pin,
Terminal,
Style Stair;



PLV:
Proleveling System,
Proleveling Wedge
System;



PSPT:
Prosupport Tube,
Prosupport Profile;



PSTS:
Prosupport Slim,
Prorail System;





© 2022 All rights reserved by Progress Profiles. Printed in Italy

SHOWROOM SET-UP EXAMPLES



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 1 - Back - panels and desks are not included
DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST

Description	Article
Rotating display stand + Sample boards (x18)	**ESPGSM18 + PESP...**
Counter display for flyer + Proleveling system flyer	**PBPLS + FLYPLS 20**
Proleveling System Board	**PNPLS**
Proterrace Display	**ESPFDPP**
Counter display for mini catalogues	**ESPB**
Membrane case	**COFM**
Photo book	**BOAM**



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 2 - Back - panels and desks are not included
DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST

Description	Article
Exposure Display / Wall unit	**ESHPAN 250**
Proshower system display + available grids set	**ESPSHW 70 + COLGPSHW70**
Exibition Board	**PNPSR**
Photo Book	**BOAM**
Proleveling system Sample Board	**PNPLS**



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 3 - Back - panels and desks are not included
DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST

Description	Article
Exposure Display / Wall unit	**ESHPAN 250**
Square show case with drawers for profiles	**ESPQC**
custom displays and expositors	**-**



PROPOSALS OF SHOWROOM EQUIPMENT - PROPOSAL 4 - Back - panels and desks are not included
DISPLAYS FOR PROFILES ARE AVAILABLE UNDER CUSTOMER REQUEST

Description	Article
Exposure Display / Wall unit	**ESHPAN 250**
Square show case with drawers for profiles	**ESPQC**

EXAMPLE OF CUSTOMIZED SHOWROOM SET-UP - 1



EXAMPLE OF CUSTOMIZED SHOWROOM SET-UP - 3



= News 2023

*** = Article on demand, Production delay and prices to be agreed.**


© 2023 All rights reserved by Progress Profiles. Printed in Italy


ESPF

EXPOSURE DISPLAY ESPF (accessories excluded)
width **65 cm** - depth **20 cm** - height **112 cm**

Article	€/Pc
ESPF	457,07





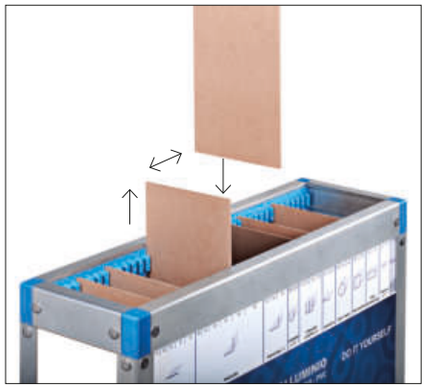


The displays ESPF and ESPF 2 are supplied with some removable interior dividers that allow you to easily separate the interior space to be able to arrange the profiles according to the sales needs.

ESPF 2

EXPOSURE DISPLAY ESPF 2 (accessories excluded)
width **65 cm** - depth **40 cm** - height **112 cm**

Article	€/Pc
ESPF 2	718,24





ESPF 2015

EXPOSURE DISPLAY ESPF 2015 (accessories excluded)
width **100 cm** - depth **28 cm** - height **81 cm**

Article	€/Pc
ESPF 2015	368,84



ESPF 2 2015

EXPOSURE DISPLAY ESPF 2 2015 (accessories excluded)
width **100 cm** - depth **56 cm** - height **81 cm**

Article	€/Pc
ESPF 2 2015	633,94




© 2020. All rights reserved by Progress Profiles. Printed in Italy

DISPLAYS FOR PROFILES

PEPCP

EXPOSURE DISPLAY "PEPCP" (accessories excluded)
width **100 cm** - depth **50 cm** - height **230 cm**

Article	€/Pc	
PEPCP (profiles)	**760,73**	*
PEPCPBT (skirtings)	**760,73**	*

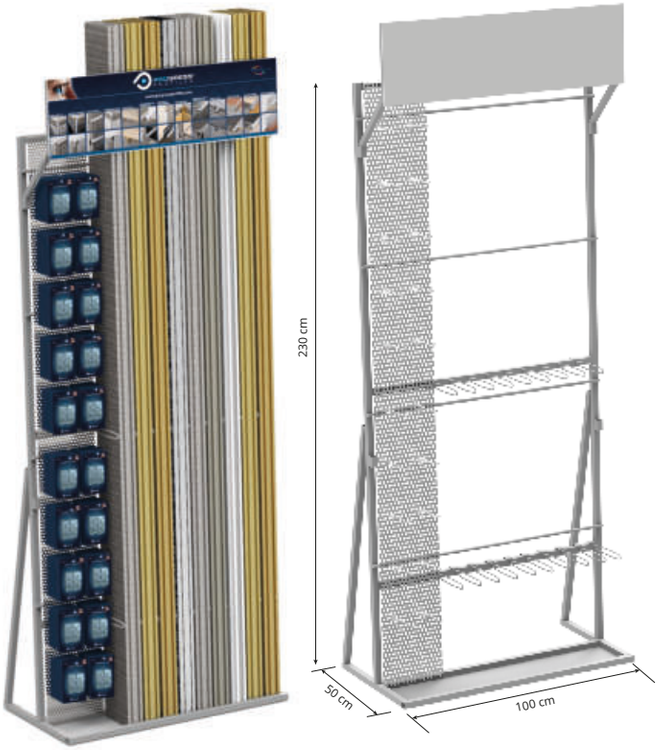

PEP

EXPOSURE DISPLAY PEP (accessories excluded)
width **100 cm** - depth **50 cm** - height **230 cm**


Article	€/Pc	
PEP (profiles)	**469,40**	
PEPBT (skirtings)	**469,40**	*



PEPCPSP

EXPOSURE DISPLAY PEPCPSP (accessories excluded)
width **100 cm** - depth **50 cm** - height **230 cm**

Article	€/Pc	
PEPCPSP (profiles)	**754,38**	*
PEPCPSPBT (skirtings)	**754,38**	*

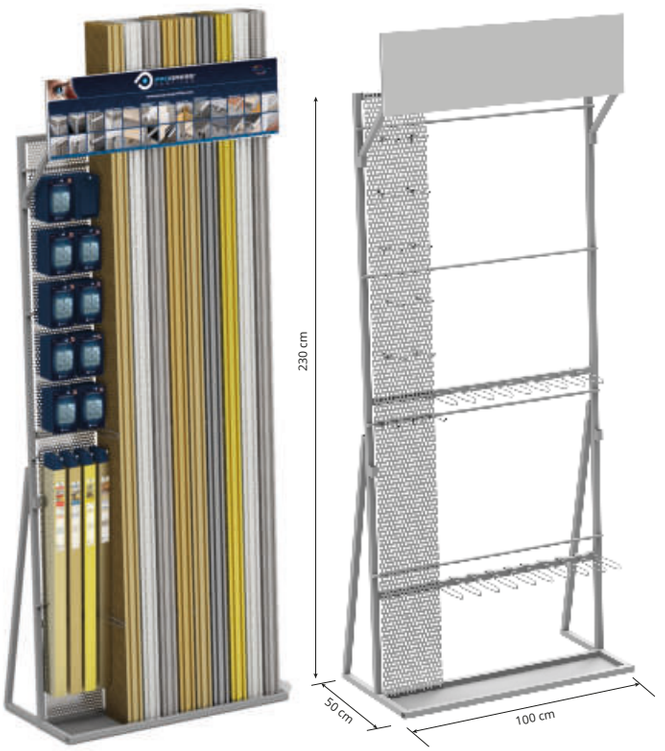

PEPSP

EXPOSURE DISPLAY PEPSP (accessories excluded)
width **100 cm** - depth **50 cm** - height **230 cm**

Article	€/Pc	
PEPSP (profiles)	**748,05**	*
PEPSPBT (skirtings)	**748,05**	*



= News 2023

* = Article on demand, Production delay and prices to be agreed.

© 2023 All rights reserved by Progress Profiles. Printed in Italy

DISPLAYS FOR PROFILES

ESPSP

EXPOSURE DISPLAY ESPSP (accessories excluded)
width **100 cm** - depth **75 cm** - height **240 cm**

Article	€/Pc
ESPSP	469,40



PEPINSP

EXPOSURE DISPLAY PEPINSP (accessories excluded)
width **100 cm** - depth **50 cm** - height **230 cm**

Article	€/Pc
PEPINSP	637,05



PEM

EXPOSURE DISPLAY PEM (ACCESSORIES EXCLUDED)
width **120 cm** - depth **61 cm** - height **160 cm**


Article	€/Pc
PEM	1292,89



PEPINS

EXPOSURE DISPLAY PEPINS (accessories excluded)
width **100 cm** - depth **50 cm** - height **230 cm**

Article	€/Pc
PEPINS (profiles)	469,40
PEPINSBT (skirtings)	469,40 *

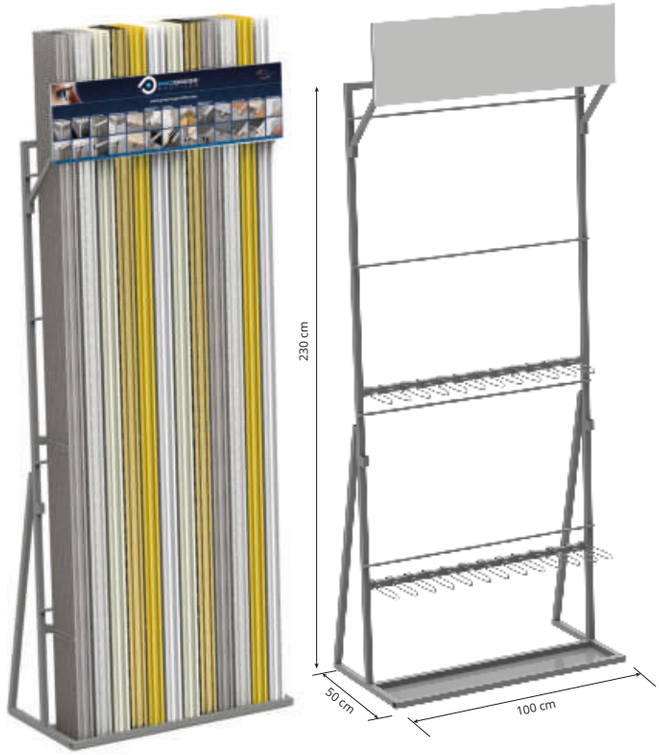

= News 2023

* = Article on demand, Production delay and prices to be agreed.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

GADGETS

GADGETS

Article	Description	€/Pc
PEN	Pen	**3,17**
CUTTER	Cutter	**15,08**
FOGLAPP	Post It	**4,43**
PENCIL	Work pencil	**3,30**
TAPMOUSE	Mousepad	**12,68**
CARTPBPP	Portfolio	**26,63**
USB	USB Pendrive	**31,06**
FLESSOMETRO	Tape	**15,72**
CAP	Baseball cap	**10,14**
MARSUPIO BASIC	Pouch	**14,57**
PRGS10	Profile measurement ruler	**3,80**
OMBRELLOP	Umbrella	**21,42**
PLAN	Planning	**12,04**
PENNA DA BANCO	Counter pen	**13,94**
PENNA TECNICA	Technical Pen	**17,76**



T-SHIRT

Article	Description	€/Pc
TSHIRT S	T-shirt white S	**15,21**
TSHIRT M	T-shirt white M	**15,21**
TSHIRT L	T-shirt white L	**15,21**
TSHIRT XL	T-shirt white XL	**15,21**
TSHIRT XXL	T-shirt white XXL	**15,21**



WHITE POLO

Article	Description	€/Pc
POLOB M	polo stretch wwhite M	**48,80**
POLOB L	polo stretch white L	**48,80**
POLOB XL	polo stretch white XL	**48,80**
POLOB XXL	polo stretch white XXL	**48,80**



BLUE NAVY POLO

Article	Description	€/Pc
POLOBNM	polo stretch wwhite M	**48,80**
POLOBN L	polo stretch blu navy L	**48,80**
POLOBN XL	polo stretch blu navy XL	**48,80**
POLOBN XXL	polo stretch blu navy XXL	**48,80**



GILET PROGRESS PROFILES

Article	Description	€/Pc
GILET	Vest	**60,86**



PILE PROGRESS PROFILES

Article	Description	€/Pc
PILE	Fleece sweatshirt	**57,71**



= News 2023

© 2023 All rights reserved by Progress Profiles. Printed in Italy

Progress Profiles SpA
Via Le Marze 7
31011 ASOLO (TV) Italy

Tel. +39 0423 950398
Fax +39 0423 950979
Certified company UNI EN ISO 9001:2015

P.I. IT 03481880262 - R.E.A. TV 275319
C.F. e Iscr. Reg.Impr. TV 03481880262
Cap. soc. € 120.000,00 i.v.
N. Meccanografico TV 44685

ORDER No. _____

on, _____ 20____

Sale with retention of ownership made according to the conditions established in the terms of sale herebelow

CUSTOMER CODE ☐☐☐☐☐☐ AGENT CODE ☐☐☐ _____ AREA MANAGER ☐☐☐ _____ COMM. ☐☐☐ _____

Company _____ Agent _____

Street _____ Payment _____

District _____ Zip Code _____ Bank _____ ABI ☐☐☐☐☐

Province _____ Agency _____ CAB ☐☐☐☐☐

e-mail _____ Delivery _____

VAT No. _____ Notes _____

Tel. _____ Fax _____ _____

CODE	DESCRIPTION	U.M.	QUANTITY	UNIT PRICE	DISC. %

Terms of sale: 1) Dispatch at cost price - 2) Orders are always "SUBJECT TO APPROVAL BY THE MANUFACTURER". - 3) In the event of refusal of the goods after 7 days have elapsed from the date of order, the customer is obliged to pay 30% of the total amount.
Retention of ownership: 1) Sale is made with retention of ownership by Progress Profiles until full payment of the price, in accordance with sections 1523 ut seq. of the Italian Civil Code - 2) Failure to pay even one instalment shall entitle Progress Profiles, among other things, to take back the goods and to withhold the paid instalments by way of compensation for damage, all and any objection being forthwith excluded. Should collection of the goods and withholding of the paid instalments not compensate for the damage caused to Progress Profiles, the latter shall have the right to take action in respect of the difference. - 3) The sole place of jurisdiction for any dispute, in accordance with section 28 of the Italian Code of Civil Procedure, will be that of Progress Profiles.

A charge is made for late payment, whatever the reason, at the bank interest rate of 2.50% a month, which the customer undertakes to accept with the signing hereof.

With our signature we declare that we have perused the foregoing terms of sale and in particular specifically approve the clauses: 1) Terms of sale. - 2) Retention of ownership. - 3) Termination of the agreement and the consequences thereof. - 4) Chosen place of jurisdiction Law Court of Treviso.

Stamp and signature in acceptance _____

© 2023 All rights reserved by Progress Profiles. Printed in Italy

GENERAL TERMS AND CONDITIONS OF SALES PROGRESS PROFILES S.P.A.

These general terms and conditions (hereafter "General Terms and Conditions of Sales") govern the contractual relationships of the products manufactured or marketed (hereafter "Product/s" or "Good/s") by the company PROGRESS PROFILES S.P.A. (hereafter "Vendor") to its customers (hereafter individually "Buyer" or "Customer") (Buyer and Vendor also referred to jointly as "Parties" and individually as "Party"). These General Terms and Conditions of Sales do not apply to sales to consumers.

1) EFFECTIVENESS OF THE GENERAL TERMS AND CONDITIONS
These General Terms and Conditions of Sales apply even if not explicitly referred to and signed in individual orders. Any provisions in derogation of the requirements herein shall be effective only if expressly accepted in writing by the Parties. Any general terms and conditions of the Customer will not apply, even partially, unless they have been expressly accepted in writing by the Vendor. These General Terms Conditions of Sales are effective until they have been expressly revoked by the Vendor or are replaced by new terms and conditions that will become effective from their signing.

2) ORDER
The Goods object of each sale between the Buyer and the Vendor are described in the purchase order ("Order") that the Buyer sends directly or indirectly through its representatives to the Vendor. The Order is considered irrevocable for the Buyer if confirmed by the Vendor through the Order Confirmation, preform invoice.

3) CONTRACT
The sales contract of the Goods ("Contract") is governed by the Order, by the Order Confirmation and these General Terms and Conditions. The sending of an Order by the Customer implies his/her full acceptance of these General Terms and Conditions of sales and of any of the specific ones related to the Order itself. The Contract is completed with the acceptance of the Order by Order Confirmation, communicated in writing by the Vendor to the Buyer or, failing that, with the execution of the Order by delivering the Goods to the carrier or forwarder. Any changes to the Contract, proposed by the Buyer, will result in changes to the same only if accepted in writing by the Vendor.

4) DELIVERY TERMS, TRANSPORT OF GOODS
The delivery terms of the Goods will be agreed from time to time in the individual Order and relative Order Confirmation. The delivery terms must always be considered indicative, not essential, and are not binding for the Vendor. Any variations requested in the production phase, nonetheless relieve the Vendor from complying with the agreed terms. In this case the terms and conditions of delivery will be renegotiated. If the Buyer expressly requests an express delivery service in the Order, the Vendor will indicate, in the Order Confirmation the cost for this service which shall be considered accepted, if not contested in writing by the Buyer to the Vendor. Any reference to delivery terms (e.g. EX WORKS, CIF, FOB and others) contained in the Order and in the Order Confirmation refers to the Incoterms® of the International Chamber of Commerce, in the text in force on the date of the Order Confirmation. If a sale has been agreed with transport via carrier, regardless of the Party that appoints the carrier, the risks are transferred to the Customer with the delivery of the Goods to the first carrier: any claims for breakages, deterioration, tampering or deficiencies must be reported by Buyer to the carrier in accordance with the law, providing the Vendor with appropriate information. The Vendor is therefore entitled to reasonably anticipate or postpone the delivery of all or part of the Goods, without this entitling the Buyer to request full or partial termination of the Sales Contract or to claim compensation or indemnity and without the Buyer refusing delivery of the Goods. We shall not be liable for any delays in shipments which will not entitle the Customer to claim damages and/or penalties, to delay payments or reject the Goods. It is understood, however, that maximum effort shall be ensured in the execution of the Order on the agreed dates.

5) FORCE MAJEURE
The occurrence of causes not dependent on the will of the Parties, such as strikes of any kind, earthquakes, fires, floods, lack of motive power or energy, lack or scarcity of raw materials, breakdowns and breakages at the Vendor's production facilities, delays in granting authorizations by the Authorities, embargo or other measures of national or supranational Authorities and other impediments independent of the will of the Parties, which make delivery temporarily impossible or excessively expensive, the delivery time will be extended by a period equal to the duration of the impediment, the Party, upon becoming aware of the impediment, will communicate within a reasonable time to the other Party the existence of the impediment and, where this is not already implicit in the type of impediment, the probable effects it shall have on the delivery obligation. Similarly, the Party will inform the other Party of the removal of the impediment. It is understood that neither the Customer nor the Vendor can demand compensation or indemnity of any kind due to the occurrence of the circumstances provided for in article 5.

6) REFUSAL TO RECEIVE DELIVERY
Where the Buyer refuses to receive the delivery of all or part of the Goods only, the Vendor may, at its own unquestionable choice, demand performance of the Contract, or declare its total or partial termination. In either case, the Vendor retains the right to claim compensation for damages. Any responsibility of the Vendor for risks and costs deriving from or inherent to the stock of the Goods is expressly excluded, which shall be entirely charged to the Buyer.

7) DESCRIPTIVE DRAWINGS AND DOCUMENTS
The dimensions, sections, drawings, colours, finishes, prices and the other data included in the catalogues, prospectuses, circulars, advertisements, illustrations and price lists of the Vendor are approximate indications. These data is not binding except to the extent that they are expressly provided for in the Order Confirmation or in the Contract. Any photographs included in the offer and/or the Vendor's Order Confirmation are not binding and are for illustrative purposes only.

8) PRICES, PAYMENTS AND DEFINITION OF DEFAULT INTERESTS
The prices of the products are those indicated in the price list or on each offer made by the Seller with net prices. Such prices shall be determined on the basis of the price list in force when the order shall be taken in charge and processed by the Seller and shall be clearly indicated on the order confirmation. The prices of the products do not include any taxes or duties whatsoever, and are always Ex Works and do not include any installation or transport. Payments must be made by the Customer as specified and within the times indicated on the order confirmation. Orders for an amount less than € 100.00 shall not be fulfilled, or alternatively their value shall be increased by processing and handling costs. Orders for an amount less than Eur 300.00 shall also be increased by ancillary costs as shown on the "transport cost charges" chart in the Progress Profiles catalogue in the related section. For late payments, default interests shall be charged at the rate established by Italian Legislative Decree no. 231/2002 and subsequent amendments and / or additions, and shall apply from the first day after the expiry of the payment deadline. It is understood however that for any complaints or disputes the Customer is not entitled to suspend or, in all cases, delay payments for the Products subject of the claim, or any other supplies. More generally, no action or exception may be taken or opposed by the Customer unless after the full payment of the Products for which this dispute or exception is referred to. Furthermore, the Customer is not authorized to make any deductions from the agreed price (eg in the case of alleged defects in the Products), unless previously agreed in writing with the Seller.

9) SUSPENSION OF PERFORMANCE AND TERMINATION
The non-payment, even partial, of supplies or any amount due by the Buyer, or the total or partial non-fulfilment of contractual obligations or agreed conditions for the supply, automatically authorizes the Vendor to suspend further shipments or cancel any Orders in progress, or to subordinate the delivery of the Products to the provision of adequate guarantees of payment, and exonerate the Vendor from any ongoing commitment with the same Customer at any time and without prior notice. The Vendor has a similar right whenever changes occur to the Buyer, in its structure or corporate structure, in the composition of its governing or management bodies, in its financial situation, equity or commercial image, as well as in the case of lodging or submission of proof of debt in bankruptcy, pending enforcement or precautionary procedures, suspensions, difficulties or delays in the performance of obligations assumed, including to third parties, of facts referring to the Buyer that may be detrimental to the successful completion of the Contract and/or detrimental to commercial interests of the Vendor.

10) CHANGES - CONFORMITY
The Vendor reserves the right to make non-decisive changes to models, measures, materials always within the tolerances of use and without obligation of communication to the Buyer by sending the Order, the Customer declares to have verified that the Goods described in the Order comply with any legal, regulatory or administrative provisions in force in their country or in another country of destination of the Goods, applicable to the import, sale and use of the Goods. In no case will the Vendor be held responsible for any non-compliance with these legal provisions, regulations or administrative provisions. It is the Buyer's obligation to indicate to the Vendor in the Order any provision of law or regulation and/or any standard applicable to the Goods ordered if different from those applicable in Italy and/or indicated in the Vendor's Offer. In this case, the prices of the Goods will not be those indicated in article 8, but the will be agreed between the Parties for each supply. It is understood that, in the absence of such indications, the Vendor will not be in any way responsible for the non-compliance or non-conformity of the Goods supplied to laws, regulations, standards or administrative provisions and the Buyer shall be obliged to keep the Vendor indemnified from any damage or claim that the Vendor, or its staff or administrators, may suffer, even against claims made by third parties, due to such shortcomings.

11) WARRANTY AND LIMITS
In the terms provided for in article 11, the Vendor undertakes to deliver the Products as agreed and exempt from manufacturing defects. The warranty does not cover aesthetic defects, meaning finishes difference or shades in the outward appearance of the products. The Vendor is also not responsible for defects in conformity and defects in the Products due to normal wear. The Vendor likewise is not liable for defects in conformity of the Products and defects caused by non-compliance, even partial, of the rules provided in the instruction manual/product data sheet, maintenance and/or cleaning with unsuitable products and/or materials and from incorrect choice by the Customer of the Product ordered for the purpose and intended use. This warranty does not extend to defects due to tampering or improper use of the Products, negligent preservation thereof, causes of force majeure The Vendor assumes no responsibility for damages resulting from the installation of the Products supplied. The Vendor declines all responsibility for any damage that may, directly or indirectly, derive from persons or things as a result of failure to comply with all the requirements indicated in the documentation accompanying the Products, and in particular that concern the warnings regarding installation, use and maintenance.

12) REPORTING OF FAULTS AND DEFECTS
The Products purchased must be verified and checked by the Buyer upon receipt. Any apparent defects of the Goods supplied (packaging status, quantity, species, or external characteristics of the Products, etc.) must, under penalty of forfeiture, be contested at the time of delivery directly to the carrier on the transport document and notified not later than 7 (seven) days to the Vendor by registered letter with return receipt or other means of communication that assures the proof and date of receipt (e.g. Certified Electronic Email). After this deadline, the Products will be considered for all purposes accepted; furthermore, the use and/or installation and/or laying of the Products presenting apparent defects, excludes the possibility of disputes or complaints concerning the defects themselves. Any hidden defects (defects not identifiable through diligent control at the time of receipt of the Products) must be notified by the Buyer, under penalty of forfeiture, to the Vendor by registered letter with return receipt or other means of communication that assures the proof and date of receipt (e.g. Certified Electronic Email), within 8 (eight) days of discovery and in any case no later than 12 (twelve) months from delivery to the Buyer. It is understood that the successful use and/or installation and/or laying of the Products that have manifested defects, excludes the possibility of disputes or complaints concerning the defects themselves, implying acceptance of the Products for all purposes. Each complaint must accurately specify the defect found; the Products object of the dispute must always be made available to the Vendor's agents for their verification. Any complaints or disputes will not entitle the Buyer to suspend or delay payments due to the Vendor in any way. Following a regular complaint by the Customer, within the terms indicated above, the Vendor will only perform the free replacement of the Product recognized as defective by the Vendor, Product that will be accepted in return from the same Vendor only in original packaging, undamaged and complete. Any disputes concerning a single delivery do not exonerate the Customer from the obligation to withdraw the remaining quantity of Products provided for by the specific Order, or by other Orders distinct from the one in question, nor do they entail the termination of the Contract.

13) LIMITATION OF LIABILITY
Any compensation for defective goods to be paid to the Buyer cannot in any case exceed the consideration paid and relative to the quantity of defective Goods. This warranty lasts 12 (twelve) months from the delivery of the Goods, it shall replace and supersedes all legal guarantees and/or responsibilities provided by law and excludes any other responsibility of the Vendor, however, originating from the Goods supplied or their resale; in particular, the Buyer cannot make further claims for indemnity or compensation for damages, direct or indirect, of any nature, price reduction or termination of the Contract. Following the term of the warranty, no claim can be made against the Vendor.

14) RETENTION OF TITLE
This sale is carried out with retention of title (art. 1523 Italian Civil Code et seq.): therefore the Products remain the property of the Vendor until full payment of the price by the Buyer. Failure to pay, even partially, entitles the Vendor to reserve the right to undertake any other action, to directly recover the Goods under consideration in the supply, even if held by third parties. The Buyer acquires the property right of the Goods only following full payment of the related price to the Vendor in addition to ancillary charges, but assumes the risks from the time of delivery and will be liable for any damage or loss of the Goods (for example due to poor maintenance or negligence).

15) INDUSTRIAL AND INTELLECTUAL PROPERTY
Any distinguishing mark and/or production and commercial technology of the Vendor, whether registered and/or patented or not, must be treated as confidential by the Customer and must not be used or disclosed without the prior written authorization of the Vendor. All printed matter and other documents (price lists, catalogues or other similar documents, even on IT and digital support) relating to the Products are the exclusive property of the Vendor, covered by copyright. Their reproduction, even if only partial, is prohibited unless previously authorized by the Vendor.
The Vendor warns against the unauthorized use of its own brand, and/or other trademarks shown on the Products or connected to the Products supplied, and/or distinguishing names or marks, as well as patents, models and drawings relating to their Products.

16) APPLICABLE LAW AND EXCLUSIVE JURISDICTION
Except when agreed in these General Terms and Conditions of Sales, the Italian law shall apply to these General Terms and Conditions of Sales and to each Sales Contract completed between Vendor and Buyer. The application of the United Nations Convention on contracts for the international sales of movable property, adopted in Vienna on 11.4.1980, is expressly excluded. For any dispute connected or arising from these General Terms and Conditions of Sales and/or Orders and/or Contracts, the Court of Treviso (Italy) shall have exclusive jurisdiction.

17) PRIVACY
In the execution of these General Terms and Conditions and/or of each Contract, personal and contact data (personal data, company e-mails, company telephones, smartphones) may be communicated to each other between Vendor and Buyer, or in any case made available to the respective contacts. for business use, etc.) of administrators, employees and collaborators who, depending on the duties and tasks assigned, manage the Contract and/or execute it. Therefore, both parties will process such personal data to the extent that they are strictly necessary for the execution of all aspects of the Contract (if any): and with their transfer, in consideration of the execution of the Contract, also in extra EU countries. Data shall be retained until the completion of the reciprocal services covered by the Contract and subsequently on the basis of the prescribed terms for the deeds and documents of the entrepreneur. The individual employee or collaborator can exercise all the rights listed in articles 15 to 21 of Regulation EU 2016/679, without prejudice, however, to the limits deriving from the legitimate interest of the employer.

Place and date Asolo, 01/04/2019 **Signature of Progress Profiles SPA** **Signature of the Buyer**

Pursuant to and for the purposes of articles 1341 and 1342 of the Italian Civil Code, the Buyer declares to have read all the terms and conditions of this Contract and to expressly approve the following clauses: 4 (DELIVERY TERMS, TRANSPORT OF GOODS), 5 (FORCE MAJEURE), 6. (REFUSAL TO RECEIVE DELIVERY), 8 (PRICES, PAYMENTS AND DEFINITION OF DEFAULT INTERESTS) 9 (SUSPENSION OF PERFORMANCE AND TERMINATION) , 10 (CHANGES AND CONFORMITY) 11 (WARRANTY AND LIMITS), 12 (REPORTING OF FAULTS AND DEFECTS) 13 (LIMITATION OF LIABILITY), 16(APPLICABLE LAW AND EXCLUSIVE JURISDICTION).

Place and date Asolo, 01/04/2019 **Signature of Progress Profiles SPA** **Signature of the Buyer**

© 2023 All rights reserved by Progress Profiles. Printed in Italy

IN THE CASE OF COMPLAINT, SEND A FAX TO No. +39 0423 950 979
or E-MAIL: cservice2@progressprofiles.com

FORM FOR NON-CONFORMING MATERIAL - PART A

Please fully complete this form

Business name:

Customer Name _____

Street _____

District _____ Zip Code _____

Province _____

e@mail _____

VAT No. _____

Tel. _____ Fax _____

Reason for complaint:

☐ damaged material

☐ missing material

☐ correct documents (confirm/transport documents) but non-conforming material

Material non-conforming in: ☐ quality ☐ quantity

Dispatch references:

Preform Invoice _____ ORD. N° _____

Date _____

Name of carrier _____

Description of material

Cod. / Article	Description	U.M.	Quantity

Required action:

☐ Return of goods

☐ Sending of material

Date and place _____

Signature of agent in confirmation

_____

Signature of customer in acceptance

_____

© 2023. All rights reserved by Progress Profiles. Printed in Italy

WATCH OUT FOR DAMAGE


OPERATIONS TO BE CARRIED OUT IN PRESENCE OF THE CARRIER

1



1. Verify whether the number of packages corresponds to the number indicated in the transport documents

2

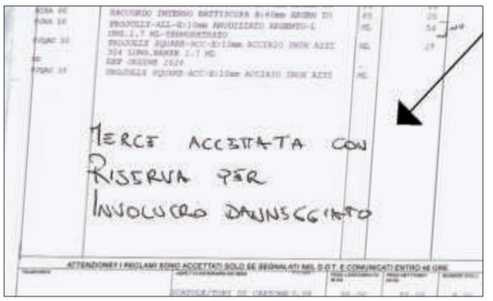

2. Verify the state of the outer packaging and on the carrier bulletin write: "*accepted with reserve*" specifying the type of anomaly

3




3. Open the packaging and verify the goods

4



4. Fill in the "*n.c. resolution form*" (see next page)

5

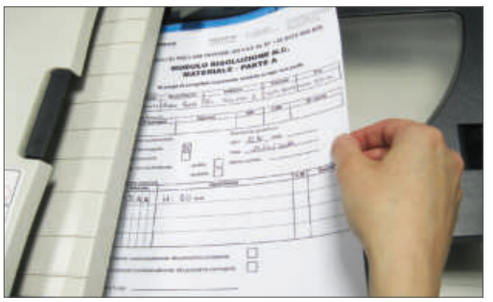

5. Send the "*n.c. resolution form*" and a copy of the reserve made to the carrier to fax number +39 0423 950979 or by e-mail to: cservice2@progressprofiles.com

In the event of damage or any other anomaly, if no reserve has been specified on the transport document, you will not be entitled to any compensation.

The reserve is a right enshrined in the Civil Code (art. 1688).

© 2023 All rights reserved by Progress Profiles. Printed in Italy

SELF PACK and ECO BLISTER

The **SELF PACK** range consists of blister profiles with adhesive labels with all the explanations for the interpretation of technical information regarding our profiles (code, length, finish, etc.). In the perforated version, screws and plugs are included.
The **ECO BLISTER** range consists of blister profiles without explanation label but provided only with an EAN barcode. In the perforated version, screws and plugs are not included.
Both have 4 colours to identify the 4 types of profiles (blue for window sill covers, red for fitting terminals, yellow for step covers, and beige for the proinsert system).



THRESHOLD-COVER PROFILES

Prosol
Proplate
Prolevall

TRANSITION PROFILES

Prolevall 29/33/305
Proskid
Propress 712
Profloor
Promoquette
Promoquette Fix

STEP NOSING

Proend Grip
Proend Ins
Proend
Prowalk
Tube for runners
Progrip


PROINSERT SYSTEM

Sol 30 self-adhesive
Zero Curve self-adhesive
Profixer Line System
Sol 40P
Terminal Pin
Zero Curve
Terminal



LAYING INSTRUCTION

LAYING INSTRUCTIONS: SELF-ADHESIVE

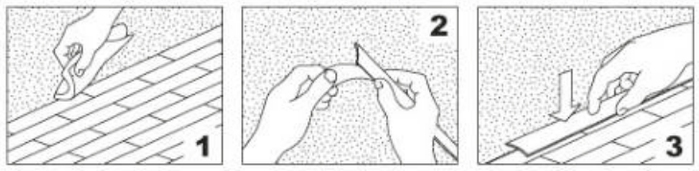

1) Clean the adhesion area. The surface must be dry, dust free, grease free, and non-friable.
2) Remove the protective paper.
3) Lay the profile and press evenly on the entire length.

LAYING INSTRUCTIONS: WITH SCREWS/PLUGS



1) Drill holes in the floor taking care that they match the holes on the profile.
2) Insert the plugs in the holes.
3) Tighten the profile.

© 2023. All rights reserved by Progress Profiles. Printed in Italy

GUIDE TO CONSULTATION

application example

description

finish

name

type of profile

technical drawings

technical information, codes, dimensions and prices

examples and instructions for laying methods


available finishes

accessories

technical drawings

technical information, codes, dimensions and prices

page

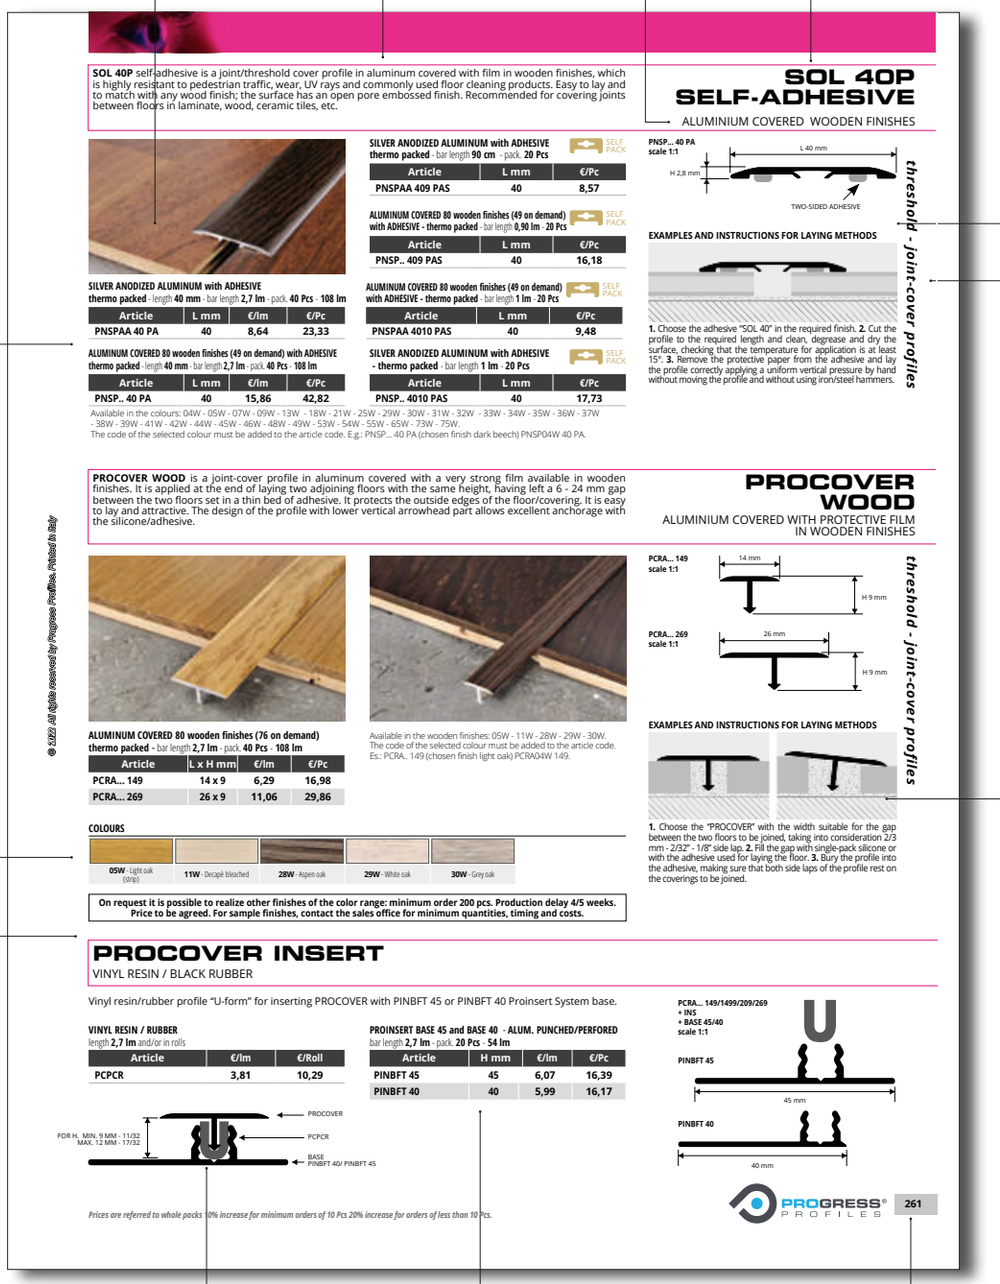

SOL 40P self-adhesive is a joint/threshold cover profile in aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WOODEN FINISHES

SILVER ANODIZED ALUMINUM with ADHESIVE thermo packed - bar length **90 cm** - pack. **20 Pcs**

Article	L mm	€/Pc
PNSPAA 409 PAS	40	8,57

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length **0,90 lm** - **20 Pcs**

Article	L mm	€/Pc
PNSP.. 409 PAS	40	16,18

SILVER ANODIZED ALUMINUM with ADHESIVE thermo packed - length **40 mm** - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PNSPAA 40 PA	40	8,64	23,33

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length **1 lm** - **20 Pcs**

Article	L mm	€/Pc
PNSPAA 4010 PAS	40	9,48

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE thermo packed - length **40 mm** - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L mm	€/lm	€/Pc
PNSP.. 40 PA	40	15,86	42,82

SILVER ANODIZED ALUMINUM with ADHESIVE - thermo packed - bar length **1 lm** - **20 Pcs**

Article	L mm	€/Pc
PNSP.. 4010 PAS	40	17,73

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PNSP... 40 PA (chosen finish dark beech) PNSP04W 40 PA.

PNSP... 40 PA scale 1:1

L 40 mm, H 2,8 mm, TWO-SIDED ADHESIVE

threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the adhesive "SOL 40" in the required finish. **2.** Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. **3.** Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

PROCOVER WOOD is a joint-cover profile in aluminum covered with a very strong film available in wooden finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM IN WOODEN FINISHES

ALUMINUM COVERED 80 wooden finishes (76 on demand) thermo packed - bar length **2,7 lm** - pack. **40 Pcs** - **108 lm**

Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 x 9	6,29	16,98
PCRA... 269	26 x 9	11,06	29,86

Available in the wooden finishes: 05W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.

PCRA... 149 scale 1:1

14 mm, H 9 mm

PCRA... 269 scale 1:1

26 mm, H 9 mm

threshold - joint-cover profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm - 2/32" - 1/8" side lap. **2.** Fill the gap with single-pack silicone or with the adhesive used for laying the floor. **3.** Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

COLOURS

05W - Light oak (strip) | **11W** - Decapè bleached | **28W** - Aspen oak | **29W** - White oak | **30W** - Grey oak

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROCOVER INSERT

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN / RUBBER
length **2,7 lm** and/or in rolls

Article	€/lm	€/Roll
PCPCR	3,81	10,29

PROINSERT BASE 45 and BASE 40 - ALUM. PUNCHED/PERFORED
bar length **2,7 lm** - pack. **20 Pcs** - **54 lm**

Article	H mm	€/lm	€/Pc
PINBFT 45	45	6,07	16,39
PINBFT 40	40	5,99	16,17

FOR H. MIN. 9 MM - 11/32
MAX. 12 MM - 17/32
PROCOVER
PCPCR
BASE PINBFT 40/ PINBFT 45

PCRA... 149/1499/209/269 + INS + BASE 45/40 scale 1:1

PINBFT 45, 45 mm
PINBFT 40, 40 mm

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROGRESS PROFILES 261

© 2023 All rights reserved by Progress Profiles, Printed in Italy

© 2023 All rights reserved by Progress Profiles, Printed in Italy

CODE COMPOSITION

EXAMPLE REGARDING METAL PROFILE:

PLSOL 308FS

- PLSOL: base code
- O: chosen finish
- 308: height or width
- F: perforated
- S: self pack

EXAMPLE REGARDING PLASTIC PROFILE:

PEG 25-01A

- PEG: base code
- 25: height or width
- 01: chosen colour
- A: adhesive

EXAMPLE REGARDING PAINTED ALUMINIUM:

PEGA 25-01A

- PEGA: base code
- 25: height or width
- 01: chosen colour
- A: adhesive



Progress Profiles SpA
Via Le Marze 7
31011 ASOLO (TV) Italy

Tel. +39 0423 950398
Fax +39 0423 950979
Certified company UNI EN ISO 9001:2015

P.I. IT 03481880262 - R.E.A. TV 275319
C.F. e Iscr. Reg.Impr. TV 03481880262
Cap. soc. € 120.000,00 i.v.
N. Meccanografico TV 44685

IMPORTANT:

Every time a price list will be given to your Client, we ask you to fill in this form and deliver it to the company Progress® Profiles s.p.a. fax: +39 0423 950 979 or mail: cservice2@progressprofiles.com

Kind regards

CEO & A.D.
Dennis Bordin

Place _____

Date _____

Name Agent _____

To the attention of Mr._____

Name Client _____

_____

_____

Reference person _____

(Stamp)

With the present we give the following material_____

_____

Catalogue / List _____ N° _____ Pcs _____

Discounts _____

Note _____

_____

_____

_____

_____

PROGRESS® PROFILES OFFICIAL CATALAGUE Rev.00_23 - distribution of this catalogue is un controlled - **Approval and issue:** (D. Bordin) - **Check:** (M. Torresan)

Kind regards

© 2023 All rights reserved by Progress Profiles. Printed in Italy

FINISHED PRODUCT AND RAW MATERIALS FEATURES

ALUMINIUM:
Primary alloy suitable for complex extrusions, it is highly resistant and has excellent superficial finish at natural state making it ideal for successive finishing processes: Anodizing, Polishing, Painting. Hot hardened and tempered it reaches a Brinnel Hp hardness degree around 70 kg/mm².

Aluminium ALLOY Mg 0,7 Si 0,4 Conventional Designation: P-Al Mg Si UNI 3569-66 UNI 6060

*Cu%	*Mn%	*Zn%	*Ti%	*Cr%	Si%	Mg%	*Fe%	Al%
0,10	*0,10*	*0,15*	*0,10*	*0,10*	*0,3-0,6*	*0,35-0,6*	*0,1-0,3*	*Remainder*

* Maximum admitted values

TILTEX & ANODIZED ALUMINIUM:
Anodic oxidation process against corrosion from atmospheric agents not combined with galvanic processes. The profiles are treated with preventive processes making them evenly matt. They are subsequently coloured by means of electro-chemical oxidation in the standard Silver, Gold, Bronze, Sand, Champagne colours with a thickness of about 15-20 micron.
The Anodized Copper and Titanium finishes are firstly superficially polished and, subsequently, subjected to the above process.
All TILTEX finishes are firstly subjected to a special superficial brushing and, subsequently, to the above process.

BRUSHED & POLISHED ALUMINIUM:
It is made of a special preventive mechanical-chemical polishing treatment and subsequent anodic bath in Chrome and Gold colours. The obtained profiles maintain the same resistance to corrosion features of the anodized profiles, but with a brilliant aesthetical aspect, making them similar to the polished surfaces.
The Polished Copper and Titanium finishes are firstly subjected to superficial polish and, subsequently, to the above process.
All BRUSHED finishes are subjected to a special superficial brushing and, subsequently, to the above process.



PAINTED ALUMINIUM:
The painting process is made of a chromium phosphate-based pre-treatment, of an electrostatic polyester-powder based paint with highly resistant features to U.V. rays and to atmospheric agents. The coating thickness covers the entire profile surface having an average thickness of approx. 50-70 micron. A hot mesh polymerisation process is also carried out for maximum guarantee of the chemical-mechanical resistance.

VARNISHED ALUMINIUM WITH SEASIDE TREATMENT:
special pre-treatment to the epoxy-polyester coating, which increases the resistance to corrosion of the profile when installed at sea front. This treatment is certified after completing 2500 hours (104 days) exposure to saline acetic mist

THERMOPLASTIC VINYL RESIN:



RVA: RIGID THERMOPLASTIC SHOCKPROOF NON TOXIC VINYL RESIN:
Purposely studied material for optimising the performing features of rigid profiles for permanent indoor application with aesthetical and long-lasting requirements. Realised starting from primary pigments and resin, their PVC composition makes it suitable for a high range of applications up to a temperature of +50/60°C. The raw material used guarantees excellent resistance to U.V. rays, to limited chemical impacts and stagnation of fungus and bacteria.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	*ASTM D 792*	*gr/cm³*	*1,43 +-0,02*
Rockwell Hardness	*ASTM D 785*		*108*
VICAT Point	*ISO 306*	*°C*	*83,7*
Tensile strength at break	*ASTM D 638*	*Mpa*	*50*
Elongation at Break	*ASTM D 638*	*%*	*100*
IZOD Resistance with Cut	*ASTM D 256*	*J/m*	*60*
Yielding strength point	*ASTM D 638*	*Mpa*	*48*
Flammability	*UL 94*	*CLASS*	*VO*
Reaction to UV Rays	*-*	*-*	*EXCELLENT RESISTANCE*

RVF: FLEXIBLE NON-TOXIC VINYL RESIN (PLASTICISED THERMOPLASTIC):
Same chemical features of RVC with which it is perfectly compatible in the CO-EXTRUSION process used by ourselves in most of the dilatation, fitting joints. Thanks to the nature of the used plasticisers, the material maintains its own essential flexible features in time.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	*CEI 20-34*	*gr/cm³*	*1,24 +-02*
Hardness	*ISO 868*	*Sh-A*	*70 +-2*
Breaking load	*ISO 527*	*N/mm²*	*>_ 13*
Elongation at Break	*ISO 527*	*%*	*300*
Thermal stability at 200°C	*ISO 182*	*min.*	*25*
Apparent Rigidity Module	*ISO R 458*	*Mpa*	*310*
Cold Flex temperature	*ISO R 458*	*C°*	*-30*

RVC: CO-EXTRUDED THERMOPLASTIC VINYL RESIN FOR CO-EXTRUSION:
Primary resin with chemical composition similar to RVA is characterised by a high resistance and optimised compatibility with regard to long-lasting adherence with plasticised resins used in the co-extrusion process, meaning the permanent joining of two materials with different degrees of Shore hardness.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	*ISO 1183*	*gr/cm³*	*1,40 +-0.5*
Hardness	*ISO 868*	*Sh-A*	*75+/-2*
Breaking load	*ISO 527*	*Mpa*	*> 18*
Elongation at Break	*ISO 527*	*%*	*> 350*
Stiffening temperature	*ISO 1183*	*°C*	*-40 +/- 2*

EPDM AND NEOPRENE VULCANISED RUBBER:
The vulcanised rubber is a modified mix of EPDM and NEOPRENE of Grey or Black colour: below are the particular features:
Excellent mechanical properties in a working temperature interval from –35°C t + 100°C; Resistance to aqueous, oily and hydrocarbon fluids. Low permanent deformation with compression and pulling. Excellent resistance to ageing. Excellent resistance to dynamic fatigue and laceration. The intrinsic features of the material make it particularly suitable in the realisation of profiles where high stresses in time are requested, both indoor and outdoor.

FEATURES	TEST	UNIT OF MEASURE	INDICATIVE VALUE
Specific weight	*DIN 53420*	*gr/cm³*	*1,21*
Hardness	*DIN 53505*	*Shore A*	*60 +-3*

RESISTANCE TO CORROSIVE AGENTS:
Below is the indicative resistance towards the main diluted chemical agents and elements. Normally, the PVC products must never come into contact with Aromatic hydrocarbons, Ketones and Esters.
For further information on the materials write to our technical department.

CORROSIVE AGENT	RIGID VINYL RESIN CONCENTRATION (RVA)
Weak acids reaction	*Null*
Weak acids reaction	*Null*
Reaction to alcohol, aliphatic hydrocarbons, oils	*Null*
Reaction to Ketones, esters, aromatic hydrocarbons	*DISSOLUTION*
Flammability	*CLASS VO UL94*
Reaction to UV Rays	*excellent resistance*

© 2023 All rights reserved by Progress Profiles. Printed in Italy

FINISHED PRODUCT AND RAW MATERIALS FEATURES

STAINLESS STEEL:
The steel profiles are realised through cold shaping of constant thickness sheets, therefore, differentiating from the corresponding version in aluminium and brass realised by hot extrusion, despite maintaining the applicative and dimensional features. The stainless steel is efficiently resistant to mechanical stresses, particularly suitable in the chemical, food, hospital sector for responding to hygienic, duration and resistance to chemical agents requisites.
Normally produced with Polished finish, it is possible to realise a brushed finish that is implemented with the partial removal of material using nylon fibre and quartz rotary brushes that confer a brushed/satin matt look to the surface, without altering its features. The ultra-glossy finish happens by means of special brushes to create mirror polished finishes.
Produced in different chemical compositions, below are the main features:

AISI	DIN	*C	Cr	Ni	*Si	*Mn	Mo
430	*1,4016*	0,10	*16,0÷18,0*	-	*1,0*	*1,0*	-
304	*1,4301*	0,06	*18,0÷20,0*	*8,0÷10,5*	*1,0*	*2,0*	-
316L	*1,4404*	0,03	*16,0÷18,0*	*11,0÷13,0*	*1,0*	*2,0*	*2,0÷2,5*

***** Maximum admitted values

STAINLESS STEEL AISI 430 – EN X 8 CR 17 – DIN 1.4016:
Chromium stainless steel forming part of the FERRITE category, despite being considered stainless it can easily be stained in presence of particularly aggressive products, and be contaminated by oxidising generated by other materials.

STAINLESS STEEL AISI 304 – EN X 5 CRNI 18 10 – DIN 1.4301:
Nickel/chromium stainless steel forming part of the AUSTENITIC category is the most diffused and used alloy in the manufacturing of products with highly technical and performing features. Highly resistant to most chemical products it can superficially stain or darken; a normal polishing (e.g. sidol/smac) product is sufficient to give it back its original state.
In presence of oxidising stains in the Brushed/satin version due to the brushes, simply use a wirewool.



STAINLESS STEEL AISI 316 – EN X 2 CRNIMO 17 12 – DIN 1.4404:
Stainless steel AISI 316 is part of the AUSTENITIC category that is characterised by the internal presence of Molybdenum besides Nickel-Chromium. this features confers an excellent resistance of the material in limit conditions, which the presence of Chlorine and Salt.

APPLICATION FIELDS:

Material	Indoor	Outdoor	Floor	Wall	Heavy traffic	High chemical attack (*)	Food Contact	Pools	Thermal environments	Marine environments	average % of recycling
STAINLESS STEEL - AISI 316	yes	yes	yes	yes	yes	yes	yes	yes	yes	yes	70-90%
STAINLESS STEEL - AISI 304	yes	yes	yes	yes	yes	no	yes	no	no	no	70-90%
STAINLESS STEEL - INOX 1.4016	yes	no	yes	yes	no	no	no	no	no	no	70-90%
NATURAL BRASS	yes	yes	yes	yes	yes	no	no	no	no	no	92-98%
CHROME BRASS	yes	no	yes	yes	no	no	no	no	no	no	92-98%
POLISHED VARNISHED BRASS	yes	no	no	yes	no	no	no	no	no	no	92-98%
NATURAL ALLUMINIUM	yes	yes	yes	yes	yes	no	no	no	no	no	20-70%
VARNISHED ALLUMINIUM	yes	yes	no	yes	no	no	no	no	no	no	20-70%
WOOD EFFECT FINISHES ALLUMINIUM	yes	no	yes	yes	no	no	no	no	no	no	20-70%
ANODIZED / POLISHED / BRUSHED ALLUMINIUM	yes	no	yes	yes	no	no	no	no	no	no	20-70%
VINIL RESIN (PVC)	yes	no	no	yes	no	yes	no	yes	yes	yes	10-80%

PROGRESS RECYCLE PROJECT

Progress Profiles® always at the forefront of the research and development process, uses an important percentage of second-life raw materials for its products. This continuous search for new production technologies together with the use of renewable energy, thanks to the production of its photovoltaic systems, pushes Progress Profiles towards its industrial project with zero environmental impact, "A look into the future", one of the most important values and founders of the company itself.

(*) In the case of applications in environments where they are used special chemicals aggresyesve, consult the technical department.

BRASS:
The brass profiles are characterised by a high resistance to mechanical stresses making it particularly suitable in heavy traffic applications like, for example, industrial applications with frequent pedestrian crossings. The brass is resistant to the main chemical agents intervening in ceramic coating applications. The surface of the profile, in presence of humidity or particularly aggressive agents, can show superficial oxidising phenomenon that can be removed by using a normal polishing product (e.g. Sidol and Smac). The profiles can be realised by means of hot extrusion and cold shaping of constant thickness sheets.

EXTRUSION ALLOY Cu Zn 43 Pb2 Al EN 12167 CW 624N

**Cu%	*Pb%	*Sn%	*Fe%	*Ni%	**Al%	Other%	Zn%
55-57	*1,6-3*	*0,30*	*0,30*	*0,30*	*0,05-0,5*	*0,2*	*Remainder*

** Indicative values * Maximum admitted values

LAMINATING ALLOY Cu Zn 37 EN 1652 CW 508L

**Cu%	*Pb%	*Fe%	Zn%	Impurity%
67	*0,1*	*0,1*	*Remainder*	*0,30*


** Indicative values * Maximum admitted values

POLISHED BRASS:
The polished finish is realised with special machines with springs/brushes that mechanically polish the surface without altering the intrinsic features of the material. A partial darkening of the surface in presence of oxidising materials is a phenomenon that can be contrasted using normal polishing products (e.g. Sidol and Smac).

CHROMIUM BRASS:
The finish is obtained by beams of galvanic process that confers a brilliant look similar to the ultra-glossy stainless steel. The treatment confers an excellent aesthetical look, excellent resistance to chemical aggressions but limited resistance to mechanical superficial impacts and persistent abrasion.



© 2023. All rights reserved by Progress Profiles. Printed in Italy

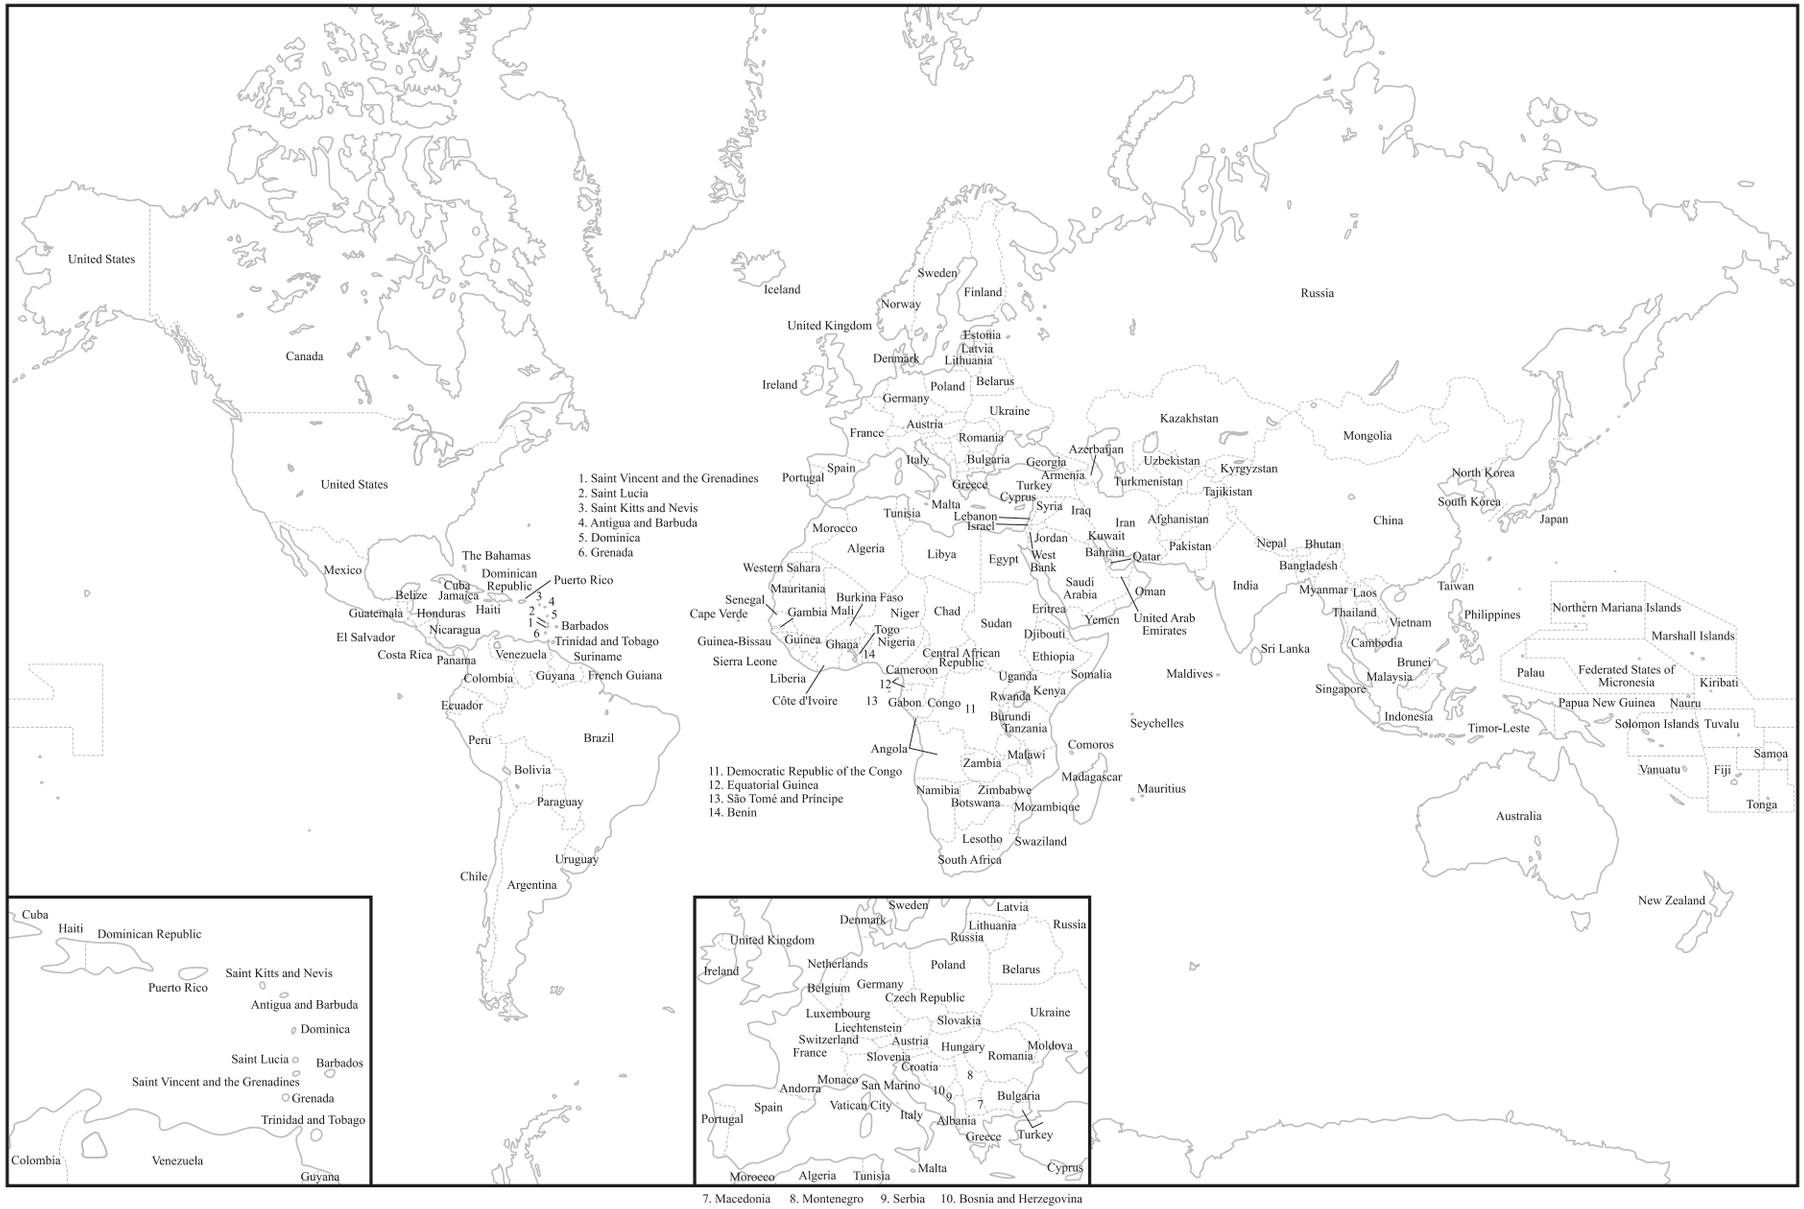

© 2023 All rights reserved by Progress Profiles. Printed in Italy

METALS

STEEL

- Polished stainless steel AISI 304/1.4301-V2A — AC
- Super polished stainless steel AISI 304/1.4301-V2A — ACML
- Satin finish stainless steel AISI 304/1.4301-V2A — ACS
- Sanded stainless steel AISI 304/1.4301-V2A — ACSB
- Polished stainless steel AISI 316L/1.4404-V4A — ACM

BRASS

- ON — Natural brass
- OL — Polished brass
- OC — Chromed brass
- OB — Antique brass
- OS — Brushed brass

ALUMINIUM

- Natural aluminium — AN
- Anodised silver aluminium — AA
- Polished chrome aluminium — BC
- Brushed silver aluminium — BS
- Brushed silver tiltex aluminium — BX
- Anodised copper aluminium — AR
- Polished copper aluminium — BR
- Brushed copper aluminium — RS
- Brushed copper tiltex aluminium — RX
- Brushed black aluminium — NS
- Anodised black aluminium — NE
- Polished black aluminium — BN
- AT — Anodised titanium aluminium
- BT — Polished titanium aluminium
- TS — Brushed titanium aluminium
- TX — Brushed titanium tiltex aluminium
- AO — Anodised Gold aluminium
- BO — Polished Gold aluminium
- BOS — Brushed Gold aluminium
- AB — Anodised Bronze aluminium
- DB — Anodised dark Bronze aluminium
- BRA — Anodised antique bronze aluminium
- BRAS — Brushed antique bronze aluminium
- CH — Anodised champagne aluminium
- SB — Anodised sand aluminium

VARNISHED ALUMINIUM

- White (9016) — 01
- Matt White (9016) — 01O
- White ivory (9001) — 0106
- Light grey (7035) — 02
- Stone grey (7030) — 03
- Quartz grey (7039) — 0211
- Asphalt grey (7043) — 0311
- Ivory (1015) — 06
- Klinker red (8004) — 10
- Black (9005) — 11
- Bahama beige — 17
- Tuscany grey — 03TU
- Tuscany beige — 05TU
- Tuscany bronze — 20TU

VARNISHED ALU. (only Proterrace)

- B — White (9010)
- G — Grey (7038)
- T — Dark brown (8019)
- E — Beige (1019)

VARNISHED ALU. (embossed)

- BF — White (9010)
- GF — Grey (7038)
- A — Anthracite grey
- TF — Dark brown (8019)
- C — Corten
- EF — Beige (1019)

VARNISHED ALUMINIUM STONE LINE

- Stone white — SL01
- Stone cream — SL02
- Stone greyvory — SL03
- Stone sand — SL04
- Stone gray — SL05
- Stone cristal gray — SL06
- Stone antragray — SL07
- SL08 — Stone antradark
- SL09 — Stone bronze
- SL10 — Stone corten
- SL11 — Stone brown
- SL12 — Stone black
- SL13 — Stone oyster grey

MARBLED

- Carrara white — MC
- Real yellow beige — MB
- Sky blue — MA
- Portugal pink — MR
- Guatemalan green — MV
- Aquamarine green — MVA
- Soft blue — MAS
- Soft pink — MRS
- Soft beige — MBS
- Soft green — MVAS
- Travertino light — MTC
- Travertino dark — MTS

MARBLED on demand

- MNA — Navona**
- MBC — Polished chrome**
- MBD — Bardiglio**
- MGV — Veined grey**
- MGVC — Light veined grey**
- MBPS — Salt-and-pepper beige**
- MCRI — Ivory cream**
- MCRC — Light cream**
- MBO — Polished gold**
- MAM — Macauba blue**
- MAB — Blue**
- MBDX — Burgundy**
- MVBL — Brazil green**

**Production on demand with a minimum order of 800 pcs. Production delay 4/5 weeks. Price to be agreed

Colour chart

WOOD

similar finishes are indicated between brackets

- Dark beech — 04W
- Dark cherry (board) — 08W
- Indonesian teak — 13W
- Aspen oak — 28W
- Pink oak — 32W
- American oak — 36W
- Brown oak — 40W
- Honey oak — 44W
- 48W
- Cork oak — 52W
- 56W
- 60W
- 64W
- 68W
- 72W
- 76W
- 80W
- 84W
- 88W
- 94W
- Mahogany* — M
- Light oak (strip) — 05W
- Red walnut (Merbau-apple-walnut) — 09W
- Light zebrano — 18W
- White oak — 29W
- Sawed oak — 33W
- Carvi oak — 37W
- Ice oak — 41W
- Morocco oak — 45W
- 49W
- Sand oak — 53W
- 57W
- 61W
- 65W
- Tripoli — 69W
- 73W
- Bangkok — 77W
- 81W
- 85W
- 89W
- 95W
- Natural Oak** —
- Dark oak (walnut) — 06W
- Wengé (panga panga-wengè) — 10W
- Powder oak — 21W
- Grey oak — 30W
- Havana oak — 34W
- Queens oak — 38W
- Grace oak — 42W
- Black decapè — 46W
- 50W
- 54W
- 58W
- 62W
- 66W
- 70W
- 74W
- 78W
- 82W
- 86W
- 90W
- 97W
- Light cherry (strip) — 07W
- Bleached decapè — 11W
- Bleached fir — 25W
- Victoria oak — 31W
- Edimburgo oak — 35W
- Grey elm — 39W
- Manhattan oak — 43W
- Black oak — 47W
- 51W
- 55W
- 59W
- 63W
- 67W
- 71W
- 75W
- Liotard — 79W
- 83W
- 87W
- New white — 93W

(for a precise assessment of colours and finishes, request the wood finishes sample range)

*available only with Angle bar AGEM 25 and Skirting BTPRM 70

**available only with Proslider wood, Prostair wood and wood 2, Prostep wood, Prostyle wood

WOOD

Rigid PVC

- White ice — 00
- White — 01
- White ivory — 0106
- Light grey — 02
- Cement grey — 03
- Light beige — 04
- Dark beige — 05
- Ivory — 06
- Pink — 07
- Sky blue — 08
- Yellow — 09
- Red — 10
- Black — 11
- Silver — 12
- Gold — 13
- Green — 14

PVC

Flexible / Expanded PVC

- 15 — Brown
- 16 — Blue
- 17 — Bahama beige
- 18 — Grey
- 19 — Beige**
- 20 — Dark ivory**
- 21 — Light pink**
- 22 — Dark pink**
- 23 — Dark antique pink**
- 24 — Dark sky blue**
- 25 — Brick red**
- 26 — Turquoise green**
- 27 — Dark green**
- 28 — Hazel brown**
- 29 — Dark brown**

**Production on demand with a minimum order of 800 pcs. Production delay 4/5 weeks. Price to be agreed

- White — B
- Light grey — GC
- Dark grey — GS
- Brown Only for Flexible PVC — M
- Dark Brown Only for Flexible PVC — T
- Black — N

INSERTS steps - vinyl rubber

- A — Ivory
- G — Grey
- B — Beige
- N — Black

INSERTS joints - vinyl rubber

- G — Grey
- N — Black

JOINTS rigid part - rigid PVC / flexible part - plastified PVC

- Dark grey / Dark grey — GS 51 E 86
- Dark grey / Transparent — GT 51 E 80
- GL 50 E 82 — Light grey / Light grey

JOINTS rigid part - rigid PVC / flexible part - plastified PVC

- Brick red * / Transparent — RT 52 E 80
- White * / White — BIBI
- Beige * / Beige — BB 54 54
- MT 53 E 80 — * Brown Transparent
- N — * Black Black

* Production on demand with a minimum order of 400 pcs. Production delay 4/5 weeks. Price to be agreed

PRODILAT & JOINTS flexible part - EPDM

- Grey — G
- N — Black

CAT23E

8 031893 344058

©2023 All rights reserved by Progress Profiles. Printed in Italy

PROGRESS PROFILES

ARTICLE	PAGE
AG...	276
AGAC...	276
AGE...25	237
AGOL...	276
AGP...	277
AL...	277
ALP...	277
BR...	331
BTA... 40	225
BTA... 60	227
BTA... 80	229
BTA...100	231
BTAC...	230
BTAC... 40	224
BTAC... 60	226
BTAC... 80	228
BTEPR...4010	235,269
BTEPR...7011	235
BTEPR...7011	269
BTEPR...7016	234
BTEPR...7016	268
BTEPR..R	233,267
BTEPR..S	232,266
BTPF...	236
BTPR...	237
BTPV...	236
C 550...	319
C51...	146,147
CAT...	331
CLPS	307
COF...	328
COFMIE	329
COL...	328
CPGC...	321
CT...	282
CU...	278
CURAS	326
CW...	278
DMP...	309
DSVT	311
DVO...	311
ESHPAN 250	325
ESPB...	331
ESPCLSH...	326
ESPD	330
ESPFDPP	330
ESPGLED...	328
ESPGSM 18	326
ESPGSMBT	327
ESPPDHT...	329
ESPPLS	330
ESPPST	330
ESPQC...	324
ESPSHW 70	329
FLY...	331
FTPP	300
G...	146
GCAC...	143
GCAN...	143
GCT...	305
GDA ...	150
GDA 55...	151
GDSP...	147
GNS...	152
GP...	148
GPL...	73
GRP...	306
KBPSHWPAC...	195
KMD	300
M...	314
MCAT...	331
MSP...	291
PBP...	121
PBPLS...	331
PC...	169
PCG...	168
PCLA...	73
PCLO...	73
PCM 08	111
PCPF...	312
PCR...	89,110
PCR...1045	86
PCR...14PT	91
PCRA...	89
PCRA...	261
PCRA...	110
PCRAC...	88
PCRO...	88
PCT...	60
PCT...T	60
PDA...	75
PDAACV...	111
PDAC...	74
PDD...	164
PDDR...	174,177
PDES...	185
PDESEC...	183
PDESH...	181
PDESHG...	179
PDESHK...	182
PDESHST...	183
PDKLA...	86
PDLRA...	75
PDO...	74
PDONCV...	111
PDRI 10	188
PDRP	171
PDSND...	187
PDSNDTP...	187
PDWR...	76
PDZ...	308
PED 4528...	135
PED...	132
PED...7537	135
PEDBD...	45
PEF...	187
PEG...	48
PEGA...	48
PEGAC...	46
PEGO...	46
PEGR.. 5230	137
PEGR..7032	136
PEGRAA 50	136
PEGRAC...	47
PEGRO...	47
PEL...	68
PELAACV...	107
PELONCV...	107
PEM	337
PEN...	150
PENF...	149
PEP...	337
PESP...	326
PETAA...	91
PETAC...	90
PETFX...	153
PETFXPAA...	153
PETO...	90
PFC...40	45
PFDP...	166
PFDPP...	165
PFLO...	188
PFLOPST...	188
PFLPAN...	189
PFLPANICH	203
PFLT...	44
PFPSAL...	295
PFR...1216	84
PFR...24...	85
PFRA... 712	83
PFRAC...712	83
PFROL...712	83
PFTT...	301
PFX...	148
PFX...	144
PFX5...	144
PFX5PR...	145
PFXAC...	140
PFXACN...	142
PFXACPR...	140
PFXAL...	141
PFXALN...	142
PFXOT...	141
PGAO...	71
PGAW...15	238,270
PGBORD	205
PGR...	117,137
PHTST...	206
PI...	279
PI...	32,33
PIAC...	30
PIF...	283
PIKL...	32,160
PIKLAC...	30
PIKLAC...	160
PIN...	271,272
PINS...	260
PINT...	110
PINTPC...	252,258
PINYC...	254
PINYLC...	255
PINZ...	260,262
PINZC...	250,258
PISPC...	249,258
PITA...	72
PITO...	72
PJ...	18
PJ...	23
PJ...	22
PJAACV...	109
PJAC...	15
PJE...	25
PJE...	24
PJO...	17
PJONCV...	109
PJP	23
PJQ...	9
PJQS...	6
PJQSAC...	2
PJQSOS...	5
PJQT...	11,14
PJQTAC...	10
PJTR...	28
PJTR135...	29
PJTRAC...	26
PJTRO...	27
PKAA...	220
PKCHAA...	211
PKFLAA...	211
PKGLEDAA...	219
PKINSAA 60	212
PKISPAA...	213
PKL...	156
PKLEDAA...	217
PKLIAA	212
PKLL...	58
PKLL...	157
PKLT...	214
PKSHAA 70	221
PKSHAA...	221
PLF...	309
PLF...R...	309
PLFE...	309
PLG...	67,68
PLS...	97
PLSAC...	93
PLSO...	95
PLT...	43
PLTAC...	40
PLTCH...	34,198
PLTLED	43
PLTP...	42
PLTPO...	41
PLU...16	85
PLV...	99
PLV...29	79
PLV...30...	80
PLV...32	80
PLVOL 33	79
PLVOL 358...	81
PLVOL 4413	81
PMF...	100
PMG...	101
PMPFX...	245
PMQ...	100
PNPLS	330
PNPLWS	330
PNPSR	330
PNSP...	261
PNVA.. 713	82
PP...	313
PPD...	305
PPN...	312
PPT...	304
PPU...	310
PPV...	310
PPY...	311
PQE...	71
PRB...	188
PRBBU...	186
PRBFX...	186
PRBKL...	186
PRBKLAB...	186
PRBPE...	185
PRBT	186
PRBT	196
PRCLEAN	300
PRCP...	239
PRCPS...	239
PRDAC	54
PRFA...	71
PRFAACV...	108
PRFAC...	70
PRFO...	70
PRFONCV...	108
PRLISH	300
PRLW...	290
PRMKL	186
PRS...	289
PRS...712...	84
PRSHLF...	205
PRSPD 10	301
PRTA...	78
PRTAC...	77
PRTO...	77
PS...	53
PSA...	56
PSA...	55
PSAW...20	238
PSAW...20	270
PSB...	57
PSBF...	57
PSD...	306
PSDWK...	167
PSDWK...	123
PSF...	56
PSHA...	52
PSHAC...	50
PSHD...	159
PSHLDK	201
PSHPAN	190
PSHPANCEK	200
PSHPANEK	190
PSHR...	159
PSHW...	193
PSHWBB..	191
PSHWCP	201
PSHWDL...	191
PSHWDL...	192
PSHWP...	194
PSHWPACS...	196
PSHWPFACS...	197
PSHWPGACS...	196
PSHWPLACS...	197
PSHWPLT...	194
PSHWRD...	193
PSLD...	78
PSM	301
PSPRPT...	295
PSS...	54
PST...	306
PST...	292
PSTRAN	296
PSTSL...	298
PSWC...	264
PSYA...	127
PSYAC...	126
PSYACS 2610	114
PSYGRACS 6020	118
PSYKLAA 1045	161
PSYO...	126
PSYW...	129
PT...	37
PT...	66
PT...	39
PTAC...	16
PTAC...	36
PTACV...	104
PTANCV...	105
PTEDP...	167
PTI...	35
PTO...	37
PTO...	65
PTONCV...	105
PTP...	120
PTPW...	129
PTR...	120
PTR50...	119
PTRACS...	114
PTRB...	121
PTRGRACS...	117
PTRKLAA 2045	161
PTRLEDAA..	124
PTRW...	128
PTRWZ...	128
PTS.. 613	82
PTSAA...	127
PTSAA...	253
PTSPA...	122
PTSPAC...	59
PTSPAC...	122
PTSPAC...	122
PTUE...	170
PVJ...	320
PWK...	133
PWK...25...	134
PWKAC...	132
R...	306
R...	291
R11...	304
SC...	131
SO..	131
SPCPDES...	329
SQG...	299
T...	282
TCT...	131
TDA...	304
TET...	131
TGS...	131
TP...	280
TQP...	280
TQV...	281
TR...	281
TRAG18	326
TV...	280
UG...	281
VIN...	273
WP...	307